
Kconfig: BGMAC /drivers/net/ethernet/broadcom BCMA\_HOST\_SOC && HAS\_DMA

```
skb_*
eth_random_addr
register_netdev
eth_type_trans
napi_*
kfree*
eth_prepare_mac_addr_change
memcpy
dma_*
ethtool_*
container_of
netdev_alloc_skb
netdev_*
```

```
is_valid_ether_addr
free_irq
kmalloc_array
if_*
unregister_netdev
netdev_alloc_skb_ip_align
netif_*
mdiobus_*
udelay
eth_commit_mac_addr_change
request_irq
free_netdev
dev_*
```

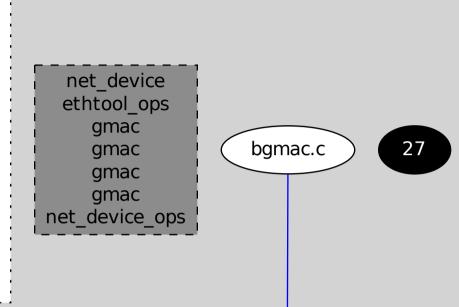

dev\_\* bgmac.h 7