Network Taxonomy

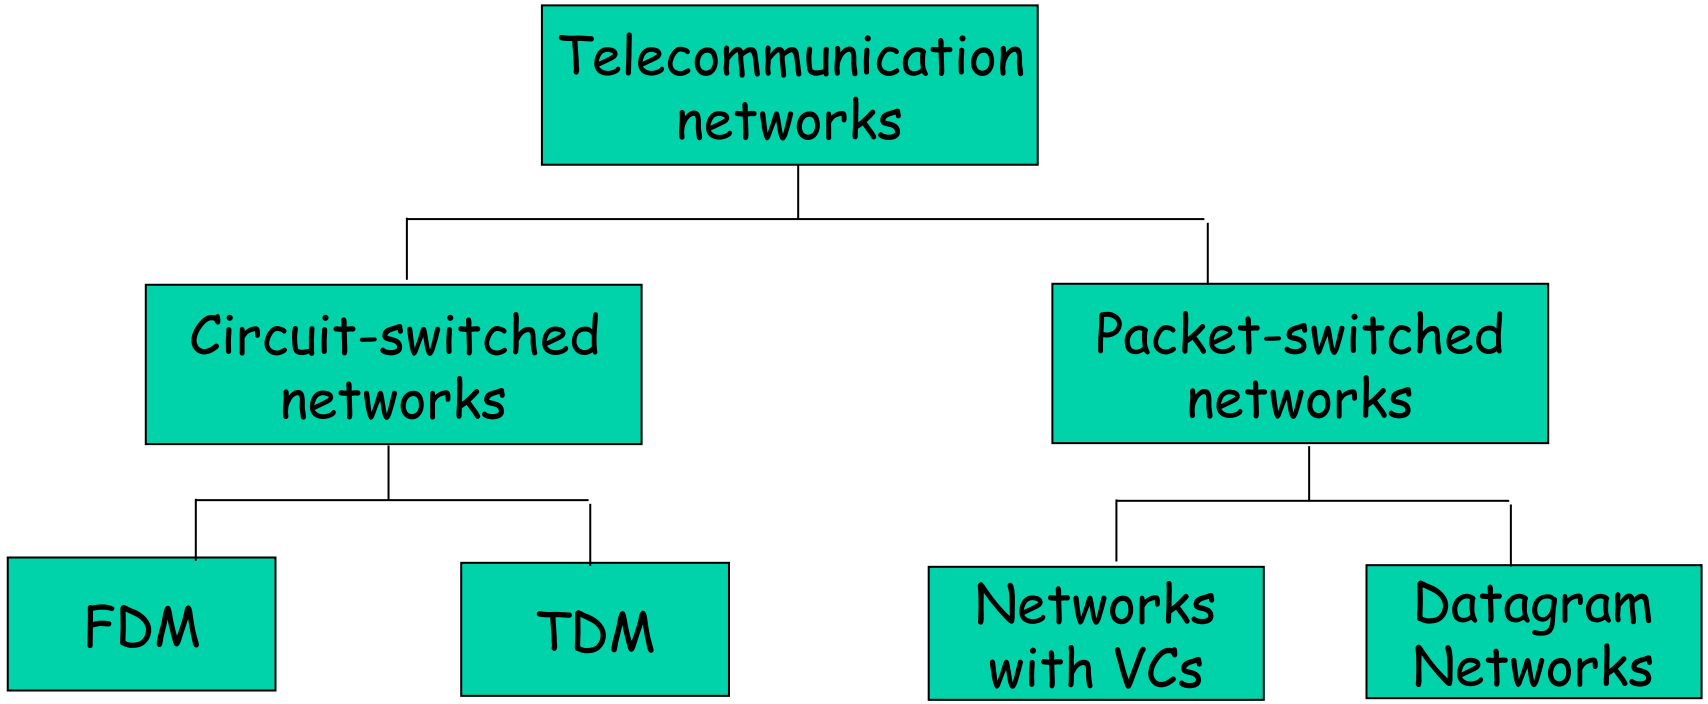

- Datagram network is *not* either connection-oriented or connectionless.
- Internet provides both connection-oriented (TCP) and connectionless services (UDP) to apps.

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

1.3 Network access and physical media

1.4 Network core

1.5 Internet structure and ISPs

1.6 Delay & loss in packet-switched networks

1.7 Protocol layers, service models

1.8 History

Internet structure: network of networks

- roughly hierarchical
- at center: "tier-1" ISPs (e.g., MCI, Sprint, AT&T, Cable and Wireless), national/international coverage
  - treat each other as equals

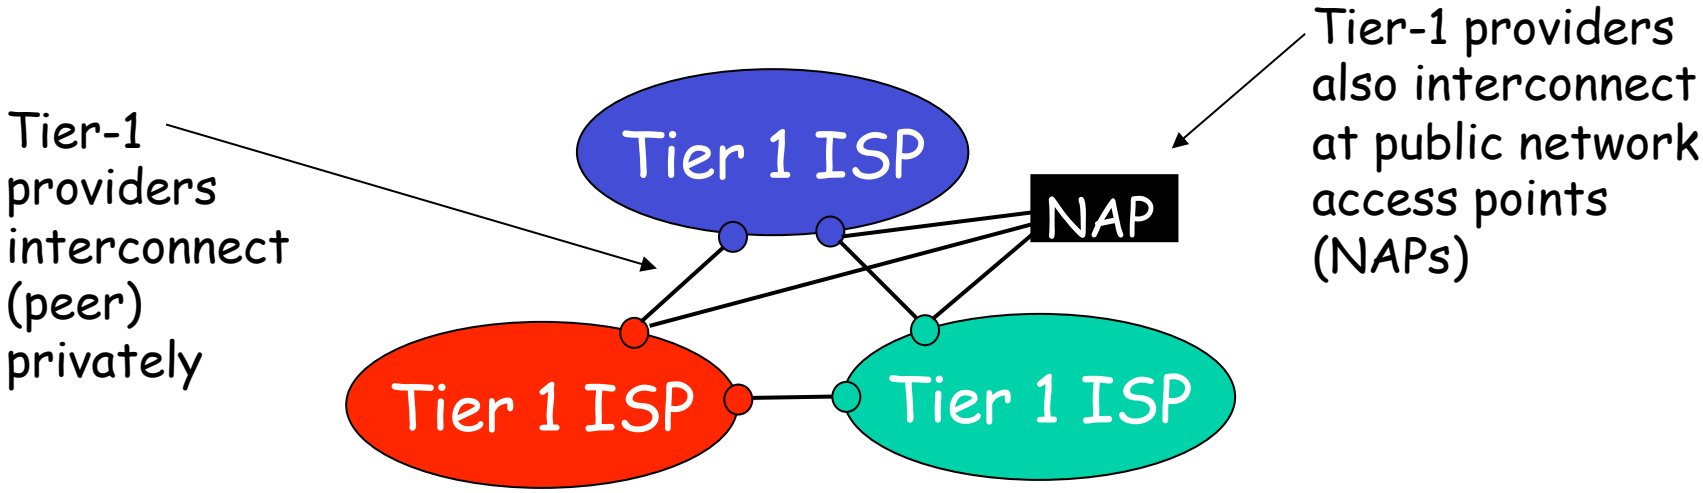

Tier-1 ISP: e.g., Sprint

Sprint US backbone network

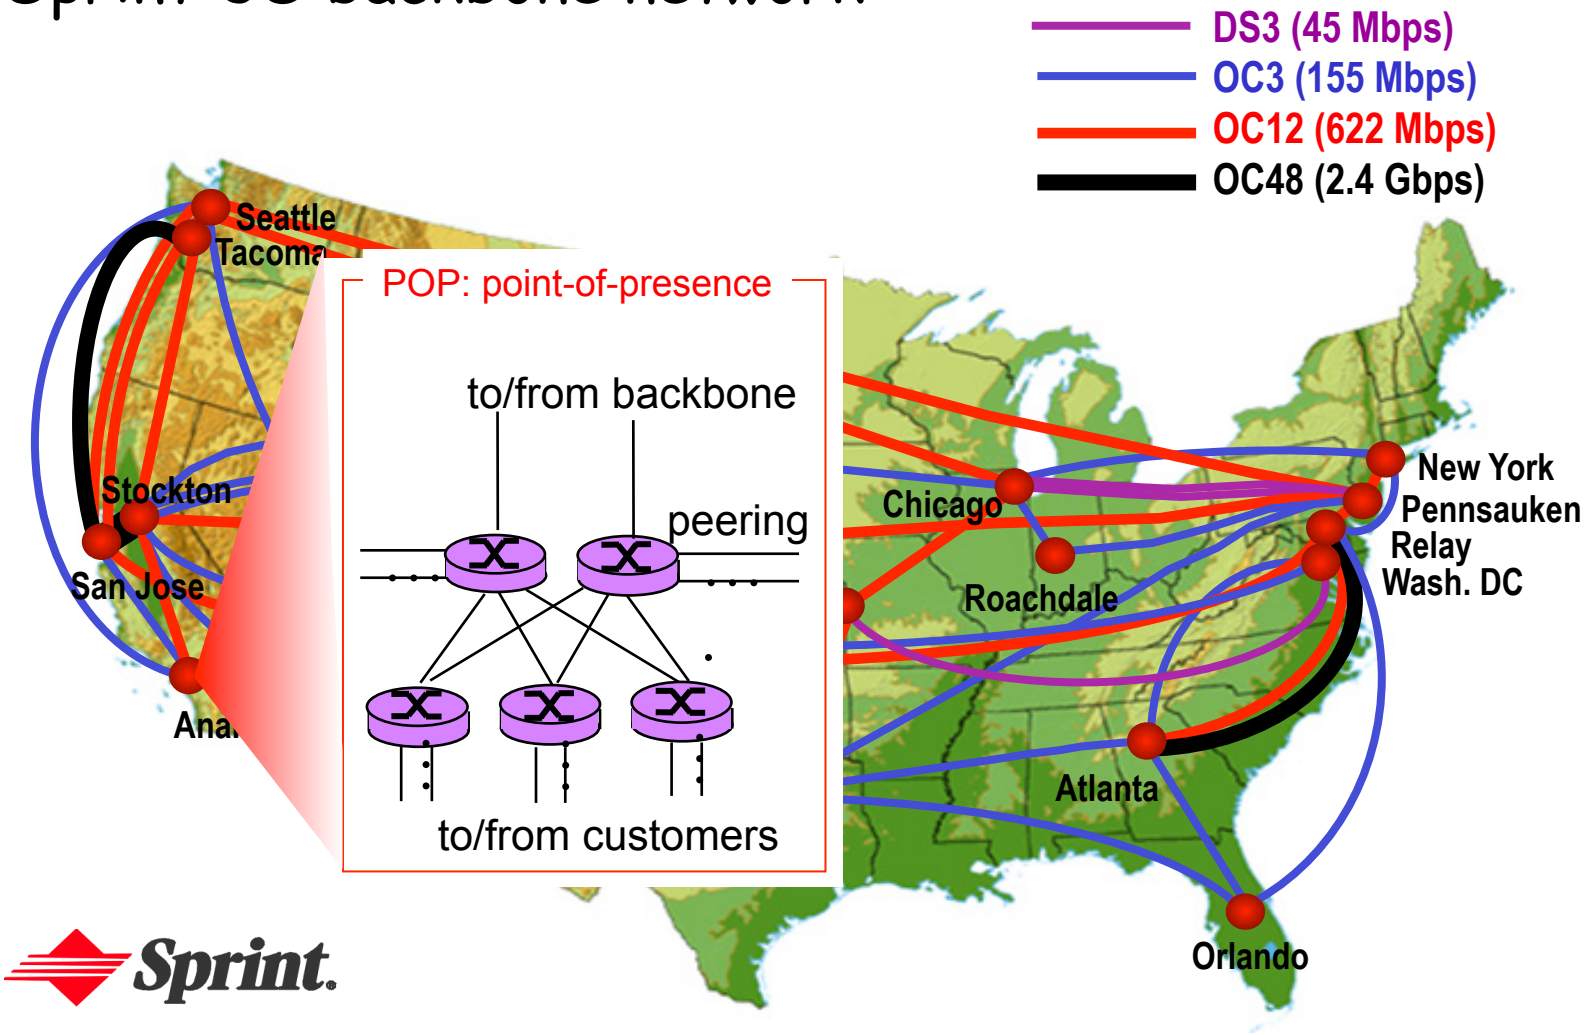

Internet structure: network of networks

- "Tier-2" ISPs: smaller (often regional) ISPs
  - Connect to one or more tier-1 ISPs, possibly other tier-2 ISPs

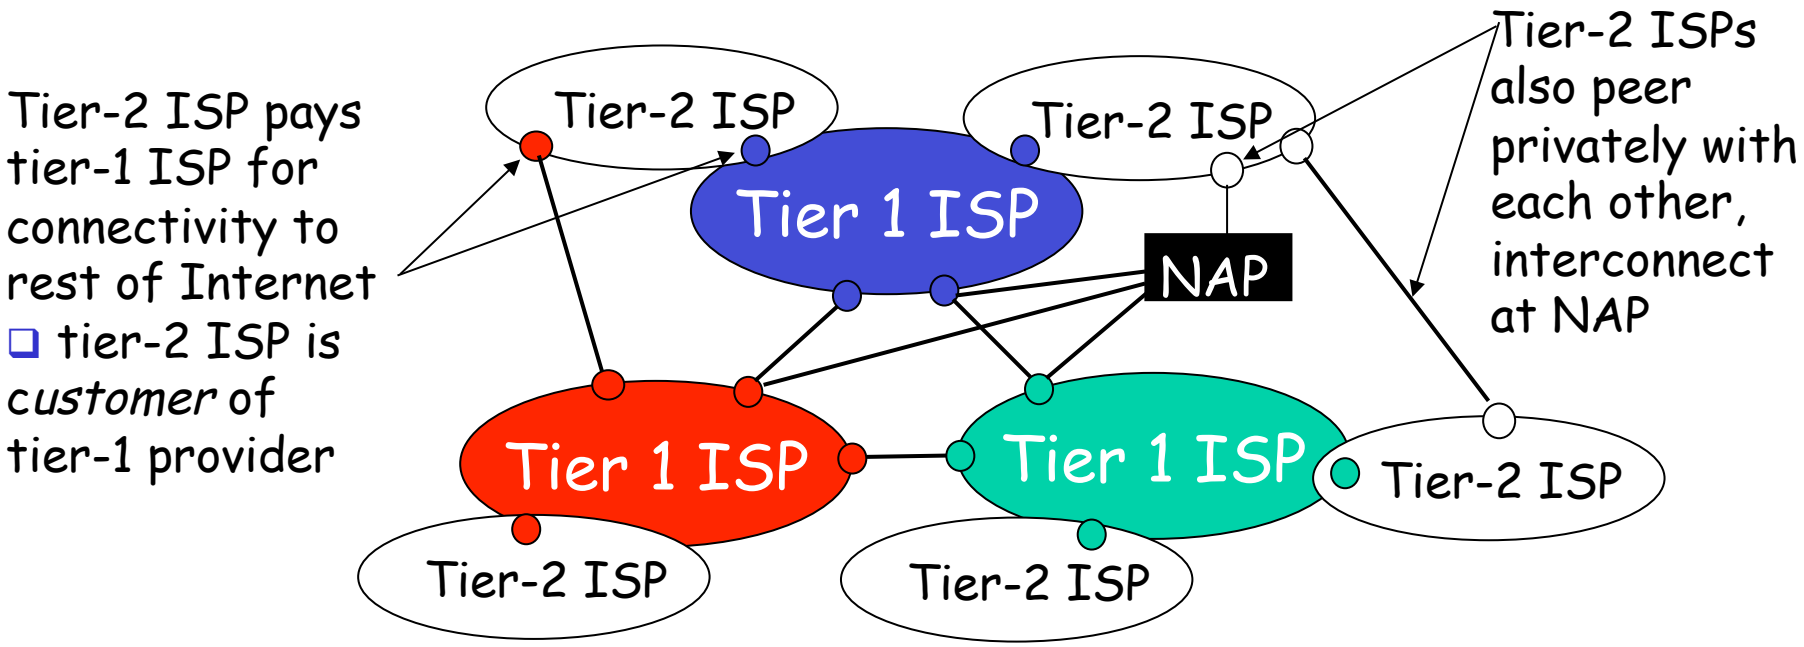

Internet structure: network of networks

- "Tier-3" ISPs and local ISPs
  - last hop ("access") network (closest to end systems)

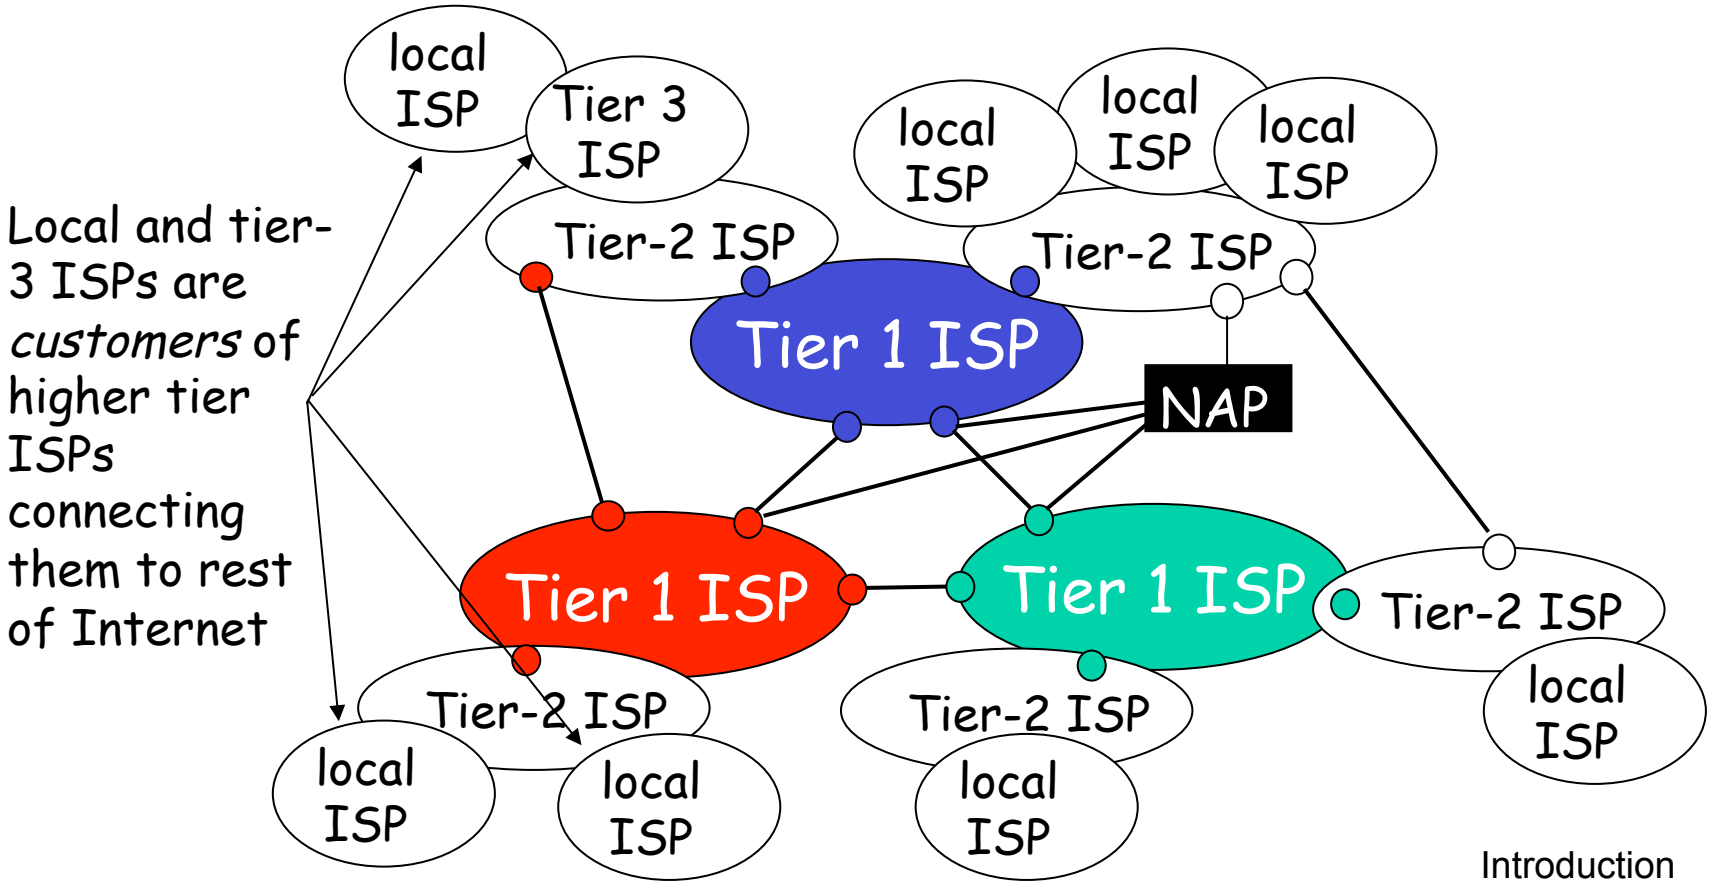

Internet structure: network of networks

- a packet passes through many networks!

  local (taxi) → T1 (bus) → T2 (domestic) → T3 (international)

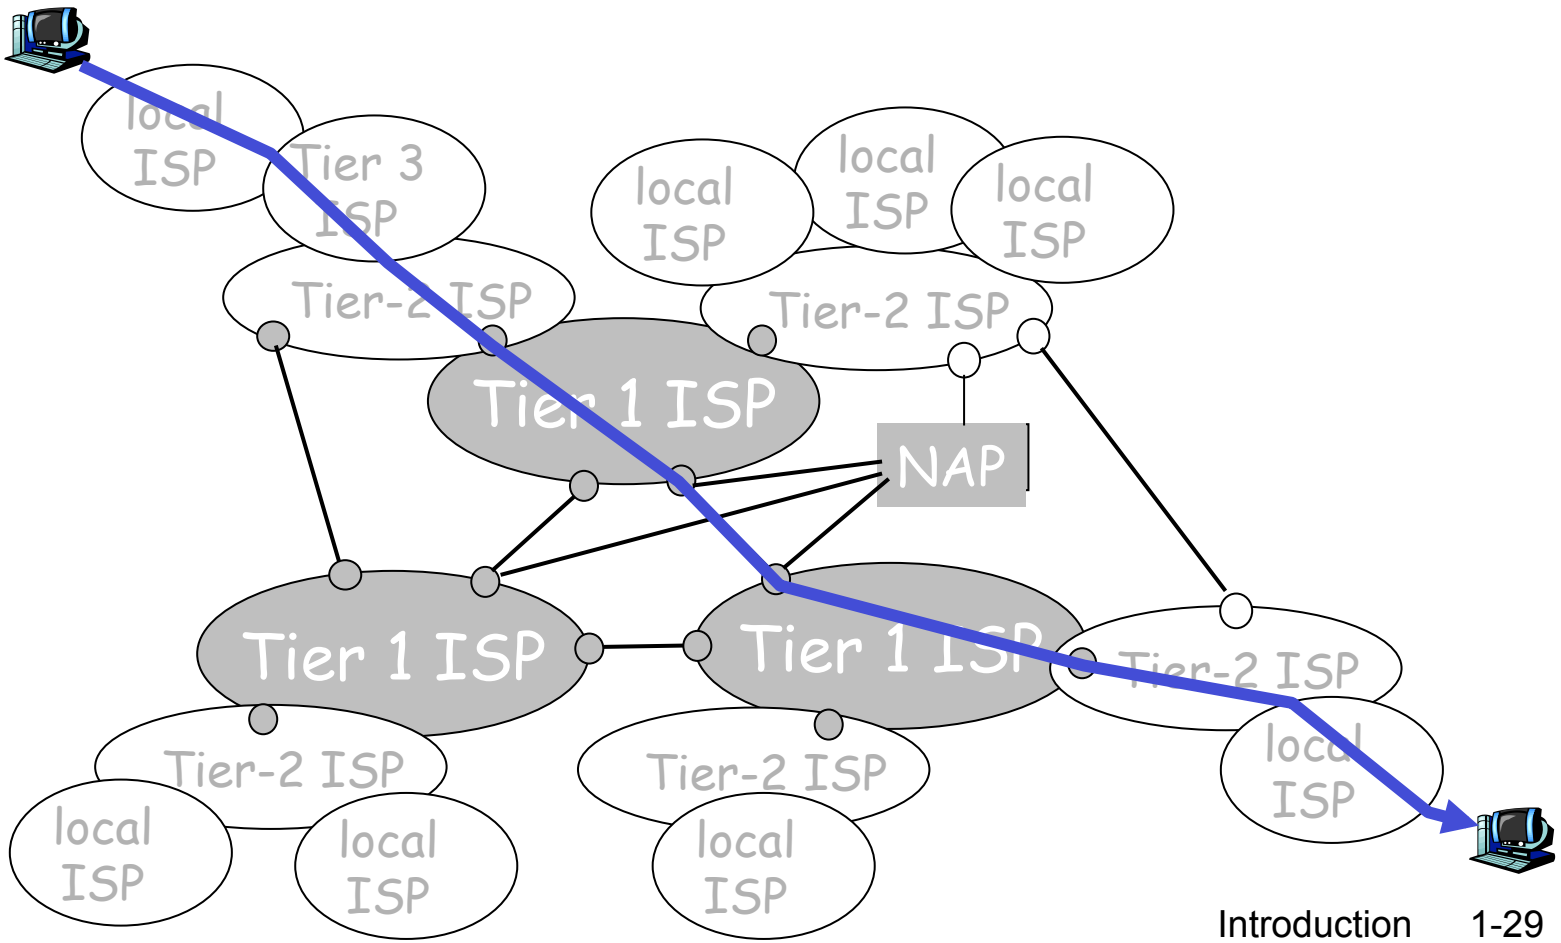

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

1.3 Network access and physical media

1.4 Network core

1.5 Internet structure and ISPs

1.6 Delay & loss in packet-switched networks

1.7 Protocol layers, service models

1.8 History

How do loss and delay occur?

packets *queue* in router buffers

- packet arrival rate to link exceeds output link capacity
- packets queue, wait for turn

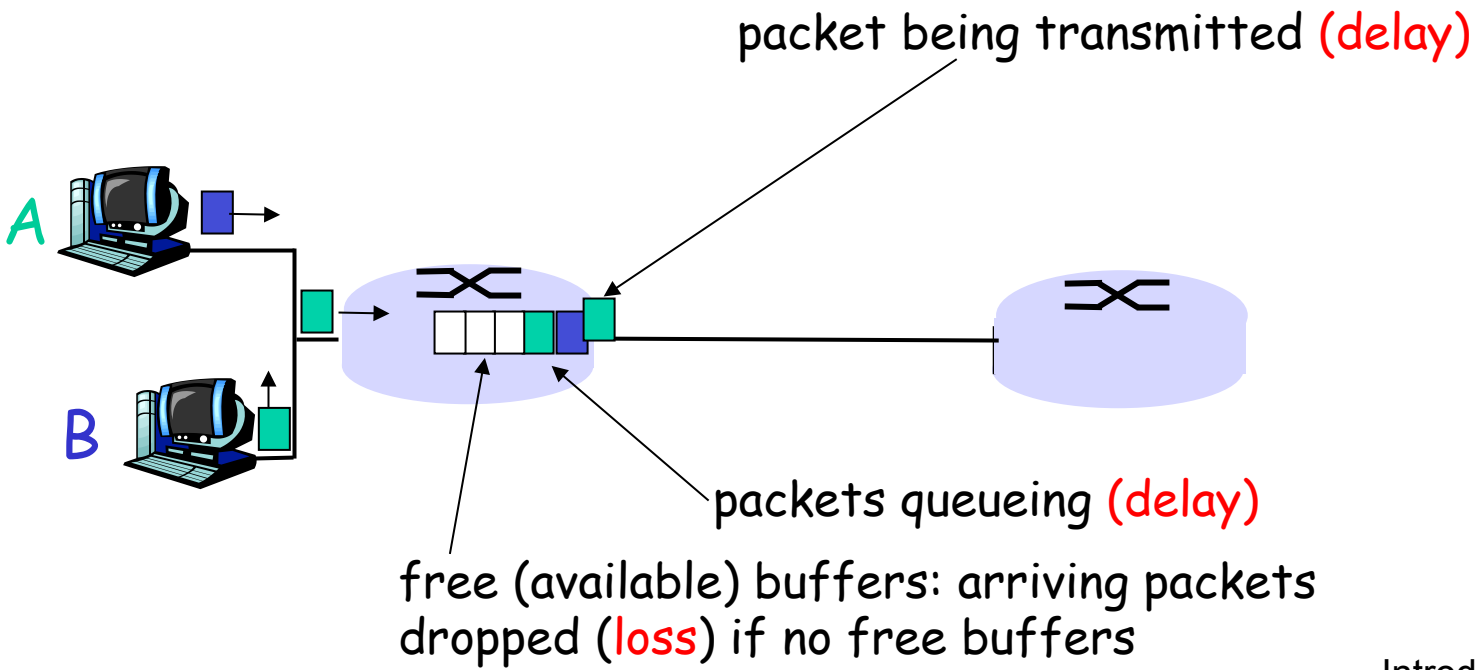

Four sources of packet delay

- 1. nodal processing:
  - check bit errors
  - determine output link
- 2. queueing
  - time waiting at output link for transmission
  - depends on congestion level of router

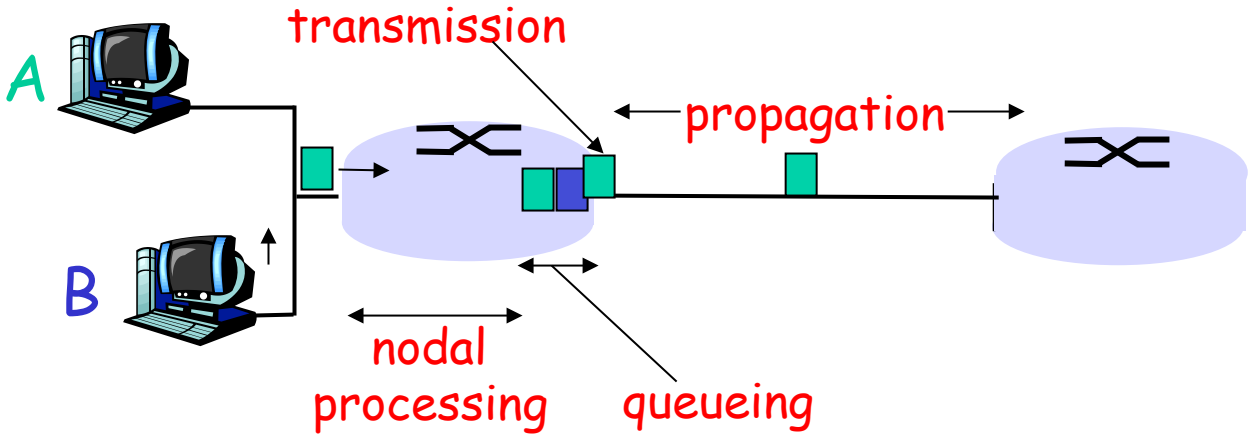

Delay in packet-switched networks

3. Transmission delay:

- R=link bandwidth (bps)
- L=packet length (bits)
- time to send bits into link = L/R

4. Propagation delay:

- d = length of physical link
- s = propagation speed in medium (~$2x10^8$ m/sec)
- propagation delay = d/s

Note: s and R are *very* different quantities!

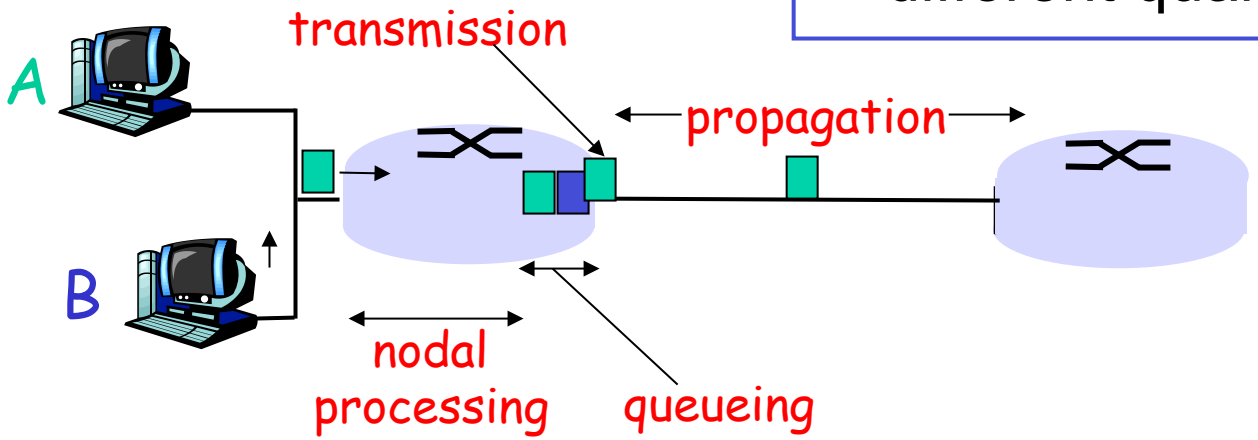

Caravan analogy

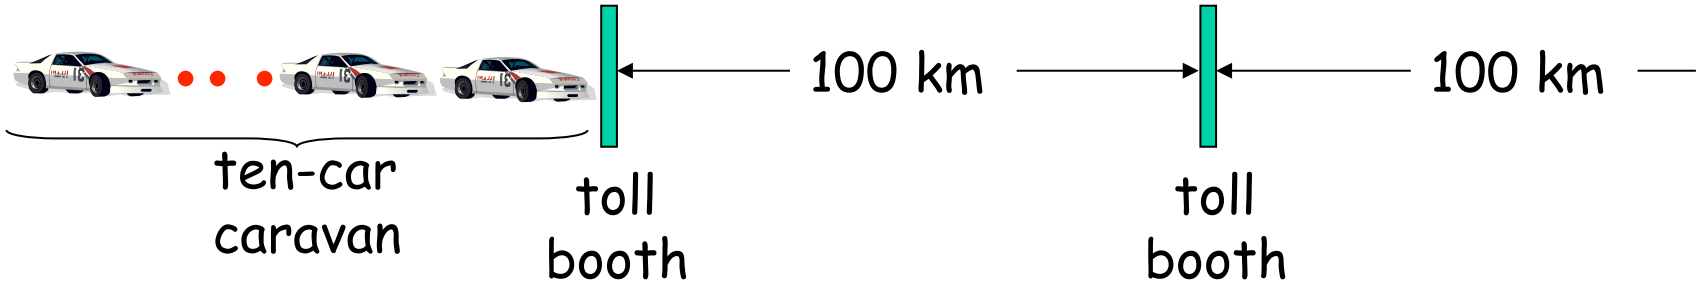

- Cars "propagate" at 100 km/hr
- Toll booth takes 12 sec to service a car (transmission time)
- car~bit; caravan ~ packet
- Q: How long until caravan is lined up before 2nd toll booth?

- Time to "push" entire caravan through toll booth onto highway = 12*10 = 120 sec
- Time for last car to propagate from 1st to 2nd toll both: 100km/(100km/hr)= 1 hr
- A: 62 minutes

Caravan analogy (more)

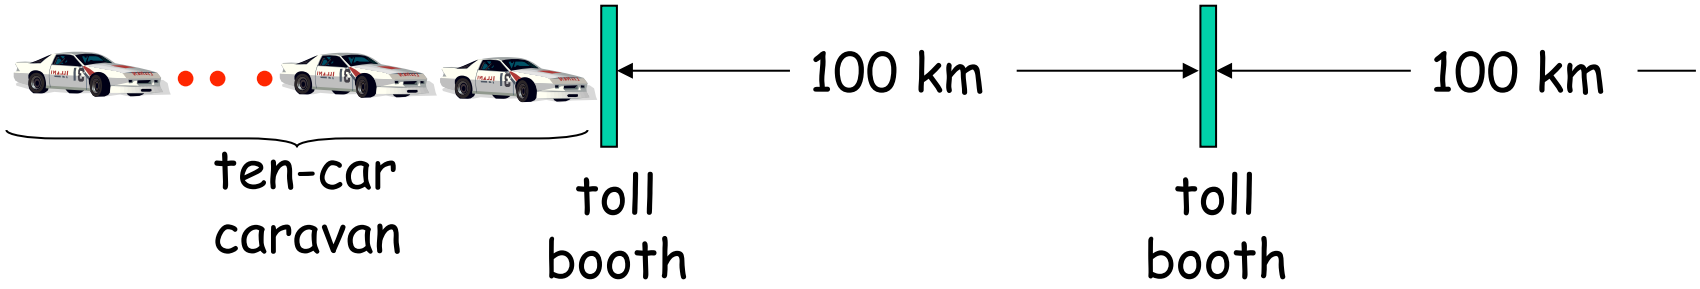

- Cars now "propagate" at 1000 km/hr
- Toll booth now takes 1 min to service a car
- Q: Will cars arrive to 2nd booth before all cars serviced at 1st booth?

- Yes! After 7 min, 1st car at 2nd booth and 3 cars still at 1st booth.
- 1st bit of packet can arrive at 2nd router before packet is fully transmitted at 1st router!
  - See Ethernet applet at AWL Web site

Nodal delay

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$

- d_{proc} = processing delay
  - typically a few microsecs or less
- d_{queue} = queuing delay
  - depends on congestion
- d_{trans} = transmission delay
  - = L/R, significant for low-speed links
- d_{prop} = propagation delay
  - a few microsecs to hundreds of msecs

Queueing delay (revisited)

- R=link bandwidth (bps)
- L=packet length (bits)
- a=average packet arrival rate

traffic intensity = La/R

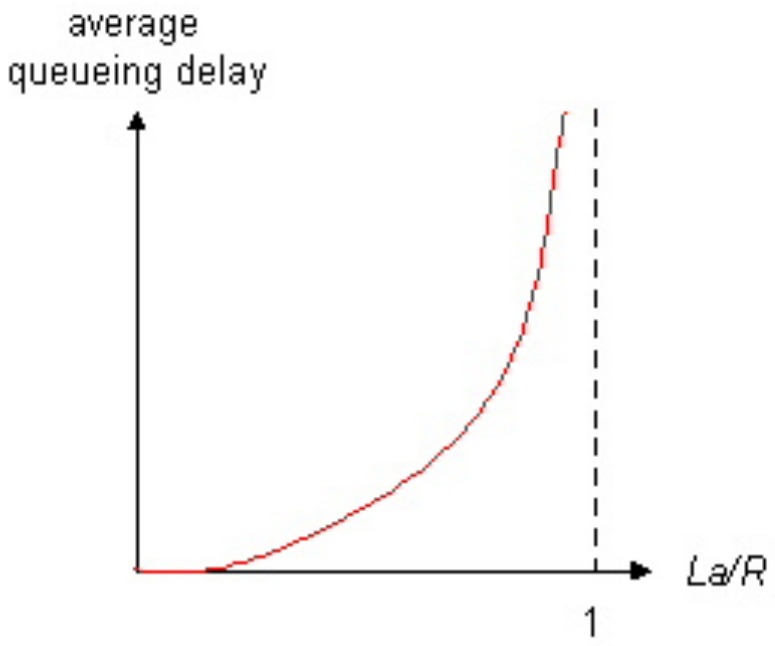

- La/R ~ 0: average queueing delay small
- La/R -> 1: delays become large
- La/R > 1: more “work” arriving than can be serviced, average delay infinite!

"Real" Internet delays and routes

- What do "real" Internet delay & loss look like?
- **`Traceroute`** program: provides delay measurement from source to router along end-end Internet path towards destination. For all *i:*
  - sends three packets that will reach router *i* on path towards destination
  - router *i* will return packets to sender
  - sender times interval between transmission and reply.

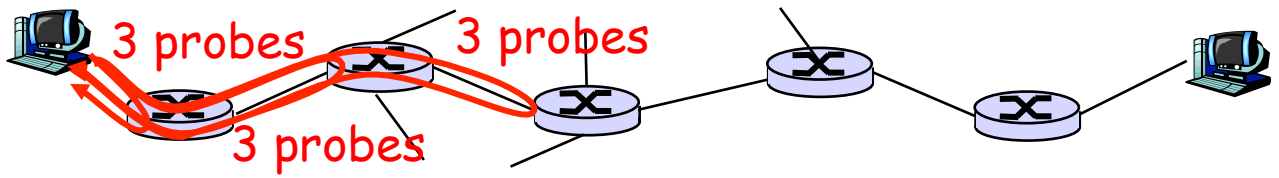

"Real" Internet delays and routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

Three delay measurements from gaia.cs.umass.edu to cs-gw.cs.umass.edu

```
1  cs-gw (128.119.240.254)  1 ms  1 ms  2 ms
2  border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145)  1 ms  1 ms  2 ms
3  cht-vbns.gw.umass.edu (128.119.3.130)  6 ms 5 ms 5 ms
4  jn1-at1-0-0-19.wor.vbns.net (204.147.132.129)  16 ms 11 ms 13 ms
5  jn1-so7-0-0-0.wae.vbns.net (204.147.136.136)  21 ms 18 ms 18 ms
6  abilene-vbns.abilene.ucaid.edu (198.32.11.9)  22 ms  18 ms  22 ms
7  nycm-wash.abilene.ucaid.edu (198.32.8.46)  22 ms  22 ms  22 ms
8  62.40.103.253 (62.40.103.253)  104 ms 109 ms 106 ms
9  de2-1.de1.de.geant.net (62.40.96.129)  109 ms 102 ms 104 ms
10  de.fr1.fr.geant.net (62.40.96.50)  113 ms 121 ms 114 ms
11  renater-gw.fr1.fr.geant.net (62.40.103.54)  112 ms  114 ms  112 ms
12  nio-n2.cssi.renater.fr (193.51.206.13)  111 ms  114 ms  116 ms
13  nice.cssi.renater.fr (195.220.98.102)  123 ms  125 ms  124 ms
14  r3t2-nice.cssi.renater.fr (195.220.98.110)  126 ms  126 ms  124 ms
15  eurecom-valbonne.r3t2.ft.net (193.48.50.54)  135 ms  128 ms  133 ms
16  194.214.211.25 (194.214.211.25)  126 ms  128 ms  126 ms
17  * * *
18  * * *
19  fantasia.eurecom.fr (193.55.113.142)  132 ms  128 ms  136 ms
```

trans-oceanic link

* means no response (probe lost, router not replying)

Packet loss

- queue (aka buffer) preceding link has finite capacity
- when packet arrives to full queue, packet is dropped (aka lost)
- lost packet may be retransmitted by previous node, by source end system, or not retransmitted at all

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

1.3 Network access and physical media

1.4 Network core

1.5 Internet structure and ISPs

1.6 Delay & loss in packet-switched networks

1.7 Protocol layers, service models

1.8 History

Protocol "Layers"

Networks are complex!

- many "pieces":
  - hosts
  - routers
  - links of various media
  - applications
  - protocols
  - hardware, software

Question:

Is there any hope of *organizing* structure of network?

Or at least our discussion of networks?

Layering of airline functionality

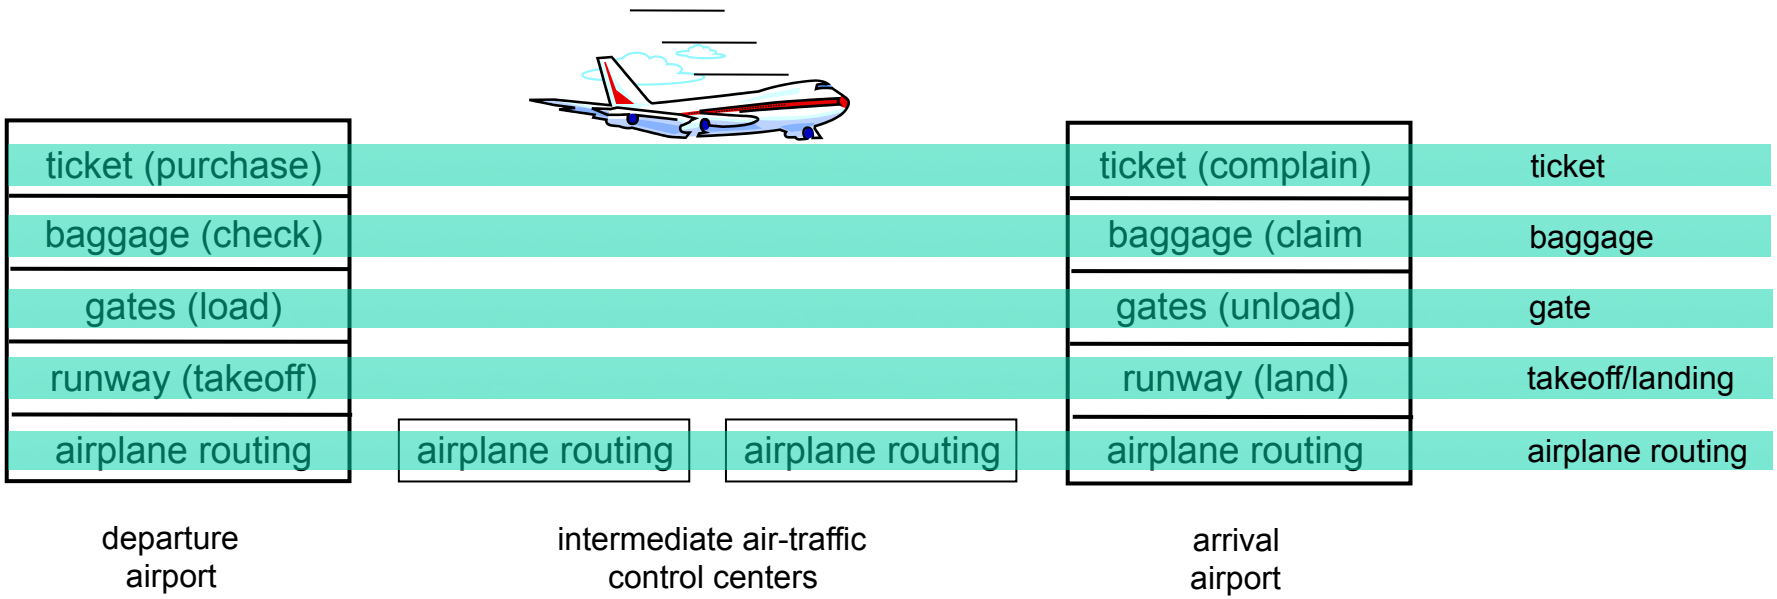

Layers: each layer implements a service

- Same layers communicate
  - Baggage section of RDU only calls baggage section of LAX
- Layers rely on services provided by layer below

Internet protocol stack

- application: supporting network applications
  - FTP, SMTP, HTTP
- transport: host-host data transfer
  - TCP, UDP
- network: routing of datagrams from source to destination
  - IP, routing protocols
- link: data transfer between neighboring network elements
  - PPP, Ethernet
- physical: bits “on the wire”

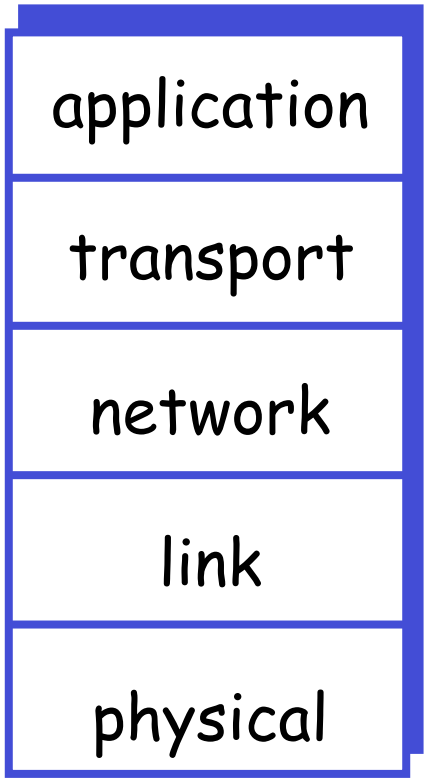

Encapsulation