


CM7V-T1A

Tuning Fork Crystal 32.768 kHz



100% leadfree, RoHS - compliant

DIMENSIONS

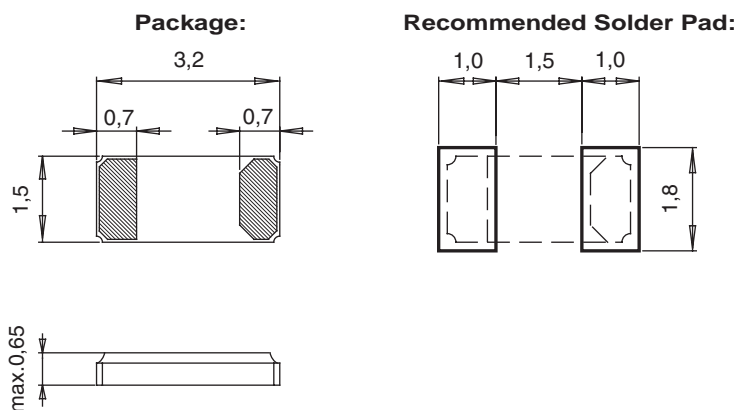

All dimensions in mm typical

Miniature SMT ceramic package with metal lid
Low package height 0.65 mm max.
SMD-package in Tape and Reel
Ind. and Ext. temperature ranges
AEC-Q200 automotive compliant
High stability, Low aging
Low power consumption
High shock and vibration resistance

DESCRIPTION:

This SMD ceramic package with metal lid has been specially designed for miniature industrial, telecom and portable applications. This part is available for extended operating temperature range and is compliant with the AEC-Q200 quality standards for automotive applications. A special crystal manufacturing process is used to achieve improved electrical characteristics and a miniaturized blank size.

For pick-and-place equipment, the parts are available in 12 mm tape:

7" (178 mm) reel with 1'000 crystals

7" (178 mm) reel with 3'000 crystals

13" (330 mm) reel with 14'000 crystals

ELECTRICAL CHARACTERISTICS AT 25°C:

Nominal Frequency ¹⁾	F _L	32.768	kHz
Load capacitance ²⁾	C _L	7.0 / 9.0 / 12.5	pF
Frequency tolerance ³⁾	ΔF/F	+/-20	ppm
	ΔF/F	+/-100	ppm
Series resistance typ./max.	R _s	50 / 70	kΩ
Motional capacitance typ.	C ₁	3.7	fF
Static capacitance typ.	C ₀	1.2	pF
Drive level max.	P	1.0	μW
Insulation resistance min.	R _i	500	MΩ
Aging first year max.	ΔF/F	+/-3	ppm
Turnover temperature	T ₀	25 +/-5	°C
Frequency vs. temperature	ΔF/F ₀	-0.035 ppm/°C ² (T - T ₀) ² +/-10%	ppm

1) Other frequencies on request.

2) Other load capacitances on request.

3) Tighter and wider frequency tolerances on request.


ENVIRONMENTAL CHARACTERISTICS:

Frequency kHz
32.768
Other frequencies on request

		Conditions	Max. Dev.
Storage temp. range		−55 to +125°C	
TA Operating temperature range		−40 to +85°C	
TB Extended oper. temp. range		−40 to +125°C	
TC Extended oper. temp. range		−55 to +125°C	
Shock resistance	ΔF/F	5000 g, 0.3 ms, ½ sine	+/-5 ppm
Vibration resistance	ΔF/F	20 g / 10–2000 Hz	+/-5 ppm

PRODUCT DESCRIPTION AND ORDERING INFORMATION:

Type	Termination	Processing
CM7V-T1A	For SMD mounting Au plated pads	Reflow soldering 260°C / 20 s max.

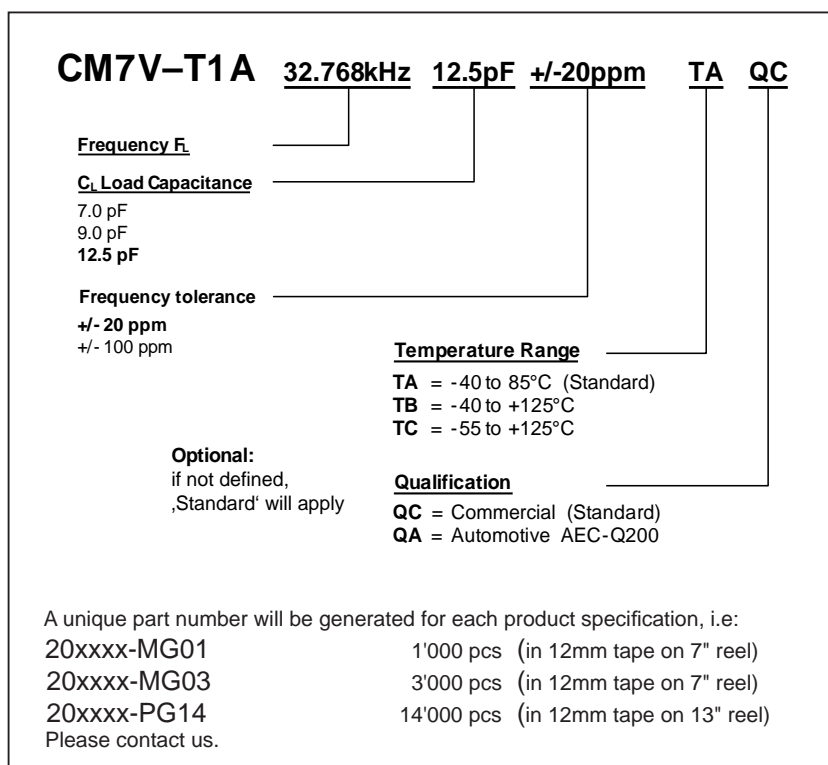

All specifications subject to change without notice.



Micro Crystal AG
Mühlestrasse 14
CH-2540 Grenchen
Switzerland

Tel. +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Micro Crystal:

[CM7V-T1A-32.768kHz-7pF-20PPM-TA-QC](#) [CM7V-T1A-Low-ESR-32.768k-7pF-10-TB-QA](#) [CM7V-T1A-Low-ESR-32.768kHz-7pF-20-TA-QC](#) [CM7V-T1A-32.768kHz-7pF-10PPM-TA-QC](#) [CM7V-T1A-32.768k-12.5pF-20PPM-TB-QA](#) [CM7V-T1A-32.768k-9pF-20PPM-TA-QA](#) [CM7V-T1A-32.768k-7pF-100PPM-TB-QA](#) [CM7V-T1A-32.768kHz-12.5pF-20PPM-TA-QC](#) [CM7V-T1A-32.768kHz-6pF-20PPM-TA-QC](#) [CM7V-T1A-32.768kHz-9pF-20PPM-TC-QC](#) [CM7V-T1A-32.768k-9pF-100PPM-TC-QA](#) [CM7V-T1A-32.768kHz-12.5pF-10PPM-TB-QC](#) [CM7V-T1A-32.768kHz-7pF-20PPM-TB-QC](#) [CM7V-T1A-100.000kHz-9pF-100PPM-TA-QC](#) [CM7V-T1A-32.768k-7pF-20PPM-TB-QA](#) [CM7V-T1A-0.3-32.768kHz-7pF-20PPM-TA-QC](#) [CM7V-T1A-Low-ESR-32.768k-9pF-20-TB-QA](#) [CM7V-T1A-Low-ESR-32.768kHz-6pF-20-TA-QC](#) [CM7V-T1A-32.768kHz-9pF-20PPM-TA-QC](#) [CM7V-T1A-0.3-32.768kHz-9pF-20PPM-TA-QC](#) [CM7V-T1A-32.768kHz-6pF-10PPM-TA-QC](#) [CM7V-T1A-32.768kHz-12.5pF-20PPM-TC-QC](#) [CM7V-T1A-32.768kHz-9pF-100PPM-TA-QC](#) [CM7V-T1A-32.768kHz-12.5pF-100PPM-TC-QC](#) [CM7V-T1A-32.768k-12.5pF-10PPM-TA-QA](#) [CM7V-T1A-32.768k-12.5pF-20PPM-TC-QA](#) [CM7V-T1A-32.768kHz-12.5pF-100PPM-TA-QC](#) [CM7V-T1A-32.768k-6pF-20PPM-TB-QA](#) [CM7VT1A-LowESR-32.768kHz-12.5pF-20-TA-QC](#) [CM7V-T1A-32.768kHz-12.5pF-20PPM-TB-QC](#) [CM7V-T1A-32.768k-9pF-20PPM-TB-QA](#) [CM7V-T1A-32.768kHz-9pF-20PPM-TB-QC](#) [CM7VT1A-0.3-32.768kHz-12.5pF-20PPM-TA-QC](#) [CM7V-T1A-32.768kHz-12.5pF-100PPM-TB-QC](#) [CM7V-T1A-32.768k-9pF-20PPM-TC-QA](#) [CM7V-T1A-32.768kHz-7pF-100PPM-TA-QC](#) [CM7V-T1A-32.768kHz-12.5pF-10PPM-TA-QC](#) [CM7V-T1A-32.768k-7pF-20PPM-TC-QA](#) [CM7V-T1A-32.768kHz-9pF-10PPM-TB-QC](#) [CM7V-T1A-32.768k-12.5pF-20PPM-TA-QA](#) [CM7V-T1A-Low-ESR-32.768kHz-9pF-20-TA-QC](#) [CM7V-T1A-32.768kHz-9pF-10PPM-TA-QC](#) [CM7V-T1A-32.768k-7pF-20PPM-TA-QA](#)