



PATCH-BAY(S)

Non-normalized - through

P.1

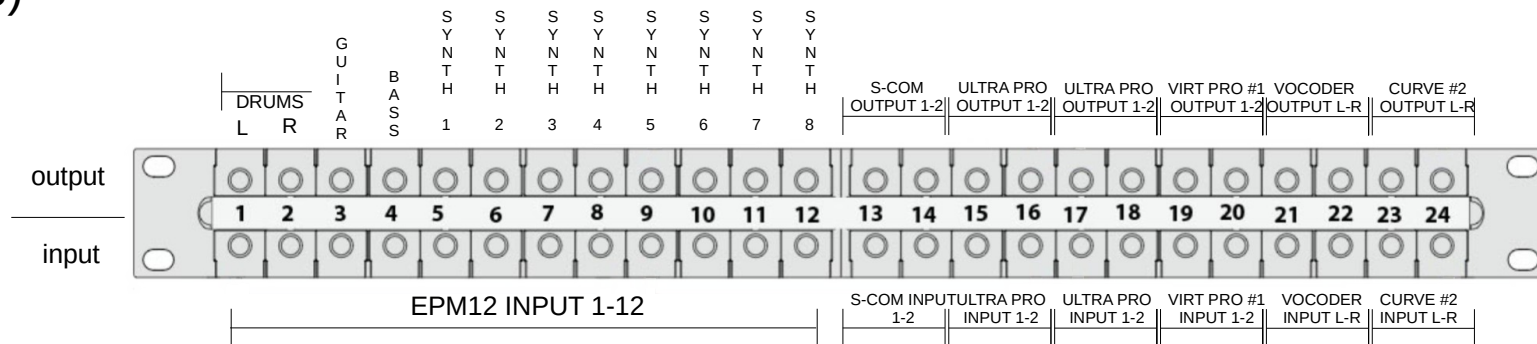


P.2

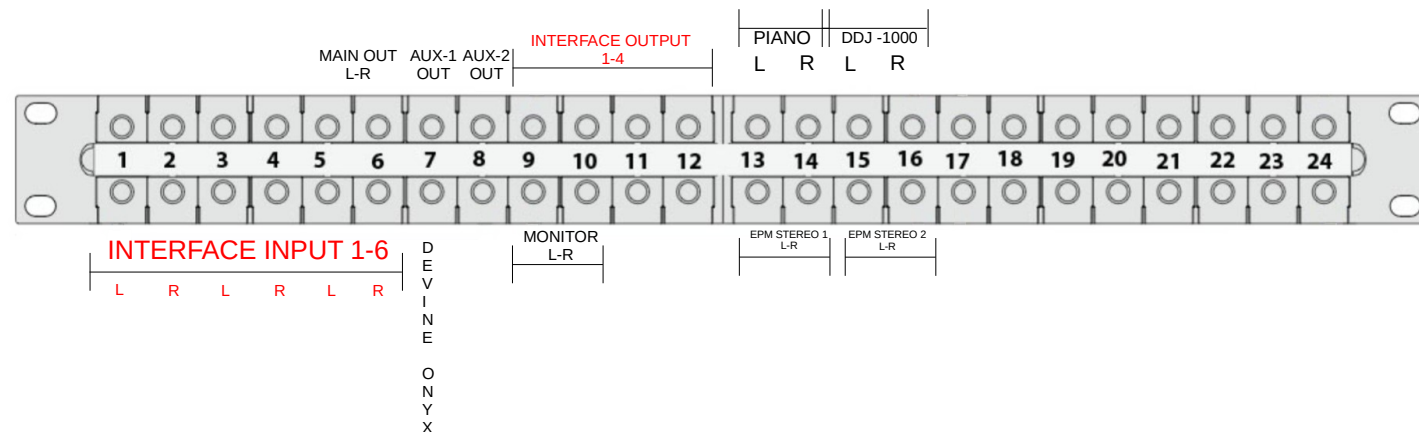

NOTE:

Entire patch-bay configured in half-normalized setup if not mentioned implicitly otherwise as visualized on the right


Interface patchpoints in red mean that these points are configured in Focusrite Control software (Windows / Mac), and can only be adjusted in this software. More information about audio interface setup can be found in [AUDIO-INTERFACE-CONFIGURATION visualization](#)

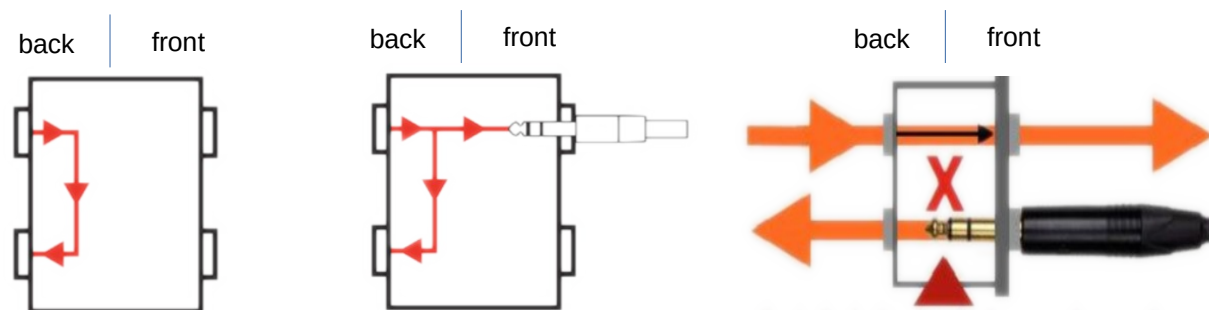




The Scarlett Focusrite 18i6 3rd generation has been configured in the following way using the Focusrite Control Software. The interface has two different groups of stereo outputs. Output 1-2 are grouped to be one stereo output, and output 3-4 are another group-with output group (1,2) going to the monitors in the patch bay. Both of them have the same configuration in which the usb software (DAW) input is made into stereo, and that the 6 line inputs have been grouped into 3 groups of stereo inputs [group-1: {1,2}, group-2: {3,4}, group: {5,6}]. This is to ensure stereo output and that you can both have sound coming from the computer + from the analogue equipment connected to the mixer / patchbays.

Stereo output groups


Group-1

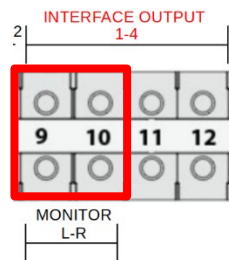

Group-2

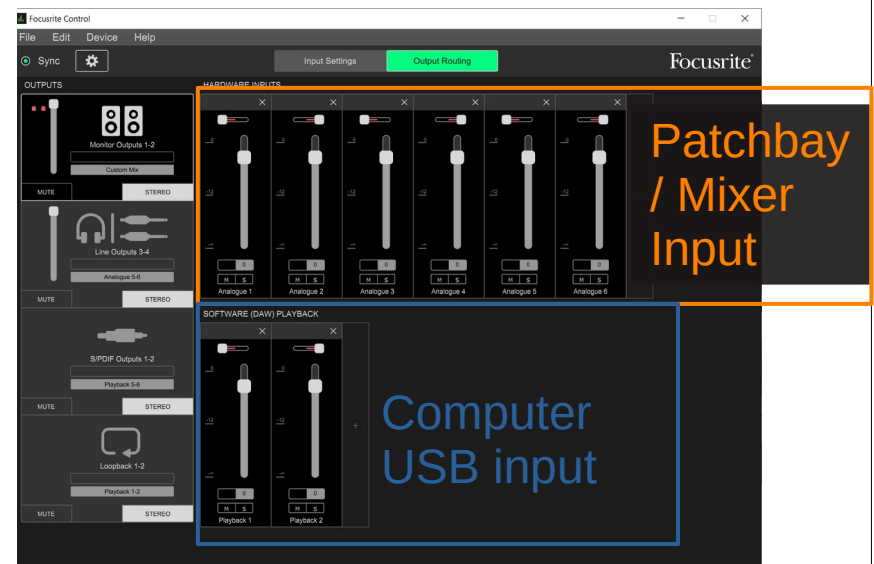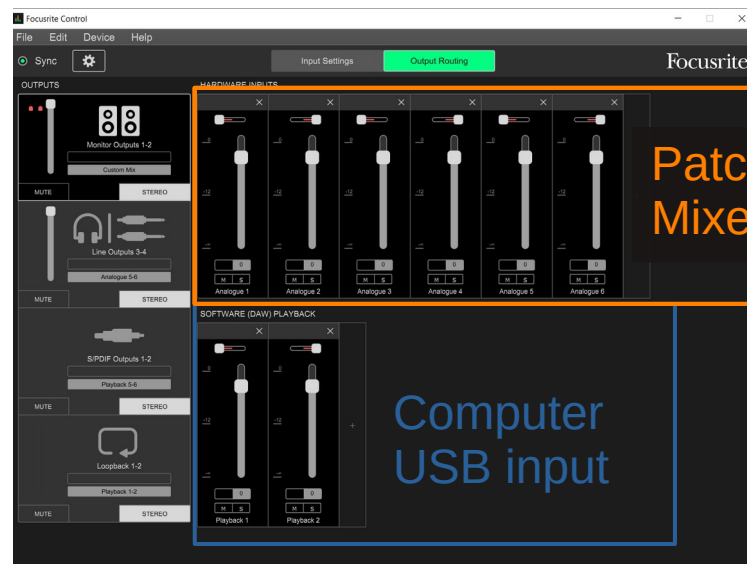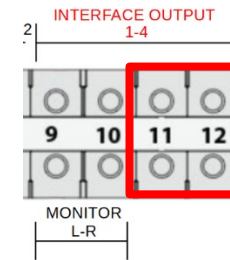

LAYOUT

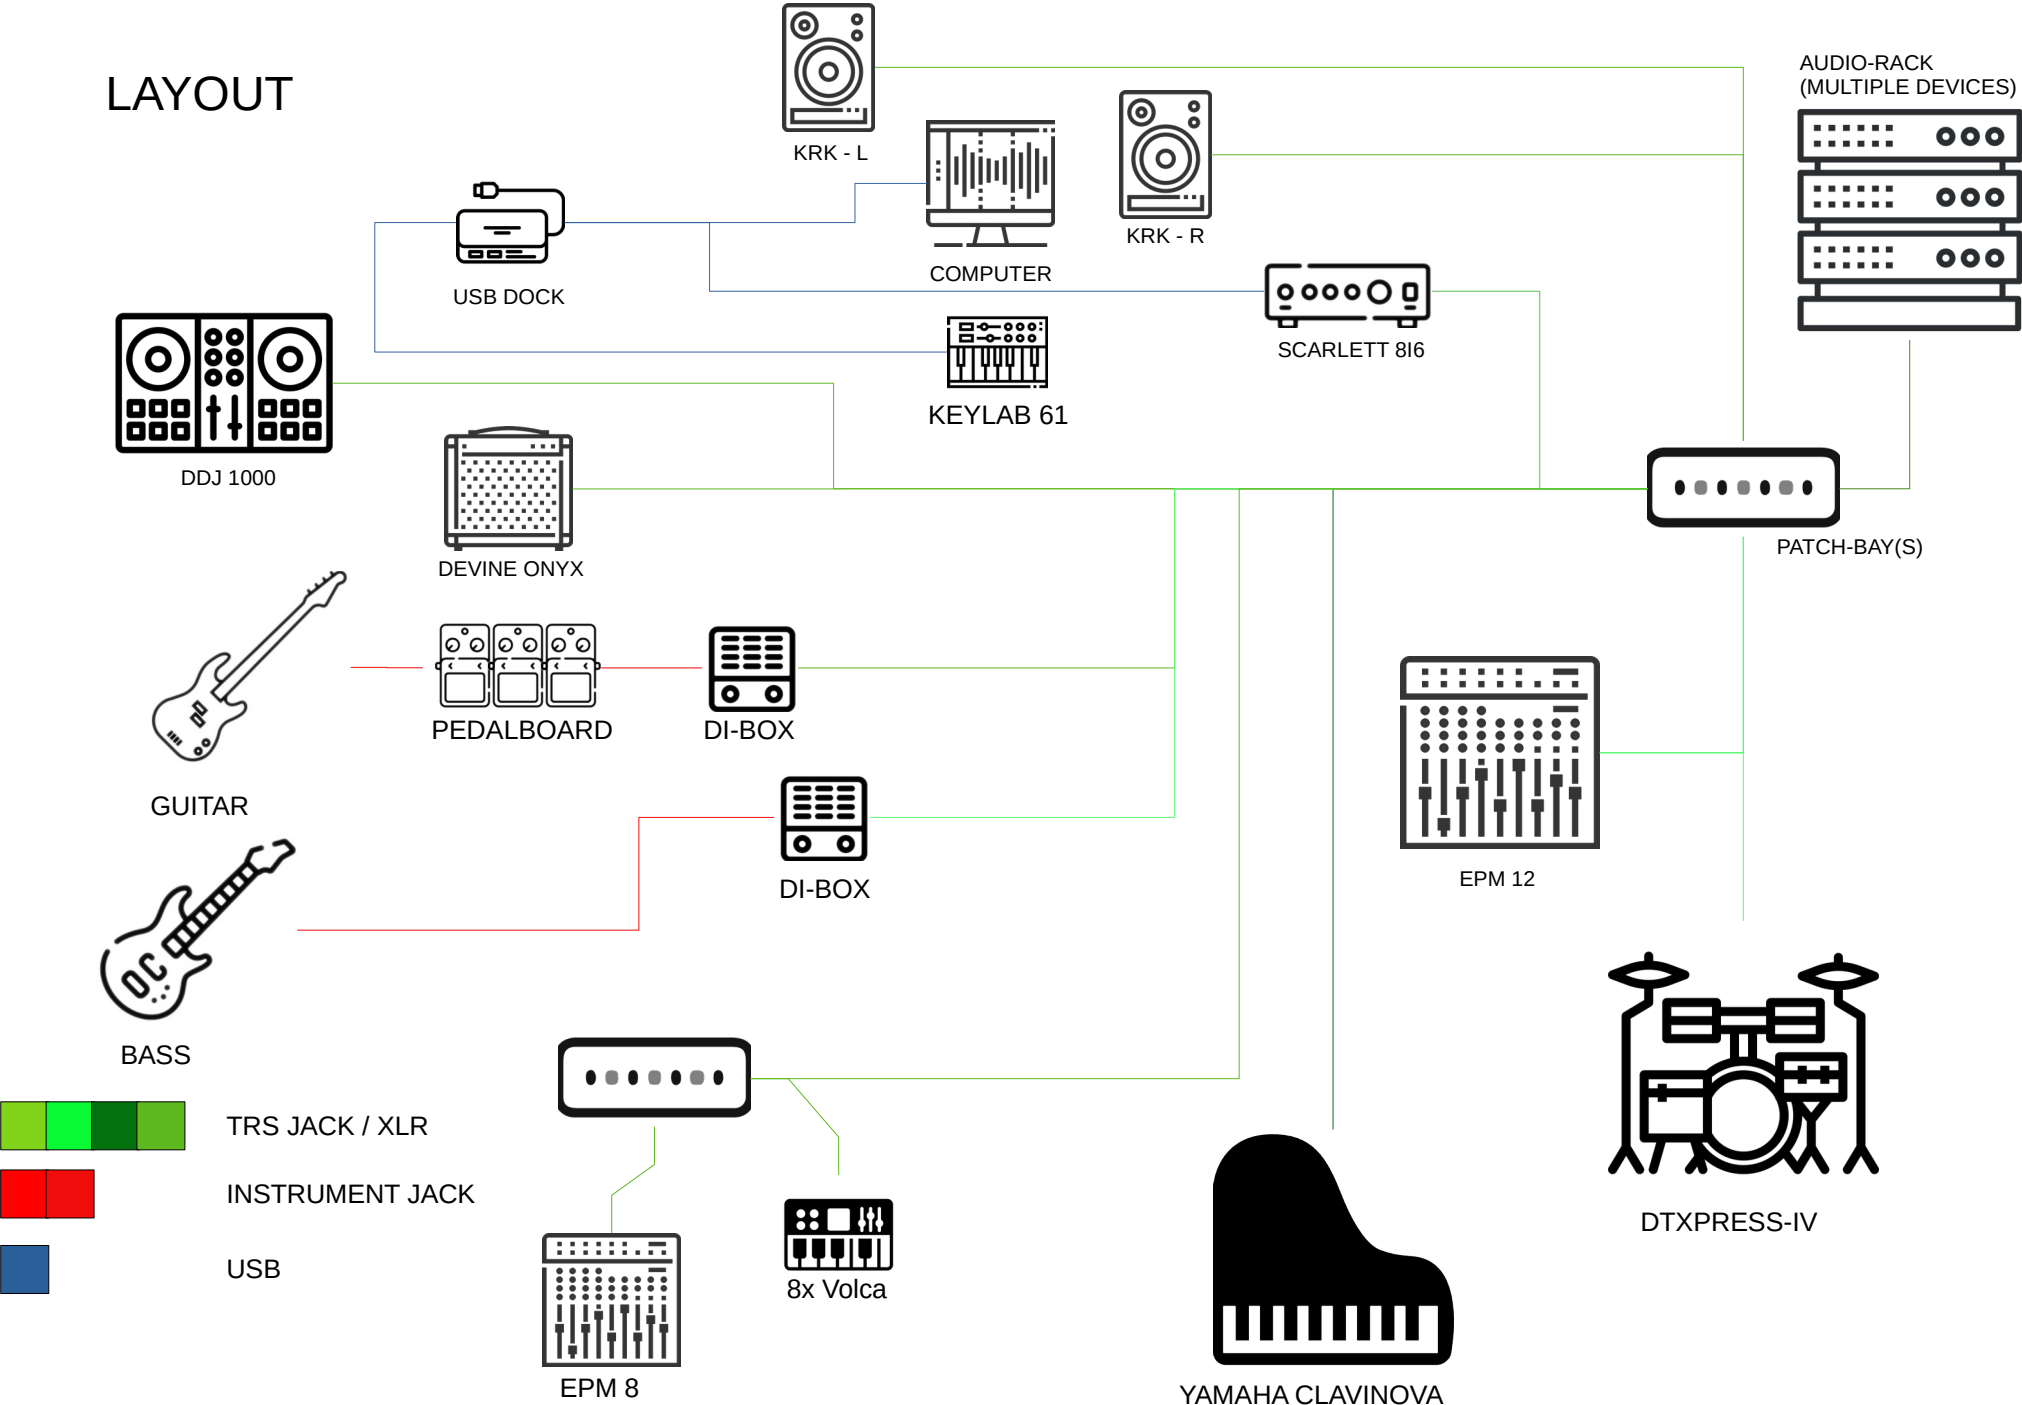

MIDI

