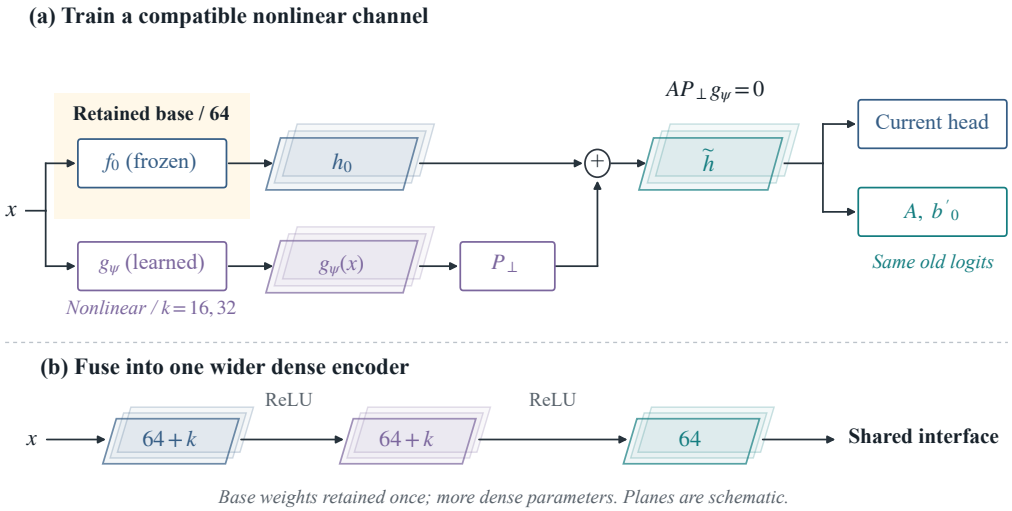

(a) Train a compatible nonlinear channel
Retained base / 64
f_0 (frozen)
h_0
x
g_ψ (learned)
$g_\psi(x)$
$P_\perp$
Nonlinear / $k = 16, 32$
$AP_\perp g_\psi = 0$
$\tilde{h}$
Current head
$A,\ b'_0$
Same old logits
(b) Fuse into one wider dense encoder
x
$64 + k$
ReLU
$64 + k$
ReLU
64
Shared interface
Base weights retained once; more dense parameters. Planes are schematic.