

[Working Title] Using a neural interface for interaction in virtual reality

an HCI study

Masters Thesis

To obtain the academic degree M.Sc.

Julius Neudecker

2025850



University of applied sciences Hamburg
Faculty of Design, Media und Information
Department of Media Engineering

First examiner: Prof. Dr. Roland Greule

Second examiner: Dipl. Inf. Rüdiger Höfert

preliminary version from May 24, 2021

Contents

1	Introduction	4
1.1	Management Summary	5
1.2	Brain-Computer-Interfaces	6
1.3	Working principle	7
1.4	Related work	8
1.5	Use case "Neural Interface in VR"	8
1.6	Hypothesis	10
2	Technological challenges	11
2.1	Resolution of the Interface	11
2.2	Constraints	11
3	Survey Structure and layout	12
3.1	Considerations	12
3.2	Survey structure	12
3.3	Survey	12
4	Survey results	13
5	Findings	14
6	Conclusion	15
6.1	Results	15
6.2	Future Work	15
7	Acknowledgements	16
A	Material	17
A.1	Surveys, Protocols, etc.	17
	List of Figures	18
	List of Tables	19
	Bibliography	20

Abstract

Modern technology evolved to pick up the electric signals emitted from the human brain in order to generate user input to electronic equipment. This study aims to evaluate a demo use-case by using a neural interface from nextmind to control user interactions in Virtual Reality.

1 Introduction

In recent years significant progress has been made on the development of interfaces which relies on direct interaction with the brain itself. The latest popular example is *Neuralink* with their monkey learning to play the game *Pong* only by using its brain ([Neuralink \(2021\)](#)). However there are more examples of a working interfacem, which will be discussed in section 1.4, since this vast area of resarch is an intersection between several areas of research: medical engineering, neuroscience, computer science and HCI¹. These interfaces are generally called *Brain-Computer-Interface* or *BCI* in short. [Microsoft Research \(23/10/2020\)](#) has a very precise definition of the scope:

Brain-Computer Interface (BCI) is a system that measures central nervous system (CNS) activity and converts it into artificial output that replaces, restores, enhances, supplements, or improves the natural CNS output and thereby changes the ongoing interactions between the CNS and its external or internal environment. BCI is direct communication pathway between an enhanced or wired brain and an external device.

As of Q2 2021 there are already devices available for consumers to buy, which fall into this category. This opens up possibilities for a widespread application of these kind of interfaces. Nevertheless, new ways of interacting with computers require some degree of resarch to define useful and user-friendly ways to interact with such technology. This study aims to provide insight into one aspect of this process.

After a thorough disussion about the state of research in this field, the research hypothesis will be defined based on considerations about future use cases. Subsequently a user survey will be designed, carried out and conclusively evaluated to put the results into context.

¹Human Computer Interaction

1.1 Management Summary

In the *2018 Gartner Hype Cycle* report (Gartner (24/05/2021)), which is shown in figure 1.1, BCIs are denoted as to be on the brink of the peak of inflated expectations:

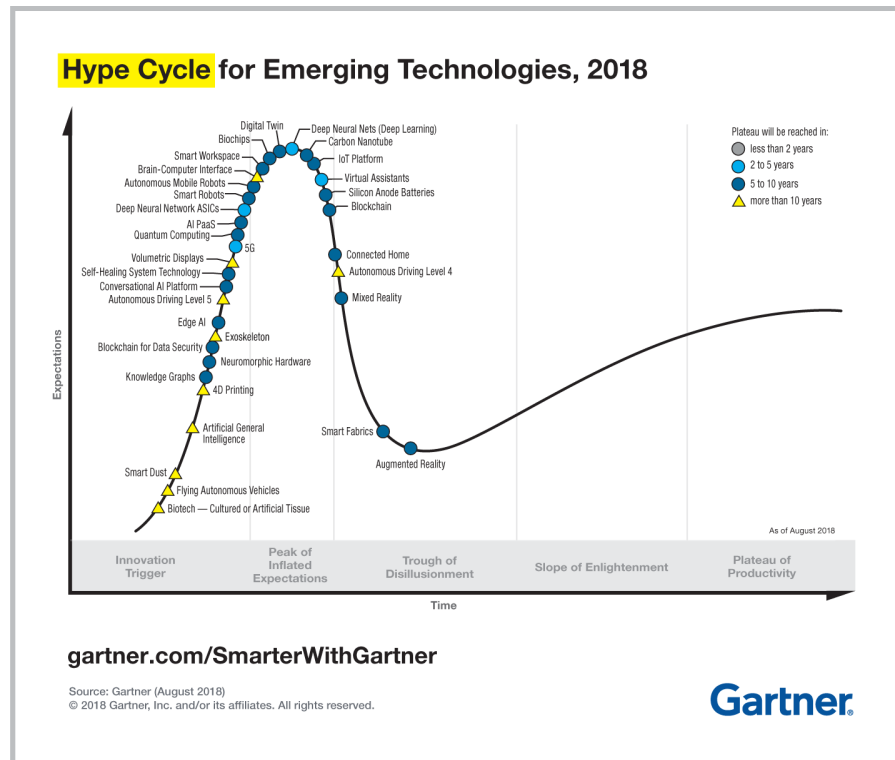


Figure 1.1: Gartner report of emerging technologies 2018

It is important to note though that as of 2018, it'll still take more than 10 years to reach a plateau of productivity. Although there is no mention about this technology in subsequent reports in the following year, two market revenue forecasts from 2015 until 2022 and 2018 until 2022 show a similar pattern in figure 1.2.

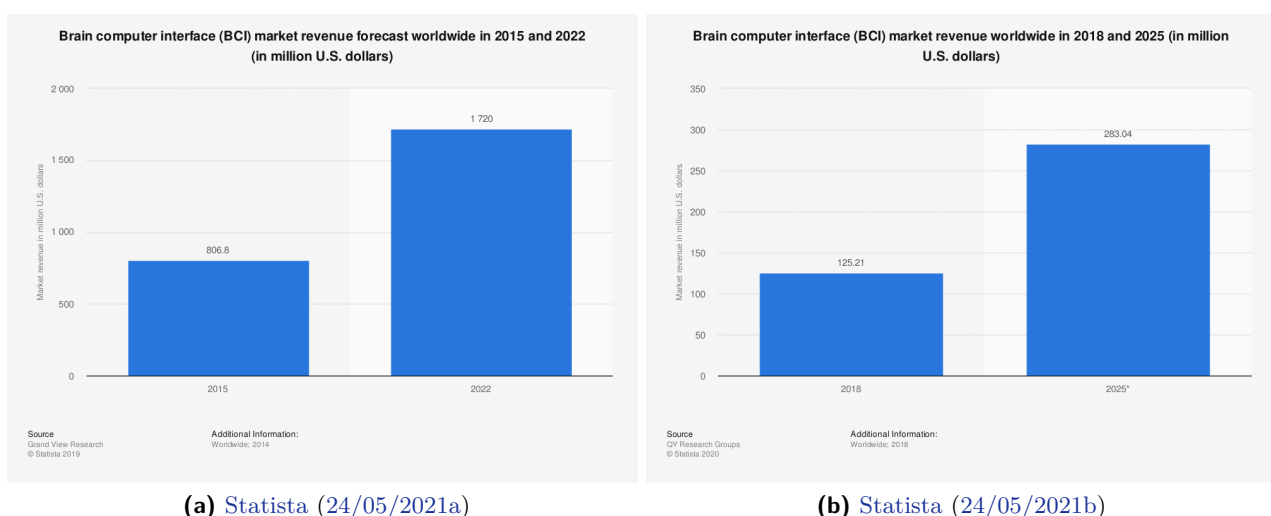


Figure 1.2: Statista revenue forecast as of 2015 and 2018

Essentially the market revenue expectation has been very inflated from 2015 on so that it was corrected downwards in 2018. But although the absolute growth was projected to only a small fraction, the relative growth potential stayed about the same of doubling within the next seven years. This is

very indicative for the technology being overhyped, as Gartner explains: (Gartner (24/05/2021))

A wave of “buzz” builds and the expectations for this innovation rise above the current reality of its capabilities. In some cases, an investment bubble forms, as happened with the web and social media

Nevertheless, what this technology sets apart from other featured technologies is the fact that it has been around for a few decades and has been continuously researched upon. A strong indicator is the amount of organizations and conferences held about this entire discipline, as can be seen in section 1.4. The fact that it has only been on the radar of early adopters and tech-enthusiasts in conjunction with market revenue projections is a strong indicator that this technology has reached a level of maturity which makes a widespread application outside of laboratories somewhat feasible.

The latest 2020 Gartner Hype Cycle report shows already the enhanced version of bidirectional BCIs (titled “2-Way Brain Machine Interface”) on the slope of innovation:

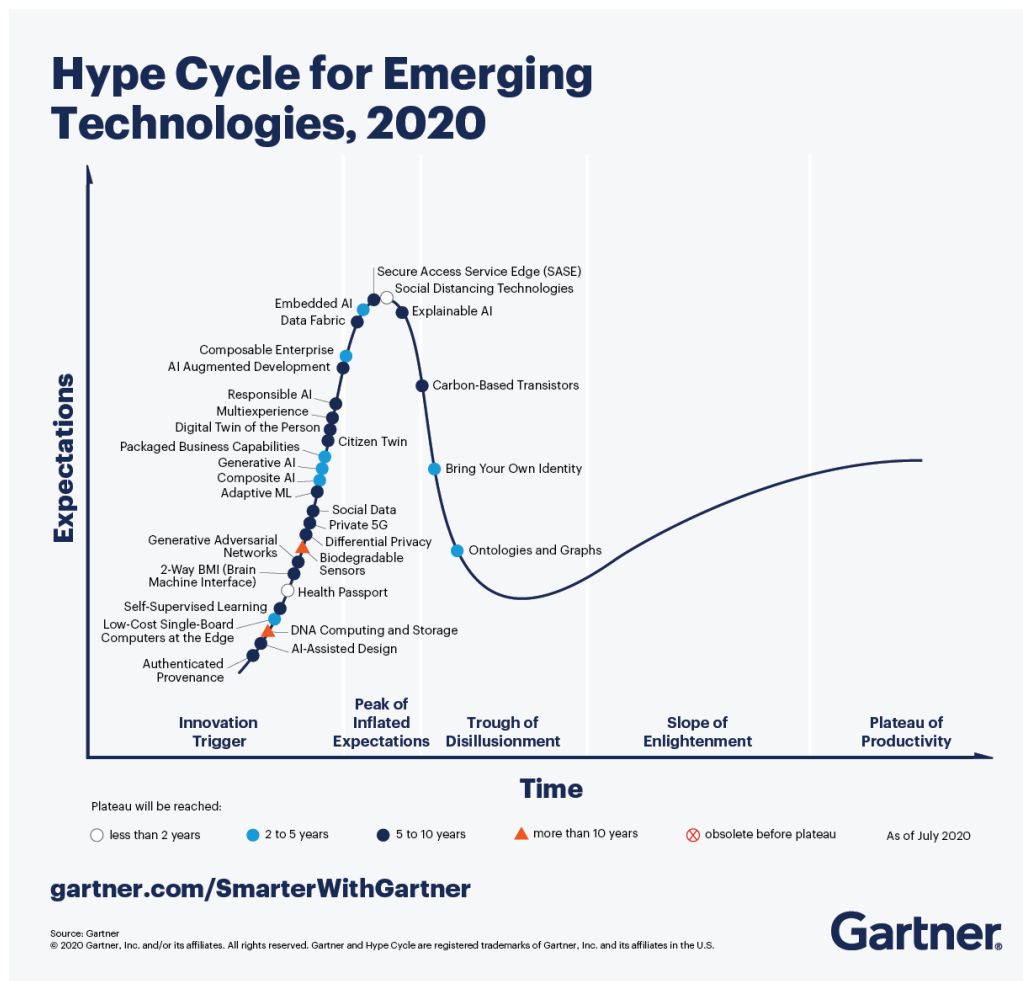


Figure 1.3: Gartner report of emerging technologies 2020

All in all, there are strong indicators that the technology gained traction over the last few years and could be considered a worthwhile investment if approached with care.

1.2 Brain-Computer-Interfaces

In this section a general overview of the working principle of these interfaces will be provided. Since this study is aimed at computer science and HCI², the neuroscience and medical domain will be only covered very briefly.

²Human Computer Interaction

First studies began by [Vidal \(1973\)](#), who investigated the possibility to use EEG³ waves, which were first recorded by [Berger \(1929\)](#), as a way to create a direct interaction between a machine and a human brain.

There are three types of BCIs: invasive, partially invasive and non invasive. This depicts the degree of intrusion into the skull and brain tissue. *Invasive* BCIs are electrodes, which are implanted directly into or onto the grey matter of the brain. This can cause long term issues like scars and also degraded signal strength according to [Abdulkader et al. \(2015\)](#). Partially invasive BCI however are although located within the skull not in direct contact with the grey matter. Non-Invasive BCI are only placed on the head without intrusion of any tissue. Due to the direct contact, invasive BCI provide the best resolution of the measured signals. Non-invasive BCI in comparison suffer from signal degradation and deformation of the cranial bone tissue. Therefore partially invasive BCI are a compromise between good signal strength and the risk of medical conditions. Another potential advantage of non-invasive BCIs is that these Interfaces could be easier mass-produced and become affordable to consumers. Also they don't require specialized medical knowledge and equipment to operate.

The way these interfaces work is based on the same principle: A human brain emits electrical signals, which can be picked up. According to [Vidal \(1973\)](#), they can be described as follows:

"Embedded in this sustained "spontaneous" or "ongoing" electrical activity, short, distinctive (0.5-2 sec) waveforms can be found that are evoked, for instance, when a brief sensory message (stimulus) such as a brief illumination of the visual field or a tap on the forearm is received by the subject."

Based on the origin within the brain, these can be correlated to certain stimuli, mental and emotional states ([Jardim-Gonçalves \(2018\)](#)) and according to [Waldert \(2016\)](#) been used to drive *an external effector or affecting internal body parts and functions*. The external effector is the use case which is being examined in this study.

Without a BCI, interaction with a computer requires some physical interaction with devices such as keyboards, mouses or gestures on a touch screen. There are mainly two different reasons, why these devices are a constraint to speed and efficiency of HCI. The first reason is a limitation on interaction speed: Although there is no definitive consensus about the speed of thinking, the **majority of people would agree**, that typing along in the same speed as the thinking process is usually impossible - except for rare individuals who devoted a significant time practicing. Secondly: in applications such as games, where reaction time and accuracy is the fundamental element for success or failure, an interaction based on motoric interaction with a physical pointing device has some significant drawbacks like limited accuracy, if the whole chain of wrist movement in conjunction with a mouse is under scrutiny.

If a BCI was to replace these types interaction, these constraints could potentially be alleviated and interaction based on physical interaction rendered obsolete.

1.3 Working principle

Before any deeper considerations in regard to the general scope of this study can be made, it is important to understand the working principle of the BCI, which will be used. Although the vendor of the BCI in question does not disclose any details of the inner workings itself, it is safe to assume that the underlying technique used is the so called *Visually Evoked Potential* - VEP in short. [Sokol \(1976\)](#) provides detailed inside into the topic from a neuroscientific point of view. The general principle however is that any visual stimuli cause a certain pattern of waves within the visual cortex of the brain. These patterns can be used to evaluate if a certain pattern is being seen *and* in fokus of the person.

This is being done by subsequently feeding the sensor data through a trained neural network. The objects, which are being seen by the person, have been labeled *neurotags* ([NextMind \(23/11/2020\)](#)) from the vendor of the BCI. These neurotags can provide two different readouts: If it is triggered (i.E. *seen*) and the confidence, which depicts the level of *focus* of the user on the neurotag ([NextMind \(18/11/2020\)](#)).

³Electroencephalogram



Figure 1.4: How VEP works in principle citation?

The physical layout of the sensor is shown at figure 1.5. It has 18 electrodes, which are arranged in pairs to cover the area, where the visual cortex is located at on the back of the cranium. It is battery driven and communicates via the Bluetooth LowEnergy protocol.

1.4 Related work

As previously mentioned in section 1, research on BCIs is partitioned between four different domains: *medical engineering, neuroscience, computer science and HCI*. Apart from commercial entities such as *Microsoft* or *IBM*, the majority of the research community is clustered in four organizations:

- ICBCI (*International Conference of Brain Computer Interfaces*), which is a department of the WASET (*World Academy of Science Engineering and Technology*)
- EMBS (*Engineering in Medicine and Biology Society*), which is a department of the IEEE
- BCI Society, which is an entity of its own
- NeurIPS (*Neural Informations Processing Systems*)

There are also research efforts in the east-asian region, according to corresponding tech-sites such as [Global Times](#) (20/04/2021) and [Techwire Asia](#) (24/05/2021) but due to a language barrier, these sources cannot be considered.

To narrow the scope, where this research paper is located at, the considerations from section 1.5 are taken into account. As already established in section 1.3, the sensor used in this study uses VEP and is non-invasive in nature. Therefore the general scope of this research is located in the realm of *non-invasive BCI based on VEP used for HCI*.

1.5 Use case "Neural Interface in VR"

Before any use case can be conceived, it has to be determined what kind of interaction this interface allows. Section 1.2 covered briefly the concept of input taxonomies to elaborate optimization potentials



Figure 1.5: Physical layout of the sensor

with BCIs. According to [Find some source](#) an input taxonomy depicts the DOF⁴ and the granularity and magnitudes in regard to the interface which this interface offers.

Figure 1.6 shows the input taxonomy of the BCI in question. It is derived from the API⁵ endpoints which the the SDK⁶ of the sensor offers: [NextMind \(18/11/2020\)](#) . The only two *tracking results* are *hit* and *confidence*. Where *hit* is a two state interaction: the neurotag is being seen by the user and subsequently recognized by the sensor and its backend or it is not. The confidence property depicts the attention which the user is paying to the *neurotag*. This is a continuous decimal value between 0 and 1. The fact that these types of interaction are based on neural activity raises the question if a pure mapping of continuous and discrete input modalities to established interfaces would be beneficial to the user experience. Under the reasonable assumption that without any training the metric *focus* can only be deliberately controlled on a very coarse level, the necessary sensitiveness required for modern GUIs can not be achieved with this particular sensor. The remaining two state property, which can be utilized to select or deselect certain objects also only allows for limited interaction. However, these neurotags can be placed in arbitrary places. Although a *toggle*-like behavior is not mentioned explicitly, it might be possible to de-select any activated neurotag when the *focus* property falls under a certain value.

Based on the previous reasoning, the following questions can be raised in regard to the feasibility of any interface which could potentially be conceived with this technology:

- How fast is the perceived and measured reaction time of these neurotags?
- What is the minimum size the neurotags have to have in order to be recognizable?
- Is the interface usable for brains of all ages or do gerontological effects have an effect on usability?
- Do certain medical conditions (i.e. attentiveness disorder) have an impact on the usability?
- How fast can a user switch between neurotags?
- Is a BCI controlled GUI intuitive to use?

⁴Dimensions Of Freedom

⁵Application Programming Interface

⁶Software Development Kit



Figure 1.6: Taxonomy of the nextmind BCI. **Todo:** Create taxo schema

- Does a personal affinity to technology have an influence on the perceived difficulty of interaction?

These questions can be clustered into two groups: *neurological* and *interaction*. Although these considerations open up a vast space of potential cases. Therefore the priority is to examine whether these interfaces are generally usable by the majority of users and if these interfaces are intuitive to use.

1.6 Hypothesis

The considerations in the previous section lead to these two hypotheses:

"Age does not have a detrimental effect on the ability to use a non-invasive BCI based on VEP technology."

and

"VEP BCI operated GUIs are intuitive to use."

2 Technological challenges

Due to being non-invasive there must exist certain drawbacks with this technology. I want to examine the shortcomings and possible ways to overcome these. A valuable resource of information might be [nextminds homepage](#).

2.1 Resolution of the Interface

- definition of the resolution parameter
- input taxonomy diagram
- how to examine with survey

2.2 Constraints

As far as I understood, the interface allows for four different interaction goals. It would be interesting to see, which kinds of interaction are possible.

- Interaction objects
- interaction types in regard to input taxonomy
- evaluation in user survey

3 Survey Structure and layout

Before any survey can be designed, certain considerations like sample size, population ... [ref to döring/bortz for details](#) have to be taken into account. Also depending on the desired outcome of the survey, the questionnaire has to be defined.

3.1 Considerations

- what are my tools
- how to I operationalize the values for context
- What are my performance indicators
- Quantitative sampling to prove hypothesis
- gender equal
-

3.2 Survey structure

Based on the findings, I want to define the survey in this section.

- item 1
- ...

3.3 Survey

How is the survey carried out. This depends largely on the outcome of section survey structure.

- item 1
- ...

4 Survey results

Once the study has been structured and carried out, I can write down the results.

5 Findings

This section also depends on the outcomes in context to the research question.

6 Conclusion

6.1 Results

Summarizing the results and findings of the study briefly.

6.2 Future Work

Based on the findings and new devices on the horizon, this should give a brief outlook on how to continue this research.

7 Acknowledgements

...

A Material

A.1 Surveys, Protocols, etc.

Neque porro quisquam est qui dolorem ipsum quia dolor sit amet, consectetur, adipisci velit...

List of Figures

1.1	Gartner report of emerging technologies 2018	5
1.2	Statista revenue forecast as of 2015 and 2018	5
1.3	Gartner report of emerging technologies 2020	6
1.4	How VEP works in principle <i>citation?</i>	8
1.5	Physical layout of the sensor	9
1.6	Taxonomy of the nextmind BCI. <i>Todo: Create taxo schema</i>	10

List of Tables

Bibliography

- Neuralink. The first fully-implanted 1000+ channel brain-machine interface, 2021. URL <https://neuralink.com/blog/>.
- Microsoft Research. Brain-computer interfaces - microsoft research, 23/10/2020. URL <https://www.microsoft.com/en-us/research/project/brain-computer-interfaces/>.
- Gartner. Understanding gartner’s hype cycles, 24/05/2021. URL <https://www.gartner.com/en/documents/3887767/understanding-gartner-s-hype-cycles>.
- Statista. Global brain computer interface market size 2015 and 2022 | statista, 24/05/2021a. URL <https://www.statista.com/statistics/1015039/worldwide-brain-computer-interface-market-value/>.
- Statista. Global brain computer interface market size 2018 and 2025 | statista, 24/05/2021b. URL <https://www.statista.com/statistics/1015013/worldwide-brain-computer-interface-market-value/>.
- J. J. Vidal. Toward direct brain-computer communication. *Annual review of biophysics and bioengineering*, 2:157–180, 1973. ISSN 0084-6589. doi: 10.1146/annurev.bb.02.060173.001105.
- H. Berger. *Über das elektroenkephalogramm des menschen*. Archiv für psychiatrie und nervenkrankheiten, 1929. URL https://pure.mpg.de/rest/items/item_2281721/component/file_2281720/content.
- Sarah N. Abdulkader, Ayman Atia, and Mostafa-Sami M. Mostafa. Brain computer interfacing: Applications and challenges. *Egyptian Informatics Journal*, 16(2):213–230, 2015. ISSN 11108665. doi: 10.1016/j.eij.2015.06.002.
- R. Jardim-Gonçalves, editor. *9th International Conference on Intelligent Systems 2018 (IS’18): "Theory, research and innovation in applications" : conference proceedings*, [Piscataway, New Jersey], 2018. IEEE. ISBN 978-1-5386-7097-2.
- Stephan Waldert. Invasive vs. non-invasive neuronal signals for brain-machine interfaces: Will one prevail? *Frontiers in neuroscience*, 10:295, 2016. ISSN 1662-4548. doi: 10.3389/fnins.2016.00295.
- Samuel Sokol. Visually evoked potentials: Theory, techniques and clinical applications. *Survey of Ophthalmology*, 21(1):18–44, 1976. ISSN 00396257. doi: 10.1016/0039-6257(76)90046-1.
- NextMind. Technology | nextmind, 23/11/2020. URL <https://www.next-mind.com/technology/>.
- NextMind. Struct trackingresults, 18/11/2020. URL <https://www.next-mind.com/documentation/unity-sdk/api-reference/api/NextMind.NeuroTags.TrackingResults.html>.
- Global Times. Fudan university unveils self-developed remote bci chip - global times, 20/04/2021. URL <https://www.globaltimes.cn/page/202104/1221323.shtml>.
- Techwire Asia. China’s first wireless brain-computer interface chip for animals goes on display in shanghai, 24/05/2021. URL <https://www.yicaiglobal.com/news/china-first-wireless-brain-computer-interface-chip-for-animals-goes-on-display-in-shanghai>.

I hereby confirm that this thesis is my own work and that I have not sought or used inadmissible help of third parties to produce this work and that I have clearly referenced all sources used in this thesis. I have fully referenced and used inverted commas for all text directly or indirectly quoted from a source.

Place and date

Julius Neudecker