
EIGRP – OSPF – VLAN Lab 2

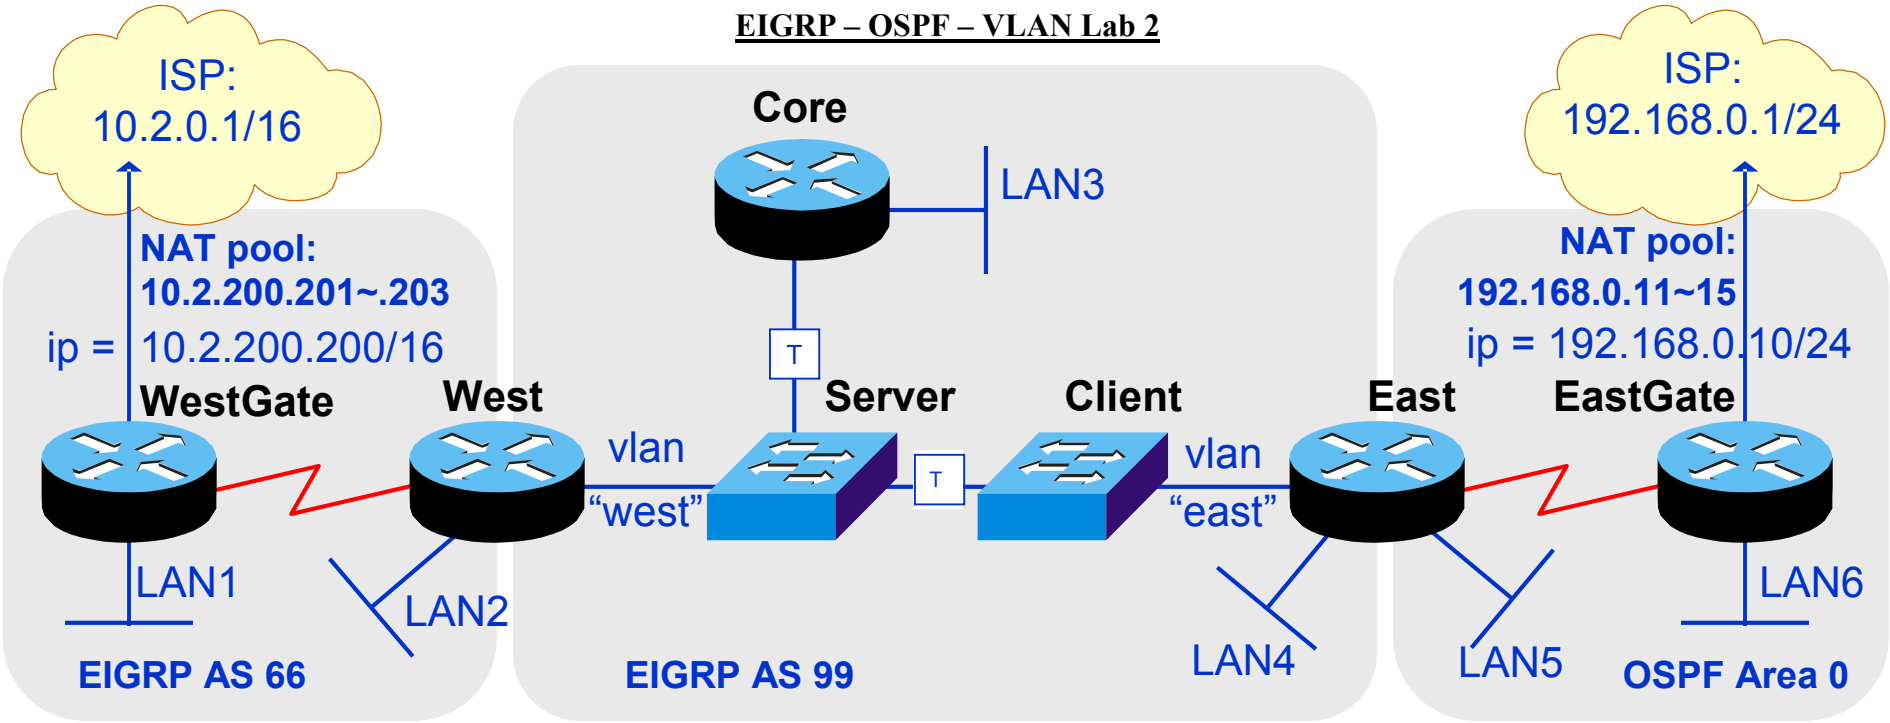

1/ IP addressing: subnets of the major network:
EIGRP 66: **172.21.0.0/16**; EIGRP 99: **172.22.0.0/16**; OSPF Area 0: **172.23.0.0/16**.

2/ There are 8000 hosts/LAN; 4000 hosts/VLAN

3/ VLANs: vlans 2 name west; vlan 3 name east; VTP: domain=business, password=goodluck

4/ WestGate: NAT; **ip route 0.0.0.0 0.0.0.0 10.2.0.1**; **ip default-network 10.0.0.0**.

5/ EastGate: NAT; **ip route 0.0.0.0 0.0.0.0 192.168.0.1**; **default-information originate**

6/ East & West: Routing redistribution. Note: there are 2 entries of default route for 2 ISPs in the routing table

7/ Core, West and East: Inter-VLAN routing.

8/ ACL on West (applied to FastEthernet interface): do not allow LAN2 ping vlan "east", except HTTP+TELNET access (two way); other traffics are allowed.