



Order Code: CGS160MNWB  
CITY GS Ground Mounted Spotlight 21W - Medium Beam - 4000K



Features

- Suitable for exterior building and signage lighting
- Medium beam angle (40°)

Construction

- Die-cast aluminium body finished in black (RAL 9005)

To Specify


CITY GS Ground Mounted Spotlight 21W - Medium Beam - 4000K  
as per Tamlite CITY GS range.



Technical Data

| General                    |           | Electrical                      |       |
|----------------------------|-----------|---------------------------------|-------|
| Luminaire Wattage (W)      | 21        | Power Factor (pf)               | 0.96  |
| Weight (kg)                | 3.40      | Input Voltage Range (VAC)       | 0.09  |
| Operating Temperature (°C) | -40 to 50 | Inrush Current Peak (A)         | 15.54 |
| Light Output               |           | Surge Protection (kV)           | 2     |
|                            |           | Total Harmonic Distortion (THD) | 10    |
|                            |           | Output LF Ripple                | ±5%   |
|                            |           | LED                             |       |
| Lumens (lm)                | 1600      | CCT (K)                         | 4000  |
| Efficacy (lm/W)            | 76        | CRI                             | 80    |
| Beam Angle (FWHM°)         | 40        | Macadam Elipses                 | <3    |
| Life                       |           |                                 |       |
| L80 Lifetime (HRS)         | 57400     |                                 |       |
| L70 Lifetime (HRS)         | 91600     |                                 |       |

Photometrics

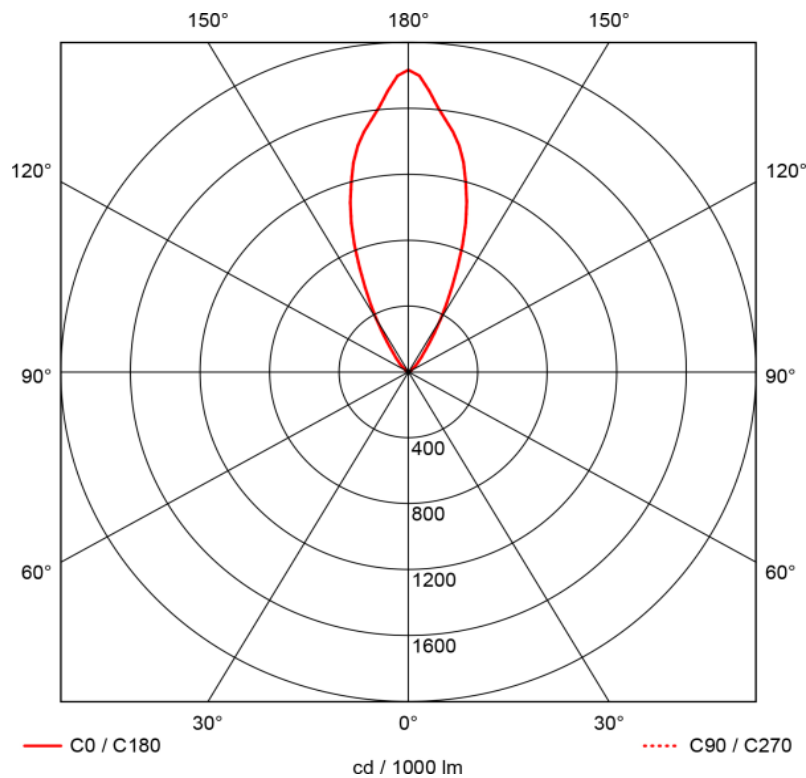

Dimensions


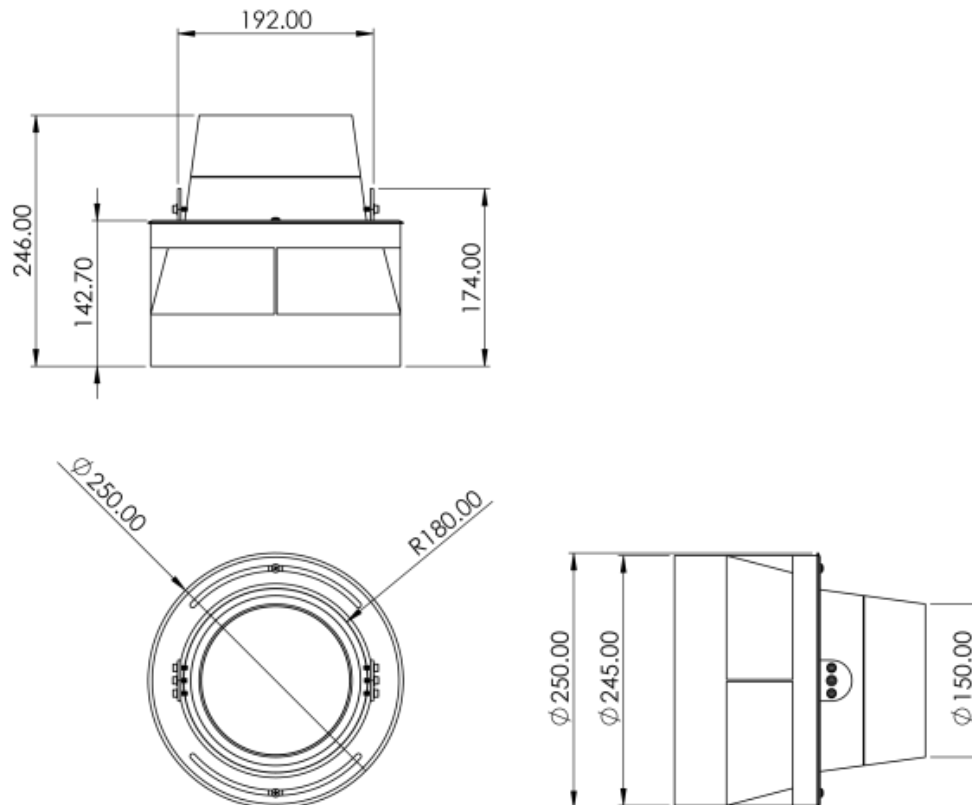


Image not found or type unknown

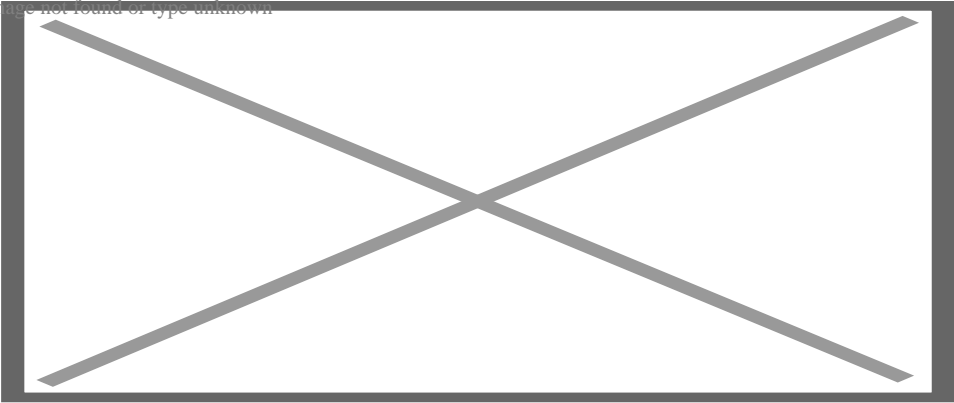

Technical Data