
CodeX

Generated in 6.7 seconds: Visualize

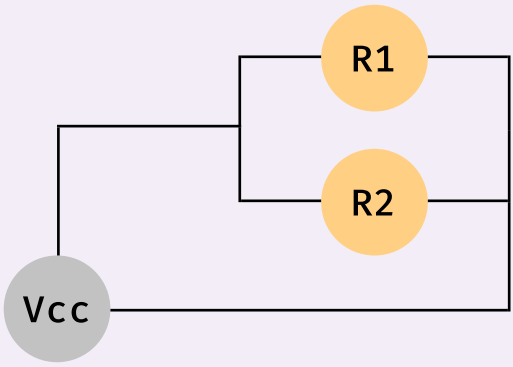

Prompt: Generate a two-stage BJT amplifier where the first transistor provides voltage gain and the second transistor acts as an emitter follower to buffer the output. Include resistor biasing networks and coupling capacitors to block DC between stages and to the input/output. Ensure the final output has a low impedance suitable for driving a load.

Describe the code