





CONTENT

Augmented Reality (AR) - Digital meets real	
3D preview of Slip clutch hub	3
Integrate Ketten Fuchs catalog inside your CAD System	4
2D derivations and Bill-Of-Material (BOM)	5
Technical drawings	6
Technical data	7
Get a free E-Learning training for Ketten Fuchs catalog	8








AR

Augmented Reality, often shortened to AR, is a technology that blends digital information into the real world. For more information, please click here or directly try yourself by scanning the QR code with your phone.













Please scan the QR code above and open on AR-enabled device.

There is a possibility that the configuration will fail. If that happens, please try a different product.








3D view





HOW TO ACTIVATE 3D?

To activate the interactive 3D view in Acrobat Reader, you need to select, at the top of the page, Options and then Trust this document



⊕ Zoom

Moves you toward or away from objects in the scene when you drag vertically. You can also zoom with the hand tool by holding down Shift as you drag



Moves the model vertically and horizontally only. You can also pan with the hand tool: Ctrl-drag.



Turns 3D objects around relative to the screen. How the objects move depends on the starting view, where you start dragging and the direction in which you drag.








CAD plugins

With our CAD integrations, you can use 3Dfindit directly in your CAD system and make your work easier with additional comfort functions, such as replacing a part and many more.

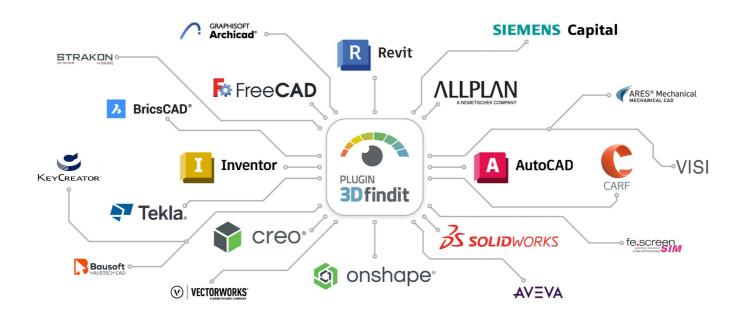


To the plugins















Bill-Of-Materials


N° Desc	scription	Amount
1 Hato	torq-slip hub couplings KETTEN FUCHS Artikel-Nr. C 240/85	1







Technical drawings

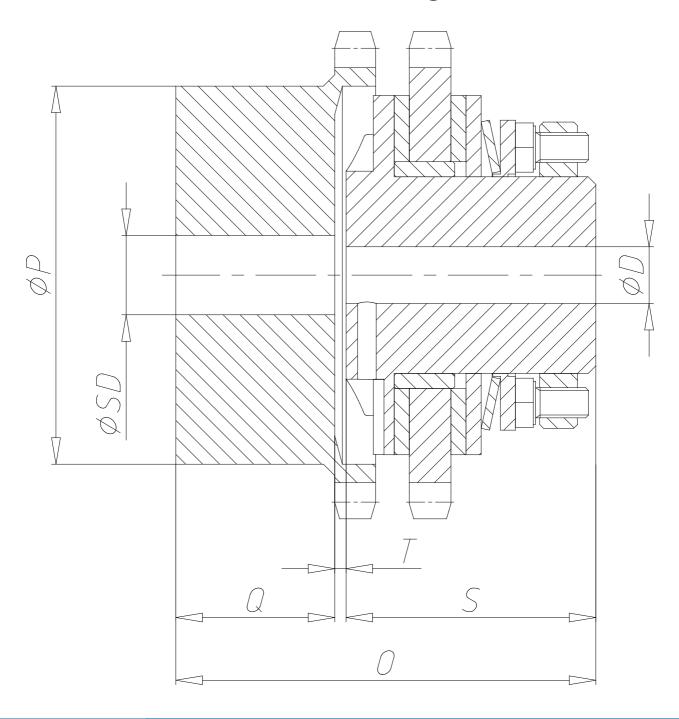







Technical data

CNSORDERNO (Order number)	C 240/85
MTA (Size Mt × A)	240 × 85
MT (Transmission values max torque Mt. / Nm)	240
AT (Number plate spring)	2
DP (Parallel offsetΔp)	0.35
AW (Axial offset ow / Grad)	30'
SD (Bore sprocket hub / mm)	21.0
SDB (sd min. / mm)	21.0
SDMAX (sd max. / mm)	65.0
D (Wheel hub bore chains / mm)	15.0
DB (D min / mm)	15.0
DMAX (D max / mm)	25.0
O (Dimensions / mm)	100.0
P (Dimensions / mm)	100.0
Q (Dimensions / mm)	42.0
S (Dimensions / mm)	55.0
T (Dimensions / mm)	3.0
Z (Number of Teeth)	20
KG (Chain size)	3/4 × 7/16"







E-Learning

Discover free training for 3Dfindit, the search engine for engineers, designers, and architects. Our 30 to 50-minute interactive courses provide you with comprehensive knowledge about the platform. Upon successful completion, you will receive a certificate. Start your first course now and master 3Dfindit!



Learn more

Start course

8