


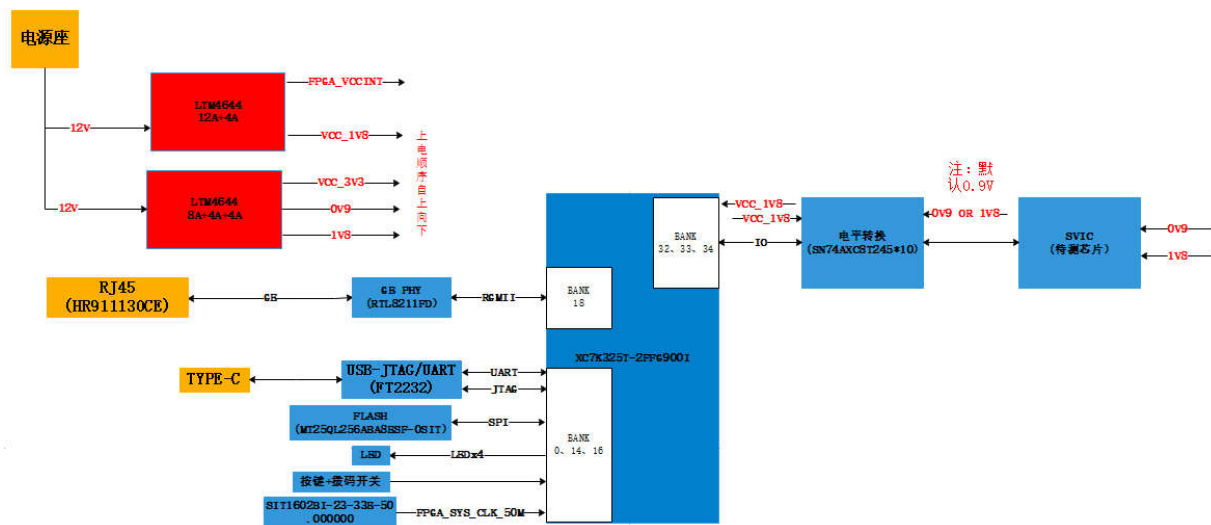
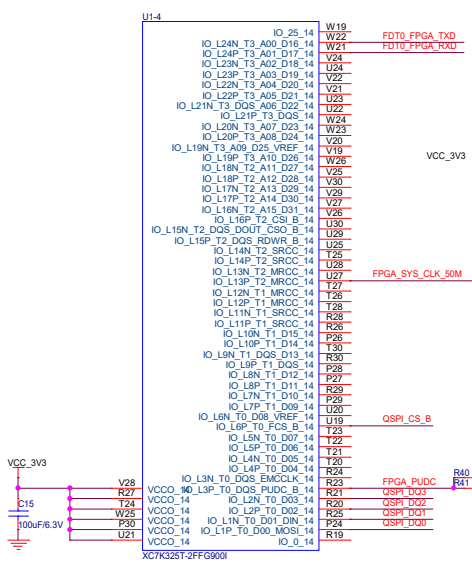


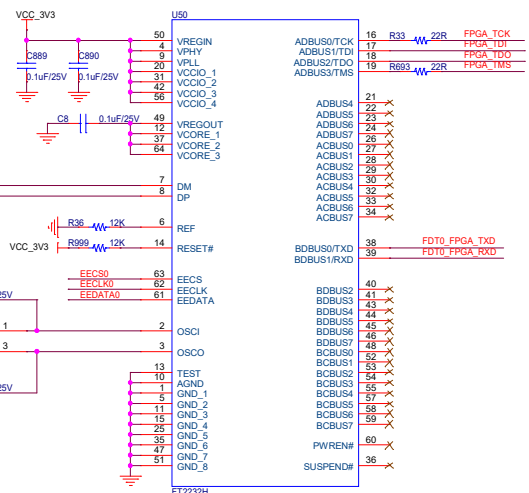
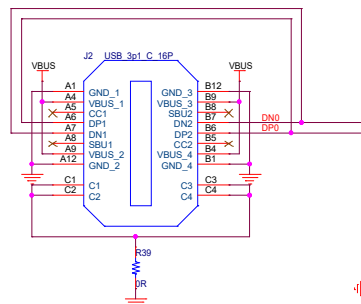
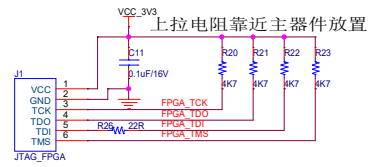
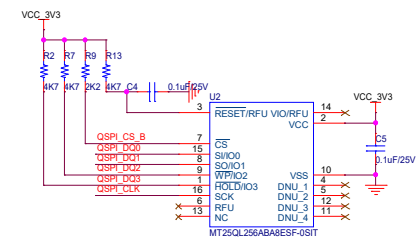






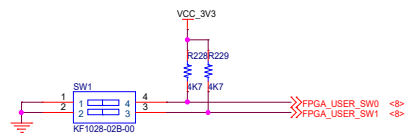





Pin configuration diagram for the XC7K325T-2FFG9001 device. The diagram shows a grid of pins with labels for various functions. On the left, pins are labeled with functions like UI-1, VCCO_0, VCCO_1, VREF0, VREF1, VCCBATT, VM, VP, DXN, U15, CFGBVS, M0, M1, M2, T0, T1, T2, T3, T4, T5, T6, T7, T8, T9, T10, T11, T12, T13, T14, T15, T16, T17, T18, T19, T20, T21, T22, T23, T24, T25, T26, T27, T28, T29, T30, T31, T32, T33, T34, T35, T36, T37, T38, T39, T40, T41, T42, T43, T44, T45, T46, T47, T48, T49, T50, T51, T52, T53, T54, T55, T56, T57, T58, T59, T60, T61, T62, T63, T64, T65, T66, T67, T68, T69, T70, T71, T72, T73, T74, T75, T76, T77, T78, T79, T80, T81, T82, T83, T84, T85, T86, T87, T88, T89, T90, T91, T92, T93, T94, T95, T96, T97, T98, T99. On the right, pins are labeled with functions like FPGA_VCCAUX, P14, P15, R14, R15, C10, T14, R15, P15, DXN, U15, CFGBVS, M0, M1, M2, T0, T1, T2, T3, T4, T5, T6, T7, T8, T9, T10, T11, T12, T13, T14, T15, T16, T17, T18, T19, T20, T21, T22, T23, T24, T25, T26, T27, T28, T29, T30, T31, T32, T33, T34, T35, T36, T37, T38, T39, T40, T41, T42, T43, T44, T45, T46, T47, T48, T49, T50, T51, T52, T53, T54, T55, T56, T57, T58, T59, T60, T61, T62, T63, T64, T65, T66, T67, T68, T69, T70, T71, T72, T73, T74, T75, T76, T77, T78, T79, T80, T81, T82, T83, T84, T85, T86, T87, T88, T89, T90, T91, T92, T93, T94, T95, T96, T97, T98, T99. The diagram also shows connections to VCC_3V3, FPGA_VCCAUX, and DSPL_CLK.

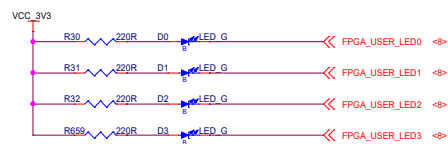

Title <Title>			
Size C	Document Number <Doc>		Rev V10
Date:	Tuesday, September 16, 2025	Sheet 2 of 11	

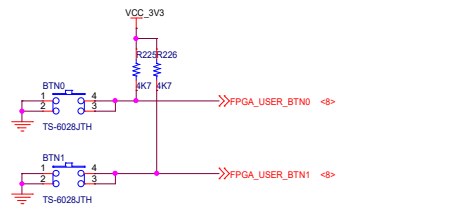



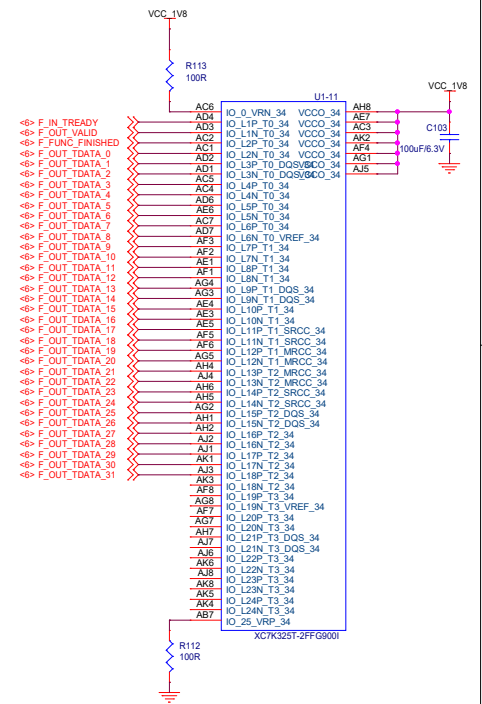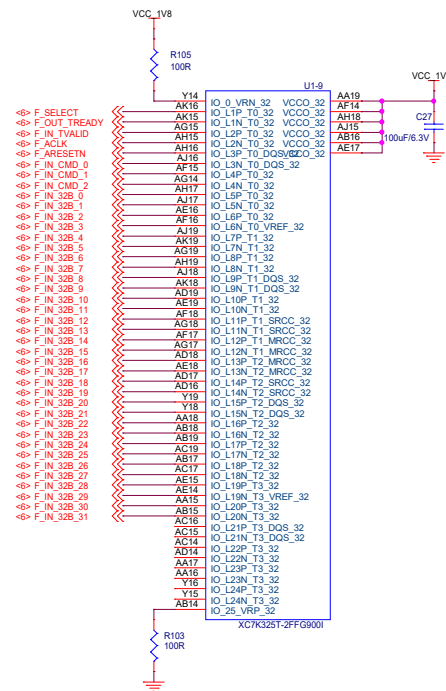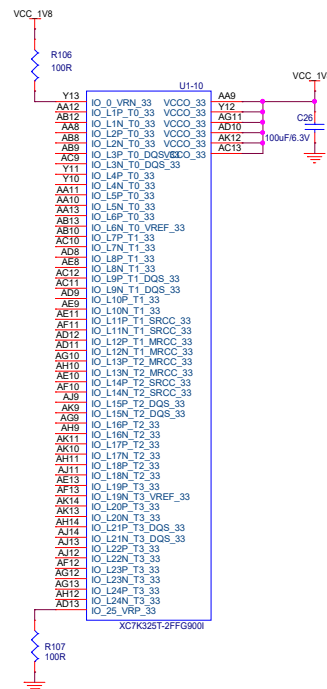





电平转换芯片前后
分段等长，速率按400M

待测芯片

表 7-1. 功能表

控制输入 ⁽¹⁾		信号方向	
OE	DIR1	DIR2	位 1:4
H	X	X	禁用 (高阻态)
L	L	L	B 转 A
L	L	H	A 转 B
L	H	L	A 转 B
L	H	H	B 转 A

(1) 数据 I/O 的输入电路始终处于激活状态，并必须驱动至有效逻辑电平。

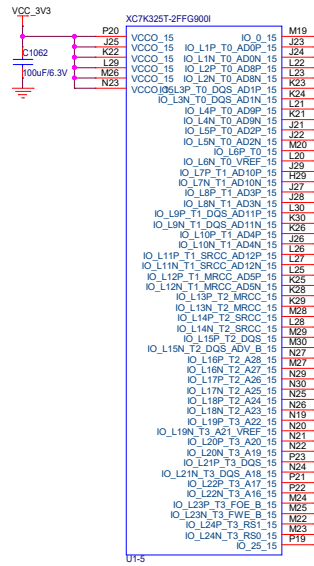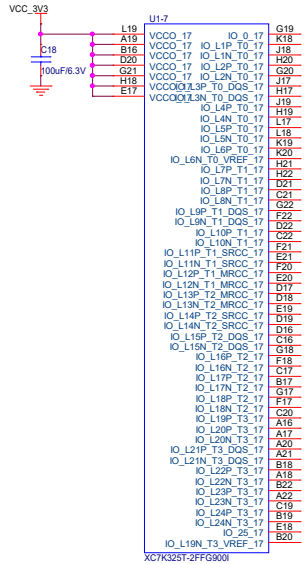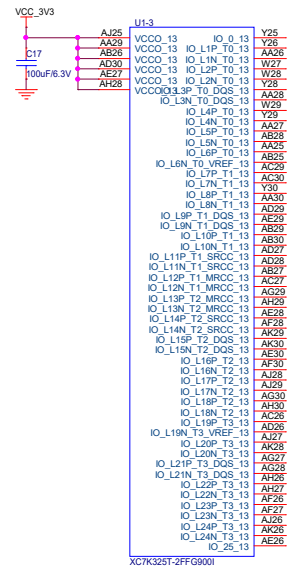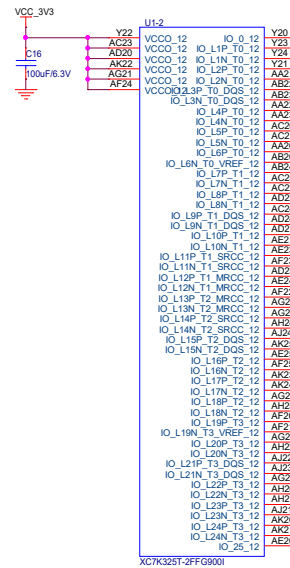








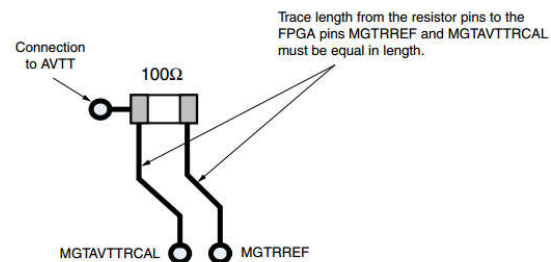


Table 2-2: Required PCB Capacitor Quantities per Device: Kintex-7 Devices⁽¹⁾⁽²⁾ (Continued)

Package	Device	V _{CCINT}			V _{CCBRAM}				V _{CCAUX}		V _{CCAUX_IO} per Group ⁽³⁾			V _{CCO} Bank 0	V _{CCO} all other Banks (per Bank)
		680 μF	330 μF	4.7 μF	660 μF	330 μF	100 μF	4.7 μF	47 μF	4.7 μF	100 μF	47 μF	4.7 μF	47 μF	47 μF or 100 μF ⁽⁴⁾
FBG900 FBV900	XC7K410T	0	5	10	0	1	0	9	4	4	0	0	0	1	1
FFG676 FFV676	XC7K160T	0	2	0	0	0	1	3	2	0	0	1	0	1	1
FFG676 FFV676 RF676	XC7K325T XQ7K325T	0	3	0	0	0	2	5	2	0	0	1	0	1	1
FFG676 FFV676 RF676	XC7K410T XQ7K410T	0	5	0	0	1	0	9	2	0	0	1	0	1	1
FFG900 FFV900 RF900	XC7K325T XQ7K325T	0	3	0	0	0	2	5	3	0	0	1	0	1	1

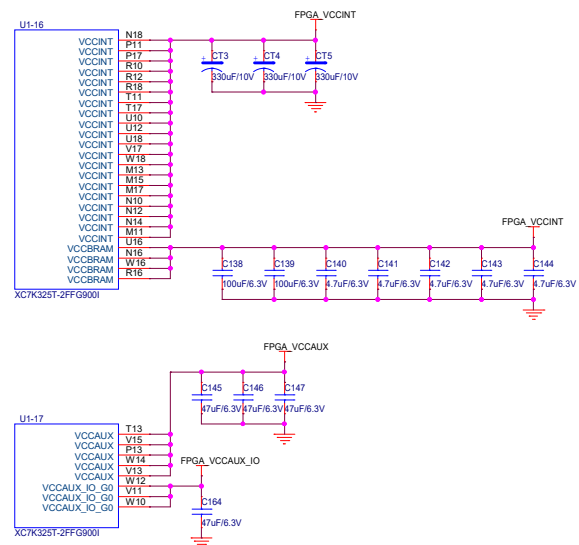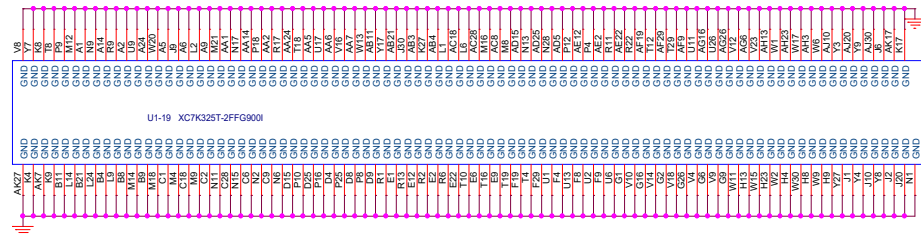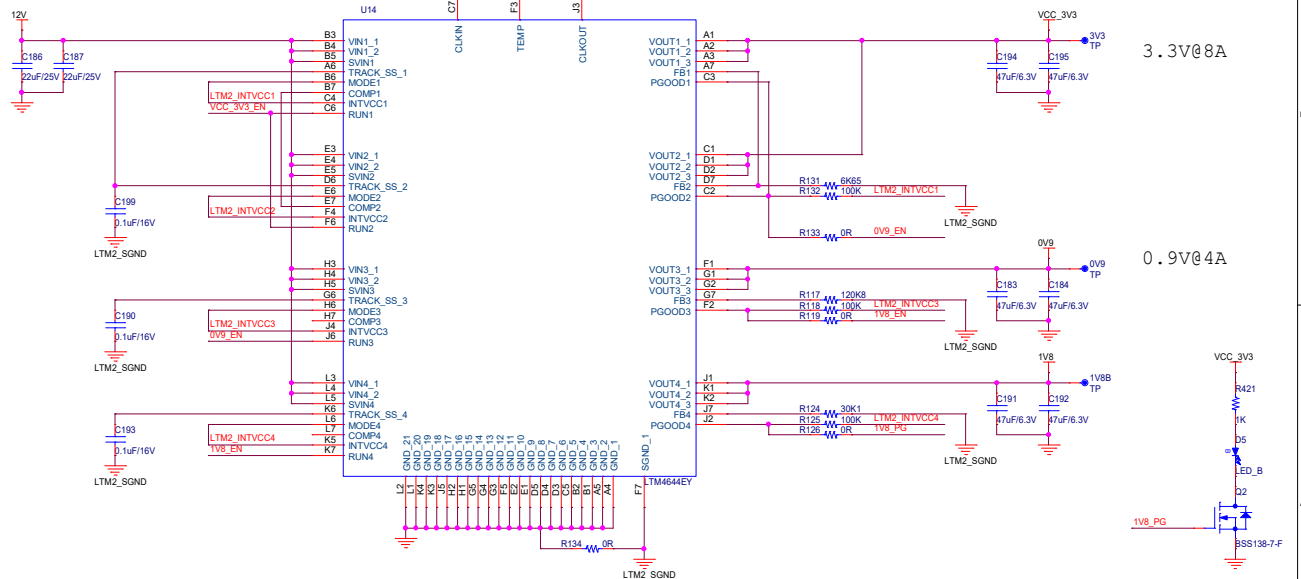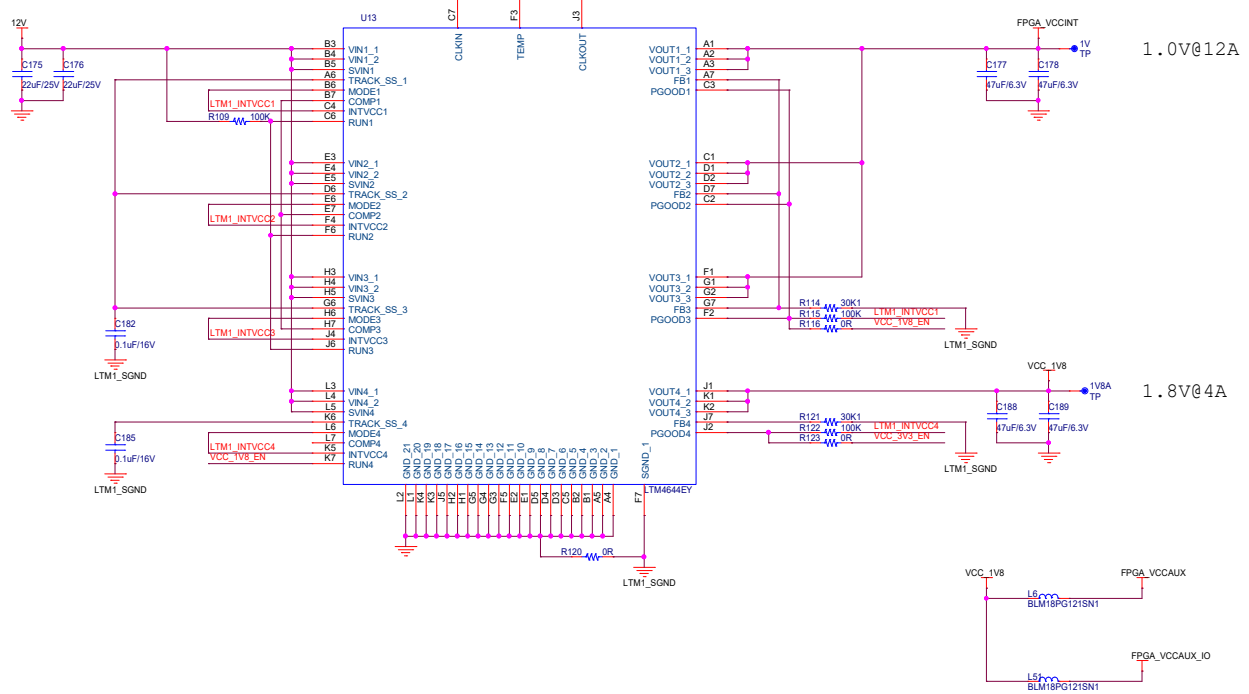

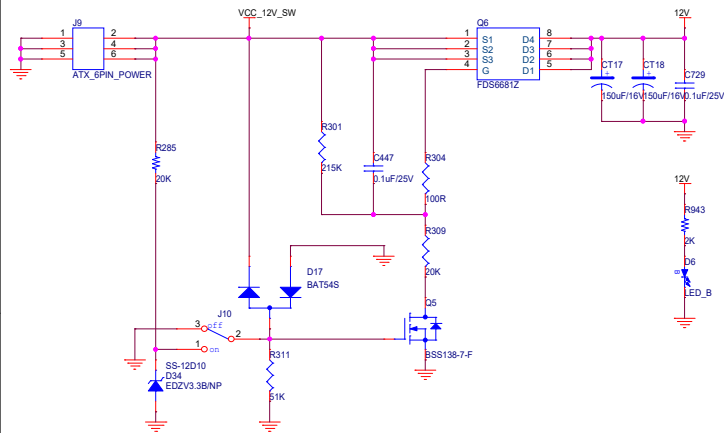

Title		<Title>	
Size	C	Document Number	<Doc>
Date:	Tuesday, September 16, 2025	Sheet	10 of 11

版本	设计	修改说明	日期
v10	惠乐乐	全部章节	2025-09-12