
REDI3. RIP 재분배

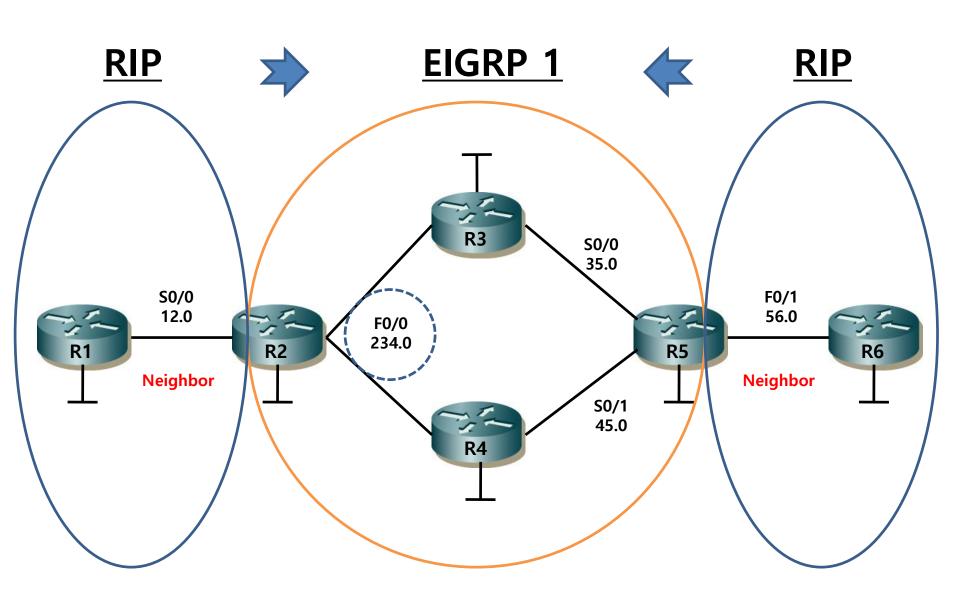

EIGRP3. RIP 재분배

- RIP
 - Default Route
 - R2→R1
 - $-R5\rightarrow R6$
- EIGRP Active-Time
 - EIGRP Router 모두
 - 10분 설정
- EIGRP 인증:R2, R3, R4
 - Key chain: CCNP
 - Key:1
 - Key-String: cisco

- RIP Timer 재설정
 - Update/Invalid/Holddo wn/Flush/Sleep Time
 - -5/10/10/20/1
- 단방향 재분배
 - R2: RIP → EIGRP
 - R5: RIP → EIGRP