

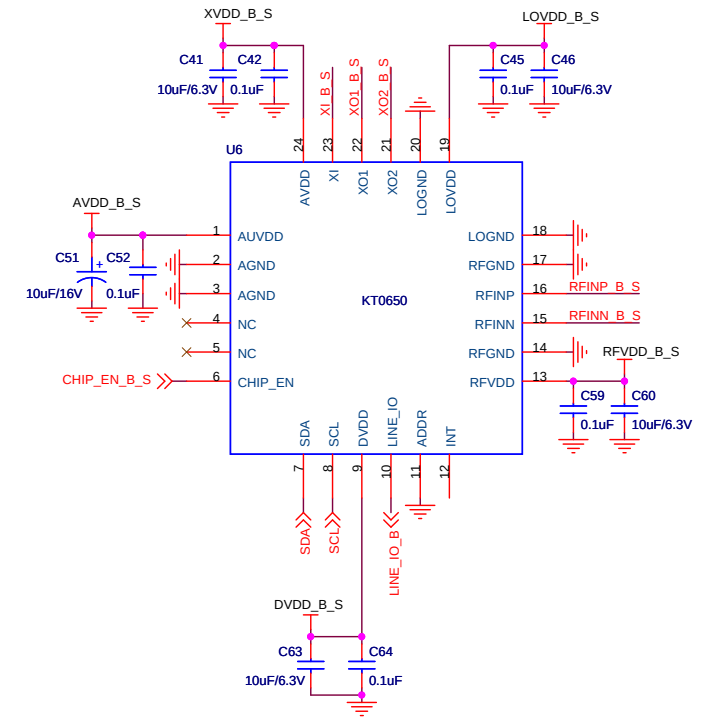
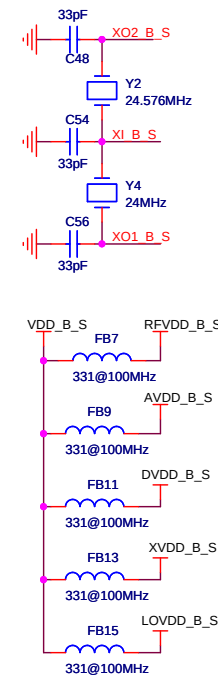


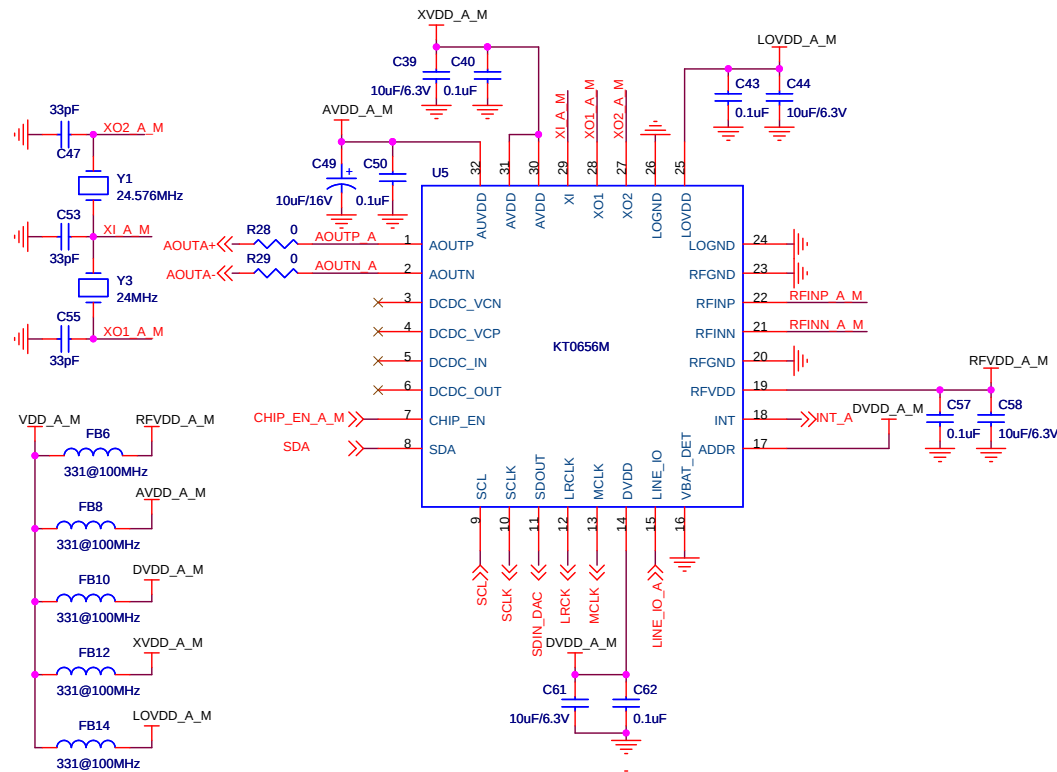



KT0656M直接输出: R28=0, R29=0
使用CS4398输出时: R28=NC, R29=NC

650-800MHz: L1,L3:18nH, C66,C69:2.2pF

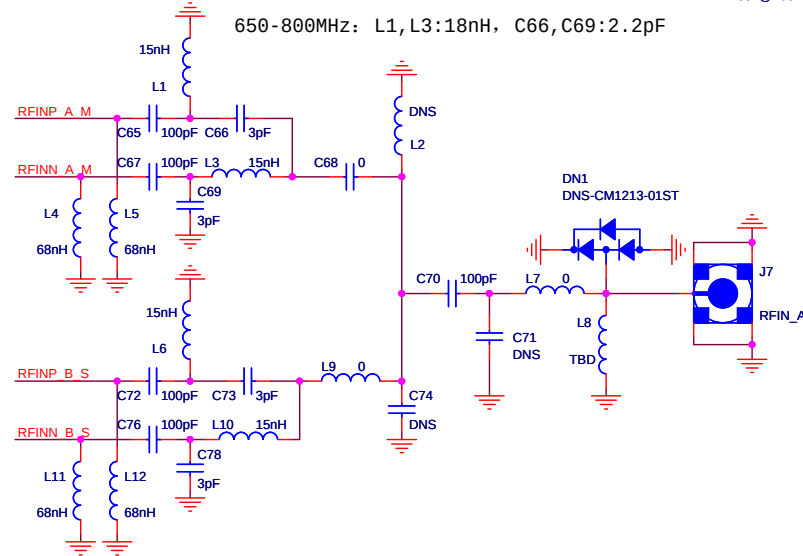

KT Micro, Inc.		
Title	CH_A	
Size	Document Number	Rev
B	KT0656M_DEMOBOARD_MAINBOARD	V1.1
Date:	Monday, March 20, 2017	Sheet 2 of 5

KT0656M直接输出: R32=NC, R33=NC, R34=NC, R35=NC
使用CS4398输出时: R32=0, R33=0, R34=0, R35=0

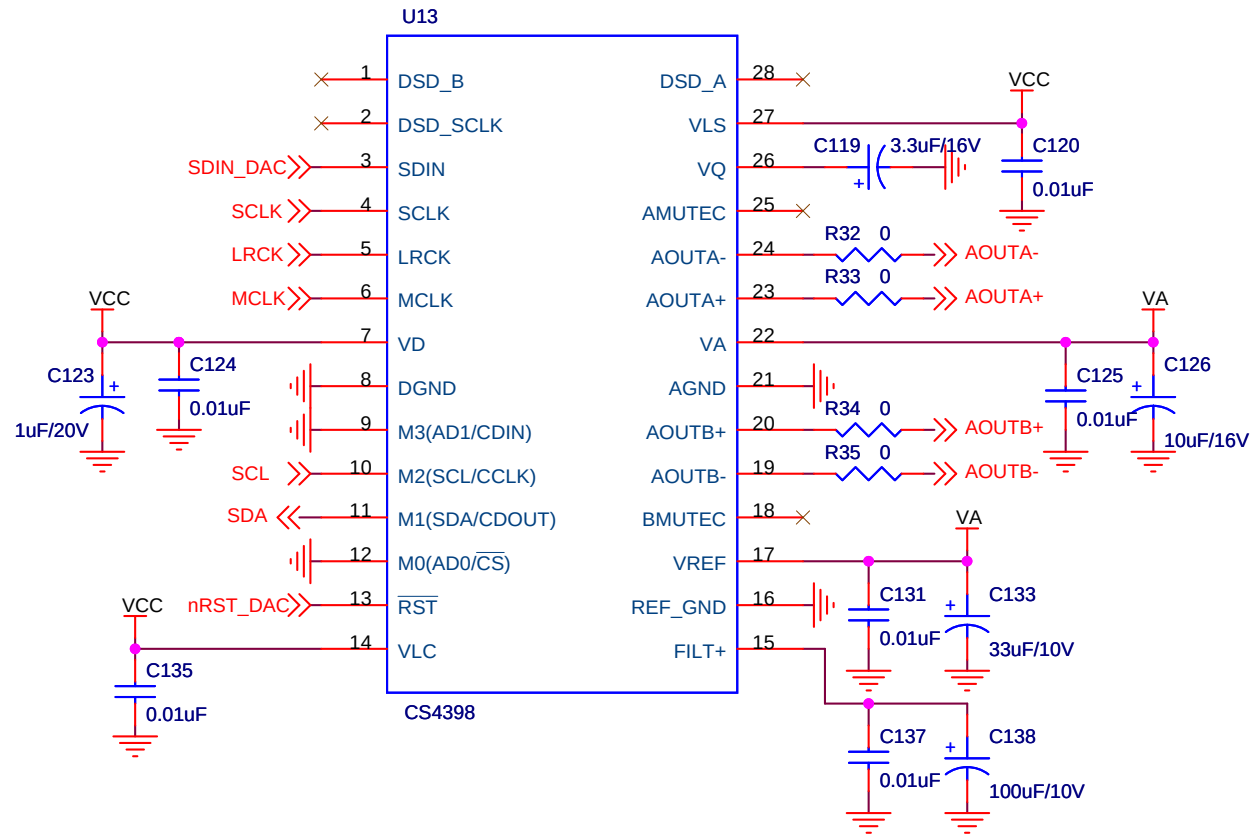

KT Micro, Inc.			
Title			
DAC			
Size	Document Number		Rev
A	KT0656M_DEMOBOARD_MAINBOARD		V1.1
Date:	Friday, December 02, 2016	Sheet	4 of 5

