


5" Flip Front Drawer Box
1/2" thick box

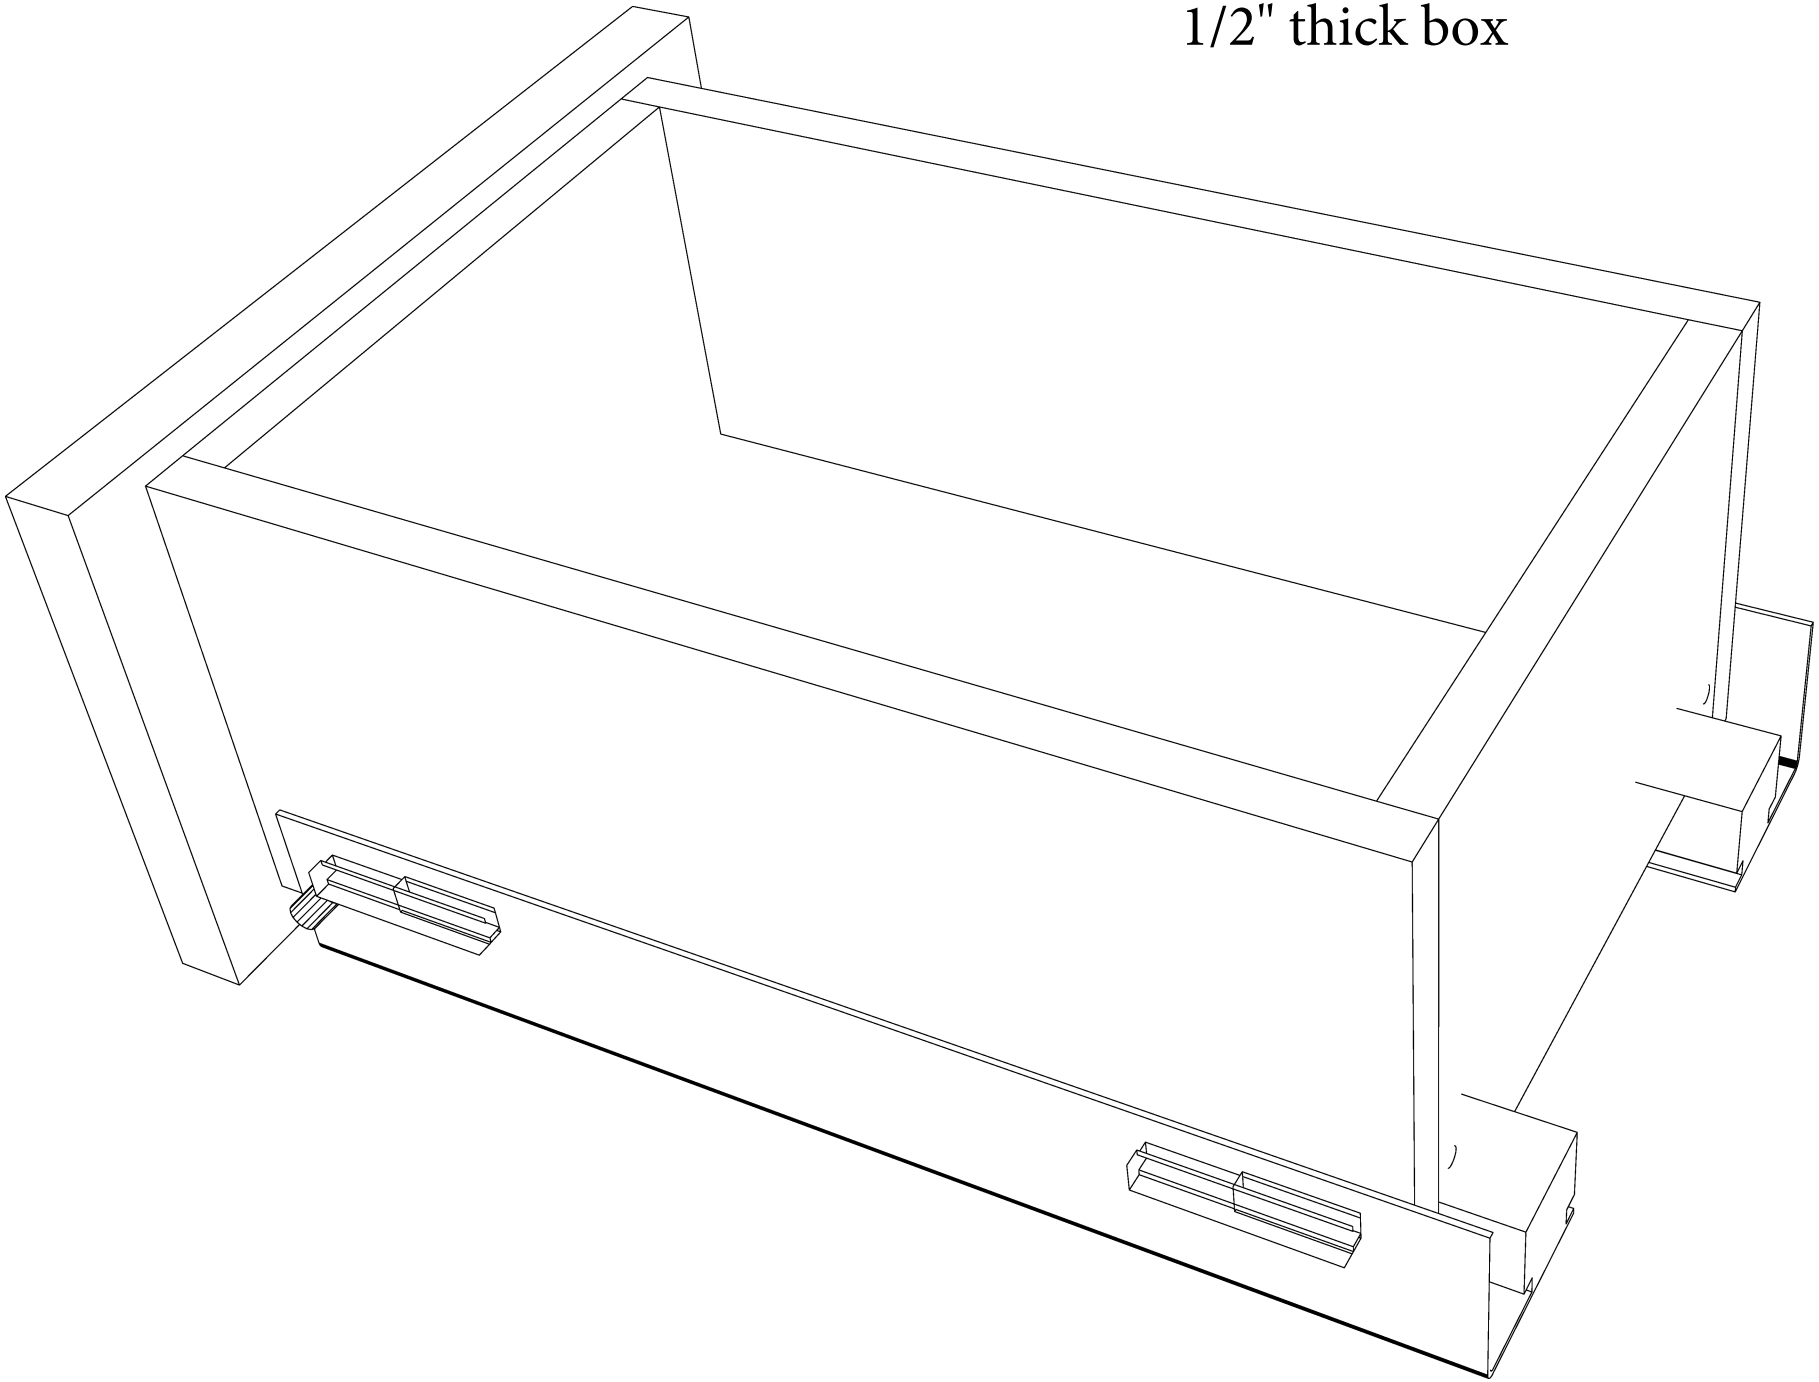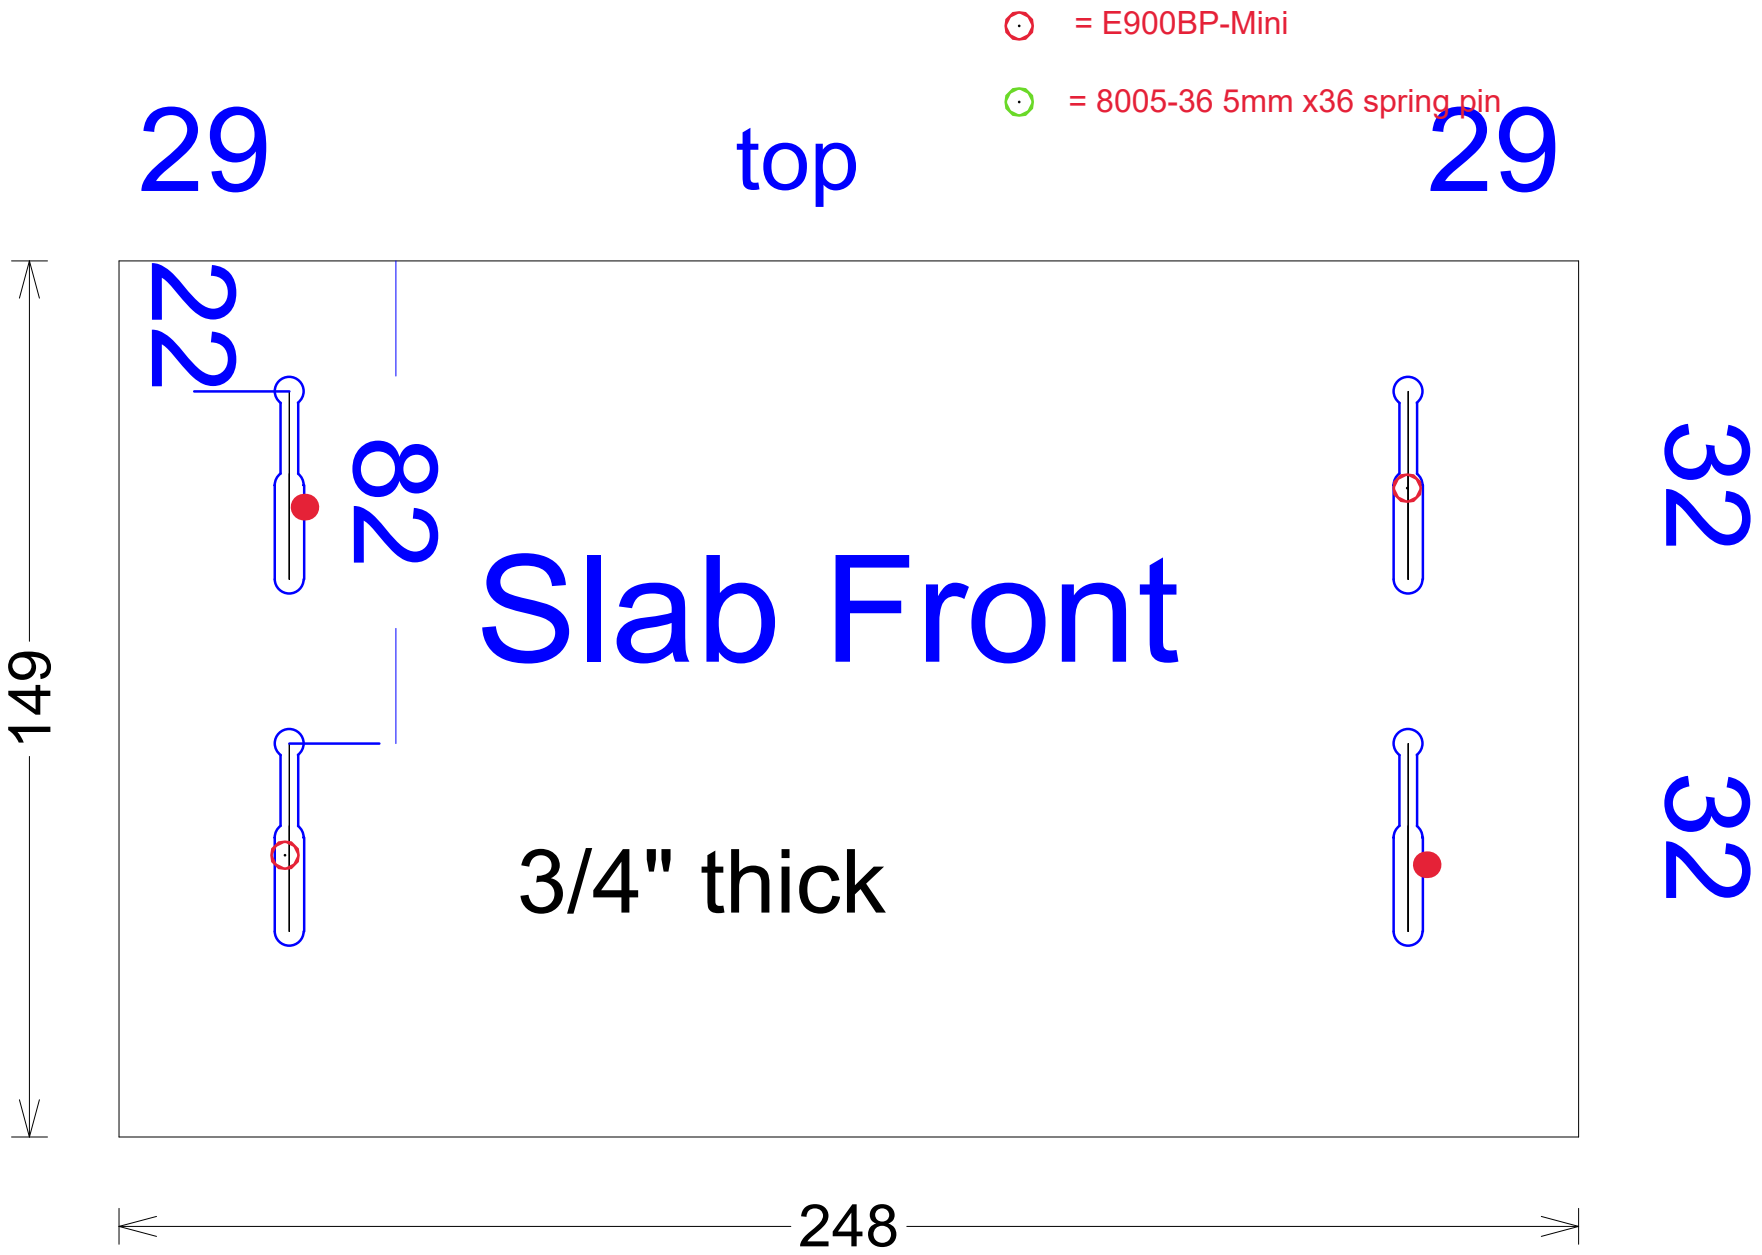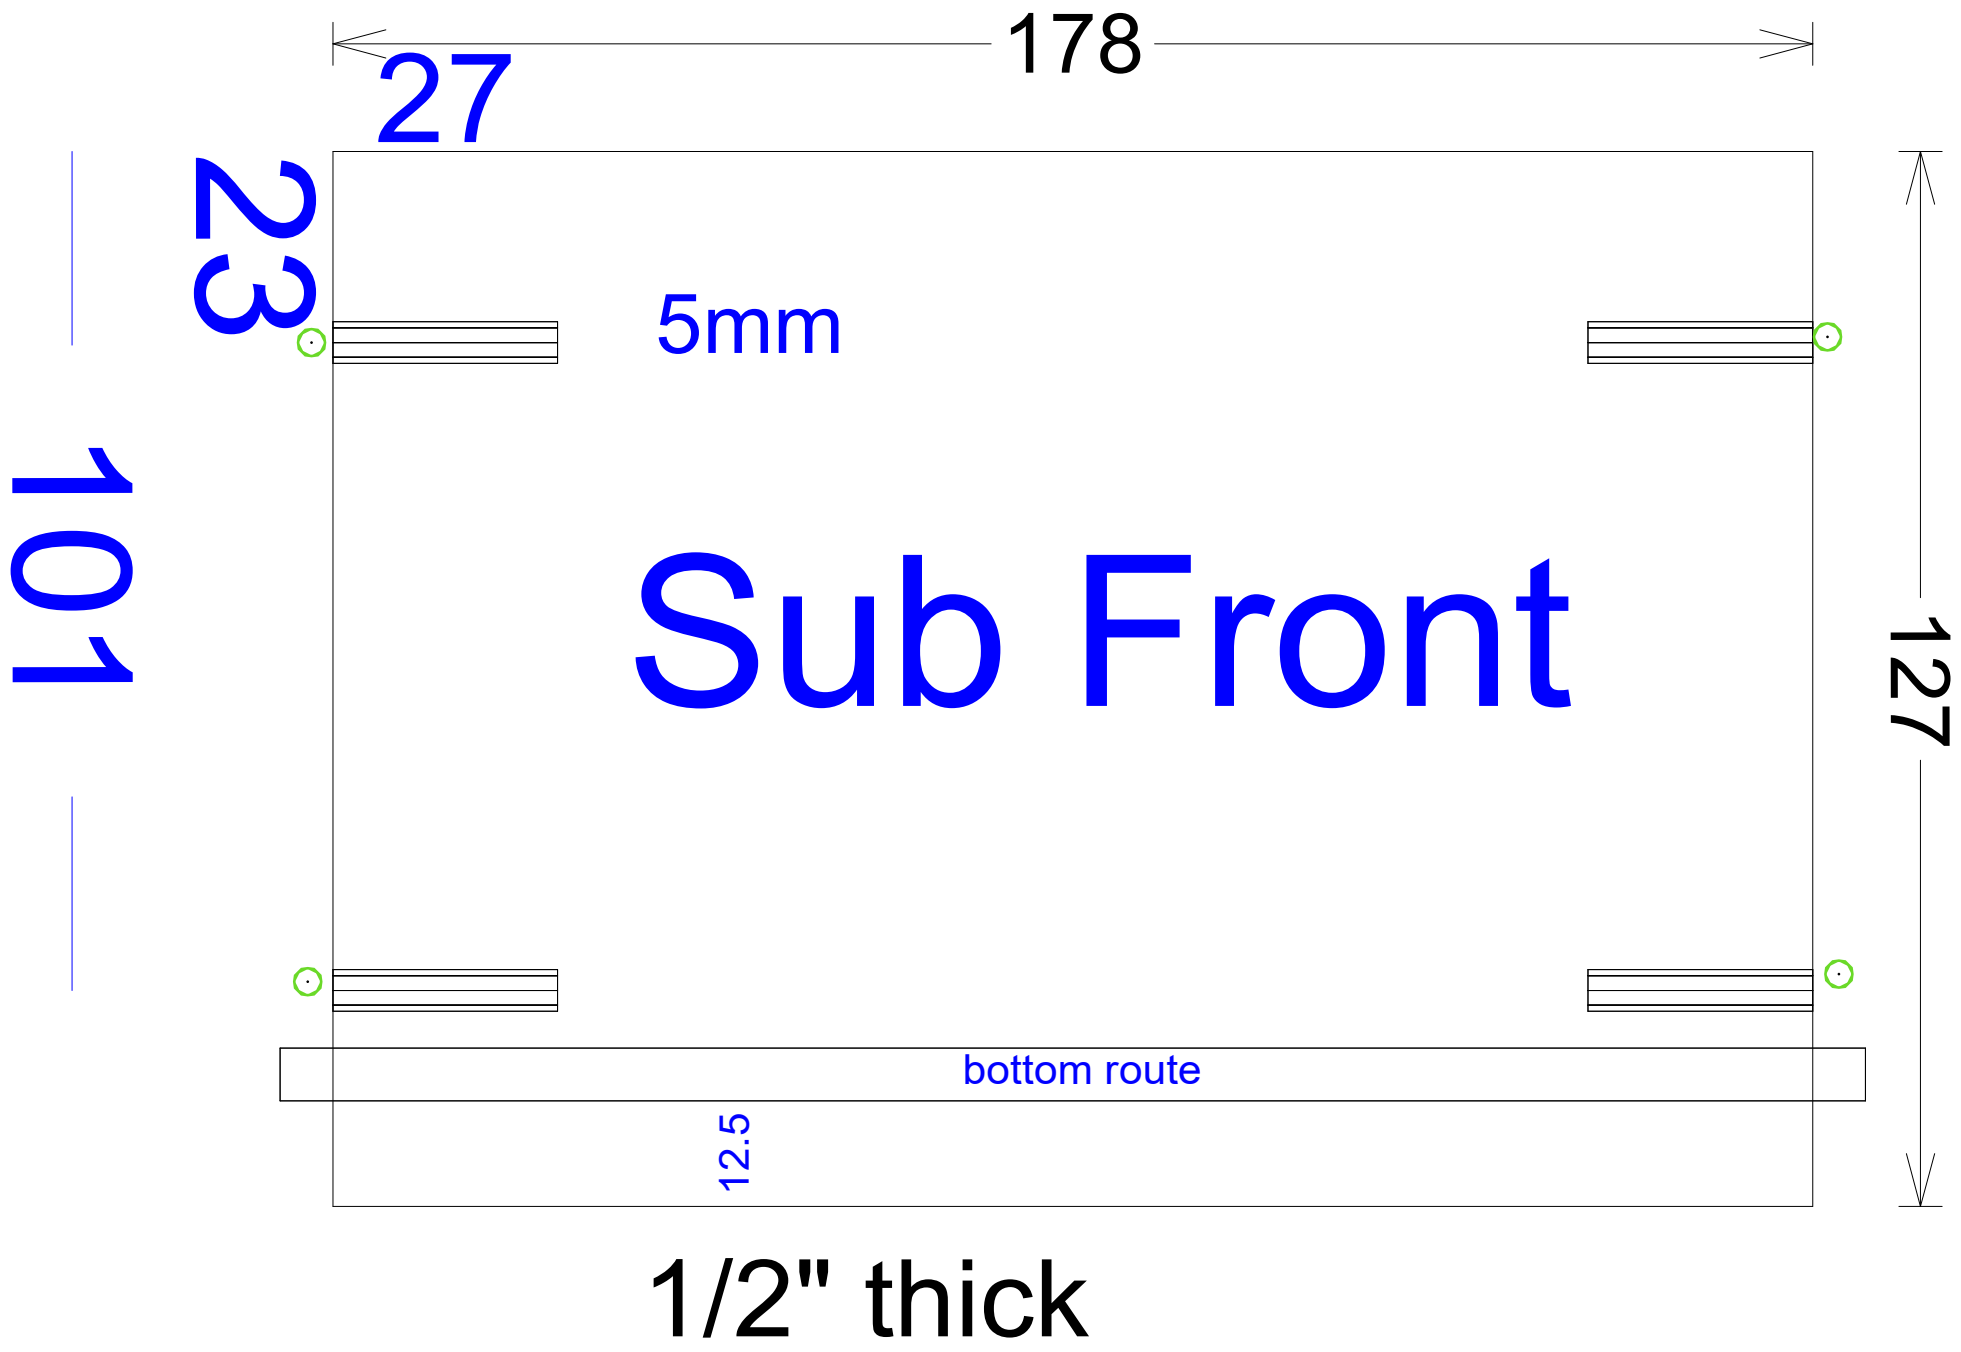


= E900BP-Mini
= 8005-36 5mm x36 spring pin
29
top
29
22
82
32
Slab Front
3/4" thick
32
149
248



178
27
23
101
5mm
Sub Front
127
bottom route
12.5
1/2" thick


1/2" thick



6
15
15
23
32
75
Right Side
16
75
101
5mm
16
127
32
16
9.5
8.5
bottom route
312.5




1/2" thick

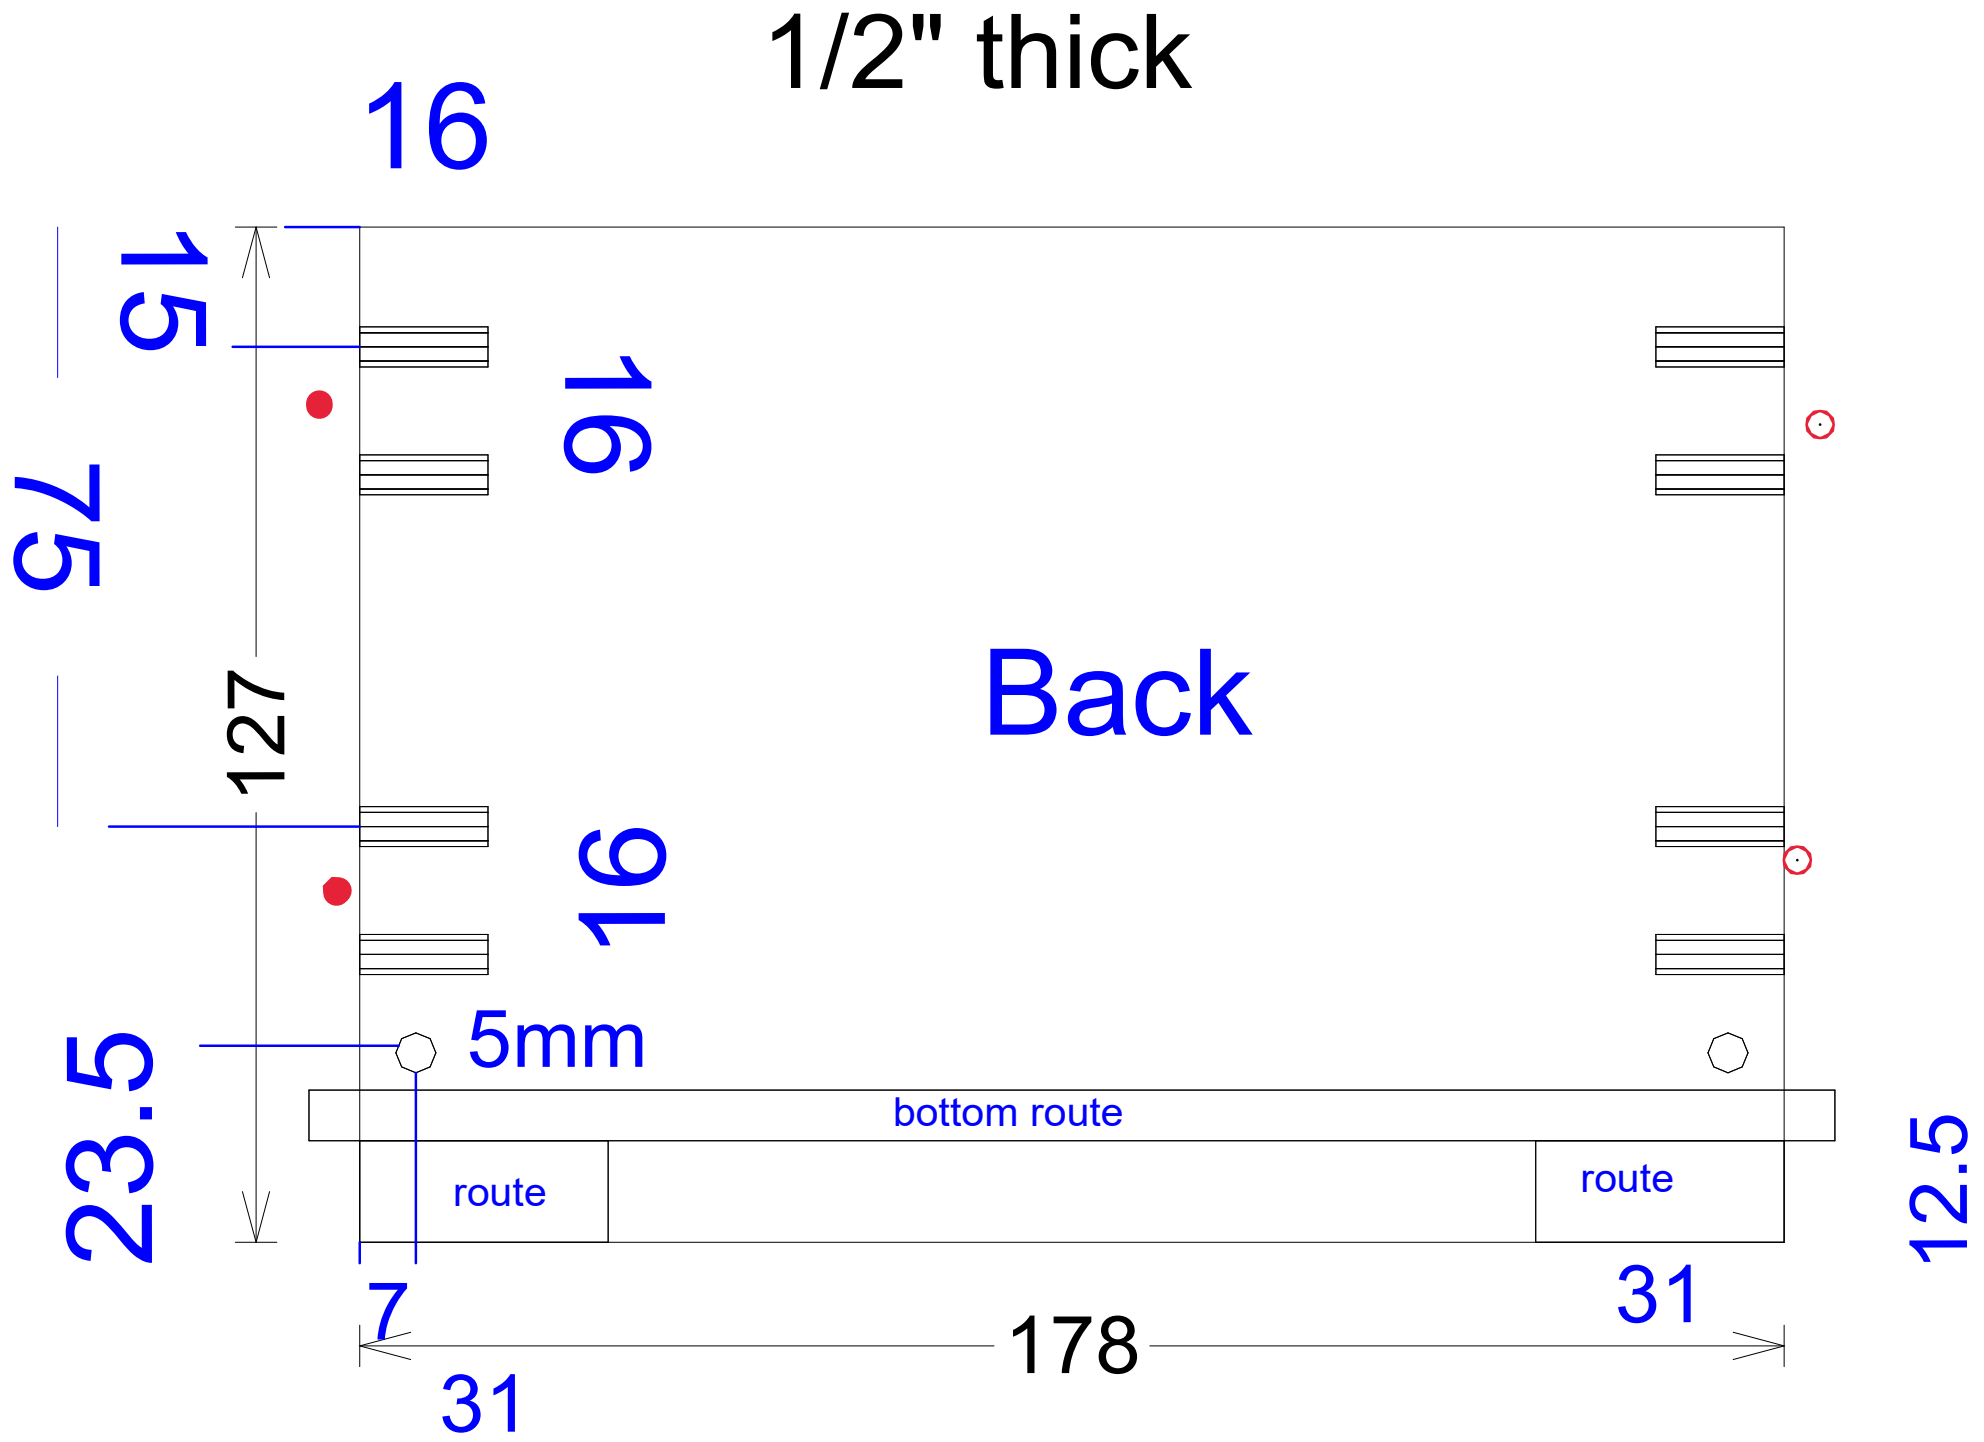
1/2" thick
16
15
16
75
127
Back
16
23.5
5mm
bottom route
route
route
12.5
7
31
178
31

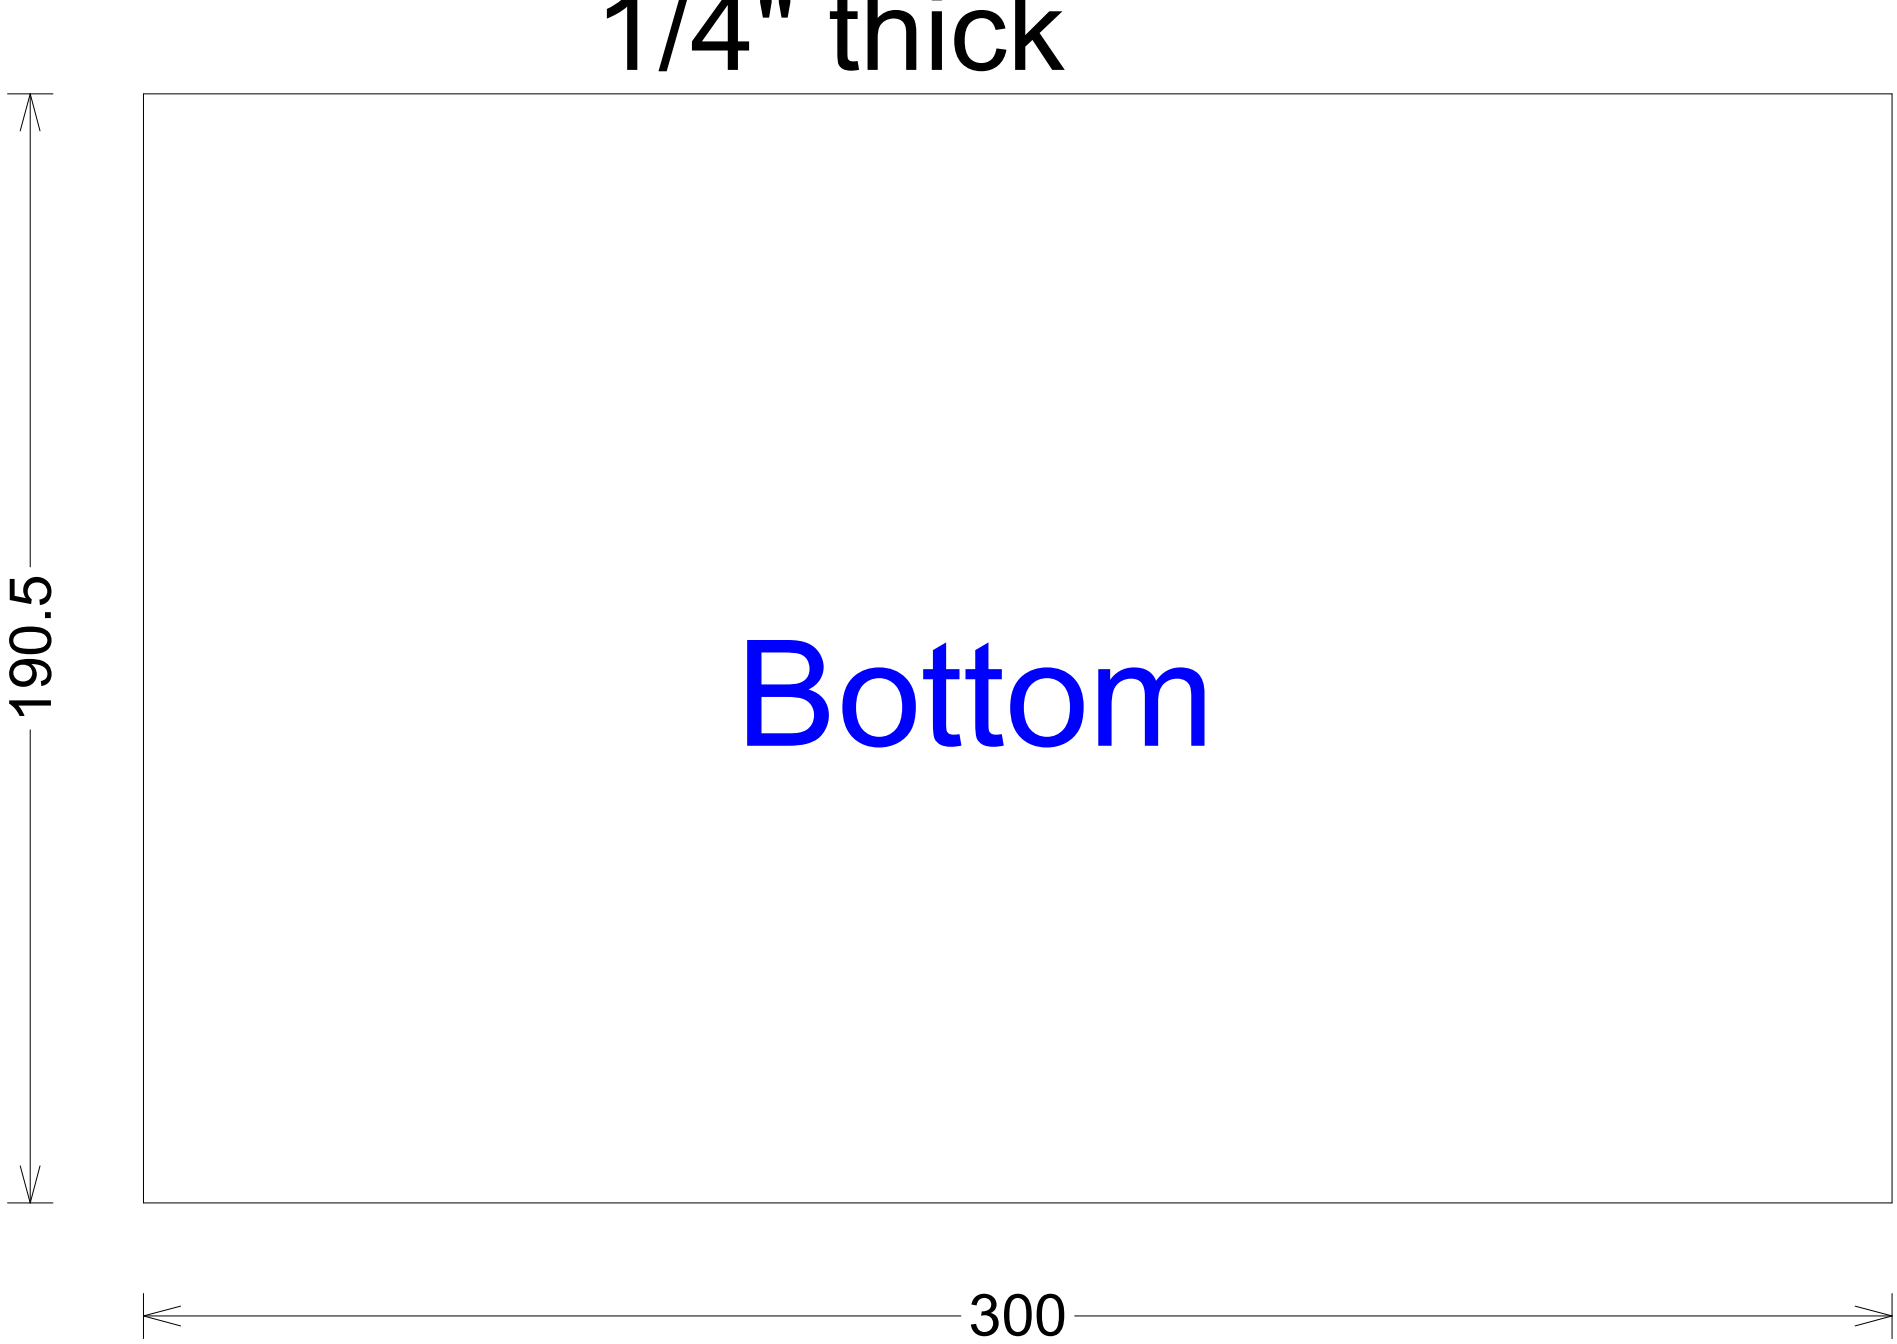
1/4" thick
190.5
Bottom
300

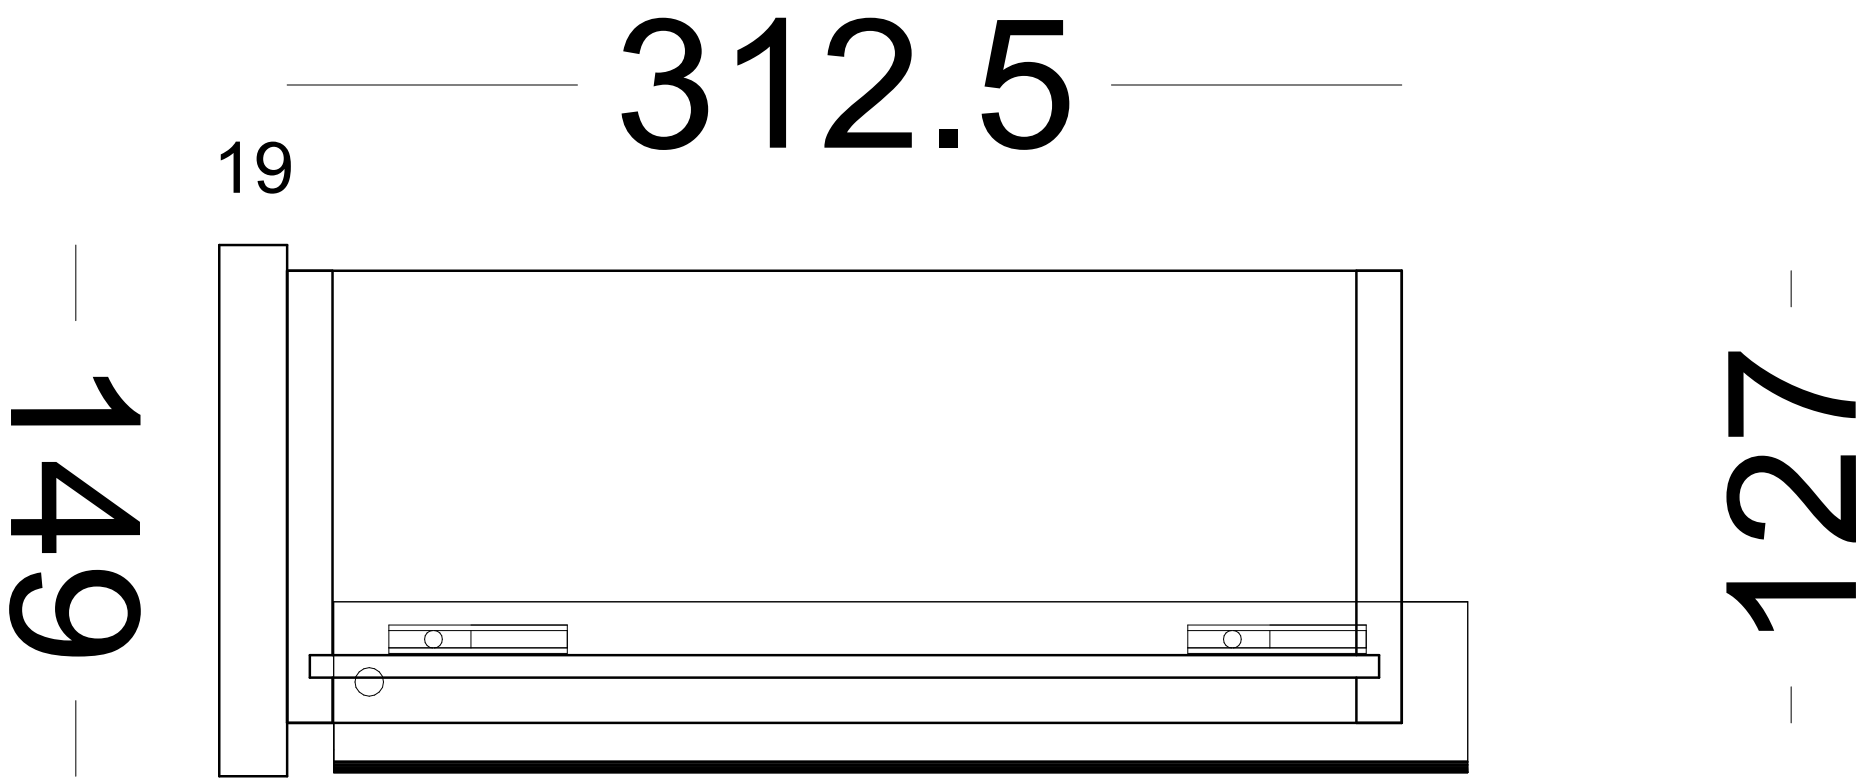
312.5
19
149
127

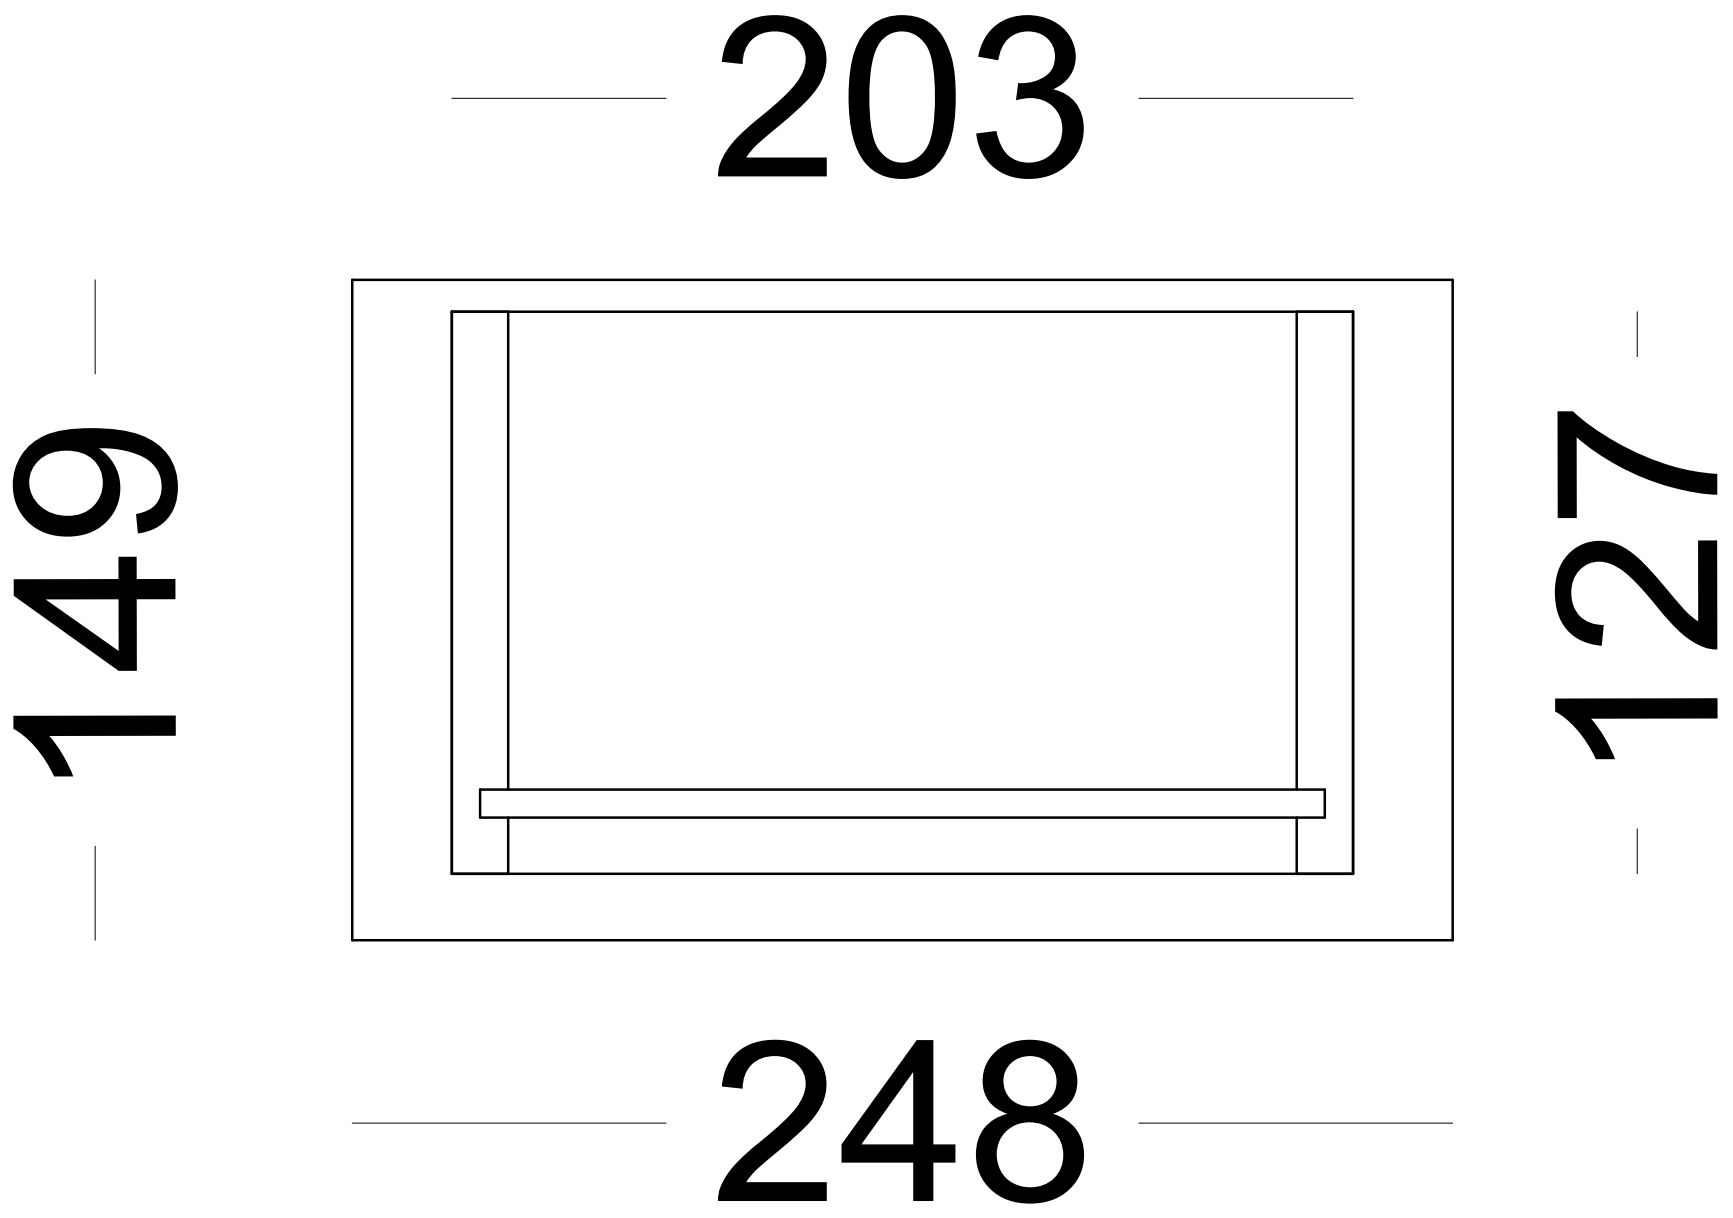
203
149
127
248

Assembly #1 - Sample Drawer Box

251.5 x 152.5 x 355.5 (1)

Drawer Fronts

1	248	149	Slab	3/4" thick


Panel Stock


1	190.5	300	Drawer Box Bottom	1/4"
1	127	312.5	Drawer Right Side	1/2"
1	127	312.5	Drawer Left Side	1/2"
1	127	178	Drawer Box Back	1/2"
1	127	178	Drawer Box Sub Front	1/2"

Hardware

4	21	5	Hardware Connector	LD Channelock - Mini-Fli
2	5	5	5x36 Sprin Pin	LD 5x36 Spring Pin
1	5	5	Channelock Mini	LD 5mm Spring Pin-DWF
4	21	5	Channelock Mini	LD Channelock - Mini
1	5	5	Channelock Mini	LD 5mm Spring Pin-DWF
1 P	25.5	318	Drawer Guide	LDSCU-3D-12in>=5/8 D'



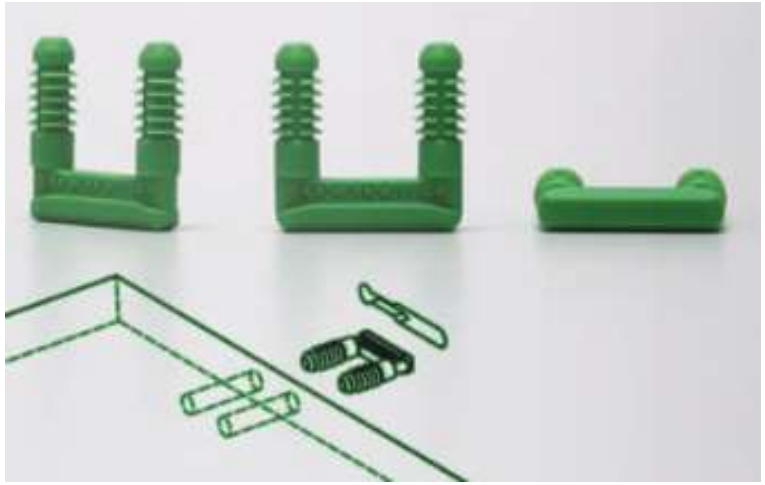

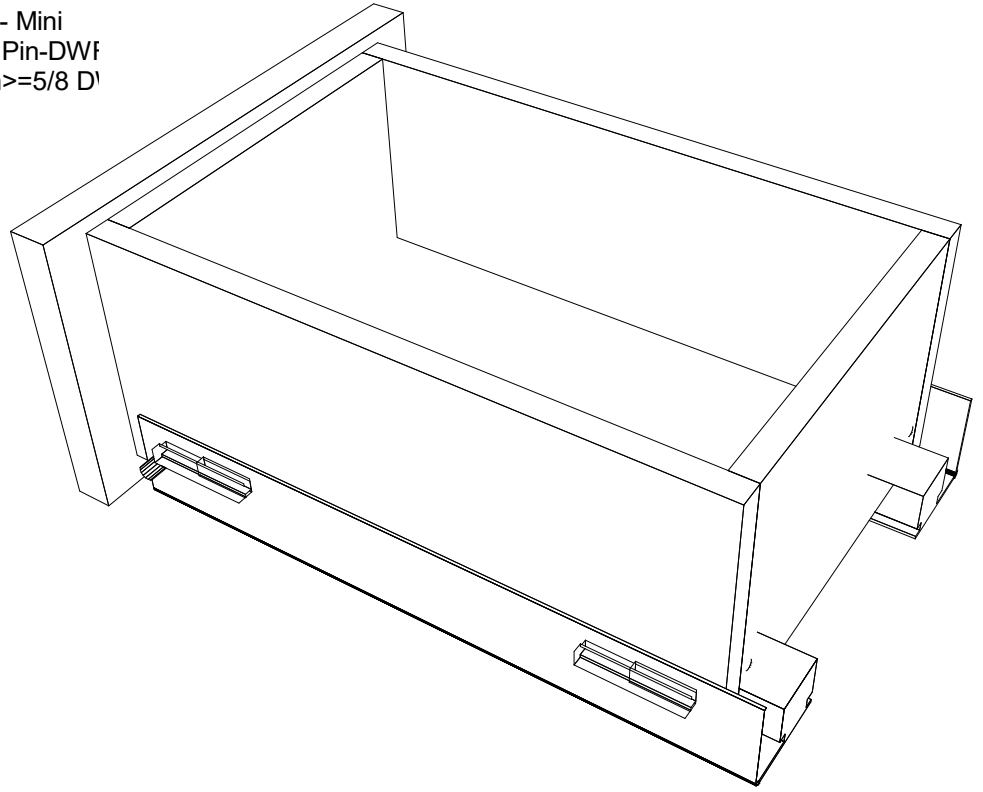

Assembly #1 - Sample Drawer Box

LD-Mini-CL 1_2 thick

L. Stile = 0 L. Scribe = 0 R. Stile = 0 R. Scribe = 0

T. Scribe = 0 B. Scribe = 0

Toe Height = 0 Toe Recess = 76

Left End = Finished Right End = Finished Back =

Job

Default


Room #1 (Room 1) - Wall #1

Date: 12/19/23

E900BPMini Mini Nylon Barbed Channel Lock


Specification

- Removable Sturdy Joint
- Pull Force: 70+ lbs
- Sheer Force: Over 50 lbs
- Requires CNC routing capability and edge boring machine
- Best used in Particle Board, Plywood, MDF, and selected plastic materials (Min. Thickness: 1/2")
- Drilling: Ø 5 mm and 16 mm spacing
- Material: Nylon 6-6

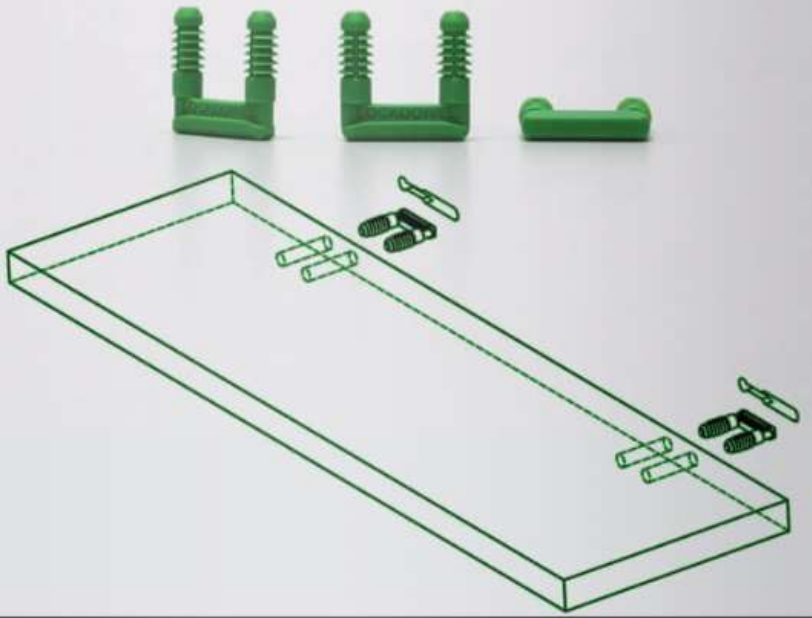


Patent Pending

Mini Barbed Channel Lock Routing Instructions

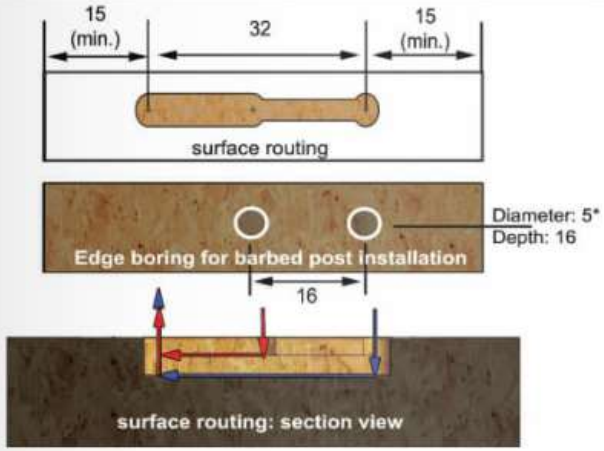

Plunge Cut: Z: -3.0 Slot Cut: X: 0 to 18
Plunge Cut: Z: -6.0 Key Slot: X:-14 to 18
(Allowable Depth Range is -6.0 to -6.3)

Route RED first. Then BLUE.



- All measurements are in mm.
* If using MDF, replace 5mm Drill Bit with 5.2mm Drill Bit.

Patent Pending