


STATE	PROJECT NO.
MISS.	

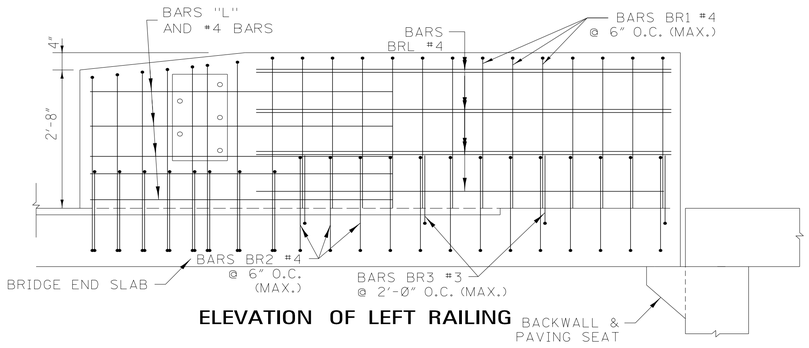

ELEVATION OF LEFT RAILING

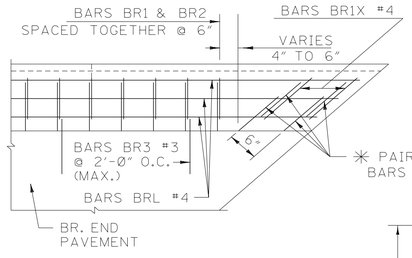


SKEWED PART PLAN OF LEFT RAILING AT BRIDGE END WALL

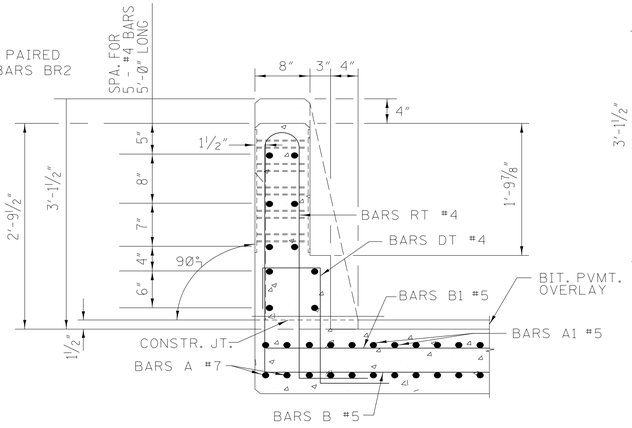


NOTE: SEE SHEET BE-1 FOR STEEL DETAILS OF BRIDGE END PAVEMENT


END ELEVATION OF RAILING

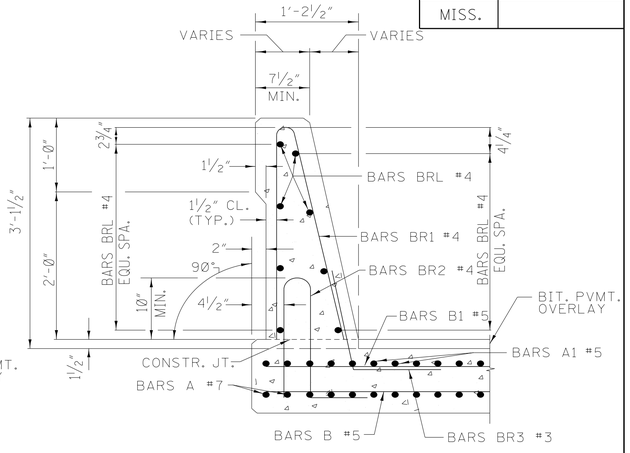


TYPICAL SECTION OF RAILING

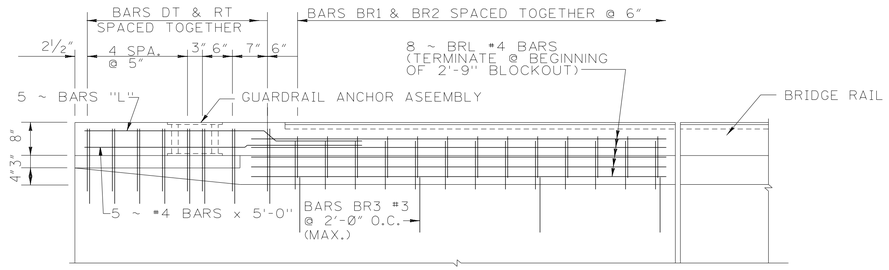


PLAN OF LEFT RAILING




PIPE SLEEVE DETAIL

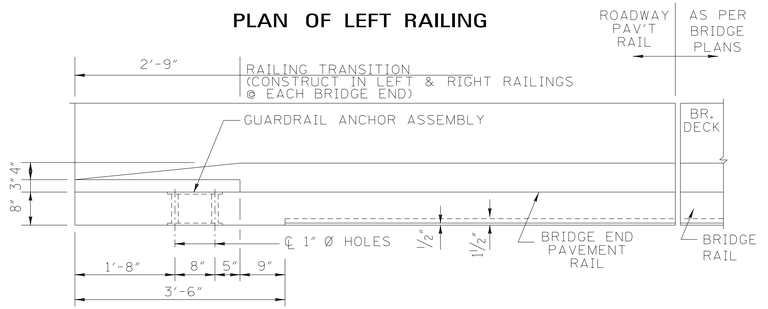


PLAN OF RIGHT RAILING
(SHOWING CONCRETE DIMENSIONS)

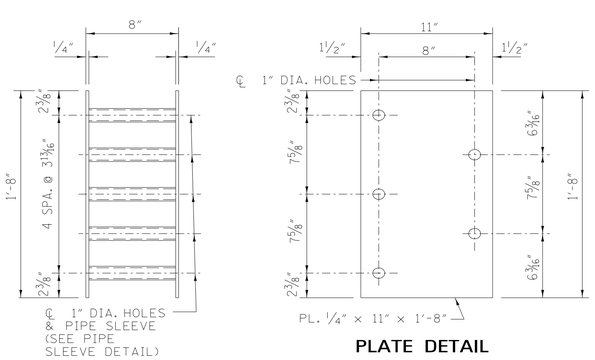


GUARDRAIL ANCHOR ASSEMBLY

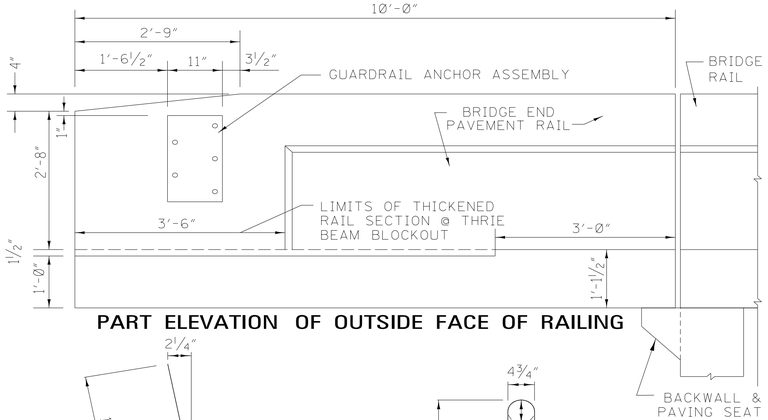


PART ELEVATION OF OUTSIDE FACE OF RAILING




BARS BR3 ~ #3




BARS BR2 ~ #4



BARS BR1 ~ #4

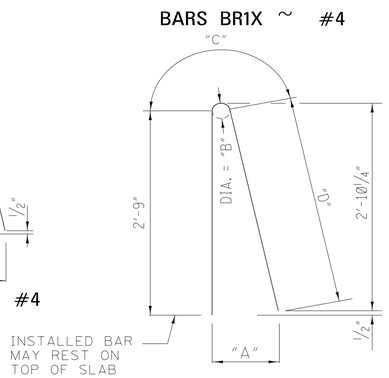

BAR BENDING DETAILS
DIMENSIONS ARE OUT TO OUT

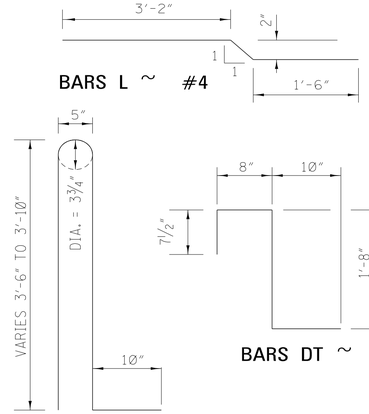

GENERAL NOTES:

1. FABRICATE GUARDRAIL ANCHOR ASSEMBLY BY TACK WELDING EACH END OF PIPE SLEEVES TO PLATES. PLATES SHALL BE ASTM A709, GRADE 36 STEEL (AASHTO M270, GRADE 36). PIPES SHALL BE ASTM 120. GALVANIZE COMPLETE ASSEMBLIES AFTER FABRICATION PER ASTM A53 (AASHTO M232).
2. ATTACH ASSEMBLIES SECURELY TO THE FORMS PRIOR TO POURING RAILING CONCRETE TO ASSURE THAT EXPOSED SURFACES OF THE ASSEMBLIES WILL BE FLUSH WITH THE CONCRETE SURFACES.
3. GUARDRAIL ANCHOR ASSEMBLIES SHALL BE INSTALLED IN BOTH LEFT AND RIGHT RAILINGS AT EACH END OF ALL BRIDGES.
4. BRIDGE END PAVEMENT RAIL SHALL BE CONSTRUCTED AND PAID FOR IN ACCORDANCE WITH SECTION 813 OF THE STANDARD SPECIFICATIONS.
5. 4" DIAMETER WEEP HOLES TO BE PLACED IN THE BRIDGE END PAVEMENT RAIL WHERE REQUIRED TO REDUCE PONDING.
6. IF TOP LIFT OF ASPHALT IS GREATER THAN 1.5", THE LIFT SHALL BE TRANSITIONED TO 1.5" ACROSS THE LENGTH OF THE BRIDGE END PAVEMENT.
7. FOR UNDERDRAIN DETAILS REFER TO MDOT STANDARD DRAWING BE-1.
8. DEFORMED WELDED WIRE REINFORCEMENT (WWR) MAY BE SUBSTITUTED FOR #4 LONGITUDINAL BARS AND BR1. REFER TO BRIDGE RAIL DETAIL SHEETS FOR BENDING DETAILS AND SPECIFICATIONS.

DESIGN DATA
SPECIFICATIONS.....A.A.S.H.T.O. LRFD 2017 WITH 2018 INTERIMS.
CONCRETE.....CLASS "AA"(4,000 PSI)
REINFORCING.....ASTM A615 (AASHTO M31) GRADE 60 (Fy = 60 KSI)

TABLE OF SKEW DIMENSIONS				
SKEW (DEG)	"A"	"B"	"C"	"D"
5	9 13/16"	2 1/2"	5 3/16"	2'-9 5/16"
10	9 7/8"	2 9/16"	5 1/4"	2'-9 5/16"
15	10 1/8"	2 9/16"	5 3/16"	2'-9 3/8"
20	10 3/8"	2 11/16"	5 5/16"	2'-9 3/8"
25	10 3/4"	2 3/4"	5 3/8"	2'-9 7/16"
30	11 1/4"	2 7/8"	5 7/16"	2'-9 7/16"
35	11 7/8"	3 1/16"	5 5/8"	2'-9 1/2"
40	1'-0 3/4"	3 1/4"	5 3/4"	2'-9 5/8"
45	1'-1 3/4"	3 9/16"	6"	2'-9 13/16"

NOTE:
IF SKEW ANGLE IS NOT SHOWN IN THE TABLE, THE DIMENSIONS FOR BARS BR1X SHALL BE USED FOR THE NEXT HIGHEST SKEW ANGLE IN THE TABLE.

✳ NOTE:
AT SKEWED END SECTIONS, BARS BR2 SHALL BE USED IN PAIRS AND FIELD ADJUSTED IN ORDER TO MAINTAIN THE NECESSARY SPACING AND CLEARANCE.

BY	REVISION	8/4/2023

MISSISSIPPI DEPARTMENT OF TRANSPORTATION
ROADWAY DESIGN DIVISION
STANDARD PLAN

37.5" BRIDGE END PAVEMENT RAIL

MDOT
WORKING NUMBER SDBER-1
SHEET NUMBER

ISSUE DATE: AUGUST 01, 2017