
McMASTER-CARR®

# Extra-High-Temperature Electrically Insulating Mica

## 23" x 39" Sheet, 0.032" Thick

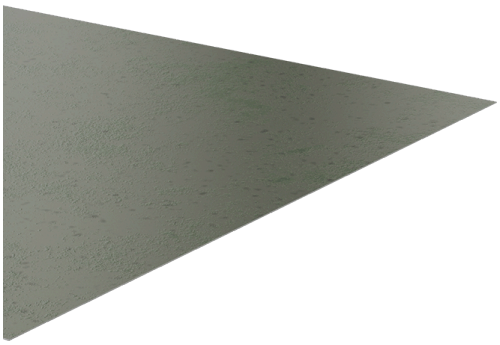


Delivers today 3-5 pm if ordered by 11:50 am

$77.97 each
85165K26

| | |
|---|---|
| Width | 23" |
| Width Tolerance | -1" to 1" |
| Length | 39" |
| Length Tolerance | -1" to 1" |
| Thickness | 0.032" |
| Thickness Tolerance | -0.0032" to 0.0032" |
| Dielectric Strength | 635 V/mil |
| Maximum Continuous Temperature | 1,275° F |
| Maximum Intermittent Temperature | 1,800° F |
| Flexibility | Rigid |
| Binder Material | Silicone Resin |
| Certificate Form | Paper |
| Certificate Type | Material Certificate with Traceable Lot Number |
| Clarity | Opaque |
| Color | Green |
| Density | 0.2 lb/in$^3$ |
| Flammability Rating | UL 94 V-0 |
| Material | Mica |
| Material Composition, Mica | 90% |
| Minimum Temperature | -60° F |
| Pattern | Spotted |
| Performance | Extra High Temperature, Flame Retardant, Electrical Insulating |
| Shape | Sheet |
| Spot Color | Brown |
| Tensile Strength | 15,000 psi |
| Thermal Conductivity | 0.3 W/(m·°C) |
| Thermal Conductivity @ Temperature | 2.08 BTU·in/(hr·ft$^2$·°F) @ 500° F |
| Country of Origin | Czech Republic |
| DFARS Compliance | Specialty Metals COTS-Exempt |
| Export Control Classification Number (ECCN) | EAR99 |
| REACH Compliance | REACH (EC 1907/2006) (02/04/2026, 253 SVHC) Compliant |
| RoHS Compliance | RoHS 3 (2015/863/EU) Compliant |
| Schedule B Number | 681410.0000 |
| U.S.–Mexico–Canada Agreement (USMCA) Qualifying | No |

Line furnaces in steel mills or cover components in aerospace engine bays. These sheets maintain electrical insulating properties and strength under extreme heat. They dissipate heat slowly and predictably for precise temperature control. Because they're abrasion resistant, they're ideal for extreme material handling components, such as the parts that guide blown glassware pieces as they leave red-hot molds. These sheets can withstand temperatures up to 1800° F for a few minutes, but if they stay above 1275° F for too long, they may turn to carbon and stop insulating. They meet UL 94 V-0 for flame retardance. Also known as phlogopite mica.

**Rigid**—Machine with high-speed steel or tungsten carbide tools.

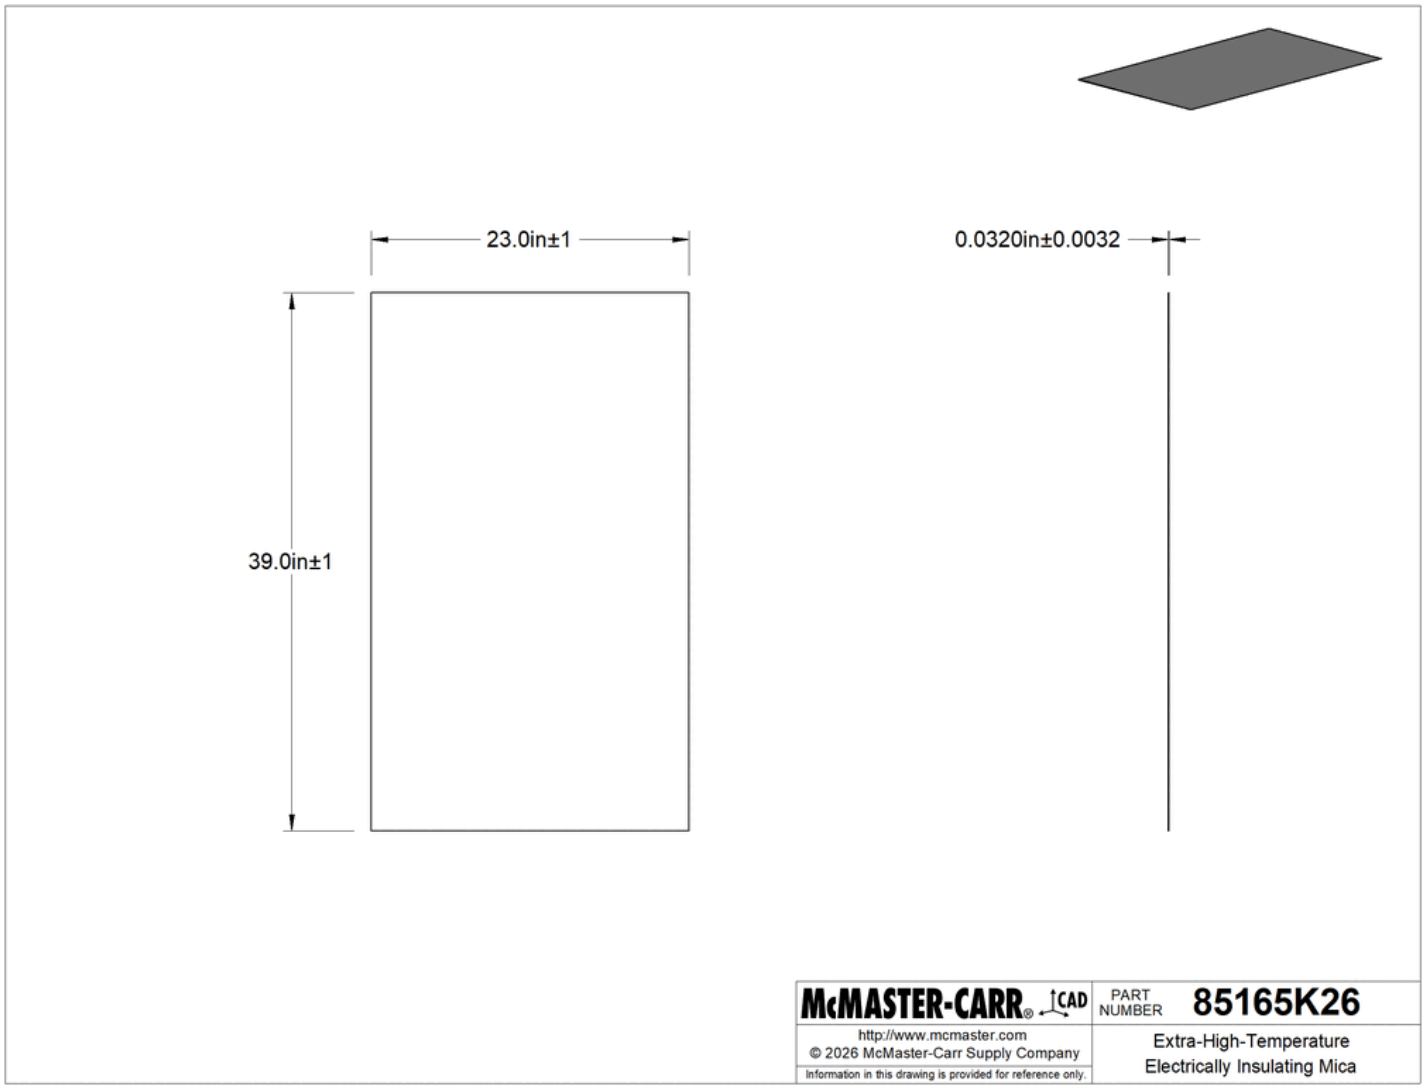


The information in this 3-D model is provided for reference only.