

Comment: Comment-1
Comment: Comment-2
Comment: Comment-3
Comment: Comment-4
Comment: Comment-5
Comment: Comment-6
Comment: Comment-7
Comment: Comment-8
Comment: Comment-9
Comment: Comment-10
Comment: Comment-11
Comment: Comment-12
Comment: Comment-13
Comment: Comment-14
Comment: Comment-15
Comment: Comment-16
Comment: Comment-17

DRAFT Protection Profile for General-Purpose Computing Platforms DRAFT



Version: 2.0
2025-05-05

National Information Assurance Partnership

Revision History

Version	Date	Comment
0.1	2020-11-16	Started
1.0	2022-02-10	Initial publication.
1.1	2024-12-13	Updates for CC:2022
2.0	2025-01-13	Draft: Incorporate TRRTs

Contents

- 1 Introduction
 - 1.1 Overview
 - 1.2 Terms
 - 1.2.1 Common Criteria Terms
 - 1.2.2 Technical Terms
 - 1.3 TOE Overview
 - 1.3.1 TOE Boundary
 - 1.3.2 TOE Operational Environment
 - 1.4 Use Cases
 - 1.5 Roles
- 2 Conformance Claims
- 3 Security Problem Definition
 - 3.1 Threats
 - 3.2 Assumptions
 - 3.3 Organizational Security Policies
- 4 Security Objectives
 - 4.1 Security Objectives for the Operational Environment
 - 4.2 Security Objectives Rationale
- 5 Security Requirements
 - 5.1 Security Functional Requirements
 - 5.1.1 Auditable Events for Mandatory SFRs
 - 5.1.2 Class: Cryptographic Support (FCS)
 - 5.1.3 Class: Security Management (FMT)
 - 5.1.4 Class: Protection of the TSF (FPT)
 - 5.1.5 TOE Security Functional Requirements Rationale
 - 5.2 Security Assurance Requirements
 - 5.2.1 Class ASE: Security Target
 - 5.2.2 Class ADV: Development
 - 5.2.3 Class AGD: Guidance Documentation
 - 5.2.4 Class ALC: Life-cycle Support
 - 5.2.5 Class ATE: Tests
 - 5.2.6 Class AVA: Vulnerability Assessment
- Appendix A - Optional Requirements
 - A.1 Strictly Optional Requirements
 - A.1.1 Auditable Events for Strictly Optional Requirements
 - A.1.2 Class ALC: Life-cycle Support
 - A.1.3 Class: Cryptographic Support (FCS)
 - A.1.4 Class: User Data Protection (FDP)
 - A.1.5 Class: Identification and Authentication (FIA)
 - A.2 Objective Requirements
 - A.2.1 Auditable Events for Objective Requirements
 - A.2.2 Class: Protection of the TSF (FPT)
 - A.3 Implementation-dependent Requirements
- Appendix B - Selection-based Requirements
 - B.1 Auditable Events for Selection-based Requirements
 - B.2 Class: Security Audit (FAU)
 - B.3 Class: Cryptographic Support (FCS)
 - B.4 Class: User Data Protection (FDP)
 - B.5 Class: Identification and Authentication (FIA)
 - B.6 Class: Protection of the TSF (FPT)
 - B.7 Class: Trusted Path/Channels (FTP)
- Appendix C - Extended Component Definitions
 - C.1 Extended Components Table
 - C.2 Extended Component Definitions
 - C.2.1 Class: Cryptographic Support (FCS)
 - C.2.1.1 FCS_CKM_EXT Cryptographic Key Management
 - C.2.1.2 FCS_HTTPS_EXT HTTPS Protocol
 - C.2.1.3 FCS_IPSEC_EXT IPsec Protocol
 - C.2.1.4 FCS_OTV_EXT Cryptographic One-Time Value Generation
 - C.2.1.5 FCS_STG_EXT Cryptographic Key Storage
 - C.2.2 Class: Identification and Authentication (FIA)

- C.2.2.1 FIA_AFL_EXT Authentication Failure Handling
- C.2.2.2 FIA_PMG_EXT Password Management
- C.2.2.3 FIA_TRT_EXT Authentication Throttling
- C.2.2.4 FIA_UIA_EXT Administrator Identification and Authentication
- C.2.3 Class: Protection of the TSF (FPT)
 - C.2.3.1 FPT_JTA_EXT Debug Port Access
 - C.2.3.2 FPT_ROT_EXT Platform Integrity
 - C.2.3.3 FPT_PPF_EXT Protection of Platform Firmware
 - C.2.3.4 FPT_RVR_EXT Platform Firmware Recovery
 - C.2.3.5 FPT_TUD_EXT Platform Firmware Update
- C.2.4 Class: Security Management (FMT)
 - C.2.4.1 FMT_CFG_EXT Secure by Default
- C.2.5 Class: Trusted Path/Channels (FTP)
 - C.2.5.1 FTP_ITC_EXT Trusted Channel Communications
 - C.2.5.2 FTP_ITE_EXT Encrypted Data Communications
 - C.2.5.3 FTP_ITP_EXT Physically Protected Channel
- C.2.6 Class: User Data Protection (FDP)
 - C.2.6.1 FDP_ITC_EXT Key Import
 - C.2.6.2 FDP_TEE_EXT Trusted Execution Environment

Appendix D - Implicitly Satisfied Requirements

Appendix E - Entropy Documentation and Assessment

- E.1 Design Description
- E.2 Entropy Justification
- E.3 Operating Conditions
- E.4 Health Testing

Appendix F - Equivalency Guidelines

- F.1 Introduction
- F.2 Approach to Equivalency Analysis
- F.3 Specific Guidance for Determining Product Equivalence
- F.4 Technical Equivalence
- F.5 Level of Specificity for Tested and Claimed Equivalent Configurations

Appendix G - Use Case Templates

- G.1 Server-Class Platform, Physically Secure Environment
- G.2 Server-Class Platform, Enhanced Security Requirements
- G.3 Portable Clients (laptops, tablets), Enhanced Security Requirements
- G.4 CSfC EUD
- G.5 Tactical EUD
- G.6 Enterprise Desktop clients
- G.7 IoT Devices

Appendix H - Acronyms

Appendix I - Bibliography

1 Introduction

1.1 Overview

The scope of this Protection Profile (PP) is to describe the security functionality of General-Purpose Computing Platforms in terms of the Common Criteria and to define functional and assurance requirements for such products.

A platform is a collection of hardware devices and firmware that provide the functional capabilities and services needed by tenant software. Such components typically include embedded controllers, trusted platform modules, management controllers, host processors, network interface controllers, graphics processing units, flash memory, storage controllers, storage devices, boot firmware, runtime firmware, human interface devices, and a power supply.

This Protection Profile for General-Purpose Computing Platforms derives requirements from the following documents:

- NIST SP 800-147 *BIOS Protection Guidelines*, April 2011
- NIST SP 800-147B *BIOS Protection Guidelines for Servers*, August 2014
- NIST SP 800-193 *Platform Firmware Resiliency Guidelines*, May 2018

Additionally, the following specifications and standards may be relevant to requirements in this PP:

- NIST SP 800-155 (Draft) *BIOS Integrity Measurement Guidelines (Draft)*, December 2011
- NIST SP 1800-34 (Draft) *Validating the Integrity of Computing Devices*, December 2022
- Trusted Computing Group, *TCG PC Client Platform Firmware Integrity Measurement Version 1.0 Revision Specification 43 Family 2.0*, May 7, 2021
- IEEE Std 802.1AR-2018, *Secure Device Identity*

1.2 Terms

The following sections list Common Criteria and technology terms used in this document.

1.2.1 Common Criteria Terms

Assurance	Grounds for confidence that a TOE meets the SFRs [CC].
Base Protection Profile (Base-PP)	Protection Profile used as a basis to build a PP-Configuration.
Collaborative Protection Profile (cPP)	A Protection Profile developed by international technical communities and approved by multiple schemes.
Common Criteria (CC)	Common Criteria for Information Technology Security Evaluation (International Standard ISO/IEC 15408).
Common Criteria Testing Laboratory	Within the context of the Common Criteria Evaluation and Validation Scheme (CCEVS), an IT security evaluation facility accredited by the National Voluntary Laboratory Accreditation Program (NVLAP) and approved by the NIAP Validation Body to conduct Common Criteria-based evaluations.
Common Evaluation Methodology (CEM)	Common Evaluation Methodology for Information Technology Security Evaluation.
Extended Package (EP)	A deprecated document form for collecting SFRs that implement a particular protocol, technology, or functionality. See Functional Packages.
Functional Package (FP)	A document that collects SFRs for a particular protocol, technology, or functionality.
Operational Environment (OE)	Hardware and software that are outside the TOE boundary that support the TOE functionality and security policy.
Protection Profile (PP)	An implementation-independent set of security requirements for a category of products.
Protection Profile Configuration (PP-Configuration)	A comprehensive set of security requirements for a product type that consists of at least one Base-PP and at least one PP-Module.
Protection	An implementation-independent statement of security needs for a TOE type complementary

Profile Module (PP-Module)	to one or more Base-PPs.
Security Assurance Requirement (SAR)	A requirement to assure the security of the TOE.
Security Functional Requirement (SFR)	A requirement for security enforcement by the TOE.
Security Target (ST)	A set of implementation-dependent security requirements for a specific product.
Target of Evaluation (TOE)	The product under evaluation.
TOE Security Functionality (TSF)	The security functionality of the product under evaluation.
TOE Summary Specification (TSS)	A description of how a TOE satisfies the SFRs in an ST.

1.2.2 Technical Terms

Administrator	An Administrator is responsible for management activities, including setting policies that are applied by the enterprise on the platform. An Administrator can act remotely through a management server, from which the platform receives configuration policies and updates. An Administrator can enforce settings on the system that cannot be overridden by non-Administrator users.
American National Standards Institute (ANSI)	A private organization that oversees development of standards in the United States.
Application	Software that runs on a platform and performs tasks on behalf of the user or owner of the platform.
Application Programming Interface (API)	A specification of routines, data structures, object classes, and variables that allows an application to make use of services provided by another software component, such as a library. APIs are often provided for a set of libraries included with the platform.
Baseboard Management Controller (BMC)	Or Management Controller. A small computer generally found on Server motherboards that performs management tasks on behalf of an Administrator.
Cipher-based Message Authentication Code (CMAC)	A mode of AES that provides authentication, but not confidentiality.
Commercial Solutions for Classified (CSfC)	An US Department of Defense program for delivering cybersecurity solutions that leverage commercial technologies and products.
Credential	Data that establishes the identity of a user, e.g. a cryptographic key or password.
Critical Security Parameters (CSP)	Information that is either user or system defined and is used to operate a cryptographic module in processing encryption functions including cryptographic keys and authentication data, such as passwords, the disclosure or modification of which can compromise the security of a cryptographic module or the security of the information protected by the module.
Data-at-Rest (DAR) Protection	Countermeasures that prevent attackers, even those with physical access, from extracting data from non-volatile storage. Common techniques include data encryption and wiping.
Developer	An entity that manufactures platform hardware or writes platform software/firmware. For the purposes of this document, vendors and developers are the same.

Diffie-Hellman Key Exchange (DH)	A cryptographic key exchange protocol using public/private key pairs.
Distinguished Name (DN)	Information used in certificate-based operations to uniquely identify a person, organization, or business.
End-User Device (EUD)	A class of computing platform characterized by having a user interface for a single user. Often, EUDs are portable (e.g., laptop, tablet, mobile device), but this is not necessarily the case (e.g., desktop PC).
General Purpose Operating System	A class of OS designed to support a wide-variety of workloads consisting of many concurrent applications or services. Typical characteristics for OSes in this class include support for third-party applications, support for multiple users, and security separation between users and their respective resources.
General-Purpose Computing Platform (GPCP)	A physical computing platform designed to support general-purpose operating systems, virtualization systems, and applications.
Internet of Things (IoT)	Physical computing devices that are embedded with sensors, processing ability, software, and other technologies that connect and exchange data with other devices and systems over communications networks.
Joint Test Action Group (JTAG)	A standard for verifying and testing circuit boards after manufacture.
KECCAK Message Authentication Code (KMAC)	A variable-length keyed hash function described in NIST SP 800-185.
Management Controller (MC)	Or Baseboard Management Controller (BMC). A small computer generally found on server motherboards that performs management tasks on behalf of an Administrator.
Open Mobile Terminal Platform (OMTP)	A forum created by mobile network operators to discuss standards with manufacturers of mobile devices.
Operating System (OS)	Software that manages physical and logical resources and provides services for applications. Operating systems are the generally the primary tenant of a GPCP.
Physical Presence	A user or administrator having physical access to the TOE. An assertion of physical presence can take the form, for example, of requiring entry of a password at a boot screen, unlocking of a physical lock (e.g., a motherboard jumper), or inserting a USB cable before permitting platform firmware to be updated.
Root of Trust (RoT)	Roots of trust are highly reliable hardware, firmware, and software components that perform specific, critical security functions. Roots of trust are the foundation for integrity of computing devices.
Sensitive Data	Sensitive data may include all user or enterprise data or may be specific application data such as PII, emails, messaging, documents, calendar items, and contacts. Sensitive data must minimally include credentials and keys.
Subject Alternative Name (SAN)	An extended X.509 certificate field.
Tenant Software	Software that runs on and is supported by a platform. In the case of a GPCP, tenant software generally consists of an operating system, virtualization system, or "bare-metal" application.
Trusted Execution Environment (TEE)	An isolated and secure area that ensures the confidentiality and integrity of code and data loaded inside.
User	In the context of a GPCP, a User is a human who interacts with the platform through a user interface. Users do not need to be authenticated by the platform to use the platform, but generally authenticate to tenant software such as on Operating System.
Virtualization System (VS)	A software product that enables multiple independent computing systems to execute on the same physical hardware platform without interference from one other.

1.3 TOE Overview

This Protection Profile for General-Purpose Computing Platforms (GPCP) specifies security requirements for general-purpose computing platforms. A GPCP is a hardware device that is capable of hosting one or more general-purpose operating systems as defined by the Protection Profile for General Purpose Operating Systems, one or more virtualization systems as defined by the Protection Profile for Virtualization, or more than one application. Typical platform implementations include servers, PC clients, laptops, and tablets.

Mobile Device platforms as defined in the Protection Profile for Mobile Device Fundamentals and Network Device platforms as defined in the collaborative Protection Profile for Network Devices are out of scope of this PP. Mobile Device and Network Device platforms must be evaluated against the more specific requirements in their respective specialized PPs.

Likewise, hardcopy devices such as printers, scanners, copiers, and fax machines are out of scope of this Protection Profile and should be evaluated instead against the Protection Profile for Hardcopy Devices.

Finally, platforms for sharing and isolation of peripheral devices across domains, such as KVM Switches and Isolators, should be evaluated against the Protection Profile for Peripheral Sharing Devices.

The core security features of GPCPs include protected firmware and a boot integrity processes. Platform firmware must be protected such that it is not permitted to execute if it has been modified outside of authorized and authenticated update processes. Other use-case-specific features include audit capabilities, Administrator authentication, and protections against physical tampering.

1.3.1 TOE Boundary

The TOE comprises the hardware and firmware necessary for the hosting of tenant software. Generally, tenant software is an operating system or virtualization system, but may also be "bare-metal" applications. Tenant software is outside the TOE boundary.

For example, for a PC Client platform, the hardware and firmware responsible for booting the platform and operation of platform devices (such as BIOS, device controller firmware, and platform management firmware) would all be included in the TOE. Operating systems and application software is outside the TOE.

For server-class hardware, any management controller responsible for updating platform firmware (such as a baseboard management controller) is expressly included within the TOE.

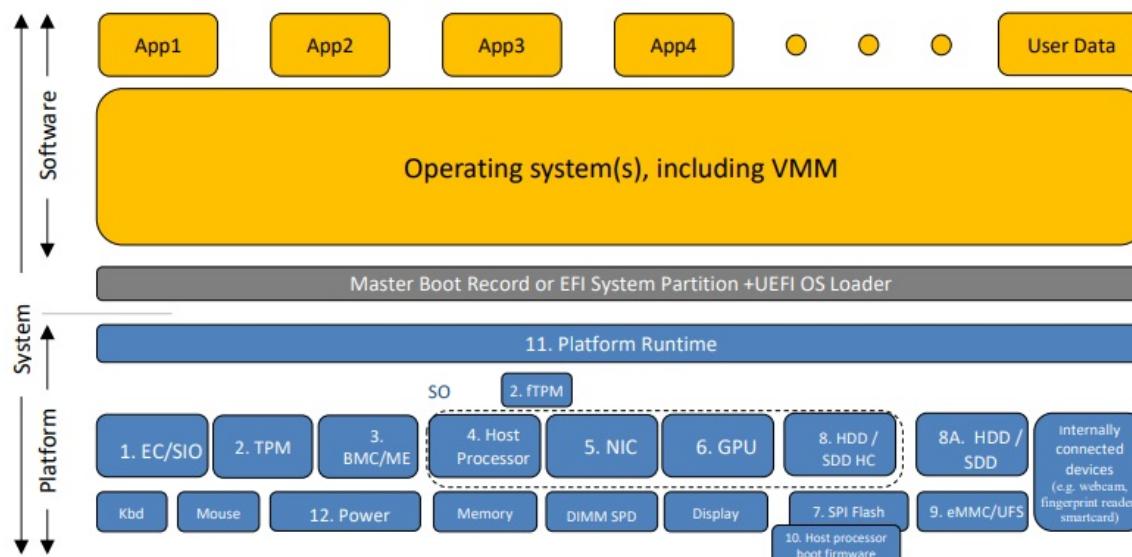


Figure 1: High-Level Architecture of a Generic Platform

Figure 1 (taken from [NIST SP 800-193](#)) shows a high-level system architecture for a typical generic computing platform. Tenant software (operating system/virtualization system and applications) is shown in orange. The tenant-specific software responsible for booting the tenant (Master Boot Record, etc.) is shown in grey. Platform components are in blue.

In general, the TOE consists of the platform components represented by the blue boxes, along with their associated firmware. Any particular platform may have additional hardware components, or fewer than those illustrated.

Addresses TRRT 1567 If the GPCP includes Full Drive Encryption (FDE), and the FDE component has been previously evaluated against the FDEcPPs, or will be evaluated against the FDEcPPs concurrently with the GPCP evaluation, then the FDE component may be excluded from the TOE for purposes of the GPCP evaluation.

1.3.2 TOE Operational Environment

The TOE has no platform since it is itself a platform, but the TOE does have an operational environment. The OE consists of the physical environment in which the TOE operates (e.g., data center, enterprise office, vehicle, outdoors) and any networks to which the TOE may be connected. Different use cases may invoke different requirements depending on the operational environment.

1.4 Use Cases

This Protection Profile supports several use cases. The cases enumerated below add requirements to the baseline for GPCP due to additional threats or changes in assumptions about the operational environment. Use cases not listed below (e.g. consumer-grade desktop, laptop, and tablet computers) need be evaluated only against the baseline requirements subject to the appropriate selections.

The requirements associated with some use case encompass those of other use cases. In these situations, a TOE that meets the larger set of requirements meets both use cases. Specifically

- a TOE that meets [USE CASE 2] Server-Class Platform, Enhanced Security Requirements also meets [USE CASE 1] Server-Class Platform, Physically Secure Environment
- a TOE that meets [USE CASE 4] CSfC EUD also meets [USE CASE 3] Portable Clients (laptops, tablets), Enhanced Security Requirements
- a TOE that meets [USE CASE 5] Tactical EUD also meets [USE CASE 3] Portable Clients (laptops, tablets), Enhanced Security Requirements.

[USE CASE 1] Server-Class Platform, Physically Secure Environment

This use case encompasses server-class hardware in a data center. There are no additional physical protections required because the platform is assumed to be protected by the operational environment as indicated by [A.PHYSICAL_PROTECTION](#). The platform is administered using a management controller that is accessed remotely or through a console.

This use case adds audit requirements and Administrator authentication requirements to the base mandatory requirements.

For changes to included SFRs, selections, and assignments required for this use case, see [G.1 Server-Class Platform, Physically Secure Environment](#).

[USE CASE 2] Server-Class Platform, Enhanced Security Requirements

This use case adds physical protections to the base requirements for server-class hardware. Additional physical protections are required because the platform is assumed to not be protected by the operational environment, or because of enhanced security requirements imposed by data center or operational policies.

This use case adds requirements for audit, physical protections, and Administrator authentication to the base mandatory SFRs. It removes the assumption that the TOE is physically protected by the OE.

For changes to included SFRs, selections, and assignments required for this use case, see [G.2 Server-Class Platform, Enhanced Security Requirements](#).

[USE CASE 3] Portable Clients (laptops, tablets), Enhanced Security Requirements

This use case adds physical protections to the base requirements for portable clients or end-user devices. It is intended for devices are used in high-assurance scenarios.

For changes to included SFRs, selections, and assignments required for this use case, see [G.3 Portable Clients \(laptops, tablets\), Enhanced Security Requirements](#).

[USE CASE 4] CSfC EUD

[Modified to address TRRT 1560](#) EUDs used in accordance with the CSfC Mobile Access Capability Package can include smart phones, tablets, desktops, and laptops. This use case covers the basic CSfC requirements for EUDs other than mobile devices (mobile devices are out of scope for this PP).

CSfC requires that users maintain physical control of EUDs at all times. This use case adds requirements for audit and for protection of debug ports .

For changes to included SFRs, selections, and assignments required for this use case, see [G.4 CSfC EUD](#).

[USE CASE 5] Tactical EUD

This use case adds requirements for portable end user computing devices in a tactical environment.

For changes to included SFRs, selections, and assignments required for this use case, see [G.5 Tactical EUD](#).

[USE CASE 6] Enterprise Desktop clients

This use case covers the requirements for non-portable desktop computing devices in a low-threat enterprise physical environment.

This use case adds only audit to the base mandatory SFRs.

For changes to included SFRs, selections, and assignments required for this use case, see [G.6 Enterprise Desktop clients](#).

[USE CASE 7] IoT Devices

IoT devices are field-located devices without human interfaces when in normal operation. In order to qualify for evaluation under this PP, the device must meet the basic criteria for a general-purpose platform, and not meet the requirements for a mobile device or network device.

For changes to included SFRs, selections, and assignments required for this use case, see [G.7 IoT Devices](#).

1.5 Roles

For purposes of these requirements there are two entities that interact with a general-purpose computing platform:

1. Users (unprivileged users)
2. Administrators (privileged users)

Users are humans who interact with the platform through user interfaces. They usually have to authenticate themselves to tenant software (e.g. an operating system), but generally not to the platform itself. Throughout

this document the term "user" refers generally to a person interacting with the platform.

Administrators are users who manage the platform through a management interface. The interface may be local or remote to the platform.

Administrators manage the physical platform, not the OS (OS Administrators would be classified as platform Users). Administrators must be authenticated to the platform before the platform can allow them to perform administrative functions. For an EUD, this could be accomplished through an interface implemented in firmware. For server-class hardware, the management interface could be implemented in a management controller that is part of the platform. Administrators are assumed to be acting in the best interests of the platform owner.

Tenant Software generally consists of an operating system, virtualization system, or application that uses platform resources to run workloads on behalf of Users. Tenant software generally has the privilege of the User or Administrator in whose context it runs.

2 Conformance Claims

Conformance Statement

An ST must claim exact conformance to this PP.

The evaluation methods used for evaluating the TOE are a combination of the workunits defined in [CEM] as well as the Evaluation Activities for ensuring that individual SFRs and SARs have a sufficient level of supporting evidence in the Security Target and guidance documentation and have been sufficiently tested by the laboratory as part of completing [ATE_IND.1](#). Any functional packages this PP claims similarly contain their own Evaluation Activities that are used in this same manner.

CC Conformance Claims

This PP is conformant to Part 2 (extended) and Part 3 (extended) of Common Criteria CC:2022, Revision 1 as corrected and interpreted in [\[ERR\]](#), Version 1.1.

PP Claim

This PP does not claim conformance to any Protection Profile.

There are no PPs or PP-Modules that are allowed in a PP-Configuration with this PP.

Package Claim

- This PP is Functional Package for Secure Shell (SSH) Version 2.0 conformant.
- This PP is Functional Package for Transport Layer Security Version 2.1 conformant.
- This PP is Functional Package for X.509 Version 1.0 conformant.
- This PP does not conform to any assurance packages.

The functional packages to which the PP conforms may include SFRs that are not mandatory to claim for the sake of conformance. An ST that claims one or more of these functional packages may include any non-mandatory SFRs that are appropriate to claim based on the capabilities of the TSF and on any triggers for their inclusion based inherently on the SFR selections made.

3 Security Problem Definition

The security problem is described in terms of the threats that the GPCP is expected to address, assumptions about the operational environment, and any organizational security policies that the GPCP is expected to enforce.

The platform has three major security responsibilities:

- ensuring the integrity of its own firmware and hardware
- ensuring that it is resilient
- providing security services to tenant workloads

These responsibilities manifest as protecting:

- Platform firmware and hardware
- Platform firmware updates
- Tenant initialization (boot)

3.1 Threats

T.PHYSICAL

An attacker with physical access might be able to compromise TOE integrity, subvert TOE protections, or access tenant data through hardware attacks such as probing, physical manipulation, fault-injection, side-channel analysis, environmental stress, or activating disabled features or pre-delivery services. This threat is mitigated by TOE functionality for the use cases listed below; for other use cases, the expectation is that the environmental security objectives are sufficient mitigation for this threat.

- Server-Class Platform, Enhanced
- Portable Clients (laptops, tablets), Enhanced
- CSfC EUD
- Tactical EUD
- IoT Devices

T.SIDE_CHANNEL_LEAKAGE

An attacker running in a tenant context might be able to leverage physical effects caused by the operation of the TOE to derive sensitive information about other tenants or the TOE.

T.PERSISTENCE

An attacker might be able to establish a permanent presence on the TOE in firmware. This could result in permanent compromise of tenant information, as well as TOE updates. This threat does not encompass attacker presence in tenant software, as tenant software is not part of the TOE.

T.UPDATE_COMPROMISE

An attacker may attempt to provide a compromised update of TOE firmware. Such updates can undermine the security functionality of the device if they are unauthorized, unauthenticated, or are improperly validated using non-secure or weak cryptography.

T.SECURITY_FUNCTIONALITY_FAILURE

An attacker could leverage failed or compromised security functionality to access, change, or modify tenant data, TOE data, or other security functionality of the device.

T.TENANT_BASED_ATTACK

An attacker running software as a tenant can attempt to access or modify TOE firmware or functionality. Note that direct tenant attacks against other tenants are not encompassed by this threat as they are out of scope.

T.NETWORK_BASED_ATTACK

An attacker from off the TOE can attempt to compromise the TOE through a network interface connected to an active TOE component, such as a management subsystem.

T.UNAUTHORIZED_RECONFIGURATION

An attacker might be able to modify the configuration of the TOE and alter its functionality. This might include, activating dormant subsystems, disabling hardware assists, or altering boot-time behaviors.

T.UNAUTHORIZED_PLATFORM_ADMINISTRATOR

An attacker might be able to attain platform administrator status by defeating or bypassing authentication measures.

3.2 Assumptions

A.PHYSICAL_PROTECTION

The TOE is assumed to be physically protected in its operational environment and thus is not subject to physical attacks that could compromise its security or its ability to support the security of tenant workloads. This assumption does not apply if the TOE implements any of the below, in which case physical protection from the Operational Environment is not assumed and the threat [T.PHYSICAL](#) and its associated TOE Objectives apply:

- Server-Class Platform, Enhanced
- Portable Clients (laptops, tablets), Enhanced
- CSfC EUD
- Tactical EUD

- IoT Devices

A.ROT_INTEGRITY

The TOE includes one or more Roots of Trust composed of TOE firmware, hardware, and pre-installed credentials. Roots of Trust are assumed to be free of malicious capabilities as their integrity cannot be verified.

A.TRUSTED_ADMIN

TOE Security Administrator are assumed to be trusted and to act in the best interest of security for the organization. The TOE is not expected to be capable of defending against a malicious Administrator that actively works to bypass or compromise the security of the platform.

A.MFR_ROT

The root signing credential of the manufacturer is assumed to be secure and has not been compromised.

A.TRUSTED_DEVELOPMENT_AND_BUILD_PROCESSES

The TOE cannot protect itself during its own development and build processes. Therefore it is assumed that the developers and participants in the build process are not hostile.

A.SUPPLY_CHAIN_SECURITY

The hardware components that comprise the TOE are assumed to be non-hostile and not compromised at the time of TOE construction. Likewise, the TOE is assumed to retain its integrity throughout transportation until delivery to its operational site.

A.CORRECT_INITIAL_CONFIGURATION

It is assumed that the initial setup and configuration of the TOE at its operational site is correct and in accordance with organizational security policy and operational use case.

A.TRUSTED_USERS

Physically present non-administrative users of the TOE are assumed to be trusted as far as they are assumed to not be actively trying to subvert the system. (Not for all use cases).

A.REGULAR_UPDATES

It is assumed that the manufacturer provides updates to TOE firmware in a timely manner in response to known vulnerabilities, and that Administrators apply these updates when they are received.

3.3 Organizational Security Policies

This document does not define any additional OSPs.

4 Security Objectives

4.1 Security Objectives for the Operational Environment

The following security objectives for the operational environment assist the GPCP in correctly providing its security functionality. These track with the assumptions about the environment.

OE.PHYSICAL_PROTECTION

Platforms that operate within data centers or in other access-controlled environments are expected to receive a considerable degree of protection from these environments. In addition to physical protection, these environments often provide malware-detection and behavior-monitoring services for networked computing assets.

OE.SUPPLY_CHAIN

The manufacturer is expected to implement processes to ensure that TOE hardware and firmware is not compromised between time of TOE manufacture and delivery to its operational site.

OE.TRUSTED_ADMIN

The administrator of the GPCP is not careless, willfully negligent or hostile, and administers the platform within compliance of enterprise security policy.

4.2 Security Objectives Rationale

This section describes how the assumptions and organizational security policies map to operational environment security objectives.

Table 1: Security Objectives Rationale

Assumption or OSP	Security Objectives	Rationale
A.PHYSICAL_PROTECTION	OE.PHYSICAL_PROTECTION	The operational environment objective OE.PHYSICAL_PROTECTION is realized through A.PHYSICAL_PROTECTION.
A.ROT_INTEGRITY	OE.SUPPLY_CHAIN	The operational environment objective OE.SUPPLY_CHAIN is realized through A.ROT_INTEGRITY.
A.TRUSTED_ADMIN	OE.TRUSTED_ADMIN	The operational environment objective OE.TRUSTED_ADMIN is realized through A.TRUSTED_ADMIN.
A.MFR_ROT	OE.TRUSTED_ADMIN	The operational environment objective OE.TRUSTED_ADMIN is realized through A.TRUSTED_ADMIN.
A.TRUSTED_DEVELOPMENT_AND_BUILD PROCESSES	OE.TRUSTED_ADMIN	The operational environment objective OE.TRUSTED_ADMIN is realized through A.TRUSTED_ADMIN.
A.SUPPLY_CHAIN_SECURITY	OE.TRUSTED_ADMIN	The operational environment objective OE.TRUSTED_ADMIN is realized through A.TRUSTED_ADMIN.
A.CORRECT_INITIAL_CONFIGURATION	OE.TRUSTED_ADMIN	The operational environment objective OE.TRUSTED_ADMIN is realized through A.TRUSTED_ADMIN.
A.TRUSTED_USERS	OE.TRUSTED_ADMIN	The operational environment objective OE.TRUSTED_ADMIN is realized through A.TRUSTED_ADMIN.
A.REGULAR_UPDATES	OE.TRUSTED_ADMIN	The operational environment objective OE.TRUSTED_ADMIN is realized through A.TRUSTED_ADMIN.

5 Security Requirements

This chapter describes the security requirements which have to be fulfilled by the product under evaluation. Those requirements comprise functional components from Part 2 and assurance components from Part 3 of [CC]. The following conventions are used for the completion of operations:

- **Refinement** operation (denoted by **bold text** or ~~strikethrough text~~): Is used to add details to a requirement or to remove part of the requirement that is made irrelevant through the completion of another operation, and thus further restricts a requirement.
- **Selection** (denoted by *italicized text*): Is used to select one or more options provided by the [CC] in stating a requirement.
- **Assignment** operation (denoted by *italicized text*): Is used to assign a specific value to an unspecified parameter, such as the length of a password. Showing the value in square brackets indicates assignment.
- **Iteration** operation: Is indicated by appending the SFR name with a slash and unique identifier suggesting the purpose of the operation, e.g. "/EXAMPLE1."

5.1 Security Functional Requirements

5.1.1 Auditable Events for Mandatory SFRs

Table 2: Auditable Events for Mandatory Requirements

Requirement	Auditable Events	Additional Audit Record Contents
FCS_CKM_EXT.3	No events specified	N/A
FCS_COP.1/KeyEncap	No events specified	N/A
FCS_COP.1/KeyWrap	No events specified	N/A
FCS_COP.1/XOF	No events specified	N/A
FMT_CFG_EXT.1	No events specified	N/A
FMT_MOF.1	No events specified	N/A
FMT_SMF.1	No events specified	N/A
FMT_SMR.1	No events specified	N/A
FPT_JTA_EXT.1	No events specified	N/A
FPT_PPF_EXT.1	No events specified	N/A
FPT_ROT_EXT.1	No events specified	N/A
FPT_ROT_EXT.2	[selection: Failure of integrity verification, None]	None.
FPT_STM.1	No events specified	N/A
FPT_TUD_EXT.1	No events specified	N/A

5.1.2 Class: Cryptographic Support (FCS)

FCS_CKM_EXT.3 Cryptographic Key Access

FCS_CKM_EXT.3.1

The TSF shall use specified cryptographic key access methods **[selection: key encapsulation, key wrapping, key encryption]** to access keys when performing **[selection: cryptographic key archival, cryptographic key backup, cryptographic key escrow, cryptographic key recovery, cryptographic key import, cryptographic key export]**

Application Note: If "key encapsulation" is selected, [FCS_COP.1/KeyEncap](#) must be claimed.

If "key wrapping" is selected, [FCS_COP.1/KeyWrap](#) must be claimed.

If "key encryption" is selected, [FCS_COP.1/SKC](#) or [FCS_COP.1/AEAD](#) must be claimed.

Evaluation Activities ▼

[FCS_CKM_EXT.3](#)
TSS

The evaluator shall ensure that the TSS documents that the security strength supported by the selected key access methods are sufficient for the security strength of the keys accessed through those methods.

The evaluator shall ensure that the TSS identifies the key management services implemented by the TOE and the key access methods used for each service.

Guidance

The evaluator shall ensure that the AGD instructs the administrator how to configure the TOE to use the selected key access methods.

Tests

Specific testing for this component is covered by testing for the claimed components in [FCS_COP.1/KeyEncap](#), [FCS_COP.1/KeyWrap](#), [FCS_COP.1/AEAD](#), and [FCS_COP.1/SKC](#).

FCS_COP.1/KeyEncap Cryptographic Operation - Key Encapsulation

FCS_COP.1.1/KeyEncap

The TSF shall perform [key encapsulation] in accordance with a specified cryptographic algorithm [**selection**: *Cryptographic algorithm*] and cryptographic key sizes [**selection**: *Cryptographic key sizes*] that meet the following: [**selection**: *List of standards*]

The following table provides the recommended choices for completion of the selection operations of [FCS_COP.1/KeyEncap](#).

Table 3: Recommended choices for FCS_COP.1/KeyEncap

Identifier	Cryptographic algorithm	Cryptographic key sizes	List of standards
KAS1	KAS1 [RSA-single party]	[selection : 2048 bit, 3072 bit, 4096 bit, 8192 bit]	NIST SP 800-56B Revision 2 (Sections 6.3 and 8.2)
KTS-OAEP	KTS-OAEP [RSA-OAEP]	[selection : 2048 bit, 3072 bit, 4096 bit, 8192 bit]	NIST SP 800-56B Revision 2 (Sections 6.3 and 9)
ML-KEM	ML-KEM Key Encapsulation	Parameter set = [selection : ML-KEM-512, ML-KEM-768, ML-KEM-1024]	NIST FIPS 203 (Section 7.2)

Application Note: NIST SP 800-57 Part 1 Revision 5 Section 5.6.2 specifies that the size of key used to protect the key being transported should be at least the security strength of the key it is protecting.

Evaluation Activities ▾

[FCS_COP.1/KeyEncap](#)

TSS

TBD

Guidance

TBD

Tests

The following tests require the developer to provide access to a test platform that provides the evaluator with tools that are typically not found on factory products.

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

KAS1 [RSA-single party]

Identifier	Cryptographic Algorithm	Cryptographic Key Sizes	List of Standards
KAS1	KAS1 [RSA-	[selection : 2048, 3072,	NIST SP 800-56B Revision 2

To test the TOE's implementation of the of KAS1 RSA Single-Party Key Encapsulation, the evaluator shall perform the Algorithm Functional Test and Validation Test using the following input parameters:

- RSA Private key format [Basic with fixed public exponent, Prime Factor with fixed public exponent, Chinese Remainder Theorem with fixed public exponent, Basic with random public exponent, Prime Factor with random public exponent, Chinese Remainder Theorem with random public exponent] [not broken out by exponent in KAS2] (receiver only)??
- Modulo value [2048, 3072, 4096, 8192]
- Role [initiator, responder]
- Key confirmation supported [yes, no] [not included in KAS2]

The evaluator shall generate a test group (i.e. set of tests) for each parameter value of the above parameter type with the largest number of supported values. For example, if the TOE supports all six key formats, then the evaluator shall generate six test groups. Each of the above supported parameter values must be included in at least one test group.

Regardless of how many parameter values are supported, there must be at least two test groups.

Half of the test groups are designated as Algorithm Functional Tests (AFT) and the remainder are designated as Validation Tests (VAT). If there is an odd number of groups, then the extra group is designated randomly as either AFT or VAT.

If there are only two test groups, in addition to the above, one shall act as an initiator, and the other as a responder, if supported.

Algorithm Functional Test

For each test group designated as AFT, the evaluator shall generate 10 test cases using random data (except for a fixed public exponent, if supported). The resulting shared secrets shall be compared with those generated by a known-good implementation using the same inputs.

Validation Test

For each test group designated as VAT, the evaluator shall generate 25 test cases are using random data (except for a fixed public exponent, if supported). Of the 25 test cases:

- Two test cases must have a shared secret with a leading nibble of 0s,
- Two test cases have modified derived key material,
- Two test cases have modified tags, if key confirmation is supported,
- Two test cases have modified MACs, if key confirmation is supported, and
- The remaining test cases are not modified.

To determine correctness, the evaluator shall confirm that the resulting 25 shared secrets correspond as expected for both the modified and unmodified values.

KTS-OAEP [RSA-OAEP]

Identifier	Cryptographic Algorithm	Cryptographic Key Sizes	List of Standards
KTS-OAEP	KTS-OAEP [RSA-OAEP]	[selection: 2048, 3072, 4096, 8192] bits	NIST SP 800-56B Revision 2 (Sections 6.3 & 9)

To test the TOE's implementation of the of KTS-OAEP, the evaluator shall perform the Algorithm Functional Test and Validation Test using the following input parameters:

- Roles [initiator, receiver]
- Private Key format [Basic with fixed public exponent, Prime Factor with fixed public exponent, Chinese Remainder Theorem with fixed public exponent, Basic with random public exponent, Prime Factor with random public exponent, Chinese Remainder Theorem with random public exponent] (receiver only)
- Supported modulo values [2048, 3072, 4096, 8192]
- Key confirmation supported [yes, no]

The evaluator shall generate a test group (i.e. set of tests) for each parameter value of the above parameter type with the largest number of supported values. For example, if the TOE supports all six key formats, then the evaluator shall generate six test groups. Each of the above supported parameter values must be included in at least one test group.

Regardless of how many parameter values are supported, there must be at least two test groups.

Half of the test groups are designated as Algorithm Functional Tests (AFT) and the remainder are designated as Validation Tests (VAT). If there is an odd number of groups, then the extra group is designated randomly as either AFT or VAT.

If there are only two test groups, in addition to the above, one shall act as an initiator, and the other as a responder, if supported.

Algorithm Functional Test

For each test group designated as AFT, the evaluator shall generate 10 test cases using random

data (except for a fixed public exponent, if supported). The resulting shared secrets shall be compared with those generated by a known-good implementation using the same inputs.

Validation Test

For each test group designated as VAT, the evaluator shall generate 25 test cases are using random data (except for a fixed public exponent, if supported). Of the 25 test cases:

- Two test cases must have a shared secret with a leading nibble of 0s,
- Two test cases have modified derived key material,
- Two test cases have modified tags, if key confirmation is supported,
- Two test cases have modified MACs, if key confirmation is supported, and
- The remaining test cases are not modified.

To determine correctness, the evaluator shall confirm that the resulting 25 shared secrets correspond as expected for both the modified and unmodified values.

ML-KEM Key Encapsulation

Identifier	Cryptographic Algorithm	Cryptographic Key Sizes	List of Standards
ML-KEM	ML-KEM KeyEncap	Parameter set = [selection: ML-KEM-512, ML-KEM-768, ML-KEM-1024]	NIST FIPS PUB 203 (Section 7.2)

To test the TOE's implementation of ML-KEM key encapsulation/decapsulation, the evaluator shall perform the Encapsulation Test and the Decapsulation Test using the following input parameters:

- *Encapsulation Parameters:*
 - Parameter set [ML-KEM-512, ML-KEM-768, ML-KEM-1024]
 - Previously generated encapsulation key (ek)
 - Random value (m) [32 bytes]
- *Decapsulation Parameters:*
 - Parameter set [ML-KEM-512, ML-KEM-768, ML-KEM-1024]
 - Previously generated decapsulation key (dk)
 - Previously generated ciphertext (c) [32 bytes]

Encapsulation Test

For each supported parameter set the evaluator shall generate 25 test cases consisting of an encapsulation key ek and random value m. For each test case the evaluator shall require the implementation under test to generate the corresponding shared secret k and ciphertext c. To determine correctness, the evaluator shall compare the resulting values with those generated using a known-good implementation using the same inputs.

Decapsulation Test

For each supported parameter set the evaluator shall use a single previously generated decapsulation key dk and generate 10 test cases consisting of valid and invalid ciphertexts c. For each test case the evaluator shall require the implementation under test to generate the corresponding shared secret k whether or not the ciphertext is valid. To determine correctness, the evaluator shall compare the resulting values with those generated using a known-good implementation using the same inputs.

FCS_COP.1/KeyWrap Cryptographic Operation - Key Wrapping

FCS_COP.1.1/KeyWrap

The TSF shall perform [key wrapping] in accordance with a specified cryptographic algorithm [**selection: Cryptographic algorithm**] and cryptographic key sizes [**selection: Cryptographic key sizes**] that meet the following: [**selection: List of standards**]

The following table provides the recommended choices for completion of the selection operations of [FCS_COP.1/KeyWrap](#).

Table 4: Recommended choices for FCS_COP.1/KeyWrap

Identifier	Cryptographic algorithm	Cryptographic key sizes	List of standards
AES-KW	AES in KW mode	[selection: 128, 192, 256] bits	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS]

[selection:
ISO/IEC
19772:2020
(clause 6),
NIST SP
800-38F
(Section
6.2)] [KW
mode]

AES-KWP	AES in KWP mode	[selection: 128, 192, 256] bits	[selection: ISO/IEC 18033- 3:2010 (Subclause 5.2), FIPS PUB 197] [AES]
			NIST SP 800-38F (Section 6.3) [KWP mode]
AES-CCM	AES in CCM mode with unpredictable, non-repeating nonce, minimum size of 64 bits	[selection: 128 bits, 192 bits, 256 bits]	[selection: ISO/IEC 18033- 3:2010 (Subclause 5.2), FIPS PUB 197] [AES]
			[selection: ISO/IEC 19772:2020 (Clause 7), NIST SP 800-38C] [CCM]
AES-GCM	AES in GCM mode with non-repeating IVs using [selection: deterministic, RBG-based] , IV construction; the tag must be of length [selection: 96, 104, 112, 120, 128] bits.	[selection: 128 bits, 192 bits, 256 bits]	[selection: ISO/IEC 18033- 3:2010 (Subclause 5.2), FIPS PUB 197] [AES]
			[selection: ISO/IEC 19772:2020 (Clause 10), NIST SP 800- 38D] [GCM]

Application Note: NIST 800-57p1rev5 sec. 5.6.2 specifies that the size of key used to protect the key being transported should be at least the security strength of the key it is protecting.

Evaluation Activities ▾

FCS_COP.1/KeyWrap

TSS

TBD

Guidance

TBD

Tests

For tests of AES-GCM and AES-CCM, see testing for *FCS_COP.1/AEAD*.

AES-KW

Identifier	Cryptographic Algorithm	Cryptographic Key Sizes	List of Standards
AES-KW	AES in KW mode	[selection: 128, 192, 256] bits	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES] [selection: ISO/IEC 19772:2020 (clause 6), NIST SP 800-38F (Section 6.2)] [KW mode]

To test the TOE's ability to wrap keys using AES in Key Wrap mode the evaluator shall perform the Algorithm Functional Tests using the following input parameters:

- Key size [128, 192, 256] bits
- Keyword cipher type [cipher, inverse]
- Payload sizes [832, 2880, 896, 2176, 128, 4096]

Algorithm Functional Test

The evaluator shall generate 100 encryption test cases using random data for each combination of claimed key size, keyword cipher type, and supported payload size from the above set.

The results shall be compared with those generated by a known-good implementation using the same inputs.

The evaluator shall generate 100 decryption test cases using the same parameters as above, but with 15 of each 100 test cases modified to produce an incorrect result.

To determine correctness, the evaluator shall confirm that the results correspond as expected for both the modified and unmodified values.

AES-KWP

Identifier	Cryptographic Algorithm	Cryptographic Key Sizes	List of Standards
AES-KWP	AES in KWP mode	[selection: 128, 192, 256] bits	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES] NIST SP 800-38F (Section 6.3) [KWP mode]

To test the TOE's ability to wrap keys using AES in Key Wrap with Padding mode with padding the evaluator shall perform the Algorithm Functional Tests using the following input parameters:

- Key size [128, 192, 256] bits
- Keyword cipher type [cipher, inverse]
- Payload sizes [656, 736, 8, 4096]

Algorithm Functional Test

The evaluator shall generate 100 encryption test cases using random data for each combination of claimed key size, keyword cipher type, and supported payload size from the above set.

The results shall be compared with those generated by a known-good implementation using the same inputs.

The evaluator shall generate 100 decryption test cases using the same parameters as above, but with 15 of each 100 test cases modified to produce an incorrect result.

To determine correctness, the evaluator shall confirm that the results correspond as expected for both the modified and unmodified values.

FCS_COP.1/XOF Cryptographic Operation - Extendable-Output Function

FCS_COP.1.1/XOF

The TSF shall perform [extendable-output function] in accordance with a specified cryptographic algorithm [selection: Cryptographic algorithm] and parameters [selection: Parameters] that meet the following: [selection: List of standards]

The following table provides the recommended choices for completion of the selection operations of FCS_COP.1/XOF.

Table 5: Recommended choices for FCS_COP.1/XOF

Cryptographic algorithm	Parameters	List of standards
cSHAKE	Output length d = [selection: 128, 256, 512, 1024, 2048]	NIST SP 800-185

	256] bits and function [selection : SHAKEd, KECCAK[2d]]	Section 3 [cSHAKE], Section 6.2 [SHAKE] NIST FIPS PUB 202 Section 5 [KECCAK]
KMACXOF	Output length d = [selection : 128, 256] bits	NIST SP 800-185 Section 4.3.1 [KMACXOF]
SHAKE	Output length d = [selection : 128, 256] bits	NIST FIPS PUB 202 Section 6.2 [SHAKE]

Application Note: The functions in cSHAKE depend on the output length d. i.e. SHAKEd is either SHAKE128 for d = 128 or SHAKE256 for d = 256. Similarly, KECCAK[2d] is either KECCAK[256] for d = 128 or KECCAK[512] for d = 256. Note that KECCAK is a cryptographic primitive which should have no direct interface exposed to the user of the TOE.

Evaluation Activities ▼

FCS_COP.1/XOF

TSS
TBD

Guidance

TBD

Tests

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

cSHAKE

Cryptographic Algorithm	Parameters	List of Standards
cSHAKE	Output length d = [selection : 128, 256] bits and function [selection : SHAKEd, KECCAK[2d]]	NIST SP 800-185 Section 3 [cSHAKE], Section 6.2 [SHAKE] NIST FIPS PUB 202 Section 5 [KECCAK]

SHAKE

Cryptographic Algorithm	Parameters	List of Standards
SHAKE	Output length d = [selection : 128, 256] bits	NIST FIPS PUB 202 Section 6.2 [SHAKE]

KMACXOF

Cryptographic Algorithm	Parameters	List of Standards
KMACXOF	Output length d = [selection : 128, 256] bits	NIST SP 800-185 Section 4.3.1 [KMACXOF]

For KMACXOF tests, refer to [FCS_COP.1/KeyedHash](#).

5.1.3 Class: Security Management (FMT)

FMT_CFG_EXT.1 Secure by Default Configuration

FMT_CFG_EXT.1.1

The TSF shall enforce that Administrator credentials be changed immediately

after first use when configured with default Administrator credentials or with no Administrator credentials.

Application Note: Default credentials are credentials (e.g., passwords, keys) that are pre-installed (without user interaction) onto the platform, generally by the manufacturer, whether they are default values or randomly generated. This requirement applies only to credentials used by an Administrator for logging in to the TOE, and not to other platform credentials that might come pre-installed.

Evaluation Activities ▼

[FMT_CFG_EXT.1](#)

TSS

The evaluator shall check the TSS to determine whether the platform comes pre-installed with default Administrator credentials, or does not require credentials for initial Administrator access.

Guidance

The evaluator shall examine the AGD to ensure that it describes the process for replacing or specifying Administrator credentials on first use.

Tests

If the platform uses default Administrator credentials or no Administrator credentials on first use the evaluator shall run the following tests:

- *Test FMT_CFG_EXT.1:1: The evaluator shall reset the platform to factory state and restart the platform to verify that only the functionality required to set new Administrator credentials is available immediately after Administrator login.*
- *Test FMT_CFG_EXT.1:2: The evaluator shall log in to the platform as Administrator using the default credentials, establish new credentials, and verify that the original default credentials no longer provide Administrative access to the platform.*

FMT_MOF.1 Management of Security Functions Behavior

FMT_MOF.1.1

The TSF shall restrict the ability to [determine the behaviour of] the functions [listed in [Table 6](#)] to [the roles indicated in [Table 6](#)].

Application Note: There are two roles defined in this PP: Administrator and User (see FIA_SMR.1). Administrators can perform most management functions on the platform, and only Administrators are required to authenticate themselves to the platform.

Users have a limited ability to select responses to certain events as specified in the Management Functions table in [FMT_SMF.1](#).

Evaluation Activities ▼

[FMT_MOF.1](#)

TSS

The evaluator shall verify that the TSS describes those management functions that may be performed by the Administrator, and those that can be performed by ordinary users. The TSS also describes any functionality that is affected by administrator-configured policy and how. This activity will be performed in conjunction with [FMT_SMF.1](#).

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

Testing of this SFR is covered in the tests for [FMT_SMF.1](#).

FMT_SMF.1 Specification of Management Functions

FMT_SMF.1.1

The TSF shall be capable of performing the following management functions: [

Table 6: Management Functions

Status Markers:

M - Mandatory

O - Optional>Selectable/Conditional

X - Not permitted

Function

<p>1 Ability to administer the platform [selection: <i>locally, remotely, not at all]</i></p>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="M"/>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="X"/>	<p>Administration is considered “local” if the Administrator is physically present at the GPCP.</p> <p>Administration is considered “remote” if communications between the Administrator and GPCP is over a network.</p> <p>“Not at all” is the proper selection for Function 1 only in the case where the GPCP is incapable of being Administered at all.</p> <p>If “remotely” is selected, then FTP_TRP.1 must be claimed in the ST and Function 5 must be selected.</p>
<p>2 Ability to configure and manage the audit functionality and audit data.</p>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="O"/>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="X"/>	<p>This Function must be claimed if FAU_GEN.1 is claimed in the ST.</p>
<p>3 Ability to configure name/address of audit/logging server to which to send audit/logging records.</p>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="O"/>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="X"/>	<p>This function must be claimed if FAU_STG.1 is claimed in the ST.</p>
<p>4 Ability to review audit records.</p>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="O"/>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="X"/>	<p>This Function must be claimed if FAU_SAR.1 is claimed in the ST.</p>
<p>5 Ability to initiate a trusted channel for remote administration.</p>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="O"/>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="X"/>	<p>This Function must be claimed if FTP_TRP.1 is claimed in the ST.</p>
<p>6 Ability to set parameters for allowable number of authentication failures.</p>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="O"/>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="X"/>	<p>This Function must be claimed if FIA_AFL_EXT.1 is claimed in the ST.</p>
<p>7 Ability to configure password length and complexity.</p>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="O"/>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="X"/>	<p>This Function must be claimed if FIA_PMG_EXT.1 is claimed in the ST.</p> <p>If password length and complexity are not configurable, then the Administrator Option should be denied.</p>
<p>8 Ability to configure authentication throttling policy.</p>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="O"/>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="X"/>	<p>This Function must be claimed if FIA_TRT_EXT.1 is claimed in the ST.</p> <p>If authentication throttling policy is not configurable, then the Administrator Option should be denied.</p>
<p>9 Ability to manage authentication methods and change default authorization factors.</p>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="O"/>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="X"/>	<p>This Function must be claimed if FIA_UAU.5 is claimed in the ST.</p> <p>If authentication methods are not configurable, then the Administrator Option should be denied.</p>
<p>10 Ability to configure of certificate</p>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="O"/>	<input style="width: 15px; height: 15px; border: 1px solid black;" type="checkbox" value="X"/>	<p>This function must be claimed if FIA_X509_EXT.1 is claimed in the ST (i.e., the TOE claims conformance to ,</p>

revocation
checking
methods.

[version](#) .

If TOE does not support configuration of certificate revocation checking methods, then the Administrator option should be denied.

11	Ability to configure TSF behavior when certificate revocation status cannot be determined.	O	X	This function must be claimed if FIA_X509_EXT.2 is claimed in the ST (i.e., the TOE claims conformance to version . and the claims made in the SFR indicate that the administrator is allowed to configure how the TSF treats a certificate with undetermined revocation status.
12	Ability to configure default action to take on integrity failure.	O	X	This Function must be claimed if FPT_ROT_EXT.2 or FPT_ROT_EXT.3 are claimed in the ST and " <i>in accordance with Administrator-configurable policy</i> " is selected in FPT_ROT_EXT.2.2 or FPT_ROT_EXT.3.2.
13	Ability to configure default action to take on update failure.	O	X	This Function must be claimed if FPT_TUD_EXT.2 or FPT_TUD_EXT.3 is claimed in the ST and " <i>in accordance with Administrator-configurable policy</i> " is selected in FPT_TUD_EXT.2.5 or FPT_TUD_EXT.3.4.
14	Ability to initiate the update process.	O	X	This Function must be claimed if something other than " <i>no mechanism for platform firmware update</i> " is selected in FPT_TUD_EXT.1.1.
15	Ability to determine the action to take on update failure.	O	O	This Function must be claimed if FPT_TUD_EXT.2 or FPT_TUD_EXT.3 are claimed in the ST. The Administrator Option must be selected if " <i>by express determination of an [Administrator]</i> " is selected in FPT_TUD_EXT.2.5 or FPT_TUD_EXT.3.4. The User Option must be selected if " <i>by express determination of an [User]</i> " is selected in FPT_TUD_EXT.2.5 or FPT_TUD_EXT.3.4.
16	Ability to determine the action to take on integrity check failure.	O	O	This Function must be claimed if FPT_ROT_EXT.2 or FPT_ROT_EXT.3 is claimed in the ST. The Administrator Option must be selected if " <i>by express determination of an [Administrator]</i> " is selected in FPT_ROT_EXT.2.2 or FPT_ROT_EXT.3.2. The User Option must be selected if " <i>by express determination of an [User]</i> " is selected in FPT_ROT_EXT.2.2 or FPT_ROT_EXT.3.2.
17	Ability to manage import and export of keys/secrets to and from protected storage.	O	X	This Function must be claimed if FCS_STG_EXT.1 is claimed in the ST.

Application Note: These functions become Mandatory or Selectable as indicated in the Notes. If "not at all" is selected in Function 1, then no other management Management Functions may be selected.

Evaluation Activities ▼

FMT_SMF.1

TSS

The evaluator shall examine the TSS to ensure that it describes each management function and its associated actions.

Guidance

The evaluator shall examine the AGD to ensure that it describes how the Administrator performs each management function that the ST claims the TOE supports.

The evaluator shall verify for each claimed management function that the guidance is sufficiently detailed to allow the function to be performed.

Tests

The evaluator shall test each management function included in the ST to demonstrate that the function can be performed only by the roles indicated in [Table 6](#) and the result of the function is demonstrated.

FMT_SMR.1 Security Roles

FMT_SMR.1.1

The TSF shall maintain the roles [User and [**selection: Administrator, no other roles**]].

FMT_SMR.1.2

The TSF shall be able to associate users with roles.

Application Note: If "Administrator" is selected, then the user authentication SFRs in FIA must be claimed.

A User is a human who interacts with the GPCP through a user interface. Users do not authenticate themselves to the GPCP, though they may be authenticated by tenant software. The User role is considered to exist even if no humans normally interact with a GPCP.

An Administrator is a privileged user that must be authenticated by the GPCP in order to administer the GPCP. This role is distinct from OS or VS administrators, who are may be authenticated to tenant software and are considered to be Users in the context of the GPCP.

Evaluation Activities ▼

FMT_SMR.1

Documentation and testing for roles is covered in the Evaluation Activities for [FMT_SMF.1](#)

5.1.4 Class: Protection of the TSF (FPT)

FPT_JTA_EXT.1 JTAG/Debug Port Access

FPT_JTA_EXT.1.1

The TSF shall allow access to JTAG or other debug ports only to an authorized Administrator through platform firmware or through assertion of physical presence.

Application Note: This requirement means that JTAG ports may not be accessible to tenant software.

For use cases that include the threat [T.PHYSICAL](#), [FPT_JTA_EXT.2](#) should also be included in the ST.

Evaluation Activities ▼

FPT_JTA_EXT.1

TSS

The evaluator shall examine the TSS to determine how access to the JTAG or debug ports is denied to tenant software.

Guidance

The evaluator shall examine the AGD to ensure that it describes how Administrators assert physical presence to the TSF.

Tests

The evaluator shall perform the following tests:

- *Test FPT_JTA_EXT.1.1: The evaluator shall attempt to access the debug port without authenticating as an Administrator. The attempt should fail.*
- *Test FPT_JTA_EXT.1.2: The evaluator shall authenticate as an Administrator and then attempt to access the debug port. The attempt should succeed.*

FPT_PPF_EXT.1 Protection of Platform Firmware and Critical Data

FPT_PPF_EXT.1.1

The TSF shall allow modification of platform firmware only through the update mechanisms described in [FPT_TUD_EXT.1](#).

Application Note: Platform firmware must be modifiable only through one of the secure update mechanisms specified in [FPT_TUD_EXT.1](#). If the update mechanism itself is implemented in platform firmware, then naturally, it must itself also be modifiable only through the secure update mechanism. Configuration data used by platform firmware that is stored in nonvolatile memory is not included in these protections. Executable portions of the TSF and data critical for ensuring the integrity of the TSF are included in these protections. Specifically, this includes the key store and the signature verification algorithm used by the update mechanisms.

Evaluation Activities ▾

[FPT_PPF_EXT.1](#)

TSS

The evaluator shall examine the TSS to ensure that it explains how the various areas of platform firmware and critical data are protected from modification outside of the platform firmware update mechanism described in [FPT_TUD_EXT.1](#). If the TOE implements an authenticated update mechanism as specified in [FPT_TUD_EXT.2](#), then the evaluator shall ensure that the TSS describes specifically how the signature verification code and key store is protected from update outside of the secure platform firmware update mechanism.

Guidance

The evaluator shall check the AGD to ensure that there are instructions for how to securely modify the platform firmware and critical data using a mechanism specified in [FPT_TUD_EXT.1](#).

Tests

The evaluator shall perform the following test:

The evaluator shall attempt to overwrite or modify the platform firmware without invoking one of the update mechanisms specified in [FPT_TUD_EXT.1](#) (e.g., using a modified Linux boot loader such as GRUB that attempts to write to the memory where platform firmware is stored). The test succeeds if the attempts to overwrite platform firmware fail. The evaluator shall attempt at least three such tests--one that attempts to overwrite the first platform firmware that executes after boot, one that targets the secure update mechanism (if implemented), and one that targets firmware that has been integrity-checked since the last boot.

FPT_ROT_EXT.1 Platform Integrity Root

FPT_ROT_EXT.1.1

The integrity of platform firmware shall be rooted in [selection]:

- *code or data written to immutable memory or storage*
- *credentials held in immutable storage on-platform or protected storage off-platform*
- *a separate management controller that is itself rooted in a mechanism that meets this requirement*
- *integrity measurements held securely in an on-platform dedicated security component*
- *integrity measurements held securely by an off-platform entity*

[]

Application Note: Roots of Trust are components that constitute a set of unconditionally trusted functions. The above are acceptable roots of trust for platform firmware integrity. The ST Author must select the root of trust used to ensure the integrity of the first platform firmware that executes. The integrity of subsequently executed platform firmware must be traceable back to this root or to some other root as specified in [FPT_ROT_EXT.2](#). This SFR should be iterated

for additional TOE roots (for example, a management controller or firmware executed from an add-in card).

Selection of "a separate management controller..." implies the existence of an Administrator role.

Evaluation Activities ▼

FPT_ROT_EXT.1

TSS

The evaluator shall verify that the TSS describes the Root of Trust on which initial integrity of platform firmware is anchored, consistent with the selection above. The description shall include means by which the Root of Trust is protected from modification.

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

There are no test activities for this component.

FPT_ROT_EXT.2 Platform Integrity Extension

FPT_ROT_EXT.2.1

The integrity of all mutable platform firmware outside of the platform integrity root specified in FPT_ROT_EXT.1 shall be verified prior to execution or use through: [selection:

- computation and verification of a hash by trusted code/data
- verification of a digital signature by trusted code/data
- measurement and verification by trusted code/data
- measurement and verification by an on-platform dedicated security component
- measurement and verification by an off-platform entity

].

Application Note: This requirement specifies the means for extending the initial integrity of platform firmware established by FPT_ROT_EXT.1.1 to subsequently executed platform firmware and data that is located in mutable storage. (Integrity of code and data written to immutable storage is assured).

Otherwise, integrity must be extended through cryptographic means: either through hashes or digital signatures computed and verified by firmware that is trusted because it has previously had its integrity verified or is itself a Root of Trust. Verification can be performed by TOE components such as management controllers or non-TOE trusted entities.

If "computation and verification of a hash by trusted code/data" is selected, then FCS_COP.1/Hash must be claimed.

If "verification of a digital signature by trusted code/data" is selected, then FCS_COP.1/SigVer must be claimed.

FPT_ROT_EXT.2.2

The TOE shall take the following actions if an integrity check specified in FPT_ROT_EXT.2.1 fails:

1. Halt,
2. Notify an [selection: Administrator, User] by [selection: generating an audit event, [assignment: other notification method(s)]], and
3. [selection, choose one of:
 - Stop all execution and shut down
 - Initiate a recovery process as specified in FPT_RVR_EXT.1]

[selection, choose one of:

- automatically
- in accordance with Administrator-configurable policy
- by express determination of an [selection: Administrator, User]

].

Application Note: Notification of an administrator can take many forms. For server-class platforms, such notification could take the form of administrator alerts or audit events. For platforms without management controllers, notification could be achieved, for example, by blinking lights, beep codes, screen indications, or local logging. If "Administrator" is selected anywhere in FPT_ROT_EXT.2.2, or if "in accordance with Administrator-configurable policy" is selected, then all Administrator authentication requirements must be included

in the ST ([FIA_UIA_EXT.1](#), [FIA_UAU.5](#), [FIA_PMG_EXT.1](#), [FIA_AFL_EXT.1](#), [FIA_UAU.7](#)). If "generating an audit event" is selected, then [FAU_GEN.1](#), [FAU_SAR.1](#), [FAU_STG.1](#), [FAU_STG.2](#), and [FAU_STG.5](#) must be included in the ST.

If "computation and verification of a hash by trusted code/data" is selected, then [FCS_COP.1/Hash](#) must be included in the ST.

If "verification of a digital signature by trusted code/data" is selected, then [FCS_COP.1/SigVer](#) must be included in the ST.

If "Initiate a recovery process as specified in [FPT_RVR_EXT.1](#)" is selected, then [FPT_RVR_EXT.1](#) must be included in the ST.

If "in accordance with administrator-configurable policy" is selected, then [FMT_MOF.1](#) and [FMT_SMF.1](#) must be included in the ST.

Evaluation Activities ▼

[FPT_ROT_EXT.2](#)

TSS

The evaluator shall verify that the TSS describes the means by which initial integrity of platform firmware is extended to other platform components, and that the means are consistent with the selection(s) made in [FPT_ROT_EXT.2](#). The TSS shall also describe how the TOE responds to failure of verification consistent with the selections in [FPT_ROT_EXT.2.2](#).

Guidance

The evaluator shall examine the AGD to ensure that it describes the actions taken and notification methods used in case of failure to establish the integrity of the platform firmware root. If the actions are configurable, the AGD shall explain how they are configured.

Tests

The evaluator shall modify the platform firmware in a way that should cause a failure of the integrity check. The test passes if the mechanism specified in [FPT_ROT_EXT.2.2](#) is triggered on the first subsequent boot of the platform.

Depending on the protections implemented, the evaluator may need a specially crafted update module from the vendor to perform this test. But note that this is not necessarily the same as a test of the update mechanism. The update mechanism can be tested either at boot time or at the time of the update. This verification check must be done during boot.

If modification of platform firmware in situ or using the update mechanism is deemed to be not feasible within the time and cost constraints of the evaluation, then the evaluator shall make such an argument in the AAR, and with concurrence of the CC scheme, this test can be replaced by evidence of vendor testing.

[FPT_STM.1 Reliable Time Stamps](#)

FPT_STM.1.1

The TSF shall be able to provide reliable time stamps.

Application Note: It is acceptable for the TSF to provide timestamp data either through an internal clock or a counter. It is also permissible for the TSF to obtain time data from a clock contained within the same physical enclosure as the TOE.

Evaluation Activities ▼

[FPT_STM.1](#)

TSS

The evaluator shall examine the TSS to ensure that it lists each security function that makes use of time. The TSS provides a description of how the time is maintained and considered reliable in the context of each of the time related functions.

Guidance

The evaluator shall examine the AGD to ensure it instructs the Administrator on any mechanisms for configuring the time source.

Tests

The evaluator shall perform the following tests:

[conditional] If the TSF provides a mechanism to manually set the time, the evaluator shall use the guidance documentation to set the time. The evaluator shall then use an available interface to observe that the time is reported correctly.

FPT_TUD_EXT.1 TOE Firmware Update

FPT_TUD_EXT.1.1

The TSF shall implement [selection]:

- no mechanism for platform firmware update
- an authenticated platform firmware update mechanism as described in [FPT_TUD_EXT.2](#)
- a delayed-authentication platform firmware update mechanism as described in [FPT_TUD_EXT.3](#)
- a secure local platform firmware update mechanism described in [FPT_TUD_EXT.4](#)

].

Application Note: The purpose of the platform firmware update mechanism is to ensure the authenticity and integrity of platform firmware updates. If platform firmware is immutable (not updateable by any non-destructive means), then the ST Author selects "no mechanism for platform firmware update."

If the platform implements an update mechanism that does not require physical presence at the platform, and that authenticates firmware updates prior to installing them, then the ST Author selects "an authenticated platform firmware update mechanism..." and includes [FPT_TUD_EXT.2](#) and [FCS_COP.1/SigVer](#) in the ST.

If the platform implements an update mechanism that does not require physical presence at the platform, and that does not authenticate firmware updates prior to installing them, then the ST Author selects "a delayed-authentication platform firmware update mechanism..." and includes [FPT_TUD_EXT.3](#) and [FCS_COP.1/SigVer](#) in the ST.

If platform firmware is modifiable only through a local update requiring physical presence at the platform, then the ST Author must select "a secure local platform firmware update mechanism..." and include [FPT_TUD_EXT.4](#) in the ST.

Evaluation Activities ▼

[FPT_TUD_EXT.1](#)

TSS

If the ST Author selects "no provision for platform firmware update," then the evaluator shall examine the TSS to ensure that it explains all ways of modifying platform firmware in the absence of any provided mechanism. For example, breaking open the case and prying a chip off the motherboard and then reprogramming the chip. The purpose of this activity is to ensure that the TOE does not implement a local update mechanism that does not meet the requirements of [FPT_TUD_EXT.4](#).

This requirement is met if the platform implements no means for updating platform firmware and the TSS describes a method for updating or replacing platform firmware that involves potentially destroying or damaging the TOE or some of its components.

If the ST Author selects "an authenticated platform firmware update mechanism..." then this requirement is satisfied if [FPT_TUD_EXT.2](#) is satisfied.

If the ST Author selects "a delayed-authentication platform firmware update mechanism..." then this requirement is satisfied if [FPT_TUD_EXT.3](#) is satisfied.

If the ST Author selects "a secure local platform firmware update mechanism..." then this requirement is satisfied if [FPT_TUD_EXT.4](#) is satisfied.

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

There are no test activities for this component.

5.1.5 TOE Security Functional Requirements Rationale

The following rationale provides justification for each SFR for the TOE, showing that the SFRs are suitable to address the specified threats:

Table 7: SFR Rationale

Threat	Addressed by	Rationale
T.PHYSICAL	FPT_JTA_EXT.1	Mitigates threat by restricting access to debug ports to authorized Administrators or physical presence.
	FPT_ROT_EXT.3 (objective)	Mitigates threat by ensuring integrity of physical components and responding to integrity failures.
	FPT_JTA_EXT.2 (sel-based)	Mitigates threat by enforcing access control to debug ports.

	FPT_PHP.1 (sel-based/objective)	Mitigates threat by passively detecting physical tampering.
	FPT_PHP.2 (sel-based/objective)	Mitigates threat by providing methods to detect and report physical tampering.
	FPT_PHP.3 (sel-based)	Mitigates threat by resisting physical tampering.
T.SIDE_CHANNEL_LEAKAGE	FPT_TUD_EXT.1	Mitigates threat by providing a means to eliminate side-channel flaws through updates.
T.PERSISTENCE	FPT_ROT_EXT.1	Mitigates threat by providing platform integrity to prevent intrusion of a persistent presence on the platform.
	FPT_RVR_EXT.1 (sel-based)	Mitigates threat with firmware recovery mechanism in case of failure.
	FCS_STG_EXT.2 (sel-based)	Mitigates threat by enforcing access control on key data to prevent its unauthorized disclosure.
T.UPDATE_COMPROMISE	FPT_PPF_EXT.1	Mitigates threat by using the official update process to be the only method to modify platform firmware.
	FPT_ROT_EXT.2	Mitigates threat by providing a means to attest the validity of updates.
	FCS_COP.1/Hash (sel-based)	Mitigates threat by providing a means to validate the integrity of an update using a hash.
	FCS_COP.1/SigVer (sel-based)	Mitigates threat by providing a means to validate the integrity of an update using a hash.
	FPT_TUD_EXT.2 (sel-based)	Mitigates threat by using a digital signature mechanism to verify the integrity of updates and a rollback protection mechanism to prevent application of an unauthorized update.
	FPT_TUD_EXT.3 (sel-based)	Mitigates threat by using the TOE's root of trust to validate the authenticity and integrity of an update when it is applied.
T.SECURITY_FUNCTIONALITY_FAILURE	FPT_TUD_EXT.4 (sel-based)	Mitigates threat through an update mechanism that requires physical access to the TOE to use.
	FCS_STG_EXT.1 (optional)	Mitigates threat by generating keys/secrets and storing them in a secure manner, as well as destroying them on request.
	FCS_CKM.6 (sel-based)	Mitigates threat by using appropriate key destruction methods to protect the confidentiality of credential data.
	FCS_COP.1/SigGen (sel-based)	Mitigates threat by generating digital signatures with strong encryption.
	FCS_COP.1/SKC (sel-based)	Mitigates threat by establishing strong symmetric-key cryptography.
	FPT_FLS.1 (sel-based)	Mitigates threat by ensuring a DRBG self-test failure causes the TOE to enter an error state where it cannot perform secure functions using that DRBG.
	FDP_ITC_EXT.1 (sel-based)	Mitigates threat by importing keys and credentials in a secure fashion.
	FCS_RB.G.1 (sel-based)	Mitigates threat by performing random-bit generation with sufficient complexity.
	FCS_RB.G.2 (sel-based)	Mitigates threat by using an external seed source to ensure sufficiently strong random-bit generation.
	FCS_RB.G.3 (sel-based)	Mitigates threat by using an internal seed source to ensure sufficiently strong random-bit generation.
T.OPERATIONAL_FAILURE	FCS_RB.G.4 (sel-based)	Mitigates threat by using multiple internal seed sources to ensure sufficiently strong random-bit generation.
	FCS_RB.G.5 (sel-based)	Mitigates threat by ensuring that each noise source's random data is combined to ensure strong entropy when multiple sources are used.
T.OPERATIONAL_FAILURE	FPT_TST.1 (sel-based)	Mitigates threat by using self-tests to ensure correct
	FPT_TST.2 (sel-based)	Mitigates threat by using self-tests to ensure correct

		operation of the DRBG.
T.TENANT_BASED_ATTACK	FPT_STM.1	Mitigates threat by ensuring that audit data indicating a potential attack is accurately timestamped.
	FCS_RB.G.6 (optional)	Mitigates threat by providing a well-defined interface by which tenant software can access the TSF to obtain random data.
	FCS_OTV_EXT.1 (optional)	Mitigates threat by using one-time value to increase the effectiveness of cryptographic functions used to protect against attack.
	FDP_TEE_EXT.1 (optional)	Mitigates threat by establishing a trusted execution environment for tenant software to use.
	FCS_CKM.1/AKG (sel-based)	Mitigates threat by generating strong cryptographic asymmetric keys to protect stored data.
	FCS_CKM.1/SKG (sel-based)	Mitigates threat by generating strong cryptographic symmetric keys to protect stored data.
	FCS_CKM.6 (sel-based)	Mitigates threat by implementing key destruction to prevent the disclosure of keys used to protect stored data.
	FCS_CKM.5 (sel-based)	Mitigates threat by utilizing strong algorithms to derive keys that protect stored data.
	FCS_COP.1/Hash (sel-based)	Mitigates threat by implementing hash functions used for trusted communications.
	FCS_COP.1/KeyedHash (sel-based)	Mitigates threat by implementing MAC functions used for trusted communications.
	FCS_COP.1/SigGen (sel-based)	Mitigates threat by implementing signature generation functions used for protected storage.
	FCS_COP.1/SigVer (sel-based)	Mitigates threat by implementing signature verification functions used for protected storage.
	FCS_COP.1/SKC (sel-based)	Mitigates threat by implementing symmetric encryption functions used for protected storage.
	FAU_GEN.1 (sel-based)	Mitigates threat by generating audit records that could provide evidence of attack or misuse.
	FAU_SAR.1 (sel-based)	Mitigates threat by recording audit data in a manner that could be interpreted to discover evidence of attack.
	FAU_STG.1 (sel-based)	Mitigates threat by using an external server to preserve audit data that may provide evidence of an attack.
	FAU_STG.2 (sel-based)	Mitigates threat by preventing audit records indicating a potential attack from being destroyed.
	FAU_STG.5 (sel-based)	Mitigates threat by ensuring that exhaustion of audit storage does not prevent audit data indicating a potential attack from being generated.
	FCS_STG_EXT.2 (sel-based)	Mitigates threat by using cryptography to protect the confidentiality of key data from outside access.
	FCS_STG_EXT.3 (sel-based)	Mitigates threat by using cryptography to protect the integrity of key data from outside modification.
T.NETWORK_BASED_ATTACK	FPT_STM.1	Mitigates threat by ensuring that audit data indicating a potential attack is accurately timestamped.
	FCS_OTV_EXT.1 (optional)	Mitigates threat by using one-time values to increase the effectiveness of cryptographic functions used to protect against attack.
	FCS_CKM.1/AKG (sel-based)	Mitigates threat by generating strong cryptographic asymmetric keys to protect data in transit.
	FCS_CKM.1/SKG (sel-based)	Mitigates threat by generating strong cryptographic symmetric keys to protect data in transit.
	FCS_CKM.2 (sel-based)	Mitigates threat by implementing key establishment to negotiate trusted channels to protect data in transit.

	FCS_CKM.6 (sel-based)	Mitigates threat by implementing key destruction to prevent the compromise of trusted channels.
	FCS_COP.1/Hash (sel-based)	Mitigates threat by implementing hash functions used for trusted communications.
	FCS_COP.1/KAT (sel-based)	Mitigates threat by implementing key agreement and transport functions used for trusted communications.
	FCS_COP.1/KeyedHash (sel-based)	Mitigates threat by implementing MAC functions used for trusted communications.
	FCS_COP.1/SigGen (sel-based)	Mitigates threat by implementing signature generation functions used for trusted communications.
	FCS_COP.1/SigVer (sel-based)	Mitigates threat by implementing signature verification functions used for trusted communications.
	FCS_COP.1/SKC (sel-based)	Mitigates threat by implementing symmetric encryption functions used for trusted communications.
	FAU_GEN.1 (sel-based)	Mitigates threat by generating audit records that could provide evidence of attack or misuse.
	FCS_HTTPS_EXT.1 (sel-based)	Mitigates threat by implementing HTTPS as a means to protect data in transit.
	FCS_IPSEC_EXT.1 (sel-based)	Mitigates threat by implementing IPsec as a means to protect data in transit.
	FTP_ITC_EXT.1 (sel-based)	Mitigates threat by ensuring that sensitive data in transit uses trusted protocols.
	FTP_ITE_EXT.1 (sel-based)	Mitigates threat by ensuring that sensitive data transmitted over untrusted channels is encrypted prior to transit.
	FTP_ITP_EXT.1 (sel-based)	Mitigates threat by using a physically protected channel to protect data in transit.
	FAU_SAR.1 (sel-based)	Mitigates threat by recording audit data in a manner that could be interpreted to discover evidence of attack.
	FAU_STG.1 (sel-based)	Mitigates threat by using an external server to preserve audit data that may provide evidence of an attack.
	FAU_STG.2 (sel-based)	Mitigates threat by preventing audit records indicating a potential attack from being destroyed.
	FAU_STG.5 (sel-based)	Mitigates threat by ensuring that exhaustion of audit storage does not prevent audit data indicating a potential attack from being generated.
	FTP_TRP.1 (sel-based)	Mitigates threat by ensuring that remote administration only uses trusted channels.
T.UNAUTHORIZED_RECONFIGURATION	FMT_CFG_EXT.1	Mitigates threat by preventing knowledge of a default credential from being used to access the TSF without authorization.
	FMT_MOF.1	Mitigates threat by permitting management functions to be used only by authorized users.
	FMT_SMF.1	Mitigates threat by specifying the management functions implemented by the TSF.
	FMT_SMR.1	Mitigates threat by defining the management roles which can be used to grant access to management functions.
	FIA_UIA_EXT.1 (sel-based)	Mitigates threat by preventing the TSF from being modified by an unauthenticated subject.
T.UNAUTHORIZED_PLATFORM_ADMINISTRATOR	FPT_STM.1	Mitigates threat by ensuring that time-based authentication throttling or lockout is accurately enforced.
	FIA_TRT_EXT.1 (optional)	Mitigates threat by throttling authentication to prevent access via brute force.
	FIA_AFL_EXT.1 (sel-based)	Mitigates threat by limiting further authentication attempts once a failure threshold of a critical authentication mechanism has been reached.

FIA_PMG_EXT.1 (sel-based)	Mitigates threat by enforcing password complexity requirements to prevent credentials from being easily guessed.
FIA_UAU.5 (sel-based)	Mitigates threat by implementing multiple authentication mechanisms for accessing the TSF.
FIA_UAU.7 (sel-based)	Mitigates threat by preventing disclosure of authentication data during authentication attempts.

5.2 Security Assurance Requirements

The Security Objectives in were constructed to address threats identified in [Section 3.1 Threats](#). The Security Functional Requirements (SFRs) in [Section 5.1 Security Functional Requirements](#) are a formal instantiation of the Security Objectives. The PP identifies the Security Assurance Requirements (SARs) to frame the extent to which the evaluator assesses the documentation applicable for the evaluation and performs independent testing.

This section lists the set of SARs from CC part 3 that are required in evaluations against this PP. Individual Evaluation Activities to be performed are specified both in [Section 5.1 Security Functional Requirements](#) as well as in this section.

The general model for evaluation of GPCPs against STs written to conform to this PP is as follows:

After the ST has been approved for evaluation, the ITSEF will obtain the TOE, supporting environmental IT, and the administrative/user guides for the TOE. The ITSEF is expected to perform actions mandated by the Common Evaluation Methodology (CEM) for the ASE and ALC SARs. The ITSEF also performs the Evaluation Activities contained within [Section 5.1 Security Functional Requirements](#), which are intended to be an interpretation of the other CEM assurance requirements as they apply to the specific technology instantiated in the TOE. The Evaluation Activities that are captured in [Section 5.1 Security Functional Requirements](#) also provide clarification as to what the developer needs to provide to demonstrate the TOE is compliant with the PP.

5.2.1 Class ASE: Security Target

As per ASE activities defined in [\[CEM\]](#).

5.2.2 Class ADV: Development

The information about the TOE is contained in the guidance documentation available to the end user as well as the TSS portion of the ST. The TOE developer must concur with the description of the product that is contained in the TSS as it relates to the functional requirements. The Evaluation Activities contained in [Section 5.1 Security Functional Requirements](#) should provide the ST Authors with sufficient information to determine the appropriate content for the TSS section.

ADV_FSP.1 Basic Functional Specification (ADV_FSP.1)

The functional specification describes the TSFIs. It is not necessary to have a formal or complete specification of these interfaces. Additionally, because TOEs conforming to this PP will necessarily have interfaces to the Operational Environment that are not directly invokable by TOE users, there is little point specifying that such interfaces be described in and of themselves since only indirect testing of such interfaces may be possible. For this PP, the activities for this family should focus on understanding the interfaces presented in the TSS, KMD, and any other supplemental evidence that may be required to satisfy the TSS Evaluation Activities, such as a non-public interface specification, in response to the functional requirements and the interfaces presented in the AGD documentation. No additional "functional specification" documentation is necessary to satisfy the Evaluation Activities specified. The interfaces that need to be evaluated are characterized through the information needed to perform the Evaluation Activities listed, rather than as an independent, abstract list.

Developer action elements:

ADV_FSP.1.1D

The developer shall provide a functional specification.

Content and presentation elements:

ADV_FSP.1.1C

The developer shall provide a tracing from the functional specification to the SFRs.

Application Note: As indicated in the introduction to this section, the functional specification comprises the information contained in the TSS, KMD, and any additional supplemental documentation. The developer may reference a website accessible to application developers and the evaluator. The Evaluation Activities in the functional requirements point to evidence that should exist in the documentation and TSS section; since these are directly associated with the SFRs, the tracing in element [ADV_FSP.1.2D](#) is implicitly already done and no additional documentation is necessary.

ADV_FSP.1.2C

The functional specification shall describe the purpose and method of use for each SFR-enforcing and SFR-supporting TSFI.

ADV_FSP.1.3C

The functional specification shall identify all parameters associated with each SFR-enforcing and SFR-supporting TSFI.

ADV_FSP.1.4C

The functional specification shall provide rationale for the implicit categorization of interfaces as SFR-non-interfering.

ADV_FSP.1.5C

The tracing shall demonstrate that the SFRs trace to TSFIs in the functional specification.

Evaluator action elements:

ADV_FSP.1.1E

The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

ADV_FSP.1.2E

The evaluator shall determine that the functional specification is an accurate and complete instantiation of the SFRs.

Evaluation Activities ▾

ADV_FSP.1

There are no specific Evaluation Activities associated with these SARs, except ensuring the information is provided. The functional specification documentation is provided to support the evaluation activities described in [Section 5.1 Security Functional Requirements](#), and other activities described for AGD, ATE, and AVA SARs. The requirements on the content of the functional specification information is implicitly assessed by virtue of the other Evaluation Activities being performed; if the evaluator is unable to perform an activity because there is insufficient interface information, then an adequate functional specification has not been provided.

5.2.3 Class AGD: Guidance Documentation

The guidance documents will be provided with the ST. Guidance must include a description of how the IT personnel verifies that the Operational Environment can fulfill its role for the security functionality. The documentation should be in an informal style and readable by the IT personnel. Guidance must be provided for every operational environment that the product supports as claimed in the ST. This guidance includes instructions to successfully install the TSF in that environment; and Instructions to manage the security of the TSF as a product and as a component of the larger operational environment. Guidance pertaining to particular security functionality is also provided; requirements on such guidance are contained in the Evaluation Activities specified with each requirement.

AGD_OPE.1 Operational User Guidance (AGD_OPE.1)

Developer action elements:

AGD_OPE.1.1D

The developer shall provide operational user guidance.

Application Note: The operational user guidance does not have to be contained in a single document. Guidance to users, administrators and application developers can be spread among documents or web pages. Rather than repeat information here, the developer should review the Evaluation Activities for this component to ascertain the specifics of the guidance that the evaluator will be checking for. This will provide the necessary information for the preparation of acceptable guidance.

Content and presentation elements:

AGD_OPE.1.1C

The operational user guidance shall describe, for each user role, the user-accessible functions and privileges that should be controlled in a secure processing environment, including appropriate warnings.

Application Note: User and administrator are to be considered in the definition of user role.

AGD_OPE.1.2C

The operational user guidance shall describe, for each user role, how to use the available interfaces provided by the TOE in a secure manner.

AGD_OPE.1.3C

The operational user guidance shall describe, for each user role, the available

functions and interfaces, in particular all security parameters under the control of the user, indicating secure values as appropriate.

Application Note: This portion of the operational user guidance should be presented in the form of a checklist that can be quickly executed by IT personnel (or end-users, when necessary) and suitable for use in compliance activities. When possible, this guidance is to be expressed in the eXtensible Configuration Checklist Description Format (XCCDF) to support security automation. Minimally, it should be presented in a structured format which includes a title for each configuration item, instructions for achieving the secure configuration, and any relevant rationale.

AGD_OPE.1.4C

The operational user guidance shall, for each user role, clearly present each type of security-relevant event relative to the user-accessible functions that need to be performed, including changing the security characteristics of entities under the control of the TSF.

AGD_OPE.1.5C

The operational user guidance shall identify all possible modes of operation of the TOE (including operation following failure or operational error), their consequences, and implications for maintaining secure operation.

AGD_OPE.1.6C

The operational user guidance shall, for each user role, describe the security measures to be followed in order to fulfill the security objectives for the operational environment as described in the ST.

AGD_OPE.1.7C

The operational user guidance shall be clear and reasonable.

Evaluator action elements:

AGD_OPE.1.1E

The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

Evaluation Activities ▾

AGD_OPE.1

Some of the contents of the operational guidance are verified by the Evaluation Activities in Section 5.1 Security Functional Requirements and evaluation of the TOE according to the [CEM]. The following additional information is also required:

- If cryptographic functions are provided by the TOE, the operational guidance shall contain instructions for configuring the cryptographic engine associated with the evaluated configuration of the TOE. It shall provide a warning to the administrator that use of other cryptographic engines was not evaluated nor tested during the CC evaluation of the TOE.
- If the TOE supports firmware updates, the documentation must describe the process for verifying updates to the TOE by verifying a digital signature - this may be done by the TOE or the underlying platform. The evaluator will verify that this process includes the following steps: Instructions for obtaining the update itself. This should include instructions for making the update accessible to the TOE (e.g., placement in a specific directory). Instructions for initiating the update process, as well as discerning whether the process was successful or unsuccessful. This includes generation of the hash/digital signature.

The TOE will likely contain security functionality that does not fall in the scope of evaluation under this PP. The operational guidance shall make it clear to an administrator which security functionality is covered by the evaluation activities.

AGD_PRE.1 Preparative Procedures (AGD_PRE.1)

Developer action elements:

AGD_PRE.1.1D

The developer shall provide the TOE, including its preparative procedures.

Application Note: As with the operational guidance, the developer should look to the Evaluation Activities to determine the required content with respect to preparative procedures.

Content and presentation elements:

AGD_PRE.1.1C

The preparative procedures shall describe all the steps necessary for secure acceptance of the delivered TOE in accordance with the developer's delivery procedures.

AGD_PRE.1.2C

The preparative procedures shall describe all the steps necessary for secure

installation of the TOE and for the secure preparation of the operational environment in accordance with the security objectives for the operational environment as described in the ST.

Evaluator action elements:

AGD_PRE.1.1E

The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

AGD_PRE.1.2E

The evaluator shall apply the preparative procedures to confirm that the TOE can be prepared securely for operation.

Evaluation Activities ▼

AGD_PRE.1

As indicated in the introduction above, there are significant expectations with respect to the documentation—especially when configuring the operational environment to support TOE functional requirements.

5.2.4 Class ALC: Life-cycle Support

At the assurance level provided for TOEs conformant to this PP, life-cycle support is limited to end-user-visible aspects of the life-cycle, rather than an examination of the TOE vendor's development and configuration management process. This is not meant to diminish the critical role that a developer's practices play in contributing to the overall trustworthiness of a product; rather, it is a reflection on the information to be made available for evaluation at this assurance level.

ALC_CMC.1 Labeling of the TOE (ALC_CMC.1)

This component is targeted at identifying the TOE such that it can be distinguished from other products or versions from the same vendor and can be easily specified when being procured by an end user.

Developer action elements:

ALC_CMC.1.1D

The developer shall provide the TOE and a reference for the TOE.

Content and presentation elements:

ALC_CMC.1.1C

The TOE shall be labeled with a unique reference.

Application Note: Unique reference information includes:

- TOE Model Name
- TOE Version
- TOE Description
- Software Identification (SWID) tags, if available

Evaluator action elements:

ALC_CMC.1.1E

The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

Evaluation Activities ▼

ALC_CMC.1

The evaluator will check the ST to ensure that it contains sufficient information to specifically identify the the TOE and the version that meets the requirements of the ST. Further, the evaluator will check the AGD guidance and TOE samples received for testing to ensure that the version number is consistent with that in the ST. If the vendor maintains a web site advertising the TOE, the evaluator will examine the information on the web site to ensure that the information in the ST is sufficient to distinguish the product.

ALC_CMS.1 TOE CM Coverage (ALC_CMS.1)

Given the scope of the TOE and its associated evaluation evidence requirements, this component's Evaluation Activities are covered by the Evaluation Activities listed for [ALC_CMC.1](#).

Developer action elements:

ALC_CMS.1.1D

The developer shall provide a configuration list for the TOE.

Content and presentation elements:

ALC_CMS.1.1C

The configuration list shall include the following: the TOE itself; and the evaluation evidence required by the SARs.

ALC_CMS.1.2C

The configuration list shall uniquely identify the configuration items.

Evaluator action elements:

ALC_CMS.1.1E

The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

Evaluation Activities ▼

ALC_CMS.1

The "evaluation evidence required by the SARs" in this PP is limited to the information in the ST coupled with the guidance provided to administrators and users under the AGD requirements. By ensuring that the OS is specifically identified and that this identification is consistent in the ST and in the AGD guidance (as done in the Evaluation Activity for ALC_CMC.1), the evaluator implicitly confirms the information required by this component. Life-cycle support is targeted aspects of the developer's life-cycle and instructions to providers of applications for the developer's devices, rather than an in-depth examination of the TSF manufacturer's development and configuration management process. This is not meant to diminish the critical role that a developer's practices play in contributing to the overall trustworthiness of a product; rather, it's a reflection on the information to be made available for evaluation.

The evaluator will ensure that the developer has identified (in guidance documentation for application developers concerning the targeted platform) one or more development environments appropriate for use in developing applications for the developer's platform. For each of these development environments, the developer shall provide information on how to configure the environment to ensure that buffer overflow protection mechanisms in the environment(s) are invoked (e.g., compiler and linker flags). The evaluator will ensure that this documentation also includes an indication of whether such protections are on by default, or have to be specifically enabled. The evaluator will ensure that the TSF is uniquely identified (with respect to other products from the TSF vendor), and that documentation provided by the developer in association with the requirements in the ST is associated with the TSF using this unique identification.

ALC_TSU_EXT.1 Timely Security Updates

This component requires the TOE developer, in conjunction with any other necessary parties, to provide information as to how the TOE is updated to address security issues in a timely manner. The documentation describes the process of providing updates to the public from the time a security flaw is reported/discovered, to the time an update is released. This description includes the parties involved (e.g., developer/OEM, component manufacturers) and the steps that are performed (e.g., developer testing), including worst case time periods, before an update is made available to the public.

For TOE implementations with immutable firmware, update might not be possible other than through replacement of the entire device. In this case, delivery of a new device with the necessary security fixes would constitute deployment of the security update.

Developer action elements:

ALC_TSU_EXT.1.1D

The developer shall provide a description in the TSS of how timely security updates are made to the TOE.

ALC_TSU_EXT.1.2D

The developer shall provide a description in the TSS of how users are notified when updates change security properties or the configuration of the product.

Content and presentation elements:

ALC_TSU_EXT.1.1C

The description shall include the process for creating and deploying security updates for TOE firmware.

ALC_TSU_EXT.1.2C

The description shall include the mechanisms publicly available for reporting security issues pertaining to the TOE.

Note: The reporting mechanism could include web sites, email addresses, as well as a means to protect the sensitive nature of the report (e.g., public keys that could be used to encrypt the details of a proof-of-concept exploit).

Evaluator action elements:

ALC_TSU_EXT.1.1E

The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

Evaluation Activities ▼

ALC_TSU_EXT.1

The evaluator will verify that the TSS contains a description of the timely security update process used by the developer to create and deploy security updates for TOE firmware. The evaluator will also verify that, in addition to the TOE developer's process, any third-party processes are also addressed in the description. The evaluator will also verify that each mechanism for deployment of security updates is described.

The evaluator will verify that, for each deployment mechanism described for the update process, the TSS lists a time between public disclosure of a vulnerability and public availability of the security update to the TOE patching this vulnerability. The evaluator will verify that this time is expressed in a number or range of days.

The evaluator will verify that this description includes the publicly available mechanisms (including either an email address or website) for reporting security issues related to the TOE. The evaluator shall verify that the description of this mechanism includes a method for protecting the report either using a public key for encrypting email or a trusted channel for a website.

5.2.5 Class ATE: Tests

Testing is specified for functional aspects of the system as well as aspects that take advantage of design or implementation weaknesses. The former is done through the ATE_IND family, while the latter is through the AVA_VAN family. At the assurance level specified in this PP, testing is based on advertised functionality and interfaces with dependency on the availability of design information. One of the primary outputs of the evaluation process is the test report as specified in the following requirements.

ATE_IND.1 Independent Testing - Conformance (ATE_IND.1)

Testing is performed to confirm the functionality described in the TSS as well as the administrative (including configuration and operational) documentation provided. The focus of the testing is to confirm that the requirements specified in [Section 5.1 Security Functional Requirements](#) being met, although some additional testing is specified for SARs in [Section 5.2 Security Assurance Requirements](#). The Evaluation Activities identify the additional testing activities associated with these components. The evaluator produces a test report documenting the plan for and results of testing, as well as coverage arguments focused on the hardware configurations that are claiming conformance to this PP. Given the scope of the TOE and its associated evaluation evidence requirements, this component's Evaluation Activities are covered by the Evaluation Activities listed for [ALC_CMC.1](#).

Developer action elements:

ATE_IND.1.1D

The developer shall provide the TOE for testing.

Content and presentation elements:

ATE_IND.1.1C

The TOE shall be suitable for testing.

Evaluator action elements:

ATE_IND.1.1E

The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

ATE_IND.1.2E

The evaluator shall test a subset of the TSF to confirm that the TSF operates as specified.

Evaluation Activities ▼

ATE_IND.1

The evaluator will prepare a test plan and report documenting the testing aspects of the system, including any application crashes during testing. The evaluator shall determine the root cause of any application crashes and include that information in the report. The test plan covers all of the testing actions contained in the [CEM] and the body of this PP's Assurance Activities.

While it is not necessary to have one test case per test listed in an Assurance Activity, the evaluator must document in the test plan that each applicable testing requirement in the ST is covered. The test plan identifies the platforms to be tested, and for those platforms not included in the test plan but included in the ST, the test plan provides a justification for not testing the

platforms. This justification must address the differences between the tested platforms and the untested platforms, and make an argument that the differences do not affect the testing to be performed. It is not sufficient to merely assert that the differences have no effect; rationale must be provided. If all platforms claimed in the ST are tested, then no rationale is necessary. The test plan describes the composition of each platform to be tested, and any setup that is necessary beyond what is contained in the AGD documentation. It should be noted that the evaluator is expected to follow the AGD documentation for installation and setup of each platform either as part of a test or as a standard pre-test condition. This may include special test drivers or tools. For each driver or tool, an argument (not just an assertion) should be provided that the driver or tool will not adversely affect the performance of the functionality by the OS and its platform.

This also includes the configuration of the cryptographic engine to be used. The cryptographic algorithms implemented by this engine are those specified by this PP and used by the cryptographic protocols being evaluated (IPsec, TLS). The test plan identifies high-level test objectives as well as the test procedures to be followed to achieve those objectives. These procedures include expected results.

The test report (which could just be an annotated version of the test plan) details the activities that took place when the test procedures were executed, and includes the actual results of the tests. This shall be a cumulative account, so if there was a test run that resulted in a failure; a fix installed; and then a successful re-run of the test, the report would show a "fail" and "pass" result (and the supporting details), and not just the "pass" result.

5.2.6 Class AVA: Vulnerability Assessment

For the first generation of this protection profile, the evaluation lab is expected to survey open sources to discover what vulnerabilities have been discovered in these types of products. In most cases, these vulnerabilities will require sophistication beyond that of a basic attacker. Until penetration tools are created and uniformly distributed to the evaluation labs, the evaluator will not be expected to test for these vulnerabilities in the TOE. The labs will be expected to comment on the likelihood of these vulnerabilities given the documentation provided by the vendor. This information will be used in the development of penetration testing tools and for the development of future protection profiles.

AVA_VAN.1 Vulnerability Survey (AVA_VAN.1)

Developer action elements:

AVA_VAN.1.1D

The developer shall provide the TOE for testing.

Content and presentation elements:

AVA_VAN.1.1C

The TOE shall be suitable for testing.

Evaluator action elements:

AVA_VAN.1.1E

The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

AVA_VAN.1.2E

The evaluator shall perform a search of public domain sources to identify potential vulnerabilities in the TOE.

Application Note: Public domain sources include the Common Vulnerabilities and Exposures (CVE) dictionary for publicly known vulnerabilities.

AVA_VAN.1.3E

The evaluator shall conduct penetration testing, based on the identified potential vulnerabilities, to determine that the TOE is resistant to attacks performed by an attacker possessing Basic attack potential.

Evaluation Activities ▼

AVA_VAN.1

The evaluator will generate a report to document their findings with respect to this requirement. This report could physically be part of the overall test report mentioned in ATE_IND, or a separate document. The evaluator performs a search of public information to find vulnerabilities that have been found in similar applications with a particular focus on network protocols the application uses and document formats it parses. The evaluator documents the sources consulted and the vulnerabilities found in the report.

For each vulnerability found, the evaluator either provides a rationale with respect to its non-applicability, or the evaluator formulates a test (using the guidelines provided in ATE_IND) to confirm the vulnerability, if suitable. Suitability is determined by assessing the attack vector needed to take advantage of the vulnerability. If exploiting the vulnerability requires expert skills and an electron microscope, for instance, then a test would not be suitable and an appropriate justification would be formulated.

Appendix A - Optional Requirements

As indicated in the introduction to this PP, the baseline requirements (those that must be performed by the TOE) are contained in the body of this PP. This appendix contains three other types of optional requirements:

The first type, defined in Appendix [A.1 Strictly Optional Requirements](#), are strictly optional requirements. If the TOE meets any of these requirements the vendor is encouraged to claim the associated SFRs in the ST, but doing so is not required in order to conform to this PP.

The second type, defined in Appendix [A.2 Objective Requirements](#), are objective requirements. These describe security functionality that is not yet widely available in commercial technology. Objective requirements are not currently mandated by this PP, but will be mandated in the future. Adoption by vendors is encouraged, but claiming these SFRs is not required in order to conform to this PP.

The third type, defined in Appendix [A.3 Implementation-dependent Requirements](#), are Implementation-dependent requirements. If the TOE implements the product features associated with the listed SFRs, either the SFRs must be claimed or the product features must be disabled in the evaluated configuration.

A.1 Strictly Optional Requirements

A.1.1 Auditable Events for Strictly Optional Requirements

Table 8: Auditable Events for Strictly Optional Requirements

Requirement	Auditable Events	Additional Audit Record Contents
FCS_CKM.5	No events specified	N/A
FCS_CKM_EXT.8	No events specified	N/A
FCS_RBG.6	No events specified	N/A
FCS_STG_EXT.1	No events specified	N/A
FDP_TEE_EXT.1	No events specified	N/A
FIA_TRT_EXT.1	Authentication throttling triggered.	None.

A.1.2 Class ALC: Life-cycle Support

ALC_FLR.1 Basic Flaw Remediation (ALC_FLR.1)

This SAR is optional and may be claimed at the ST-Author's discretion.

Developer action elements:

ALC_FLR.1.1D

The developer shall document and provide flaw remediation procedures addressed to TOE developers.

Content and presentation elements:

ALC_FLR.1.1C

The flaw remediation procedures documentation shall describe the procedures used to track all reported security flaws in each release of the TOE.

ALC_FLR.1.2C

The flaw remediation procedures shall require that a description of the nature and effect of each security flaw be provided, as well as the status of finding a correction to that flaw.

ALC_FLR.1.3C

The flaw remediation procedures shall require that corrective actions be identified for each of the security flaws.

ALC_FLR.1.4C

The flaw remediation procedures documentation shall describe the methods used to provide flaw information, corrections and guidance on corrective actions to TOE users.

Evaluator action elements:

ALC_FLR.1.1E

The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

Evaluation Activities ▼

ALC_FLR.1

The evaluator shall inspect the TSS and verify it identifies how to access the flaw remediation procedures.

ALC_FLR.2 Flaw Reporting Procedures (ALC_FLR.2)

This SAR is optional and may be claimed at the ST-Author's discretion.

Developer action elements:

ALC_FLR.2.1D

The developer shall document and provide flaw remediation procedures addressed to TOE developers.

ALC_FLR.2.2D

The developer shall establish a procedure for accepting and acting upon all reports of security flaws and requests for corrections to those flaws.

ALC_FLR.2.3D

The developer shall provide flaw remediation guidance addressed to TOE users.

Content and presentation elements:

ALC_FLR.2.1C

The flaw remediation procedures documentation shall describe the procedures used to track all reported security flaws in each release of the TOE.

ALC_FLR.2.2C

The flaw remediation procedures shall require that a description of the nature and effect of each security flaw be provided, as well as the status of finding a correction to that flaw.

ALC_FLR.2.3C

The flaw remediation procedures shall require that corrective actions be identified for each of the security flaws.

ALC_FLR.2.4C

The flaw remediation procedures documentation shall describe the methods used to provide flaw information, corrections and guidance on corrective actions to TOE users.

ALC_FLR.2.5C

The flaw remediation procedures shall describe a means by which the developer receives from TOE users reports and enquiries of suspected security flaws in the TOE.

ALC_FLR.2.6C

The procedures for processing reported security flaws shall ensure that any reported flaws are remediated and the remediation procedures issued to TOE users.

ALC_FLR.2.7C

The procedures for processing reported security flaws shall provide safeguards that any corrections to these security flaws do not introduce any new flaws.

ALC_FLR.2.8C

The flaw remediation guidance shall describe a means by which TOE users report to the developer any suspected security flaws in the TOE.

Evaluator action elements:

ALC_FLR.2.1E

The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

Evaluation Activities ▼

ALC_FLR.2

The evaluator shall inspect the TSS and verify it identifies how to access the flaw remediation procedures.

The evaluator shall inspect the guidance document and verify it describes how to access the flaw remediation guidance.

ALC_FLR.3 Systematic Flaw Remediation (ALC_FLR.3)

This SAR is optional and may be claimed at the ST-Author's discretion.

Developer action elements:

ALC_FLR.3.1D

The developer shall document and provide flaw remediation procedures addressed to TOE developers.

ALC_FLR.3.2D

The developer shall establish a procedure for accepting and acting upon all reports of security flaws and requests for corrections to those flaws.

ALC_FLR.3.3D

The developer shall provide flaw remediation guidance addressed to TOE users.

Content and presentation elements:

ALC_FLR.3.1C

The flaw remediation procedures documentation shall describe the procedures used to track all reported security flaws in each release of the TOE.

ALC_FLR.3.2C

The flaw remediation procedures shall require that a description of the nature and effect of each security flaw be provided, as well as the status of finding a correction to that flaw.

ALC_FLR.3.3C

The flaw remediation procedures shall require that corrective actions be identified for each of the security flaws.

ALC_FLR.3.4C

The flaw remediation procedures documentation shall describe the methods used to provide flaw information, corrections and guidance on corrective actions to TOE users.

ALC_FLR.3.5C

The flaw remediation procedures shall describe a means by which the developer receives from TOE users reports and enquiries of suspected security flaws in the TOE.

ALC_FLR.3.6C

The flaw remediation procedures shall include a procedure requiring timely response and the automatic distribution of security flaw reports and the associated corrections to registered users who might be affected by the security flaw.

ALC_FLR.3.7C

The procedures for processing reported security flaws shall ensure that any reported flaws are remediated and the remediation procedures issued to TOE users.

ALC_FLR.3.8C

The procedures for processing reported security flaws shall provide safeguards that any corrections to these security flaws do not introduce any new flaws.

ALC_FLR.3.9C

The flaw remediation guidance shall describe a means by which TOE users report to the developer any suspected security flaws in the TOE.

ALC_FLR.3.10C

The flaw remediation guidance shall describe a means by which TOE users may register with the developer, to be eligible to receive security flaw reports and corrections.

ALC_FLR.3.11C

The flaw remediation guidance shall identify the specific points of contact for all reports and enquiries about security issues involving the TOE.

Evaluator action elements:

ALC_FLR.3.1E

The evaluator shall confirm that the information provided meets all requirements for content and presentation of evidence.

Evaluation Activities ▼

ALC_FLR.3

The evaluator shall inspect the TSS and verify it identifies how to access the flaw remediation

procedures.

The evaluator shall inspect the guidance document and verify it describes how to access the flaw remediation guidance.

A.1.3 Class: Cryptographic Support (FCS)

FCS_CKM.5 Cryptographic Key Derivation

FCS_CKM.5.1

The TSF shall derive cryptographic keys [**selection: Key type**] from [**selection: Input parameters**] in accordance with a specified key derivation algorithm [**selection: Key derivation algorithm**] and specified cryptographic key sizes [**selection: Key sizes**] that meet the following: [**selection: List of standards**]

The following table provides the recommended choices for completion of the selection operations of FCS_CKM.5.

Table 9: Recommended choices for FCS_CKM.5

Key type	Input parameters	Key derivation algorithm	Key sizes	List of standards
KDF-CTR	[selection: Direct Generation from a Random Bit Generator as specified in FCS_RBG.1, Concatenated keys]	KPF2 - KDF in Counter Mode using [selection: AES-128-CMAC, AES-192-CMAC, AES-256-CMAC, HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-512] as the PRF	[selection: 128, 192, 256, 512]	[selection: ISO/IEC 11770-6:2016 (Subclause 7.3.2) [KPF2], NIST SP 800-108 Revision 1 Update 1 (Section 4.1) [KDF in Counter Mode]]
KDF-FB	[selection: Direct Generation from a Random Bit Generator as specified in FCS_RBG.1, Concatenated keys]	KPF3 - KDF in Feedback Mode using [selection: AES-128-CMAC, AES-192-CMAC, AES-256-CMAC, HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-512] as the PRF	[selection: 128, 192, 256, 512]	[selection: ISO/IEC 11770-6:2016 (Subclause 7.3.3) [KPF3], NIST SP 800-108 Revision 1 Update 1 (Section 4.2) [KDF in Feedback Mode]]
KDF-DPI	[selection: Direct Generation from a Random Bit Generator as specified in FCS_RBG.1, Concatenated keys]	KDF in Double Pipeline Iteration Mode using [selection: AES-128-CMAC, AES-192-CMAC, AES-256-CMAC, HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-512] as the PRF	[selection: 128, 192, 256, 512]	[selection: ISO/IEC 11770-6:2016 (Subclause 7.3.4) [KPF4], NIST SP 800-108 Revision 1 Update 1 (Section 4.3) [KDF in Double-Pipeline Iteration Mode]]
KDF-XOR	More than one intermediary key	exclusive OR (XOR)	[selection: 128, 192, 256, 512]	N/A

KDF- ENC	Two keys	Encrypting using an algorithm specified in [selection]: <i>FCS_COP.1/SKC, FCS_COP.1/AEAD</i>	[selection]: N/A 128, 192, 256, 512] bits
KDF- HASH	Shared secret	Hash function from <i>FCS_COP.1/Hash</i>	[selection]: NIST SP 128, 192, 256, 512] bits Revision 2 (Section 4.1, Option 1) [One- Step Key Derivation]
KDF- MAC- 1S	Shared secret, salt, IV, output length, fixed information	Keyed hash from <i>FCS_COP.1/KeyedHash</i>	[selection]: NIST SP 128, 192, 256, 512] bits Revision 2 (Section 4.1, Options 2, 3) [One- Step Key Derivation]
KDF- MAC- 2S	Shared secret, salt, IV, output length, fixed information	MAC Step [selection]: AES-128-CMAC, AES-192-CMAC, AES-256-CMAC, HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-512] as randomness extraction and; KDF Step [selection]: KDF-CTR, KDF-FB, KDF-DPI] using [selection]: AES-128-CMAC, HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-512] as PRF.	[selection]: NIST SP 128, 192, 256, 512] bits Revision 2 (Section 5) [Two-Step Key Derivation]
KDF- KMAC	Key, context string, output length, label	[selection]: KMAC128, KMAC256]	[selection]: NIST SP 128, 192, 256, 512] bits Revision 1 Update 1 (Section 4.4 "KDF Using KMAC")

Application Note: In KDF-MAC-2S, if a CMAC is selected in the MAC step, then select AES-128-CMAC in the KDF step and select 128 as the output key size. If HMAC is selected in the MAC step, then select the same HMAC in the KDF.

The respective FCS_COP.1 component must be claimed for each primitive selected in key derivation algorithm.

Evaluation Activities ▾

FCS_CKM.5

TSS

The evaluator shall ensure that the TSS documents that the security strength of the auxiliary functions in the below key derivation methods are sufficient for the security strength of the keys derived through those methods.

The evaluator shall ensure that the TSS identifies the purposes for which each of the claimed key derivation functions are used.

TBD The evaluator shall examine the TSS to ensure that:

- *The TSS describes the complete key derivation chain and the description must be consistent with the description in the TSS. For all key derivations the TOE must use a method as described in the PP table. There should be no uncertainty about how a key is derived from another in the chain.*
- *The length of the key derivation key is defined by the PRF. The evaluator should check whether the key derivation key length is consistent with the length provided by the selected PRF.*
- *If a key is used as an input to several KDFs, each invocation must use a distinct context string. If the output of a KDF execution is used for multiple cryptographic keys, those keys must be disjoint segments of the output.*
- *If keys are combined, the ST Author shall describe which method of combination is used in order to justify that the effective entropy of each factor is preserved.*

Guidance

The evaluator shall verify that the AGD instructs the administrator how to configure the TOE to use the selected key derivation functions for all uses identified in the ST.

Tests

The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

KDF in Counter Mode

Key Type	Input Parameters	Key Derivation Algorithm	Key Sizes	List of Standards
KDF-CTR	[selection: Direct Generation from a Random Bit Generator as specified in FCS_RBG.1 , Concatenated keys]	KPF2 - KDF in Counter Mode using [selection: AES-128-CMAC; AES-192-CMAC; AES-256-CMAC; HMAC-SHA-1; HMAC-SHA-256; HMAC-SHA-512] as the PRF	[selection: 128, 192, 256, 512] bits	[selection: ISO/IEC 11770-6:2016 (Subclause 7.3.2) [KPF2], NIST SP 800-108 Revision 1 Update 1 (Section 4.1) [KDF in Counter Mode]]

To test the TOE's ability to derive cryptographic keys using KDF in Counter Mode/KDF2, the evaluator shall perform the Counter KDF Algorithm Functional Test using the following input parameters:

- Pseudo Random Function (PRF) [AES-128-CMAC, AES-192-CMAC, AES-256-CMAC, HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-512]
- Derived key length [128, 192, 256, 512] bits
- Location of the counter [after fixed data, before fixed data, middle fixed data]
- Counter length [8, 16, 24, 32] bits

Counter KDF Algorithm Functional Test

For each supported combination of the above input parameters the evaluator shall require the implementation under test to derive two keys using random data. The evaluator shall compare the resulting keys with keys generated using a known-good implementation using the same input parameters.

KDF in Feedback Mode

Key Type	Input Parameters	Key Derivation Algorithm	Key Sizes	List of Standards
KDF-FB	[selection: Direct Generation from a Random Bit Generator as specified in FCS_RBG.1 , Concatenated keys]	KPF3 - KDF in Feedback Mode using [selection: AES-128-CMAC; AES-192-CMAC; AES-256-CMAC; HMAC-SHA-1; HMAC-SHA-256; HMAC-SHA-512] as the PRF	[selection: 128, 192, 256, 512] bits	[selection: ISO/IEC 11770-6:2016 (Subclause 7.3.3) [KPF3], NIST SP 800-108 Revision 1 Update 1 (Section 4.2) [KDF in Feedback Mode]]

To test the TOE's ability to derive cryptographic keys using KDF in Feedback Mode/KDF3, the evaluator shall perform the Feedback KDF Algorithm Functional Test using the following input parameters:

- Pseudo Random Function (PRF) [AES-128-CMAC, AES-192-CMAC, AES-256-CMAC, HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-512]
- Derived key length [128, 192, 256, 512] bits
- Location of the counter [none, after fixed data, before fixed data, before iterator]
- Counter length [0, 8, 16, 24, 32] bits

Feedback KDF Algorithm Functional Test

For each supported combination of the above input parameters the evaluator shall require the implementation under test to derive two keys using random data. The evaluator shall compare the resulting keys with keys generated using a known-good implementation using the same input parameters.

KDF in Double-Pipeline Iteraton Mode

Key Type	Input Parameters	Key Derivation Algorithm	Key Sizes	List of Standards
KDF-DPI	[selection: Direct Generation from a Random Bit Generator as specified in FCS_RBG.1 , Concatenated keys]	KPF4 - KDF in Double-Pipeline Iteration Mode using [selection: AES-128-CMAC; AES-192-CMAC; AES-256-CMAC; HMAC-SHA-1; HMAC-SHA-256; HMAC-SHA-512] as the PRF	[selection: 128, 192, 256, 512] bits	[selection: ISO/IEC 11770-6:2016 (Subclause 7.3.4) [KPF4], NIST SP 800-108 Revision 1 Update 1 (Section 4.3) [KDF in Double-Pipeline Iteration Mode]]

To test the TOE's ability to derive cryptographic keys using KDF in Double Pipeline Iteration Mode/KDF4, the evaluator shall perform the Double Pipeline Iteration KDF Algorithm Functional Test using the following input parameters:

- Pseudo Random Function (PRF) [AES-128-CMAC, AES-192-CMAC, AES-256-CMAC, HMAC-SHA-1, HMAC-SHA-256, HMAC-SHA-512]
- Derived key length [128, 192, 256, 512] bits
- Location of the counter [none, after fixed data, before fixed data, before iterator]
- Counter length [0, 8, 16, 24, 32] bits

Double Pipeline Iteration KDF Algorithm Functional Test

For each supported combination of the above input parameters the evaluator shall require the implementation under test to derive two keys using random data. The evaluator shall compare the resulting keys with keys generated using a known-good implementation using the same input parameters.

KDF XORing Keys

Key Type	Input Parameters	Key Derivation Algorithm	Key Sizes	List of Standards
KDF-XOR	More than one intermediary keys	exclusive OR (XOR)	[selection: 128, 192, 256, 512] bits	N/A

There are no tests for this key derivation method.

KDF by Encrypting Keys

Key Type	Input Parameters	Key Derivation Algorithm	Key Sizes	List of Standards
KDF-ENC	Two keys	Encrypting using an algorithm specified in [selection: FCS_COP.1/SKC , FCS_COP.1/AEAD]	[selection: 128, 192, 256, 512] bits	N/A

Specific testing for this key derivation method is covered by testing for the supported symmetric encryption algorithms in [FCS_COP.1/SKC](#) or [FCS_COP.1/AEAD](#).

KDF by Hashing a Shared Secret

Key Type	Input Parameters	Key Derivation Algorithm	Key Sizes	List of Standards
KDF-HASH	Shared secret	Hash function from FCS_COP.1/Hash	[selection: 128, 192, 256, 512] bits	NIST SP 800-56C Revision 2 (Section 4.1, Option 1) [One-Step Key Derivation]

To test the TOE's ability to derive cryptographic keys by hashing a shared secret (a.k.a. One-Step HASH-based Key Derivation), the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- Auxiliary Function [SHA-1, SHA-224, SHA-256, SHA-384, SHA-512, SHA-512/224, SHA-512/256, SHA3-224, SHA3-256, SHA3-384, SHA3-512]
- Derived key length [128, 192, 256, 512] bits

Algorithm Functional Test

For each supported fixed information pattern and combination of the above input parameters the evaluator shall require the implementation under test to derive five keys using random data for a shared secret that is the same size as the derived key. The evaluator shall compare the resulting keys with keys derived using a known-good implementation using the same fixed information patterns and input parameters.

One-Step MAC-based KDF

Key Type	Input Parameters	Key Derivation Algorithm	Key Sizes	List of Standards
KDF-MAC-1S	Shared secret, salt, output length, fixed information	Keyed Hash function from FCS_COP.1/KeyedHash	[selection: 128, 192, 256, 512] bits	NIST SP 800-56C Revision 2 (Section 4.1, Options 2, 3) [One-Step Key Derivation]

Catalog EA not finalized To test the TOE's ability to derive cryptographic keys using One-Step MAC-based Key Derivation, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- Auxiliary Function [HMAC-SHA-1, HMAC-SHA-224, HMAC-SHA-256, HMAC-SHA-384, HMAC-SHA-512, KMAC128, KMAC256, KMACXOF128, KMACXOF256]
- Salt [0s, random]
- Derived key length [128, 192, 256, 512] bits
- Fixed information pattern

Algorithm Functional Test

For each supported fixed information pattern and combination of the above input parameters the evaluator shall require the implementation under test to derive five keys using random data for a shared secret. The evaluator shall compare the resulting keys with keys derived using a known-good implementation using the same fixed information patterns and input parameters.

Two-Step MAC-based KDF

Key Type	Input Parameters	Key Derivation Algorithm	Key Sizes	List of Standards
KDF-MAC-2S	Shared secret, salt, IV, output length, fixed information	MAC Step [selection: AES-128-CMAC; AES-192-CMAC; AES-256-CMAC; HMAC-SHA-1; HMAC-SHA-256; HMAC-SHA-512] as randomness extraction and; KDF Step [selection: KDF-CTR, KDF-FB, KDF-DPI] using [selection: AES-128-CMAC; HMAC-SHA-1; HMAC-SHA-256; HMAC-SHA-512] as PRF	[selection: 128, 192, 256, 512] bits	NIST SP 800-56C Revision 2 (Section 5) [Two-Step Key Derivation]

Catalog EA not finalized To test the TOE's ability to derive cryptographic keys using Two-Step MAC-based Key Derivation, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- MAC mode [AES-128-CMAC; AES-192-CMAC; AES-256-CMAC; HMAC-SHA-1; HMAC-SHA-256; HMAC-SHA-512]
- KDF Mode [Counter, feedback, Double Pipeline iteration]
- Salt [0s, random]
- Length of shared secret [224-65535]
- Hybrid shared secret ???, aux Shared Secret length??
- Derived key length [128, 192, 256, 512] bits
- Fixed information pattern
- Counter location [none, before fixed data, after fixed data, before iterator]
- Counter length [0, 8, 16, 24, 32]

Algorithm Functional Test

For each supported fixed information pattern and combination of the above input parameters the evaluator shall require the implementation under test to derive five keys using random data for a shared secret. The evaluator shall compare the resulting keys with keys derived using a known-good implementation using the same fixed information patterns and input parameters.

KMAC KDF

Key Type	Input Parameters	Key Derivation Algorithm	Key Sizes	List of Standards
KDF-KMAC	Key, context string, output length, label	[selection: KMAC128, KMAC256]	[selection: 128, 192, 256, 512] bits	NIST SP 800-108 Revision 1 Update 1 (Section 4.4 "KDF Using KMAC")

To test the TOE's ability to derive cryptographic keys using KMAC Key Derivation, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- MAC Function [KMAC128, KMAC256]
- Key Derivation Key Length [112-4096 by 8] bits

- Context length [8-4096 by 8] bits
- Label length [8-4096 by 8] bits
- Derived key length [128, 192, 256, 512] bits

Algorithm Functional Test

For each supported MAC function [KMAC128, KMAC256], for each supported minimum and maximum key length:

Generate 50 test cases using random data for Key Derivation Key, Context, and Label. The length of each derived key shall be randomly selected from all supported values such that the minimum and maximum lengths are chosen once each. The evaluator shall compare the resulting derived keys with keys derived using a known-good implementation using the same input parameters.

FCS_CKM_EXT.8 Password-Based Key Derivation

FCS_CKM_EXT.8.1

The TSF shall perform password-based key derivation functions in accordance with a specified cryptographic algorithm [HMAC-[**selection**: SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512], with iteration count of [**assignment**: number of iterations] using a randomly generated salt of length [**assignment**: equal to or greater than 128] and output cryptographic key sizes [**selection**: 128, 192, 256, 512] bits that meet the following standard: [NIST SP 800-132 (Section 5.3) [PBKDF2]].

Application Note: NIST recommends a minimum “number of iterations” of 1000 but prefers the largest number feasible given performance constraints.

NIST recommends that the randomly generated portion of the salt have length of at least 128 bits and must be derived from a Random Bit Generation. Therefore [FCS_OTV_EXT.1](#) must be claimed.

Evaluation Activities ▼

[FCS_CKM_EXT.8](#)

TSS

TBD Extract words from catalog appendix about mitigations.

Guidance

TBD

Tests

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

To test the TOE’s ability to derive cryptographic keys from a password using PBKDF2 the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- HMAC algorithms [SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512]
- Iteration count [1-100000000]
- Derived Key size [128, 192, 256, 512] bits
- Password length [8-128] bytes
- Salt length [128-4096] bits in multiples of 8.

Algorithm Functional Test

For each supported HMAC algorithm, the evaluator shall generate 50 test cases using supported values for the above parameters such that

- All supported derived key sizes are tested at least 10 times,
- Iteration counts are random values between the supported minimum and maximum values, with the supported minimum and maximum tested at least once each,
- Passwords are random byte strings representing upper- and lower-case letters of random supported lengths such that the minimum and maximum lengths are tested at least once, and
- Salts are random values between the supported minimum and maximum lengths such that the supported minimum and maximum lengths are both tested at least once.

The evaluator shall compare the resulting keys from each test case with keys derived using a known-good implementation with the same input parameters.

FCS_RB.G.6 Random Bit Generation Service

FCS_RB.G.6.1

The TSF shall provide a [**selection**: hardware, software, [**assignment**: other interface type]] interface to make the DRBG output, as specified in [FCS_RB.G.1](#) Random Bit Generation (RBG), available as a service to entities outside of the TOE.

Application Note: This SFR must be included in the ST if the TOE provides an entropy source accessible to tenant software.

This requirement ensures that the TOE makes available sufficient entropy to any tenant that requires it. Every entropy source need not provide high-quality entropy, but tenant software must have a means of acquiring sufficient entropy.

Evaluation Activities ▼

[FCS_RB.G.6](#)

TSS

The evaluator shall verify that the TSS documents the entropy sources implemented by the TOE. It is not necessary to document all the platform features that can be used by tenant software to contribute to entropy, rather only those features expressly provided as entropy sources.

Guidance

The evaluator shall examine the AGD to ensure that it describes how to configure entropy sources (if applicable) and how tenant software can access the sources.

Tests

The evaluator shall perform the following test:

The evaluator shall invoke the entropy source(s) from tenant software. The evaluator shall verify that the tenant acquires values from the interface.

FCS_STG_EXT.1 Protected Storage

FCS_STG_EXT.1.1

Look at replacing this SFR with [FCS_CKM_EXT.3](#). At least look at moving it out of FCS since it really isn't cryptography. The TSF shall provide [**selection**: mutable hardware-based, immutable hardware-based, software-based] protected storage for asymmetric private keys and [**selection**: symmetric keys, persistent secrets, no other keys].

Application Note: This SFR should be included in the ST if the TOE provides protected storage as a service for tenant software, or if it stores keys or other persistent secrets for its own use.

This SFR must be claimed if the TOE includes a Dedicated Security Component that provides storage services, such as a TPM.

If the protected storage is implemented in software that is protected as required by [FCS_STG_EXT.2](#), the ST Author is expected to select "software-based." If "software-based" is selected, the ST Author is expected to select "software-based key storage" in [FCS_STG_EXT.2](#) and also claim [FCS_STG_EXT.3](#).

If this SFR is included in the ST, then [FCS_CKM.6](#) must also be claimed.

FCS_STG_EXT.1.2

The TSF shall support the capability of [**selection**:

- importing keys/secrets into the TOE
- causing the TOE to generate [**selection**: asymmetric, symmetric]keys/secrets

] upon request of [**selection**: a client application, an administrator].

Application Note: If "causing the TOE to generate keys/secrets" is selected in [FCS_STG_EXT.1.2](#), then the ST must include at least one of [FCS_CKM.1/AKG](#) or [FCS_CKM.1/SKG](#) depending on the value of the internal selection.

FCS_STG_EXT.1.3

The TSF shall be capable of destroying keys/secrets in the protected storage upon request of [**selection**: a client application, an administrator].

Evaluation Activities ▼

[FCS_STG_EXT.1](#)

TSS

The evaluator shall review the TSS to determine that the TOE implements the required

protected storage. The evaluator shall ensure that the TSS contains a description of the protected storage mechanism that justifies the selection of mutable hardware-based or software-based.

Guidance

The evaluator shall examine the AGD to ensure that it describes the process for generating keys, importing keys, or both, based on what is claimed by the ST. The evaluator shall also examine the AGD to ensure that it describes the process for destroying keys that have been imported or generated.

Tests

The evaluator shall test the functionality of each security function as described below. If the TOE supports both import and generation of keys, the evaluator shall repeat the testing as needed to demonstrate that the keys resulting from both operations are treated in the same manner. The devices used with the tooling may need to be non-production devices in order to enable the execution of testing and gathering of evidence.

- *Test FCS_STG_EXT.1:1: The evaluator shall import or generate keys/secrets of each supported type according to the operational guidance. The evaluator shall write, or the developer shall provide access to, an application that generates a key/secret of each supported type and calls the import functions. The evaluator shall verify that no errors occur during import.*
- *Test FCS_STG_EXT.1:2: The evaluator shall write, or the developer shall provide access to, tenant software that uses a generated or imported key/secret:*
 - *For RSA, the secret shall be used to sign data.*
 - *For ECDSA, the secret shall be used to sign data.*

The evaluator shall verify that the tenant software is able to access and use the key/secret as described.

- *Test FCS_STG_EXT.1:3: The evaluator shall destroy keys/secrets of each supported type according to the operational guidance. The evaluator shall write, or the developer shall provide access to, tenant software that destroys an imported or generated key/secret. The evaluator shall verify that the tenant software is able to cause the deletion of only keys that were created or imported on its behalf.*

A.1.4 Class: User Data Protection (FDP)

FDP_TEE_EXT.1 Trusted Execution Environment for Tenant Software

FDP_TEE_EXT.1.1

The TSF shall implement a trusted execution environment that conforms to the following standard: [Advanced Trusted Environment: OMTP TR1 v1.1] and make this TEE available to tenant software.

Application Note: This SFR should be claimed in the ST if the TOE includes a trusted execution environment for the use of tenant software.

Evaluation Activities ▾

FDP_TEE_EXT.1

TSS

The evaluator shall examine the TSS to ensure that it describes the protections provided by the TOE's TEE implementation.

Guidance

The evaluator shall examine the AGD to ensure that it describes the steps required for tenant software to invoke the TEE.

Tests

There are no test activities for this component.

A.1.5 Class: Identification and Authentication (FIA)

FIA_TRT_EXT.1 Authentication Throttling

FIA_TRT_EXT.1.1

The TSF shall limit user authentication attempts by [selection: preventing authentication via an external port, enforcing a delay between incorrect authentication attempts] for all authentication mechanisms selected in [FIA_UAU.5.1](#).

FIA_TRT_EXT.1.2

The minimum delay between incorrect authentication attempts shall be such that no more than 10 attempts can be attempted per 500 milliseconds.

Application Note: This SFR should be included in the ST if the TOE implements a mechanism for limiting the number or frequency of Administrator authentication attempts.

The authentication throttling applies to all authentication mechanisms selected in [FIA_UAU.5.1](#). The user authentication attempts in this requirement are attempts to guess the Authentication Factor. The developer can implement the timing of the delays in the requirements using unequal or equal timing of delays. The minimum delay specified in this requirement provides defense against brute forcing.

Evaluation Activities ▼

[FIA_TRT_EXT.1](#)

TSS

The evaluator shall verify that the TSS describes the method by which authentication attempts are not able to be automated. The evaluator shall ensure that the TSS describes either how the TSF disables authentication via external interfaces (other than the ordinary user interface) or how authentication attempts are delayed in order to slow automated entry and shall ensure that no more than 10 attempts can be attempted per 500 milliseconds for all authentication mechanisms selected in [FIA_UAU.5.1](#).

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

There are no test activities for this component.

A.2 Objective Requirements

A.2.1 Auditable Events for Objective Requirements

Table 10: Auditable Events for Objective Requirements

Requirement	Auditable Events	Additional Audit Record Contents
FPT_ROT_EXT.3	Detection of attempted intrusion.	None.

A.2.2 Class: Protection of the TSF (FPT)

FPT_ROT_EXT.3 Hardware component integrity

FPT_ROT_EXT.3.1

Outside of the integrity root specified in [FPT_ROT_EXT.1](#), the integrity of **[assignment: critical platform hardware components]** shall be verified prior to execution or use through: **[assignment: method for ensuring integrity of platform hardware components]**.

Application Note: The purpose of this objective requirement is to encourage platform and component vendors to adopt mechanisms similar to those defined in upcoming NIST SP 1800-34 for ensuring the integrity of the hardware supply chain. The scope of SP 1800-34 is to cover "manufacturing and OEM processes that protect against counterfeits, tampering, and insertion of unexpected software and hardware, and the corresponding customer processes that verify that client and server computing devices and components have not been tampered with or otherwise modified. Manufacturing processes that cannot be verified by the customer are explicitly out of scope."

As a basic step, SP 1800-34 specifies that critical platform components should include immutable hardware IDs that can be listed in a hardware component manifest that is provided to the purchaser and signed by the manufacturer. It should then be possible for the TOE to verify the signature on the manifest and check that each hardware ID in the manifest matches the IDs in the actual hardware. The component manifest and hardware IDs provide proof of provenance for the TOE and its hardware components.

For purposes of this requirement, hardware identities can be verified once on first boot, on every boot, when new hardware is detected, or during normal operation of the platform - as long as the hardware integrity is verified before the component or device is used.

The ST Author lists the hardware components for which the integrity is checked, and the methods used for conducting the checks. "Critical components" generally would include chassis, motherboards, CPUs, network cards, memory chips, hard drives, controllers, graphics processors, and service controllers.

FPT_ROT_EXT.3.2

The TOE shall take the following actions if an integrity check specified in [FPT_ROT_EXT.3.1](#) fails:

1. Halt,
2. Notify an [**selection**: *Administrator, User*] by [**selection**: *generating an audit event, [assignment]: other notification method(s)*], and
3. [**selection, choose one of**]
 - *Stop all execution and shut down*
 - *Continue execution without the integrity-compromised component*
 - *Continue execution*

]

[selection, choose one of:

- *in accordance with administrator-configurable policy*
- *by express determination of an [selection: Administrator, User]*

].

Application Note: Notification of an administrator can take many forms. For server-class platforms, such notification could take the form of administrator alerts or audit events. For platforms without management controllers, notification could be achieved, for example, by blinking lights, beep codes, screen indications, or local logging. If "administrator" is selected anywhere in [FPT_ROT_EXT.3.2](#), or if "in accordance with administrator-configurable policy" is selected, then all administrator authentication requirements must be included in the ST ([FIA_UIA_EXT.1](#), [FIA_UAU.5](#), [FIA_PMG_EXT.1](#), [FIA_AFL_EXT.1](#), [FIA_UAU.7](#)).

If "generating an audit event" is selected, then [FAU_GEN.1](#), [FAU_SAR.1](#), [FAU_STG.1](#), [FAU_STG.2](#), and [FAU_STG.5](#), must be included in the ST.

If "in accordance with administrator-configurable policy" is selected, then [FMT_MOF.1](#) and [FMT_SMF.1](#) must be claimed in the ST.

Evaluation Activities ▼

[FPT_ROT_EXT.3](#)

TSS

The evaluator shall verify that the TSS describes the means by which integrity of platform hardware and firmware is maintained from TOE manufacture to delivery of the TOE to its operational site. The TSS shall also describe how the TOE responds to failure of an integrity check consistent with the selections in [FPT_ROT_EXT.3.2](#).

Guidance

The evaluator shall examine the AGD to ensure that it describes the actions taken and notification methods used in case of detection of a platform integrity violation. If the actions are configurable, the AGD shall explain how they are configured.

Tests

There are no test activities for this component.

A.3 Implementation-dependent Requirements

This PP does not define any Implementation-dependent requirements.

Appendix B - Selection-based Requirements

As indicated in the introduction to this PP, the baseline requirements (those that must be performed by the TOE or its underlying platform) are contained in the body of this PP. There are additional requirements based on selections in the body of the PP: if certain selections are made, then additional requirements below must be included.

B.1 Auditable Events for Selection-based Requirements

Table 11: Auditable Events for Selection-based Requirements

Requirement	Auditable Events	Additional Audit Record Contents
FAU_GEN.1	No events specified	N/A
FAU_STG.1	On failure of logging function, capture record of failure and record upon restart of logging function.	None.
FAU_STG.2	No events specified	N/A
FAU_STG.5	No events specified	N/A
FCS_CKM.1/AKG	No events specified	N/A
FCS_CKM.1/SKG	No events specified	N/A
FCS_CKM.2	No events specified	N/A
FCS_CKM.6	No events specified	N/A
FCS_CKM_EXT.7	No events specified	N/A
FCS_COP.1/AEAD	No events specified	N/A
FCS_COP.1/CMAC	No events specified	N/A
FCS_COP.1/Hash	No events specified	N/A
FCS_COP.1/KeyedHash	No events specified	N/A
FCS_COP.1/SKC	No events specified	N/A
FCS_COP.1/SigGen	No events specified	N/A
FCS_COP.1/SigVer	No events specified	N/A
FCS_HTTPS_EXT.1	Failure to establish a HTTPS Session.	<ul style="list-style-type: none"> Reason for failure. Non-TOE endpoint of connection (IP address) for failures.
	Establishment/Termination of a HTTPS session.	Non-TOE endpoint of connection (IP address).
FCS_IPSEC_EXT.1	Failure to establish an IPsec SA.	<ul style="list-style-type: none"> Reason for failure. Non-TOE endpoint of connection (IP address).
	Establishment/Termination of an IPsec SA.	Non-TOE endpoint of connection (IP address).
FCS_OTV_EXT.1	No events specified	N/A
FCS_RB.G.1	Failure of the randomization process	None.
FCS_RB.G.2	No events specified	N/A
FCS_RB.G.3	No events specified	N/A
FCS_RB.G.4	No events specified	N/A
FCS_RB.G.5	No events specified	N/A
FDP_ITC_EXT.1	No events specified	N/A

FIA_AFL_EXT.1	Failed attempt at Administrator authentication.	None.
FIA_PMG_EXT.1	No events specified	N/A
FIA_UAU.5	No events specified	N/A
FIA_UAU.7	No events specified	N/A
FIA_UIA_EXT.1	All use of the identification and authentication mechanism.	Provided user identity, origin of the attempt (e.g. console, remote IP address).
FPT_FLS.1	Failure of the TSF.	None.
FPT_JTA_EXT.2	No events specified	N/A
FPT_PHP.1	Detection of intrusion.	None.
FPT_PHP.2	Detection of intrusion.	None.
FPT_PHP.3	Detection of attempted intrusion.	None.
FPT_RVR_EXT.1	No events specified	N/A
FPT_TST.1	Execution of self-tests.	None.
FPT_TUD_EXT.2	[selection: <i>Failure of update authentication/integrity check/rollback, None</i>]	Version numbers of the current firmware and of the attempted update.
	[selection: <i>Failure of update operation, None</i>]	Version numbers of the current firmware and of the attempted update.
	[selection: <i>Success of update operation, None</i>]	Version numbers of the new and old firmware images.
FPT_TUD_EXT.3	[selection: <i>Failure of update authentication/integrity/rollback check, None</i>]	Version numbers of the current firmware and of the attempted update.
	[selection: <i>Failure of update operation, None</i>]	Version numbers of the current firmware and of the attempted update.
	[selection: <i>Success of update operation, None</i>]	Version numbers of the new and old firmware images.
FPT_TUD_EXT.4	No events specified	N/A
FTP_ITC_EXT.1	Termination of the trusted channel.	User ID and remote source (IP Address) if feasible.
	Failures of the trusted path functions.	User ID and remote source (IP Address) if feasible.
	Initiation of the trusted channel.	User ID and remote source (IP Address) if feasible.
FTP_ITE_EXT.1	No events specified	N/A
FTP_ITP_EXT.1	No events specified	N/A
FTP_TRP.1	Initiation of the trusted channel.	Administrator ID and remote source (IP Address), if feasible.
	Termination of the trusted channel.	Administrator ID and remote source (IP Address), if feasible.
	Failures of the trusted path functions.	User ID and remote source (IP Address), if feasible.

B.2 Class: Security Audit (FAU)

FAU_GEN.1 Audit Data Generation

The inclusion of this selection-based component depends upon selection in

FPT_ROT_EXT.2.2, FPT_ROT_EXT.3.2, FPT_TUD_EXT.2.5, FPT_TUD_EXT.3.4.

This component must also be included in the ST if any of the following use cases are selected:

- **Server-Class Platform, Physically Secure Environment**
- **Server-Class Platform, Enhanced Security Requirements**
- **CSfC EUD**
- **Enterprise Desktop clients**

FAU_GEN.1.1

The TSF shall be able to generate audit data of the following auditable events:

1. Start-up and shutdown of the audit functions
2. All administrative actions
3. Start-up, shutdown, and reboot of the platform
4. Specifically defined auditable events in [Table 2](#)
5. [selection:
 - Specifically defined auditable event in [Table 8](#) for Strictly Optional requirements
 - Specifically defined auditable event in [Table 10](#) for Objective requirements
 - Specifically defined auditable event in [Table 11](#) for Selection-based requirements
 - Additional information defined in the audit table for the [Functional Package for Transport Layer Security \(TLS\), version 2.1](#)
 - Additional information defined in the audit table for the [Functional Package for Secure Shell \(SSH\), version 2.0](#)
 - no additional auditable events].

FAU_GEN.1.2

The TSF shall record within the audit data at least the following information:

- a. Date and time of the event
- b. Type of event
- c. Subject and object identity (if applicable)
- d. The outcome (success or failure) of the event
- e. [Additional information defined in [Table 2](#)]
- f. [selection:
 - Additional information defined in [Table 8](#) for Strictly Optional SFRs
 - Additional information defined in [Table 10](#) for Objective SFRs
 - Additional information defined in [Table 11](#) for Selection-Based SFRs
 - Additional information defined in the audit table for the [Functional Package for Transport Layer Security \(TLS\), version 2.1](#)
 - Additional information defined in the audit table for the [Functional Package for Secure Shell \(SSH\), version 2.0](#)
 - no other information].

Application Note: The ST Author should include this SFR in the ST if the TOE generates audit events for integrity verification or boot failures as indicated by the appropriate selections in [FPT_ROT_EXT.2](#), [FPT_ROT_EXT.3](#), [FPT_TUD_EXT.2](#), or [FPT_TUD_EXT.3.4](#); or if the TOE supports the Server (basic or enhanced), CSfC EUD, or Enterprise Desktop use cases.

If this SFR is included in the ST, then all the other FAU SFRs must also be claimed.

Appropriate entries from [Table 8](#), [Table 10](#), and [Table 11](#) should be included in the ST if the associated SFRs and selections are included.

Specific auditable events required for SFRs from the functional packages are defined in the respective packages.

Evaluation Activities ▼

FAU_GEN.1

TSS

The evaluator shall check the TSS and ensure that it lists all of the auditable events and provides a format for audit records. Each audit record format type shall be covered, along with a brief description of each field.

Guidance

The evaluator shall also make a determination of the administrative actions that are relevant in the context of this PP. The evaluator shall examine the AGD and make a determination of which administrative commands, including subcommands, scripts, and configuration files, are related to the configuration (including enabling or disabling) of the mechanisms implemented in the TOE that are necessary to enforce the requirements claimed in the ST. The evaluator shall document the methodology or approach taken while determining which actions in the AGD are security-relevant with respect to this PP.

Tests

The evaluator shall test the TOE's ability to correctly generate audit records by having the TOE generate audit records for the events listed and administrative actions. For administrative actions, the evaluator shall test that each action determined by the evaluator above to be security relevant in the context of this PP is auditable. When verifying the test results, the evaluator shall ensure the audit records generated during testing match the format specified in the administrative guide, and that the fields in each audit record have the proper entries.

Note that the testing here can be accomplished in conjunction with the testing of the security mechanisms directly.

FAU_SAR.1 Audit Review

This component must be included in the ST if any of the following SFRs are included:

- FAU_GEN.1

FAU_SAR.1.1

The TSF shall provide **the Administrator** with the capability to read **all audited events and record contents** from the audit data.

FAU_SAR.1.2

The TSF shall provide the audit data in a manner suitable for the **Administrator** to interpret the information.

Application Note: This SFR must be included in the ST if FAU_GEN.1 is claimed.

Evaluation Activities ▼

FAU_SAR.1

TSS

There are no additional TSS evaluation activities for this component.

Guidance

The evaluator shall review the AGD for the procedure on how to review the audit records.

Tests

The evaluator shall verify that the audit records provide all of the information specified in FAU_GEN.1 and that this information is suitable for human interpretation. The evaluation activity for this requirement is performed in conjunction with the evaluation activity for FAU_GEN.1.

FAU_STG.1 Audit Data Storage Location

This component must be included in the ST if any of the following SFRs are included:

- FAU_GEN.1

FAU_STG.1.1

The TSF shall be able to **store** generated audit data on the **[selection: TOE itself, transmit the generated audit data to an external IT entity using a trusted channel according to FTP_ITC_EXT.1, [removable media]]**

Application Note: The ST Author must select "trusted channel" and include **FTP_ITC_EXT.1** in the ST if the TOE offloads audit data to external IT entity over a network connection. Protocols used for implementing the trusted channel must be selected in **FTP_ITC_EXT.1**.

The ST Author must select "removable media" if the TOE supports offload of audit data using removable media such as thumb drives or disks.

Evaluation Activities ▼

[FAU_STG.1.1](#)

TSS

The evaluator shall examine the TSS to ensure it describes the means by which the audit data are transferred to the external audit server.

Guidance

If "trusted channel" is selected above, the evaluator shall examine the AGD to ensure it describes how to establish the trusted channel to the audit server, as well as describe any requirements on the audit server (particular audit server protocol, version of the protocol required, etc.), as well as configuration of the TOE needed to communicate with the audit server. Furthermore, it must describe whether the transfer mechanism is periodic or continuous, and what happens in the event of a loss of connectivity.

If "removable media" is selected, the evaluator shall ensure that the AGD describes the process for accessing audit data and copying it to media. The AGD must also include high-level guidance on how frequently this operation may need to be done to minimize risk of data loss.

Tests

If "trusted channel" is selected above, testing of the trusted channel mechanism itself is to be performed as specified in the evaluation activities for [FTP_ITC_EXT.1](#). In addition, the evaluator must perform the following test:

The evaluator shall establish a session between the TOE and the audit server according to the configuration guidance provided. The evaluator shall then examine the traffic that passes between the audit server and the TOE during several activities of the evaluator's choice designed to generate audit data to be transferred to the audit server. The evaluator shall observe that these data are not able to be viewed in the clear during this transfer, and that they are successfully received by the audit server. The evaluator shall record the particular software (name, version) used on the audit server during testing.

If "removable media" is selected above, the evaluator must run the system for a time long enough to generate some audit data and then collect audit data onto removable media for transfer to another machine. On another machine, the evaluator shall examine the audit data to ensure that it appears to be complete and correct. This test may be performed in conjunction with any other requirement that generates audit events.

FAU_STG.2 Protected Audit Trail Storage

This component must be included in the ST if any of the following SFRs are included:

- [FAU_GEN.1](#)

FAU_STG.2.1

The TSF shall protect the stored audit data in the audit trail from unauthorized deletion.

FAU_STG.2.2

The TSF shall be able to [prevent] unauthorized modifications to the stored audit data in the audit trail.

Application Note: This SFR must be included in the ST if [FAU_GEN.1](#) is claimed.

Evaluation Activities ▼

[FAU_STG.2](#)

TSS

The evaluator shall ensure that the TSS lists the locations of all logs and the access controls of those files such that unauthorized modification and deletion are prevented.

Guidance

The evaluator shall ensure that the AGD describes the steps necessary for an authorized administrator to delete audit records, if such a capability is implemented.

Tests

The evaluator shall perform the following tests:

- Test FAU_STG.2.1: [conditional] If the TOE implements an audit record deletion capability, then the evaluator shall attempt to delete the audit trail in a manner that the access controls should prevent (as an unauthorized user) and shall verify that the attempt fails.
- Test FAU_STG.2.2: The evaluator shall attempt to modify the audit trail in a manner that the access controls should prevent (as an unauthorized application) and shall verify that the attempt fails.

This component must be included in the ST if any of the following SFRs are included:

- FAU_GEN.1

FAU_STG.5.1

The TSF shall [overwrite the oldest stored audit records] if the audit data storage is full.

Application Note: This SFR must be included in the ST if FAU_GEN.1 is claimed.

Evaluation Activities ▼**FAU_STG.5****TSS**

The evaluator shall examine the TSS to ensure that it describes the size limits on the audit records, the detection of a full audit trail, and the action(s) taken by the TSF when the audit trail is full. The evaluator shall ensure that the action(s) results in the deletion or overwrite of the oldest stored record.

Guidance

The evaluator shall examine the AGD to ensure that it describes the means used by the TOE to indicate that the audit trail is full and overwrite is about to commence.

Tests

The evaluator shall cause audit records to be written until the size limits are met and exceeded. The evaluator shall verify that the overwrite function works as described in the TSS and that the indication of full audit trail is evident as described in the AGD.

B.3 Class: Cryptographic Support (FCS)**FCS_CKM.1/AKG Cryptographic Key Generation - Asymmetric Key**

The inclusion of this selection-based component depends upon selection in FCS_STG_EXT.1.2.

This component must be included in the ST if any of the following SFRs are included:

- FCS_IPSEC_EXT.1

This component may also be included in the ST as if optional.

FCS_CKM.1.1/AKG

The TSF shall generate **asymmetric** cryptographic keys in accordance with a specified cryptographic key generation algorithm [**selection: Cryptographic key generation algorithm**] and specified cryptographic **algorithm parameters** key sizes [**selection: Cryptographic algorithm parameters**] that meet the following: [**selection: List of standards**]

The following table provides the recommended choices for completion of the selection operations of [FCS_CKM.1/AKG](#).

Table 12: Recommended choices for FCS_CKM.1/AKG

Identifier	Cryptographic key generation algorithm	Cryptographic algorithm parameters	List of standards
RSA	RSA	Modulus of size [selection: 2048, 3072, 4096] bits	NIST FIPS PUB 186-5 (Section A.1.1)
ECC-ERB	ECC-ERB - Extra Random Bits	Elliptic Curve [selection: P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1]	FIPS PUB 186-5 (Section A.2.1) [selection: NIST SP 800-186 (Section 3) [NIST Curves], RFC 5639 (Section 3) [Brainpool curves]]

ECC-RS	ECC-RS - Rejection Sampling	<p>Elliptic Curve</p> <p>[selection: <i>P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1]</i></p>	FIPS PUB 186-5 (Section A.2.2)
FFC-ERB	FFC-ERB - Extra Random Bits	<p>Static domain parameters approved for [selection:</p> <ul style="list-style-type: none"> • <i>IKE Groups</i> [selection: <i>MODP-2048, MODP-3072, MODP-4096, MODP-6144, MODP-8192</i>] • <i>TLS Groups</i> [selection: <i>ffdhe2048, ffdhe3072, ffdhe4096, ffdhe6144, ffdhe8192</i>] <p>]</p>	NIST SP 800-56A Revision 3 (Section 5.6.1.1.3) [key pair generation]
FFC-RS	FFC-RS - Extra Random Bits	<p>Static domain parameters approved for [selection:</p> <ul style="list-style-type: none"> • <i>IKE Groups</i> [selection: <i>MODP-2048, MODP-3072, MODP-4096, MODP-6144, MODP-8192</i>] • <i>TLS Groups</i> [selection: <i>ffdhe2048, ffdhe3072, ffdhe4096, ffdhe6144, ffdhe8192</i>] <p>]</p>	NIST SP 800-56A Revision 3 (Section 5.6.1.1.3) [key pair generation]
EdDSA	EdDSA	<p>Domain parameters approved for elliptic curves [selection: <i>Edwards25519, Edwards448</i>]</p>	<p>NIST FIPS PUB 186-5 (Section 6.2.1) [key-pair generation]</p> <p>NIST SP 800-186 (Section 3.2.3) [Edwards Curves]</p>
LMS	LMS	<p>Private key size = [selection:</p> <ul style="list-style-type: none"> • <i>192 bits with</i> [selection: <i>SHA-256/192, SHAKE256/192</i>] • <i>256 bits with</i> [selection: <i>SHA-256, SHAKE256</i>] <p>]</p> <p>Winternitz parameter = [selection: <i>1, 2, 4, 8</i>]</p> <p>Tree height = [selection: <i>5, 10, 15, 20, 25</i>]</p>	<p>RFC 8554 [LMS]</p> <p>NIST SP 800-208 [parameters]</p>
HSS	HSS	<p>Private key size = [selection:</p> <ul style="list-style-type: none"> • <i>192 bits with</i> [selection: <i>SHA-256/192, SHAKE256/192</i>] • <i>256 bits with</i> 	<p>RFC 8554 [HSS]</p> <p>NIST SP 800-208 [parameters]</p>

[**selection**: SHA-256, SHAKE256]

]

Winternitz parameter =
[**selection**: 1, 2, 4, 8]

Tree height =
[**selection**: 5, 10, 15, 20, 25]

Number of levels =
[**selection**: 1, 2, 3, 4, 5, 6, 7, 8]

XMSS	XMSS	Private key size = [selection : <ul style="list-style-type: none">• 192 bits with [selection: SHA-256/192, SHAKE256/192]• 256 bits with [selection: SHA-256, SHAKE256]] Tree height = [selection : 10, 16, 20]	RFC 8391 [XMSS] NIST SP 800-208 [parameters]
------	------	---	---

XMSS(MT)	XMSS(MT)	Private key size = [selection : <ul style="list-style-type: none">• 192 bits with [selection: SHA-256/192, SHAKE256/192]• 256 bits with [selection: SHA-256, SHAKE256]] (Total Tree height, Number of Levels) = [selection : (20, 2), (20, 4), (40, 2), (40, 4), (40, 8), (60, 3), (60, 6), (60, 12)]	RFC 8391 [XMSS(MT)] NIST SP 800-208 [parameters]
----------	----------	---	---

ML-KEM	ML-KEM KeyGen	Parameter set = [selection : ML-KEM-512, ML-KEM-768, ML-KEM-1024]	NIST FIPS 203 (Section 7.1)
--------	---------------	--	-----------------------------

ML-DSA	ML-DSA KeyGen	Parameter set = [selection : ML-DSA-44, ML-DSA-65, ML-DSA-87]	NIST FIPS 204 (Section 5.1)
--------	---------------	--	-----------------------------

Application Note: This SFR must be included in the ST if asymmetric key generation is a service provided by the TOE to tenant software, or if it is used by the TOE itself to support or implement PP-specified security functionality.

Also, this SFR must be included in the ST if [FCS_IPSEC_EXT.1](#) is claimed, or if "causing the TOE to generate [asymmetric] keys/secrets" is selected in [FCS_STG_EXT.1.2](#).

If this SFR is included in the ST, then [FCS_CKM.6](#) and [FCS_RBG.1](#) must also be claimed.

From catalog For RSA the choice of the modulus implies the resulting key sizes of the public and private keys generated using the specified standard methods.

For Finite Field Cryptography (FFC) DSA, ST authors should consult schemes for guidelines on use. FIPS PUB 186-5 does not approve DSA for digital signature generation but allows DSA for digital signature verification for legacy purposes. "FFC-ERB" or "FFC-RS" may be claimed only for generating private and public keys when "DH" is claimed in [FCS_CKM_EXT.7](#).

When generating ECC keys pairs for key agreement and if "ECDH" or "ECDH-Ed" is claimed in [FCS_CKM_EXT.7](#), then "ECC-ERB" or "ECC-RS" must be claimed. The sizes of the private key, which is a scalar, and the public key, which is a point on the elliptic curve, are determined by the choice of the curve.

When generating ECC key pairs for digital signature generation and if “ECDSA” is claimed in [FCS_COP.1/SigGen](#), then “ECC-ERB” or “ECC-RS” must be claimed. The sizes of the private key, which is a scalar, and the public key, which is a point on the elliptic curve, are determined by the choice of the curve.

When generating EdDSA key pairs for digital signatures and if “EdDSA” is claimed in [FCS_COP.1/SigGen](#), then “EdDSA” must be claimed here. The chosen domain parameters determine the size of the private keys and the public keys.

For LMS, HSS, XMSS, and XMSS^{MT}, the key sizes do not represent the expected security strength. All key sizes given here correspond to an expected security strength of 128 bits, per NIST SP 800-208.

For HSS and XMSS^{MT} the same hash or XOF function must be used at each level. Within each level, the same Winternitz parameter must be used but can be different for each level. For HSS, within each level, the same tree height must be used but can be different for each level.

Evaluation Activities ▼

[FCS_CKM.1/AKG](#)

TSS

The evaluator shall examine the TSS to verify that it describes how the TOE generates a key based on output from a random bit generator as specified in [FCS_RBG.1](#). The evaluator shall review the TSS to verify that it describes how the functionality described by [FCS_RBG.1](#) is invoked.

The evaluator shall examine the TSS to verify that it identifies the usage, and key lifecycle for keys generated using each selected algorithm.

If the TOE uses the generated key in a key chain/hierarchy then the evaluator shall verify that the TSS describes how the key is used as part of the key chain/hierarchy.

Guidance

The evaluator shall verify that the AGD instructs the administrator how to configure the TOE to generate keys for the selected key generation algorithms for all key types and uses identified in the TSS.

Tests

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

RSA Key Generation

Identifier	Cryptographic Key Generation Algorithm	Cryptographic Algorithm Parameters	List of Standards
RSA	RSA	Modulus of size [selection: 2048, 3072, 4096] bits	NIST FIPS PUB 186-5 (Section A.1.1)

FIPS PUB 186-5 Key Pair generation specifies five methods for generating the primes p and q.

These are:

1. Random Provable primes
2. Random Probable primes
3. Provable primes with conditions based on auxiliary provable primes
4. Probable primes with conditions based on auxiliary provable primes
5. Probable primes with conditions based on auxiliary probable primes

In addition to the key generation method, the input parameters are:

- Modulus [2048, 3072, 4096]
- Hash algorithm [SHA-1, SHA-224, SHA-256, SHA-384, SHA-512, SHA-512/224, SHA-512/256, SHA3-224, SHA3-256, SHA3-384, SHA3-512] (methods 1, 3, 4 only)
- Rabin-Miller prime test [2^{100} , $2^{\text{Security String}}$] (methods 2, 4, 5 only)
- $p \bmod 8$ value [0,1,3,5,7]
- $q \bmod 8$ value [0,1,3,5,7]
- Private key format [standard, Chinese Remainder Theorem]
- Public exponent [fixed value, random]

The evaluator shall verify the ability of the TSF to correctly produce values for the RSA key components, including the public verification exponent e, the private prime factors p and q, the public modulus n and the calculation of the private signature exponent d.

Testing for Random Provable Primes and Conditional Methods

To test the key generation method for the Random Provable primes method and for all the Primes with Conditions methods (methods 1, 3-5), the evaluator must seed the TSF key generation routine with sufficient data to deterministically generate the RSA key pair.

For each supported combination of the above input parameters, the evaluator shall have the TSF generate 25 key pairs. The evaluator shall verify the correctness of the TSF's implementation by comparing values generated by the TSF with those generated by a known good implementation using the same input parameters.

Testing for Random Probable Primes Method

If the TOE generates Random Probable Primes (method 2) then, if possible, the Random Probable primes method should also be verified against a known good implementation as described above. If verification against a known good implementation is not possible, the evaluator shall have the TSF generate 25 key pairs for each supported key length nlen and verify that all of the following are true:

- $n = p*q$
- p and q are probably prime according to Miller-Rabin tests with error probability $<2^{(-125)}$
- $2^{16} < e < 2^{256}$ and e is an odd integer
- $GCD(p-1,e) = 1$
- $GCD(q-1,e) = 1$
- $|p-q| > 2^{(nlen/2 - 100)}$
- $p \geq \text{sqrt}(2) * (2^{(nlen/2 - 1)})$
- $q \geq \text{sqrt}(2) * (2^{(nlen/2 - 1)})$
- $2^{(nlen/2)} < d < LCM(p-1,q-1)$
- $e*d = 1 \bmod LCM(p-1,q-1)$

Elliptic Curve Key Generation

Identifier	Cryptographic Key Generation Algorithm	Cryptographic Algorithm Parameters	List of Standards
ECC-ERB	ECC - Extra Random Bits	Elliptic Curve [selection: P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1]	<i>NIST FIPS PUB 186-5 (Section A.2.1)</i> [selection: NIST SP 800-186 (Section 3) [NIST Curves], RFC 5639 (Section 3) [Brainpool curves]]
ECC-RS	ECC - Rejection Sampling	Elliptic Curve [selection: P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1]	<i>NIST FIPS PUB 186-5 (Section A.2.2)</i> [selection: NIST SP 800-186 (Section 3) [NIST Curves], RFC 5639 (Section 3) [Brainpool curves]]

To test the TOE's ability to generate asymmetric cryptographic keys using elliptic curves, the evaluator shall perform the ECC Key Generation Test and the ECC Key Validation Test using the following input parameters:

- Elliptic curve [P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1]
- Key pair generation method [extra random bits, rejection sampling]

ECC Key Generation Test

For each supported combination of the above input parameters the evaluator shall require the implementation under test to generate 10 private/public key pairs (d, Q). The private key, d , shall be generated using a random bit generator as specified in [FCS_RBG.1](#). The private key, d , is used to compute the public key, Q' . The evaluator shall confirm that $0 < d < n$ (where n is the order of the group), and the computed value Q' is then compared to the generated public/private key pairs' public key, Q , to confirm that Q is equal to Q' .

ECC Key Validation Test

For each supported combination of the above parameters the evaluator shall generate 12 private/public key pairs using the key generation function of a known-good implementation. For each set of 12 public keys, the evaluator shall modify four public key values by shifting x or y out of range by adding the order of the field and modify four other public key values by shifting x or y so that they are still in bounds, but not on the curve. The remaining public key values are left unchanged (i.e., correct). To determine correctness, the evaluator shall submit the public keys to the public key validation (PKV) function of the TOE and shall confirm that the results correspond as expected for the modified and unmodified values.

Finite Field Cryptography Key Generation

Identifier	Cryptographic Key Generation Algorithm	Cryptographic Algorithm Parameters	List of Standards
FFC-ERB	FFC - Extra Random Bits	Static domain parameters approved for [selection: IKE groups [selection: MODP-2048, MODP-3072, MODP-4096, MODP-6144, MODP-8192], TLS groups [selection: ffdhe2048, ffdhe3072, ffdhe4096, ffdhe6144, ffdhe8192]]] [selection: RFC 3526 [IKE groups], RFC 7919 [TLS groups]]	NIST SP 800-56A Revision 3 (Section 5.6.1.1.3) [key pair generation] [selection: RFC 3526 [IKE groups], RFC 7919 [TLS groups]]
FFC-RS	FFC - Rejection Sampling	Static domain parameters approved for [selection: IKE groups [selection: MODP-2048, MODP-3072, MODP-4096, MODP-6144, MODP-8192], TLS groups [selection: ffdhe2048, ffdhe3072, ffdhe4096, ffdhe6144, ffdhe8192]]] [selection: RFC 3526 [IKE groups], RFC 7919 [TLS groups]]	NIST SP 800-56A Revision 3 (Section 5.6.1.1.4) [key pair generation] [selection: RFC 3526 [IKE groups], RFC 7919 [TLS groups]]

To test the TOE's ability to generate asymmetric cryptographic keys using finite fields, the evaluator shall perform the Safe Primes Generation Test and the Safe Primes Validation Test using the following input parameter:

- Fields/Groups [MODP-2048, MODP-3072, MODP-4096, MODP-6144, MODP-8192, ffdhe2048, ffdhe3072, ffdhe4096, ffdhe6144, ffdhe8192]

Safe Primes Generation Test

For each supported safe primes group, generate 10 key pairs. The evaluator shall verify the correctness of the TSF's implementation by comparing values generated by the TSF with those generated by a known good implementation using the same input parameters.

Safe Primes Verification Test

For each supported safe primes group, use a known good implementation to generate 10 key pairs. For each set of 10, the evaluator shall modify three such that they are incorrect. The remaining values are left unmodified (i.e. correct). To determine correctness, the evaluator shall submit the key pairs to the public key validation (PKV) function of the TOE and shall confirm that the results correspond as expected for the modified and unmodified values.

Edwards Elliptic Curve Key Generation

Identifier	Cryptographic Key Generation Algorithm	Cryptographic Algorithm Parameters	List of Standards
EdDSA	EdDSA	Domain parameters approved for elliptic curves [selection: Edwards25519, Edwards448]	NIST FIPS PUB 186-5 (Section 6.2.1) [key-pair generation] NIST SP 800-186 (Section 3.2.3) [Edwards Curves]

To test the TOE's ability to generate asymmetric cryptographic keys using Edwards key generation, the evaluator shall perform the EdDSA Key Generation Test and the EdDSA Key Validation Test using the following input parameter:

- Elliptic curve [Edwards25519, Edwards448]

EdDSA Key Generation Test

For each supported curve the evaluator shall require the implementation under test to generate 10 private/public key pairs (d, Q). The private key, d , shall be generated using a random bit

generator as specified in [FCS_RBG.1](#). The private key, d , is used to compute the public key, Q' . The evaluator shall confirm that $0 < d < n$ (where n is the order of the group), and the computed value Q' is then compared to the generated public/private key pairs' public key, Q , to confirm that Q is equal to Q' .

EdDSA Key Validation Test

For each supported curve, the evaluator shall generate 10 private/public key pairs using the key generation function of a known good implementation. For each set of 10 public keys the evaluator shall modify five public key values by shifting x or y so that they are still in bounds, but not on the curve. The remaining values are left unmodified (i.e. correct). To determine correctness, the evaluator shall submit the public keys to the public key validation (PKV) function of the TOE and shall confirm that the results correspond as expected for the modified and unmodified values.

Key Generation using LMS and HSS

Identifier	Cryptographic Key Generation Algorithm	Cryptographic Algorithm Parameters	List of Standards
LMS	LMS	Private key size = [selection: 192 bits with [selection: SHA-256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]], Winternitz parameter = [selection: 1, 2, 4, 8], and tree height = [selection: 5, 10, 15, 20, 25]	RFC 8554 [LMS] NIST SP 800-208 [parameters]
HSS	HSS	Private key size = [selection: 192 bits with [selection: SHA-256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]], Winternitz parameter = [selection: 1, 2, 4, 8], and tree height = [selection: 5, 10, 15, 20, 25], and number of levels = [selection: 1, 2, 3, 4, 5, 6, 7, 8]	RFC 8554 [HSS] NIST SP 800-208 [parameters]

To test the TOE's ability to generate asymmetric cryptographic keys using LMS or HSS, the evaluator shall perform the LMS Key Generation Test using the following input parameters:

- Hash algorithm [SHA-256/192, SHAKE256/192, SHA-256, SHAKE256]
- Winternitz [1, 2, 4, 8]
- Tree height [5, 10, 15, 20, 25]
- Number of levels [1, 2, 3, 4, 5, 6, 7, 8] (HSS only)

LMS Key Generation Test

For each supported combination of the hash algorithm, Winternitz parameter, and tree height the evaluator shall generate one public key for each of the test cases. The number of test cases depends on the tree height:

Table 13: Number of LMS Test Cases

Height	Number of test cases
5	5
10	4
15	3
20	2
25	1

The evaluator shall verify the correctness of the TSF's implementation by comparing the public key generated by the TSF with that generated by a known good implementation using the same input parameters.

HSS Key Generation Test

For each supported hash algorithm generate an HSS hierarchy of LMS trees and public certificates. You may use eight of the LMS trees generated in LMS Key Generation, or generate eight new LMS trees using the supported parameters.

For level one, choose an LMS tree at random. For each supported level 2 through 8 in each hierarchy choose another LMS tree from the set. The Winternitz parameters and LMS tree heights do not have to match.

Create a certificate by randomly selecting a private key from the LMS tree at level $n-1$ and generate a certificate for the LMS public key at level n .

The evaluator shall verify the correctness of the TSF's implementation by comparing the certificates generated by the TSF with those generated by a known good implementation using the same input parameters.

XMSS Key Generation

Identifier	Cryptographic Key Generation Algorithm	Cryptographic Algorithm Parameters	List of Standards
XMSS	XMSS	Private key size = [selection: 192 bits with [selection: SHA-256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]], tree height = [selection: 10, 16, 20]	RFC 8391 [XMSS] NIST SP 800-208 [parameters]
XMSSMT	XMSSMT	Private key size = [selection: 192 bits with [selection: SHA-256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]], (total tree height, number of levels) = [selection: (20, 2), (20, 4), (40, 2), (40, 4), (40, 8), (60, 3), (60, 6), (60, 12)]	RFC 8391 [XMSS ^{MT}] NIST SP 800-208 [parameters]

To test the TOE's ability to generate asymmetric cryptographic keys using XMSS or XMSS^{MT}, the evaluator shall perform the XMSS Key Generation Test using the following input parameters:

- Hash algorithm [SHA-256/192, SHAKE256/192, SHA-256, SHAKE256]
- Tree height [10, 16, 20] (XMSS only)
- Tree height/levels [20/2, 20/4, 40/2, 40/4, 40/8, 60/3, 60/6, 60/12] (XMSS^{MT} only)

Table 14: Number of Test Cases for XMSS and XMSS^{MT}

Height	Number of test cases
10	5
16	4
20	3
40	2
60	1

XMSS Key Generation Test

For each supported combination of hash algorithm and tree height, the evaluator shall generate one public key for each test case. The number of test cases depends on the tree height as specified in .

The evaluator shall verify the correctness of the TSF's implementation by comparing values generated by the TSF with those generated by a known good implementation using the same input parameters.

XMSS^{MT} Key Generation Test

For each supported combination of hash algorithm and tree height, the evaluator shall generate one public key for each test case. The number of test cases depends on the tree height as specified in .

The evaluator shall verify the correctness of the TSF's implementation by comparing values generated by the TSF with those generated by a known good implementation using the same input parameters.

Note: The number of test cases is limited due to the extreme amount of time it can take to generate XMSS trees.

ML-KEM Key Generation

Identifier	Cryptographic Key Generation Algorithm	Cryptographic Algorithm Parameters	List of Standards
ML-KEM	ML-KEM Key Generation	Parameter set = [selection: ML-KEM-512, ML-KEM-768, ML-KEM-1024]	NIST FIPS PUB 203 (Section 7.1)

To test the TOE's ability to generate asymmetric cryptographic keys using ML-KEM, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- Parameter set [ML-KEM-512, ML-KEM-768, ML-KEM-1024]
- Random seed d [32 bytes]
- Random seed z [32 bytes]

Algorithm Functional Test

For each supported parameter set the evaluator shall require the implementation under test to generate 25 key pairs using 25 different randomly generated pairs of 32-byte seed values (d, z). To determine correctness, the evaluator shall compare the resulting key pairs (ek, dk) with those generated using a known-good implementation using the same inputs.

ML-DSA Key Generation

Identifier	Cryptographic Key Generation Algorithm	Cryptographic Algorithm Parameters	List of Standards
ML-DSA	ML-DSA Key Generation	Parameter set = [selection : ML-DSA-44, ML-DSA-65, ML-DSA-87]	NIST FIPS PUB 204 (Section 5.1)

To test the TOE's ability to generate asymmetric cryptographic keys using ML-DSA, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- Parameter set [ML-DSA-44, ML-DSA-65, ML-DSA-87]
- Random seed [32 bytes]

Algorithm Functional Test

For each supported parameter set the evaluator shall require the implementation under test to generate 25 key pairs using 25 different randomly generated 32-byte seed values. To determine correctness, the evaluator shall compare the resulting key pairs with those generated using a known-good implementation using the same inputs.

FCS_CKM.1/SKG Cryptographic Key Generation - Symmetric Key

The inclusion of this selection-based component depends upon selection in FCS_STG_EXT.1.2.

This component may also be included in the ST as if optional.

FCS_CKM.1.1/SKG

The TSF shall generate **symmetric** cryptographic keys in accordance with a specified cryptographic key generation algorithm [**selection**: *Cryptographic Key Generation Algorithm*] and specified cryptographic key sizes [**selection**: *Cryptographic Key Sizes*] that meet the following: [**selection**: *List of standards*]

The following table provides the recommended choices for completion of the selection operations of [FCS_CKM.1/SKG](#).

Table 15: Recommended choices for FCS_CKM.1/SKG

Identifier	Cryptographic Key Generation Algorithm	Cryptographic Key Sizes	List of standards
RSK	Direct Generation from a Random Bit Generator as specified in FCS_RBG.1	[selection : 123, 256, 512] bits	NIST SP 800-133 Revision 2 (Section 6.1)[Direct generation of symmetric keys]

Application Note: This SFR must be included in the ST if it is a service provided by the TOE to tenant software, or if it is used by the TOE itself to support or implement PP-specified security functionality.

This SFR must be included in the ST if "causing the TOE to generate [symmetric] keys/secrets" is selected in [FCS_STG_EXT.1.2](#).

If this SFR is included in the ST, then [FCS_CKM.6](#) and [FCS_RBG.1](#) must also be claimed.

Evaluation Activities ▼

[FCS_CKM.1/SKG](#)

TSS

The evaluator shall examine the TSS to verify that it describes how the TOE obtains a symmetric

cryptographic key through direct generation from a random bit generator as specified in [FCS_RBG.1](#). The evaluator shall review the TSS to verify that it describes how the functionality described by [FCS_RBG.1](#) is invoked.

The evaluator shall examine the TSS to verify that it identifies the usage, and key lifecycle for keys generated using each selected algorithm.

If the TOE uses the generated key in a key chain/hierarchy then the evaluator shall verify that the TSS describes how the key is used as part of the key chain/hierarchy.

Guidance

The evaluator shall verify that the AGD instructs the administrator how to configure the TOE to use the RBG to generate symmetric keys for all uses identified in the ST.

Tests

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

To test the TOE's ability to generate symmetric cryptographic keys using a random bit generator, the evaluator shall configure the asymmetric cryptographic key generation capability for each claimed key size. The evaluator shall use the description of the RBG interface to verify that the TOE requests and receives an amount of RBG output greater than or equal to the requested key size.

FCS_CKM.2 Cryptographic Key Distribution

The inclusion of this selection-based component depends upon selection in [FTP_ITE_EXT.1.1](#).

This component must be included in the ST if any of the following SFRs are included:

- [FCS_IPSEC_EXT.1](#)

This component may also be included in the ST as if optional.

FCS_CKM.2.1

The TSF shall distribute cryptographic keys in accordance with a specified cryptographic key distribution method [**selection**: key encapsulation, key wrapping, encrypted channels] that meets the following: [none].

Application Note: If "key encapsulation" is selected, [FCS_COP.1/KeyEncap](#) must be claimed, which specifies the relevant list of standards.

If "key wrapping" is selected, [FCS_COP.1/KeyWrap](#) must be claimed, which specifies the relevant list of standards.

If "encrypted channels" is selected, [FTP_PRO.1](#) must be claimed, which specifies the relevant list of standards.

Evaluation Activities ▼

[FCS_CKM.2](#)

TSS

The evaluator shall ensure that the TSS documents that the security strength supported by the selected key distribution methods is sufficient for the security strength of the keys distributed through those methods.

It is not necessary to identify the services that use each key distribution method here. That information should be documented in the requirements for the individual services and protocols that invoke key distribution.

Guidance

The evaluator shall verify that the AGD guidance instructs the administrator how to configure the TOE to use the selected key distribution methods.

Tests

Specific testing for this component is covered by testing for the claimed components in [FCS_COP.1/KeyEncap](#), [FCS_COP.1/KeyWrap](#), or [FTP_PRO.1](#).

FCS_CKM.6 Timing and Event of Cryptographic Key Destruction

This component must be included in the ST if any of the following SFRs are included:

- [FCS_CKM.1/AKG](#)
- [FCS_CKM.2](#)
- [FCS_CKM_EXT.3](#)
- [FCS_CKM.5](#)
- [FCS_CKM_EXT.7](#)
- [FCS_CKM_EXT.8](#)
- [FCS_STG_EXT.1](#)
- [FIA_AFL_EXT.1](#)

FCS_CKM.6.1

The TSF shall destroy [**assignment**: list of cryptographic keys (including keying material)] when [**selection**: no longer needed, [**assignment**: other circumstances for key or keying material destruction]]

Application Note: From catalog The TOE will have mechanisms to destroy keys, including intermediate keys and key material, by using an approved method as specified in [FCS_CKM.6.2](#). Examples of keys include intermediate keys, leaf keys, encryption keys, and signing keys. Key material includes seeds, authentication secrets, passwords, PINs, and other secret values used to derive keys. The ST Author shall list all such keys and keying material that are subject to destruction in the first assignment.

This SFR does not apply to the public component of asymmetric key pairs or to keys that are permitted to remain stored, such as device identification keys.

FCS_CKM.6.2

The TSF shall destroy cryptographic keys and keying material specified by [FCS_CKM.6.1](#) in accordance with a specified cryptographic key destruction method [

- For volatile memory, the destruction shall be executed by a [**selection**:
 - single overwrite consisting of [**selection, choose one of**: a pseudo-random pattern using the TSF's RBG, zeroes, ones, a new value of a key, [**assignment**: some value that does not contain any CSP]]
 - removal of power to the memory
 - removal of all references to the key directly followed by a request for garbage collection]
- For non-volatile memory [**selection**:
 - that employs a wear-leveling algorithm, the destruction shall be executed by a [**selection**:
 - single overwrite consisting of [**selection, choose one of**: zeroes, ones, pseudo-random pattern, a new value of a key of the same size, [**assignment**: some value that does not contain any CSP]]
 - block erase]
 - that does not employ a wear-leveling algorithm, the destruction shall be executed by a [**selection**:
 - [**selection, choose one of**: single, [**assignment**: ST Author-defined multi-pass]] overwrite consisting of [**selection**: zeros, ones, pseudo-random pattern, a new value of a key of the same size, [**assignment**: some value that does not contain any CSP]] followed by a read-verify. If the read-verification of the overwritten data fails, the process shall be repeated again up to [**assignment**: number of times to attempt overwrite] times, whereupon an error is returned
 - block erase]]

] that meets the following: [no standard].

Application Note: This SFR must be included in the ST if the TOE handles sensitive cryptographic keys or credentials. In particular, if the TOE creates or stores keys, it must be able to destroy them. Specifically, this SFR must be included in the ST if any of the following SFRs are claimed: [FCS_CKM.1/AKG](#), [FCS_CKM.1/SKG](#), [FCS_CKM.2](#), [FCS_CKM.5](#), [FCS_COP.1/KAT](#), [FCS_STG_EXT.1](#), or [FIA_AFL_EXT.1](#).

The term "cryptographic keys" in this SFR includes the authorization data that is the entry point to a key chain and all other cryptographic keys and keying material (whether in plaintext or encrypted form). Examples of keys and key material include intermediate keys, encryption keys, signing keys, verification keys, authentication tokens, and submasks. This SFR does not apply to the public component of asymmetric key pairs, or to keys that are permitted to remain

stored such as device identification keys. The TOE will have mechanisms to destroy keys and key material when the keys and key material is no longer needed. Based on their implementations, vendors will explain when certain keys are no longer needed.

In the case of volatile memory, the selection “removal of all references to the key directly followed by a request for garbage collection” is used in a situation where the TSF cannot address the specific physical memory locations holding the data to be erased and therefore relies on addressing logical addresses (which frees the relevant physical addresses holding the old data) and then requesting the platform to ensure that the data in the physical addresses is no longer available for reading (i.e. the “garbage collection” referred to in the SFR text).

The selection for destruction of data in non-volatile memory includes block erase as an option, and this option applies only to flash memory. A block erase does not require a read verify, since the mappings of logical addresses to the erased memory locations are erased as well as the data itself.

Some selections allow assignment of “some value that does not contain any CSP.” This means that the TOE uses some specified data not drawn from an RBG meeting FCS_RBG requirements, and not being any of the particular values listed as other selection options. The point of the phrase “does not contain any sensitive data” is to ensure that the overwritten data is carefully selected, and not taken from a general pool that might contain current or residual data that itself requires confidentiality protection.

From crypto catalog In the case of volatile memory, the selection “removal of all references to the key directly followed by a request for garbage collection” is used in a situation where the TSF cannot address the specific physical memory locations holding the data to be erased and therefore relies on addressing logical addresses (which frees the relevant physical addresses holding the old data) and then requesting the platform to ensure that the data in the physical addresses is no longer available for reading (i.e. the “garbage collection” referred to in the SFR text).

The selection for destruction of data in non-volatile memory includes block erase as an option, and this option applies only to flash memory. A block erase does not require a read verify, since the mappings of logical addresses to the erased memory locations are erased, as well as the data itself.

Some selections allow the assignment of “some value that does not contain any CSP.” This means that the TOE uses some specified data not drawn from an RBG meeting FCS_RBG requirements, and not being any of the values listed as other selection options. The point of the phrase “does not contain any CSP” is to ensure that the overwritten data is carefully selected, and not taken from a general pool that might contain data that itself requires confidentiality protection.

Evaluation Activities ▼

FCS_CKM.6

TSS

The evaluator shall examine the TSS to ensure it lists all relevant keys and keying material (describing the source of the data, all memory types in which the data is stored (covering storage both during and outside of a session, and both plaintext and non-plaintext forms of the data)), all relevant destruction situations (including the point in time at which the destruction occurs; e.g. factory reset or device wipe function, change of authorization data, change of DEK, completion of use of an intermediate key) and the destruction method used in each case. The evaluator shall confirm that the description of the data and storage locations is consistent with the functions carried out by the TOE (e.g. that all keys in the key chain are accounted for). (Where keys are stored encrypted or wrapped under another key then this may need to be explained in order to allow the evaluator to confirm the consistency of the description of keys with the TOE functions).

The evaluator shall check that the TSS identifies any configurations or circumstances that may not conform to the key destruction requirement (see further discussion in the AGD section below). Note that reference may be made to the AGD for description of the detail of such cases where destruction may be prevented or delayed.

Where the ST specifies the use of “a value that does not contain any sensitive data” to overwrite keys, the evaluator shall examine the TSS to ensure that it describes how that pattern is obtained and used, and that this justifies the claim that the pattern does not contain any sensitive data.

Guidance

A TOE may be subject to situations that could prevent or delay data destruction in some cases. The evaluator shall check that the AGD identifies configurations or circumstances that may not strictly conform to the key destruction requirement, and that this description is consistent with the relevant parts of the TSS (and KMD). The evaluator shall check that the AGD provides guidance on situations where key destruction may be delayed at the physical layer, identifying any additional mitigation actions for the user (e.g. there might be some operation the user can

invoke, or the user might be advised to retain control of the device for some particular time to maximize the probability that garbage collection has occurred).

For example, when the TOE does not have full access to the physical memory, it is possible that the storage may implement wear-leveling and garbage collection. This may result in additional copies of the data that are logically inaccessible but persist physically. Where available, the TOE might then describe use of the TRIM command and garbage collection to destroy these persistent copies upon their deletion (this would be explained in TSS and AGD).

Where TRIM is used then the TSS or AGD is also expected to describe how the keys are stored such that they are not inaccessible to TRIM, (e.g. they would need not to be contained in a file less than 982 bytes which would be completely contained in the master file table).

KMD

The evaluator shall examine the KMD to verify that it identifies and describes the interfaces that are used to service commands to read/write memory. The evaluator shall examine the interface description for each different media type to ensure that the interface supports the selections made by the ST Author.

The evaluator shall examine the KMD to ensure that all keys and keying material identified in the TSS and KMD have been accounted for.

Note that where selections include "destruction of reference to the key directly followed by a request for garbage collection" (for volatile memory) then the evaluator shall examine the KMD to ensure that it explains the nature of the destruction of the reference, the request for garbage collection, and of the garbage collection process itself.

Tests

The following tests require the developer to provide access to a test platform that provides the evaluator with tools that are typically not found on factory products.

The evaluator shall perform the following tests:

- Test FCS_CKM.6:1: Applied to each key or keying material held as plaintext in volatile memory and subject to destruction by overwrite by the TOE (whether or not the plaintext value is subsequently encrypted for storage in volatile or non-volatile memory).

The evaluator shall:

1. Record the value of the key or keying material.
2. Cause the TOE to dump the SDO/SDE memory of the TOE into a binary file.
3. Search the content of the binary file created in Step #2 to locate all instances of the known key value from Step #1.

Note that the primary purpose of Step #3 is to demonstrate that appropriate search commands are being used for Steps #8 and #9.

4. Cause the TOE to perform normal cryptographic processing with the key from Step #1.
5. Cause the TOE to destroy the key.
6. Cause the TOE to stop execution but not exit.
7. Cause the TOE to dump the SDO/SDE memory of the TOE into a binary file.
8. Search the content of the binary file created in Step #7 for instances of the known key value from Step #1.
9. Break the key value from Step #1 into an evaluator-chosen set of fragments and perform a search using each fragment. (Note that the evaluator shall first confirm with the developer how the key is normally stored, in order to choose fragment sizes that are the same or smaller than any fragmentation of the data that may be implemented by the TOE. The endianness or byte-order should also be taken into account in the search.)

Steps #1-8 ensure that the complete key does not exist anywhere in volatile memory. If a copy is found, then the test fails.

Step #9 ensures that partial key fragments do not remain in memory. If the evaluator finds a 32-or-greater-consecutive-bit fragment, then fail immediately. Otherwise, there is a chance that it is not within the context of a key (e.g., some random bits that happen to match). If this is the case the test should be repeated with a different key in Step #1. If a fragment is also found in this repeated run, then the test fails unless the developer provides a reasonable explanation for the collision, then the evaluator may give a pass on this test.

- Test FCS_CKM.6:2: Applied to each key and keying material held in non-volatile memory and subject to destruction by overwrite by the TOE.

1. Record the value of the key or keying material.
2. Cause the TOE to perform normal cryptographic processing with the key from Step #1.
3. Search the non-volatile memory the key was stored in for instances of the known key value from Step #1.

Note that the primary purpose of Step #3 is to demonstrate that appropriate search commands are being used for Steps #5 and #6.

4. Cause the TOE to clear the key.
5. Search the non-volatile memory in which the key was stored for instances of the known key value from Step #1. If a copy is found, then the test fails.
6. Break the key value from Step #1 into an evaluator-chosen set of fragments and perform a search using each fragment. (Note that the evaluator shall first confirm with

the developer how the key is normally stored, in order to choose fragment sizes that are the same or smaller than any fragmentation of the data that may be implemented by the TOE. The endianness or byte-order should also be taken into account in the search).

Step #6 ensures that partial key fragments do not remain in non-volatile memory. If the evaluator finds a 32-or-greater-consecutive-bit fragment, then fail immediately. Otherwise, there is a chance that it is not within the context of a key (e.g., some random bits that happen to match). If this is the case the test should be repeated with a different key in Step #1. If a fragment is also found in this repeated run, then the test fails unless the developer provides a reasonable explanation for the collision, then the evaluator may give a pass on this test.

- *Test FCS_CKM.6:3: Applied to each key and keying material held in non-volatile memory and subject to destruction by overwrite by the TOE.*
 1. Record memory of the key or keying material.
 2. Cause the TOE to perform normal cryptographic processing with the key from Step #1.
 3. Cause the TOE to clear the key. Record the value to be used for the overwrite of the key.
 4. Examine the memory from Step #1 to ensure the appropriate pattern (recorded in Step #3) is used.

The test succeeds if correct pattern is found in the memory location. If the pattern is not found, then the test fails.

FCS_CKM_EXT.7 Cryptographic Key Agreement

This component may also be included in the ST as if optional.

FCS_CKM_EXT.7.1

The TSF shall derive shared cryptographic keys with input from multiple parties in accordance with specified cryptographic key agreement algorithms [selection: Cryptographic algorithm] and specified cryptographic parameters [selection: Cryptographic parameters] that meet the following: [selection: List of standards]

The following table provides the recommended choices for completion of the selection operations of [FCS_CKM_EXT.7](#).

Table 16: Recommended choices for FCS_CKM_EXT.7

Identifier	Cryptographic algorithm	Cryptographic parameters	List of standards
KAS2	RSA	Modulus size [selection: 2048, 3072, 4096, 6144, 8192] bits	NIST SP 800-56B Revision 2 (Section 8.3) [KAS2]
DH	Finite Field Cryptography Diffie-Hellman	Static domain parameters approved for [selection]: <ul style="list-style-type: none"> • IKE Groups [selection: MODP-2048, MODP-3072, MODP-4096, MODP-6144, MODP-8192] • TLS Groups [selection: ffdhe2048, ffdhe3072, ffdhe4096, ffdhe6144, ffdhe8192] 	NIST SP 800-56A Revision 3 (Section 5.7.1.1) [DH] [selection: RFC 3526 [IKE groups], RFC 7919 [TLS groups]]
ECDH	Elliptic Curve Diffie-Hellman	Elliptic Curve [selection: P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1]	NIST SP 800-56A Revision 3 (Section 5.7.1.2) [ECDH] [selection: NIST SP 800-186 (Section 3.2.1) [NIST Curves], RFC 5639 (Section 3)]

ECDH-Ed	ECDH with Montgomery Curves	Domain parameters approved for elliptic curves [selection: <i>curve25519, curve448</i>]	RFC 7748 (Section 5) [ECDH-Ed] NIST SP 800-186 (Section 3.2.2) [Montgomery Curves]
---------	-----------------------------	--	---

Application Note: This SFR must be included in the ST if key agreement or transport is a service provided by the TOE to tenant software, or if they are used by the TOE itself to support or implement PP-specified security functionality.

If this SFR is claimed, then [FCS_CKM.6](#) must also be claimed.

This SFR has dependencies [FCS_COP.1/Hash](#) and [FCS_COP.1/XOF](#) only if ML-KEM is selected.

Evaluation Activities ▾

[FCS_CKM_EXT.7](#)

TSS

The evaluator shall ensure that the TSS documents that the security strength of the material contributed by the TOE is sufficient for the security strength of the key and the agreement method.

Guidance

TBD

Tests

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

KAS2

Identifier	Cryptographic Algorithm	Cryptographic Parameters	List of Standards
KAS2	RSA	Modulus Size [selection: 2048, 3072, 4096, 6144, 8192] bits	NIST SP 800-56B Revision 2 (Section 8.3) [KAS2]

To test the TOE's implementation of the KAS2 RSA Key Agreement scheme, the evaluator shall perform the Algorithm Functional Test and Validation Test using the following input parameters:

- RSA Private key format [Basic, Prime Factor, Chinese Remainder Theorem]
- Modulo value [2048, 3072, 4096, 6144, 8192]
- Role [initiator, responder]

The evaluator shall generate a test group (i.e. set of tests) for each parameter value of the above parameter type with the largest number of supported values. For example, if the TOE supports all five Modulo values, then the evaluator shall generate five test groups. Each of the above supported parameter values must be included in at least one test group.

Regardless of how many parameter values are supported, there must be at least two test groups.

Half of the test groups are designated as Algorithm Functional Tests (AFT) and the remainder are designated as Validation Tests (VAT). If there is an odd number of groups, then the extra group is designated randomly as either AFT or VAT.

Algorithm Functional Test

For each test group designated as AFT, the evaluator shall generate 10 test cases using random data (except for a fixed public exponent, if supported). The resulting shared secrets shall be compared with those generated by a known-good implementation using the same inputs.

Validation Test

For each test group designated as VAT, the evaluator shall generate 25 test cases using random data (except for a fixed public exponent, if supported). Of the 25 test cases:

- Two test cases must have a shared secret with a leading nibble of 0s,
- Two test cases have modified derived key material,
- Two test cases have modified tags, if key confirmation is supported,
- Two test cases have modified MACs, if key confirmation is supported, and
- The remaining test cases are not modified.

To determine correctness, the evaluator shall confirm that the resulting 25 shared secrets correspond as expected for both the modified and unmodified values.

FFC Diffie-Hellman Key Agreement

Identifier	Cryptographic Algorithm	Cryptographic Parameters	List of Standards
DH	Finite Field Cryptography Diffie-Hellman	Static domain parameters approved for [selection: IKE groups [selection: MODP-2048, MODP-3072, MODP-4096, MODP-6144, MODP-8192], TLS groups [selection: ffdhe2048, ffdhe3072, ffdhe4096, ffdhe6144, ffdhe8192]]]	NIST SP 800-56A Revision 3 (Section 5.7.1.1) [DH] [selection: RFC 3526 [IKE Groups], RFC 7919 [TLS Groups]]

To test the TOE's implementation of FFC Diffie-Hellman Key Agreement, the evaluator shall perform the Algorithm Functional Test and Validation Test using the following input parameters:

- Domain Parameter Group [MODP-2048, MODP-3072, MODP-4096, MODP-6144, MODP-8192, ffdhe2048, ffdhe3072, ffdhe4096, ffdhe6144, ffdhe8192]

Algorithm Functional Test

For each supported domain parameter group, the evaluator shall generate 10 test cases by generating the initiator and responder secret keys using random data, calculating the responder public key, and creating the shared secret. The resulting shared secrets shall be compared with those generated by a known-good implementation using the same inputs.

Validation Test

For each supported combination of the above parameters the evaluator shall generate 15 Diffie Hellman initiator/responder key pairs using the key generation function of a known-good implementation. For each set of key pairs, the evaluator shall modify five initiator private key values. The remaining key values are left unchanged (i.e., correct). To determine correctness, the evaluator shall confirm that the 15 shared secrets correspond as expected for both the modified and unmodified inputs.

Elliptic Curve Diffie-Hellman Key Agreement

Identifier	Cryptographic Algorithm	Cryptographic Parameters	List of Standards
ECDH	Elliptic Curve Diffie-Hellman	Elliptic Curve [selection: P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1]	NIST SP 800-56A Revision 3 (Section 5.7.1.2) [ECDH] [selection: NIST SP 800-186 (Section 3.2.1) [NIST Curves], RFC 5639 (Section 3) [Brainpool Curves]]

To test the TOE's implementation of Elliptic Curve Diffie-Hellman Key Agreement, the evaluator shall perform the Algorithm Functional Test and Validation Test using the following input parameters:

- Elliptic Curve [P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1]

Algorithm Functional Test

For each supported Elliptic Curve the evaluator shall generate 10 test cases by generating the initiator and responder secret keys using random data, calculating the responder public key, and creating the shared secret. The resulting shared secrets shall be compared with those generated by a known-good implementation using the same inputs.

Validation Test

For each supported Elliptic Curve the evaluator shall generate 15 Diffie Hellman initiator/responder key pairs using the key generation function of a known-good implementation. For each set of key pairs, the evaluator shall modify five initiator private key values. The remaining key values are left unchanged (i.e., correct). To determine correctness, the evaluator shall confirm that the 15 shared secrets correspond as expected for the modified and unmodified values.

Elliptic Curve Diffie-Hellman Key Agreement with Montgomery Curves

Identifier	Cryptographic Algorithm	Cryptographic Parameters	List of Standards
<i>ECDH-Ed</i>	<i>ECDH with Montgomery Curves</i>	<i>Domain parameters approved for elliptic curves [selection: curve25519, curve448]</i>	<i>RFC 7748 (Section 5) [ECDH-Ed] NIST SP 800-186 (Section 3.2.2) [Montgomery Curves]</i>

To test the TOE's implementation of Elliptic Curve Diffie-Hellman Key Agreement with Montgomery Curves, the evaluator shall perform the Algorithm Functional Test and Validation Test using the following input parameters:

- - Domain Parameters for elliptic curves [curve25519, curve448]

Algorithm Functional Test

For each supported set of domain parameters, the evaluator shall generate 10 test cases by generating the initiator and responder secret keys using random data, calculating the responder public key, and creating the shared secret. The resulting shared secrets shall be compared with those generated by a known-good implementation using the same inputs

Validation Test

For each supported combination of the above parameters the evaluator shall generate 15 Diffie Hellman initiator/responder key pairs using the key generation function of a known-good implementation. For each set of key pairs, modify five initiator private keys values. The remaining key values are left unchanged (i.e., correct). To determine correctness, the evaluator shall confirm that the 15 shared secrets correspond as expected for the modified and unmodified values.

FCS_COP.1/AEAD Cryptographic Operation - Authenticated Encryption with Associated Data

The inclusion of this selection-based component depends upon selection in FCS_STG_EXT.3.1, FDP_ITC_EXT.1.2.

This component must be included in the ST if any of the following SFRs are included:

- ***FCS_IPSEC_EXT.1***
- ***FCS_STG_EXT.2***

This component may also be included in the ST as if optional.

FCS_COP.1.1/AEAD

The TSF shall perform [authenticated encryption with associated data] in accordance with a specified cryptographic algorithm [**selection: Cryptographic algorithm**] and cryptographic key sizes [**selection: Cryptographic key sizes**] that meet the following: [**selection: List of standards**]

The following table provides the recommended choices for completion of the selection operations of ***FCS_COP.1/AEAD***.

Table 17: Recommended choices for *FCS_COP.1/AEAD*

Identifier	Cryptographic algorithm	Cryptographic key sizes	List of standards
AES-CCM	AES in CCM mode with unpredictable, non-repeating nonce, minimum size of 64 bits	[selection: 128 bits, 192 bits, 256 bits]	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197][AES]
AES-GCM	AES in GCM mode with non-repeating IVs using [selection: ISO/IEC 19772:2020 (Clause 7), NIST SP 800-38C][CCM]	[selection: 128 bits, 192 bits]	[selection: ISO/IEC 19772:2020 (Clause 7), NIST SP 800-38C][CCM]

<i>deterministic, RBG-based], IV construction; the tag must be of length [selection: 96, 104, 112, 120, 128] bits.</i>	<i>256 bits]</i>	<i>18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES]</i>
		[selection: ISO/IEC 19772:2020 (Clause 10), NIST SP 800- 38D] [GCM]

Application Note: If the selected cryptographic algorithm requires an IV or nonce, then [FCS_OTV_EXT.1](#) must be claimed.

Evaluation Activities ▼

[FCS_COP.1/AEAD](#)

TSS

TBD

Guidance

TBD

Tests

The following tests require the developer to provide access to a test platform that provides the evaluator with tools that are typically not found on factory products.

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

AES-CCM

Identifier	Cryptographic Algorithm	Cryptographic Key Sizes	List of Standards
AES-CCM	AES in CCM mode with nonrepeating nonce, minimum size of 64 bits	[selection: 128, 192, 256] bits	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES] [selection: ISO/IEC 19772:2020 (Clause 7), NIST SP 800-38C] [CCM]

To test the TOE's implementation of AES-CCM authenticated encryption functionality the evaluator shall perform the Algorithm Functional Tests described below using the following input parameters:

- Key Size [128, 192, 256] bits
- Associated data size [0-65536] bits in increments of 8
- Payload size [0-256] bits in increments of 8
- IV/Nonce size [64-104] bits in increments of 8
- Tag size [32-128] bits in increments of 16

Algorithm Functional Tests

Unless otherwise specified, the following tests should use random data, a tag size of 128 bits, IV/Nonce size of 104 bits, payload size of 256 bits, and associated data size of 256 bits. If any of these values are not supported, any supported value may be used. The evaluator shall compare the output from each test case against results generated by a known-good implementation with the same input parameters.

Variable Associated Data Test

For each claimed key size, and for each supported associated data size from 0 through 256 bits in increments of 8 bits, the TOE must be tested by encrypting 10 test cases using all random data. In addition, for each key size, the TOE must be tested by encrypting 10 cases with associated data lengths of 65536 bits, if supported.

Variable Payload Test

For each claimed key size, and for each supported payload size from 0 through 256 bits in increments of 8 bits, the TOE must be tested by encrypting 10 test cases using all random data.

Variable Nonce Test

For each claimed key size, and for each supported IV/Nonce size from 64 through 104 bits in increments of 8 bits, the TOE must be tested by encrypting 10 test cases using all random data.

Variable Tag Test

For each claimed key size, and for each supported tag size from 32 through 128 bits in increments of 16 bits, the TOE must be tested by encrypting 10 test cases using all random data.

Decryption Verification Test

For each claimed key size, for each supported associated data size from 0 through 256 bits in increments of 8 bits, for each supported payload size from 0 through 256 bits in increments of 8 bits, for each supported IV/Nonce size from 64 through 104 bits in increments of 8 bits, and for each supported tag size from 32 through 128 bits in increments of 16 bits, the TOE must be tested by decrypting 10 test cases using all random data.

AES-GCM

Identifier	Cryptographic Algorithm	Cryptographic Key Sizes	List of Standards
AES-GCM	AES in GCM mode with nonrepeating IVs using [selection: deterministic, RBG-based] IV construction; the tag must be of length [selection: 96, 104, 112, 120, or 128] bits.	[selection: 128, 192, 256] bits	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES] [selection: ISO/IEC 19772:2020 (Clause 10), NIST SP 800-38D] [GCM]

To test the TOE's implementation of AES-GCM authenticated encryption functionality the evaluator shall perform the Encryption Algorithm Functional Tests and Decryption Algorithm Functional Tests as described below using the following input parameters:

- Key Size [128, 192, 256] bits
- Associated data size [0-65536] bits
- Payload size [0-65536] bits
- IV size [96] bits
- Tag size [96, 104, 112, 120, 128] bits

Encryption Algorithm Functional Tests

The evaluator shall generate 15 test cases using random data for each combination of the above parameters as follows:

- Each claimed key size,
- Each supported tag size,
- Four supported non-zero payload sizes, such that two are multiples of 128 bits and two are not multiples of 128 bits,
- Four supported non-zero associated data sizes, such that two are multiples of 128 bits and two are not multiples of 128 bits, and
- An associated data size of zero, if supported.

Note that the IV size is always 96 bits.

The evaluator shall compare the output from each test case against results generated by a known-good implementation with the same input parameters.

Decryption Algorithm Functional Tests

The evaluator shall test the authenticated decrypt functionality of AES-GCM by supplying 15 test cases for the supported combinations of the parameters as described above. For each parameter combination the evaluator shall introduce an error into either the Ciphertext or the Tag such that approximately half of the cases are correct and half the cases contain errors.

FCS_COP.1/CMAC Cryptographic Operation - CMAC

The inclusion of this selection-based component depends upon selection in FCS_STG_EXT.3.1.

This component may also be included in the ST as if optional.

FCS_COP.1.1/CMAC

The TSF shall perform [CMAC] in accordance with a specified cryptographic algorithm [**selection**: *Cryptographic algorithm*] and cryptographic key sizes [**selection**: *Cryptographic key sizes*] that meet the following: [**selection**: *List of standards*]

The following table provides the recommended choices for completion of the selection operations of [FCS_COP.1/CMAC](#).

Table 18: Recommended choices for FCS_COP.1/CMAC

Identifier	Cryptographic algorithm	Cryptographic key sizes	List of standards
AES-CMAC	AES using CMAC mode	[selection : 128 bits, 192 bits, 256 bits]	[selection : ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES] [selection : ISO/IEC 9797-1:2011 Subclause 7.6, NIST SP 800-38B] [CMAC]

Evaluation Activities ▾

[FCS_COP.1/CMAC](#)

TSS

TBD

Guidance

TBD

Tests

The following tests require the developer to provide access to a test platform that provides the evaluator with tools that are typically not found on factory products.

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

AES-CMAC

Identifier	Cryptographic Algorithm	Cryptographic Key Sizes	List of Standards
AES-CMAC	AES using CMAC mode	[selection : 128, 192, 256] bits	[selection : ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES] [selection : ISO/IEC 9797-1:2011 (Subclause 7.6), NIST SP 800-38B] [CMAC]

To test the TOE's ability to generate MAC values using AES in CMAC mode the evaluator shall perform the CMAC Generation Test and CMAC Verification Test using the following input parameters:

- Key Size [128, 192, 256] bits
- Message size [0-524288] bits in increments of 8
- MAC sizes [1-128] bits

CMAC Generation Test

The evaluator shall generate eight test cases using random keys and data for each combination of the above parameters as follows:

- For each claimed key size,
- For four message sizes as follows:
 - The smallest supported message size,

- The largest supported message size,
- Two sizes that are divisible by the block size, and
- Two sizes that are not divisible by the block size
- For three MAC sizes as follows:
 - The smallest supported MAC size,
 - The largest supported MAC size, and
 - Some other supported MAC size

The evaluator shall compare the output from each test case against results generated by a known-good implementation with the same input parameters.

CMAC Verification Test

The evaluator shall generate 20 test cases using random keys and data for each combination of the above parameters as follows:

- For each claimed key size,
- For four message sizes as follows:
 - The smallest supported message size,
 - The largest supported message size,
 - Two sizes that are divisible by the block size, and
 - Two sizes that are not divisible by the block size
- For three MAC sizes as follows:
 - The smallest supported MAC size,
 - The largest supported MAC size, and
 - Some other supported MAC size

The evaluator shall modify the tag such that 25% of the test cases in each group of 20 test cases should fail.

The evaluator shall determine that the verification fails for the test cases with modified inputs, and succeeds for those with unmodified inputs.

FCS_COP.1/Hash Cryptographic Operation - Hashing)

The inclusion of this selection-based component depends upon selection in FCS_CKM.5.1, FDP_ITC_EXT.1.2, FPT_ROT_EXT.2.1, FPT_TUD_EXT.2.1.

This component must be included in the ST if any of the following SFRs are included:

- **FCS_COP.1/KeyedHash**
- **FCS_COP.1/SigGen**
- **FCS_COP.1/SigVer**

This component may also be included in the ST as if optional.

FCS_COP.1.1/Hash

The TSF shall perform [cryptographic hashing] in accordance with a specified cryptographic algorithm [**selection**: SHA-1, SHA-224, SHA-256, SHA-384, SHA-512, SHA-512/224, SHA-512/256, SHA-3-224, SHA-3-256, SHA-3-384, SHA-3-512] that meet the following: [**selection**: ISO/IEC 10118-3:2018 [SHA, SHA3], FIPS PUB 180-4 [SHA], FIPS PUB 202 [SHA3]].

Application Note: The hash selection should be consistent with the overall strength of the algorithm used for signature generation. For example, the TOE should choose SHA-256 for 2048-bit RSA or ECC with P-256; SHA-384 for 3072-bit RSA, 4096-bit RSA, or ECC with P-384; and SHA-512 for ECC with P-521. The ST author selects the standard based on the algorithms selected.

SHA-1 may be used as a general hash function and for the following applications: generating and verifying hash-based message authentication codes (HMACs), key derivation functions (KDFs), and random bit/number generation. SHA-1 may also be used for verifying old digital signatures and time stamps, if this is explicitly allowed by the application domain. SHA-1 should not be used in applications in which collision resistance is needed.

Evaluation Activities ▼

FCS_COP.1/Hash

TSS

TBD

Guidance

TBD

Tests

The following tests require the developer to provide access to a test platform that provides the

evaluator with tools that are typically not found on factory products.

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

SHA-1, SHA2-224, SHA2-256, SHA2-384, SHA2-512, SHA2-512/224, SHA2-512/256

To test the TOE's ability to generate hash digests using SHA-1 and SHA2 the evaluator shall perform the Algorithm Functional Test, Monte Carlo Test, and Large Data Test for each claimed SHA-1 and SHA2 algorithm.

Algorithm Functional Test

The evaluator shall generate a number of test cases equal to the block size of the hash (512 for SHA-1, SHA2-224, and SHA2-256; 1024 for the other SHA2 algorithms).

Each test case is to consist of random data of a random length between 0 and 65536 bits, or the largest size supported.

Each test case is to consist of random data of a random length between 0 and 65536 bits, or the largest size supported.

Monte Carlo Test

Monte Carlo tests begin with a single seed and run 100 iterations of the chained computation.

There are two versions of the Monte Carlo test for SHA-1 and SHA-2. Either one is acceptable. For the Standard Monte Carlo test the message hashed is always three times the length of the initial seed.

```
For j = 0 to 99
    A = B = C = SEED
    For i = 0 to 999
        MSG = A || B || C
        MD = SHA(MSG)
        A = B
        B = C
        C = MD
    Output MD
    SEED = MD
```

For the alternate version of the Monte Carlo Test, the hashed message is always the same length as the seed.

```
INITIAL_SEED_LENGTH = LEN(SEED)
For j = 0 to 99
    A = B = C = SEED
    For i = 0 to 999
        MSG = A || B || C
        if LEN(MSG) >= INITIAL_SEED_LENGTH:
            MSG = leftmost INITIAL_SEED_LENGTH bits of MSG
        else:
            MSG = MSG || INITIAL_SEED_LENGTH - LEN(MSG) 0 b
        MD = SHA(MSG)

        A = B
        B = C
        C = MD
    Output MD
    SEED = MD
```

The evaluator shall compare the output against results generated by a known-good implementation with the same input.

Large Data Test

The implementation must be tested against one test case each on large data messages of 1GB, 2GB, 4GB, and 8GB of data as supported. The data need not be random. It may, for example, consist of a repeated pattern of 64 bits.

The evaluator shall compare the output against results generated by a known-good implementation with the same input.

SHA3-224, SHA3-256, SHA3-384, SHA3-512 To test the TOE's ability to generate hash digests using SHA3 the evaluator shall perform the Algorithm Functional Test, Monte Carlo Test, and Large Data Tests for each claimed SHA3 algorithm.

Algorithm Functional Test

Generate a test case consisting of random data for every message length from 0 bits (or the smallest supported message size) to rate bits, where rate equals

- 1152 for SHA3-224,
- 1088 for SHA3-256,

- 832 for SHA3-384, and
- 576 for SHA3-512.

Additionally, generate tests cases of random data for messages of every multiple of (rate+1) bits starting at length rate, and continuing until 65535 is exceeded.

The evaluator shall compare the output against results generated by a known-good implementation with the same input.

Monte Carlo Test

Monte Carlo tests begin with a single seed and run 100 iterations of the chained computation.

For this Monte Carlo Test, the hashed message is always the same length as the seed.

```

MD[0] = SEED
INITIAL_SEED_LENGTH = LEN(SEED)
For 100 iterations
    For i = 1 to 1000
        MSG = MD[i-1];
        if LEN(MSG) >= INITIAL_SEED_LENGTH:
            MSG = leftmost INITIAL_SEED_LENGTH bits of MSG
        else:
            MSG = MSG || INITIAL_SEED_LENGTH - LEN(MSG) 0 b
        MD[i] = SHA3(MSG)
    MD[0] = MD[1000]
    Output MD[0]

```

The evaluator shall compare the output against results generated by a known-good implementation with the same input.

Large Data Test

The implementation must be tested against one test case each on large data messages of 1GB, 2GB, 4GB, and 8GB of data as supported. The data need not be random. It may, for example, consist of a repeated pattern of 64 bits.

The evaluator shall compare the output against results generated by a known-good implementation with the same input.

FCS_COP.1/KeyedHash Cryptographic Operation - Keyed Hash

The inclusion of this selection-based component depends upon selection in FCS_STG_EXT.3.1, FDP_ITC_EXT.1.2.

This component must be included in the ST if any of the following SFRs are included:

- [FCS_IPSEC_EXT.1](#)

This component may also be included in the ST as if optional.

FCS_COP.1.1/KeyedHash

The TSF shall perform [keyed hash message authentication] in accordance with a specified cryptographic algorithm [**selection**: Keyed Hash Algorithm] and cryptographic key sizes [**selection**: Cryptographic key sizes] that meet the following: [**selection**: List of standards]

The following table provides the recommended choices for completion of the selection operations of [FCS_COP.1/KeyedHash](#).

Table 19: Recommended choices for FCS_COP.1/KeyedHash

Keyed Hash Algorithm	Cryptographic key sizes	List of standards
HMAC-SHA-1	[selection : (ISO, FIPS) 160, (FIPS) 128] bits	[selection : ISO/IEC 9797-2:2021 (Section 7 "MAC Algorithm 2"), FIPS PUB 198-1]
HMAC-SHA-224	[selection : 224 (ISO, FIPS), 192 (FIPS), 128 (FIPS)] bits	[selection : ISO/IEC 9797-2:2021 (Section 7 "MAC Algorithm 2"), FIPS PUB 198-1]
HMAC-SHA-256	[selection : 256 (ISO, FIPS), 192 (FIPS), 128 (FIPS)] bits	[selection : ISO/IEC 9797-2:2021 (Section 7 "MAC Algorithm 2"), FIPS PUB 198-1]
HMAC-SHA-384	[selection : 384 (ISO, FIPS), 256 (FIPS), 192 (FIPS), 128 (FIPS)] bits	[selection : ISO/IEC 9797-2:2021 (Section 7 "MAC Algorithm 2"), FIPS PUB 198-1]
HMAC-SHA-	[selection : 512 (ISO,	[selection : ISO/IEC 9797-2:2021

512	<i>FIPS), 384 (FIPS), 256 (FIPS), 192 (FIPS), 128 (FIPS)] bits</i>	<i>(Section 7 "MAC Algorithm 2"), FIPS PUB 198-1]</i>
KMAC128	128 bits	[selection: ISO/IEC 9797-2:2021 (Section 9 "MAC Algorithm 4"), NIST SP 800-185 (Section 4 "KMAC")]
KMAC256	256 bits	[selection: ISO/IEC 9797-2:2021 (Section 9 "MAC Algorithm 4"), NIST SP 800-185 (Section 4 "KMAC")]
KMACXOF128	[assignment: integer 256 le Lk lt 2^{2040}]	[selection: ISO/IEC 9797-2:2021 (Section 9 "MAC Algorithm 4"), NIST SP 800-185 (Section 4 "KMAC")]
KMACXOF256	[assignment: integer 256 le Lk lt 2^{2040}]	[selection: ISO/IEC 9797-2:2021 (Section 9 "MAC Algorithm 4"), NIST SP 800-185 (Section 4 "KMAC")]

Application Note: The HMAC minimum key sizes in the table are specified in ISO/IEC 9797-2:2021, which requires that the minimum key size be equal to the digest size. The FIPS standard specifies no minimum or maximum key sizes, so if FIPS PUB 198-1 is selected, larger or smaller key sizes may be used. This is indicated by the parenthesized annotations in the Cryptographic Key Sizes column.

If "KMACXOF128" or "KMACXOF256" is selected as Keyed Hash Algorithm, then [FCS_COP.1/XOF](#) must be claimed.

Evaluation Activities ▾

[FCS_COP.1/KeyedHash](#)

TSS

TBD

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

HMAC

Keyed Hash Algorithm	Cryptographic Key Sizes	List of Standards
HMAC-SHA-1	[selection: (ISO, FIPS) 160, (FIPS) 128] bits	[selection: ISO/IEC 9797-2:2021 (Section 7 "MAC Algorithm 2"), FIPS PUB 198-1]
HMAC-SHA-224	[selection: (ISO, FIPS) 224, (FIPS) 192, 128] bits	[selection: ISO/IEC 9797-2:2021 (Section 7 "MAC Algorithm 2"), FIPS PUB 198-1]
HMAC-SHA-256	[selection: (ISO, FIPS) 256, (FIPS) 192, 128] bits	[selection: ISO/IEC 9797-2:2021 (Section 7 "MAC Algorithm 2"), FIPS PUB 198-1]
HMAC-SHA-384	[selection: (ISO, FIPS) 384, (FIPS) 256, 192, 128] bits	[selection: ISO/IEC 9797-2:2021 (Section 7 "MAC Algorithm 2"), FIPS PUB 198-1]
HMAC-SHA-512	[selection: (ISO, FIPS) 512, (FIPS) 384, 256, 192, 128] bits	[selection: ISO/IEC 9797-2:2021 (Section 7 "MAC Algorithm 2"), FIPS PUB 198-1]

To test the TOE's ability to generate keyed hashes using HMAC the evaluator shall perform the Algorithm Functional Test for each combination of claimed HMAC algorithm and key size.

Algorithm Functional Test

The evaluator shall generate 75 test cases using random data such that the message sizes are equally divided between:

- Messages that are less than the maximum supported MAC length
- Messages that are equal to the maximum supported MAC length
- Messages that are greater than the maximum supported MAC length

The evaluator shall compare the output against results generated by a known-good implementation with the same input.

KMAC

Keyed Hash Algorithm	Cryptographic Key Sizes	List of Standards
KMAC128	128 bits	[selection: ISO/IEC 9797-2:2021 (Section 9 "MAC Algorithm 4"), NIST SP 800-185 (Section 4 "KMAC")]
KMAC256	256 bits	[selection: ISO/IEC 9797-2:2021 (Section 9 "MAC Algorithm 4"), NIST SP 800-185 (Section 4 "KMAC")]

To test the TOE's ability to generate keyed hashes using KMAC the evaluator shall perform the Algorithm Functional Test and MAC Verification Test for each claimed KMAC algorithm using the following input parameters:

- Input message length [0-65536] bits
- Key length [128, 256] bits
- Customization bit string length [no range?]

Algorithm Functional Test

The evaluator shall generate 75 test cases using random data such that the message sizes are equally divided between. For each key size, the evaluator shall generate 100 test cases using random data and random values for input message length, customization string length, and customization string.

At least one test case should include minimum supported values for input message length and customization string length. Test cases should also include the maximum supported values for input message length.

The evaluator shall compare the output against results generated by a known-good implementation with the same input.

MAC Verification Tests

For each key size, the evaluator shall generate 100 test cases as above. In half of the test cases, the evaluator shall modify the MAC so that verification fails.

The evaluator shall determine that the results are as expected.

KMACXOF

Keyed Hash Algorithm	Cryptographic Key Sizes	List of Standards
KMACXOF128	[assignment: integer $256 \leq L_k < s^{2040}$ bits]	[selection: ISO/IEC 9797-2:2021 (Section 9 "MAC Algorithm 4"), NIST SP 800-185 (Section 4 "KMAC")]
KMACXOF256	[assignment: integer $256 \leq L_k < s^{2040}$ bits]	[selection: ISO/IEC 9797-2:2021 (Section 9 "MAC Algorithm 4"), NIST SP 800-185 (Section 4 "KMAC")]

To test the TOE's ability to generate keyed hashes using KMACXOF the evaluator shall perform the Algorithm Functional Test and MAC Verification Test for each claimed KMACXOF algorithm using the following input parameters:

- Input message length [0-65536] bits
- Key length [256-524288] bits in increments of 8
- Customization bit string length [range?]
- MAC output length [16-65536] bits

Algorithm Functional Test

For each key size, the evaluator shall generate 100 test cases using random data and random values for input message length, key length, customization string length, customization string, and MAC output length.

At least one test case should include minimum supported values for input message length, key length, customization string length, and output MAC length. Test cases should also include the maximum supported values for input message length and output MAC length.

Should there be one test with all the minimum lengths? Or just make sure they show up somewhere among all the tests? The evaluator shall compare the output against results

generated by a known-good implementation with the same input.

MAC Verification Tests

For each key size, the evaluator shall generate 100 test cases as above. In half of the test cases, the evaluator shall modify the MAC so that verification fails.

The evaluator shall determine that the results are as expected.

FCS_COP.1/SigGen Cryptographic Operation - Signature Generation

The inclusion of this selection-based component depends upon selection in FCS_STG_EXT.3.1.

This component may also be included in the ST as if optional.

FCS_COP.1.1/SigGen

The TSF shall perform [digital signature generation] in accordance with a specified cryptographic algorithm [**selection**: *Cryptographic algorithm*] and cryptographic key sizes [**selection**: *Cryptographic key sizes*] that meet the following: [**selection**: *List of standards*]

The following table provides the recommended choices for completion of the selection operations of **FCS_COP.1/SigGen**.

Table 20: Recommended choices for FCS_COP.1/SigGen

Identifier	Cryptographic algorithm	Cryptographic key sizes	List of standards
RSA-PKCS	RSASSA-PKCS1-v1_5	Modulus of size [selection : 2048, 3072, 4096] bits, hash or XOF [selection : SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512]	RFC 8017 (Section 8.2) [PKCS #1 v2.2] FIPS PUB 186-5 (Section 5.4) [RSASSA-PKCS1-v1_5]
RSA-PSS	RSASSA-PSS	Modulus of size [selection : 2048, 3072, 4096] bits, hash or XOF [selection : SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE128, SHAKE256]	RFC 8017 (Section 8.1) [PKCS#1 v2.2] FIPS PUB 186-5 (Section 5.4) [RSASSA-PSS]
ECDSA	ECDSA	Elliptic Curve [selection : NIST P-256, brainpoolP256r1, NIST P-384, brainpoolP384r1, NIST P-521, brainpoolP512r1], per-message secret number generation [selection : extra random bits, rejection sampling, deterministic] and hash or XOF function using [selection : SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE128, SHAKE256]	[selection : ISO/IEC 14888-3:2018 (Subclause 6.6), FIPS PUB 186-5 (Sections 6.3.1, 6.4.1)] [ECDSA] [selection : RFC 5639 (Section 3) [Brainpool Curves], NIST SP-800 186 (Section 4) [NIST Curves]]
EdDSA	Edwards-Curve Digital Signature Algorithm	Domain parameters approved for elliptic curves [selection : Edwards25519, Edwards448]	NIST FIPS PUB 186-5 (Section 7.6) [EdDSA] RFC 8032

			[Edwards Curves]
LMS	LMS	<p>Private key size = [selection: • 192 bits with [selection: SHA-256/192, SHAKE256/192] • 256 bits with [selection: SHA-256, SHAKE256]]</p> <p>Winternitz parameter = [selection: 1, 2, 4, 8]</p> <p>Tree height = [selection: 5, 10, 15, 20, 25]</p>	RFC 8554 [LMS] NIST SP 800-208 [parameters]
HSS	Multitree version of LMS	<p>Private key size = [selection: • 192 bits with [selection: SHA-256/192, SHAKE256/192] • 256 bits with [selection: SHA-256, SHAKE256]]</p> <p>Winternitz parameter = [selection: 1, 2, 4, 8]</p> <p>Tree height = [selection: 5, 10, 15, 20, 25]</p> <p>Number of levels = [selection: 1, 2, 3, 4, 5, 6, 7, 8]</p>	RFC 8554 [HSS] NIST SP 800-208 [parameters]
XMSS	XMSS	<p>Private key size = [selection: • 192 bits with [selection: SHA-256/192, SHAKE256/192] • 256 bits with [selection: SHA-256, SHAKE256]]</p> <p>Tree height = [selection: 10, 16, 20]</p>	RFC 8391 [XMSS] NIST SP 800-208 [parameters]
ML-DSA	ML-DSA Signature Generation	Parameter set = [selection: ML-DSA-44, ML-DSA-65, ML-DSA-87]	NIST FIPS 204 (Section 5.2)
HashML-DSA	HashML-DSA Signature Generation	Parameter set = [selection: ML-DSA-44, ML-DSA-65, ML-DSA-87] and hash function [selection: SHA-256, SHA-512/256, SHA3-256, SHAKE128, SHA-384, SHA3-384, SHA-512, SHA3-512, SHAKE256]	NIST FIPS 204 (Section 5.2)

Application Note: This SFR must be included in the ST if digital signature generation is a service provided by the TOE to tenant software, or if digital signature generation is used by the TOE itself to support or implement PP-specified security functionality.

Specifically, this SFR must be included if "A digital signature of the stored key in accordance with [FCS_COP.1/SigGen](#) using an asymmetric key that is protected in accordance with [FCS_STG_EXT.2](#)" is selected in [FCS_STG_EXT.3](#).

If this SFR is included in the ST, then [FCS_COP.1/Hash](#) and [FCS_RBG.1](#) must also be claimed.

From catalog The dependency on [FCS_OTV_EXT.1](#) is needed only for signature schemes that require random bits, such as ECDSA, LMS, HSS, XMSS, XMSS^{MT}, and ML-DSA.

Evaluation Activities ▼

[FCS_COP.1/SigGen](#)
TSS
TBD

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

Boilerplate text goes here

RSA-PKCS Signature Generation

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
RSA-PKCS	RSASSA-PKCS1-v1_5	Modulus of size [selection: 2048, 3072, 4096] bits, hash or XOF [selection: SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512]	RFC 8017 (Section 8.2) [PKCS #1 v2.2] NIST FIPS PUB 186-5 (Section 5.4) [RSASSA-PKCS1-v1_5]

To test the TOE's ability to perform RSA Digital Signature Generation using PKCS1-v1,5 signature type, the evaluator shall perform the Generated Data Test using the following input parameters:

- Modulus size [2048, 3072, 4096] bits
- Hash algorithm [SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512]

Generated Data Test

For each supported combination of the above parameters, the evaluator shall cause the TOE to generate three test cases using random data. The evaluator shall compare the results against those from a known-good implementation.

RSA-PSS Signature Generation

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
RSA-PSS	RSASSA-PSS	Modulus of size [selection: 2048, 3072, 4096] bits, hash or XOF [selection: SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE128, SHAKE256]	RFC 8017 (Section 8.2) [PKCS #1 v2.2] NIST FIPS PUB 186-5 (Section 5.4) [RSASSA-PSS]

To test the TOE's ability to perform RSA Digital Signature Generation using PSS signature type, the evaluator shall perform the Generated Data Test using the following input parameters:

- Modulus size [2048, 3072, 4096] bits
- Hash or XOF algorithm [SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE128, SHAKE25]
- Salt length [0-hash length] bits Is this paired with hash alg?
- Mask function [MGF1, SHAKE128, SHAKE256]

Generated Data Test

For each supported combination of the above parameters, the evaluator shall cause the TOE to generate three test cases using random data. The evaluator shall compare the results against those from a known-good implementation.

ECDSA Signature Generation

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
ECDSA	ECDSA	Elliptic Curve [selection: P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1], per-message secret number generation [selection: extra random bits, rejection sampling, deterministic] and hash or XOF function using [selection: SHA256, SHA-	[selection: ISO/IEC 14888-3:2018 (Subclause 6.6), NIST FIPS PUB

		384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE-128, SHAKE256]	186-5 (Sections 6.3.1, 6.4.1] [ECDSA] [selection: RFC 5639 (Section 3) [Brainpool Curves], NIST SP-800 186 (Section 4) [NIST Curves]]
--	--	--	--

To test the TOE's ability to perform ECDSA Digital Signature Generation using extra random bits or rejection sampling for secret number generation, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- Elliptic Curve [P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1]
- Hash algorithm [SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE-128, SHAKE-256]

To test the TOE's ability to perform ECDSA Digital Signature Generation using deterministic secret number generation, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- Elliptic Curve [P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1]
- Hash algorithm [SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512]

Algorithm Functional Test

For each supported combination of the above parameters, the evaluator shall cause the TOE to generate 10 test cases using random data. The evaluator shall compare the results against those from a known-good implementation.

EdDSA Signature Generation

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
EdDSA	Edwards-Curve Digital Signature Algorithm	Domain parameters approved for elliptic curves [selection: Edwards25519, Edwards448]	NIST FIPS PUB 186-5 (Section 7.6) [EdDSA] RFC 8032 [Edwards Curves]

To test the TOE's ability to perform EdDSA Digital Signature Generation, the evaluator shall perform the Algorithm Functional Test and Bit Flip Test using the following input parameters:

- Elliptic Curve [Edwards25519, Edwards448]
- Length context string [0-255] bytes
 - Context string is required for curve Edwards448 or PreHash EdDSA
 - Context string is not allowed for curve Edwards25519 when Pure EdDSA (required for 448 curve or prehash) (not allowed when 25519 and PreHash is false)
- Supports [Pure EdDSA, PreHash EdDSA]

Algorithm Functional Test

For each supported combination of the above parameters, the evaluator shall cause the TOE to generate 10 test cases using random data. The evaluator shall compare the results against those from a known-good implementation.

Bit Flip Test

For this test, the evaluator shall flip individual bits in a message to ensure that the TOE produces distinct signatures for each message. How many of these? Do we compare signed bit flip message with signed original message to make sure different?

LMS and HSS Signature Generation

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
LMS	LMS	Private key size = [selection: 192 bits with [selection: SHA256/192, SHAKE256/192], 256	RFC 8554 [LMS]

		bits with [selection: SHA-256, SHAKE256]] , Winternitz parameter = [selection: 1, 2, 4, 8], and tree height = [selection: 5, 10, 15, 20, 25]	NIST SP 800-208 [parameters]
HSS	Multitree version of LMS	Private key size = [selection: 192 bits with [selection: SHA256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]] , Winternitz parameter = [selection: 1, 2, 4, 8], tree height = [selection: 5, 10, 15, 20, 25] and number of levels [selection: 1, 2, 3, 4, 5, 6, 7, 8]	RFC 8554 [HSS] NIST SP 800-208 [parameters]

To test the TOE's ability to generate cryptographic digital signature using LMS or HSS, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- Hash algorithm [SHA-256/192, SHAKE256/192, SHA-256, SHAKE256]
- Winterlitz [1, 2, 4, 8]
- Tree height [5, 10, 15, 20, 25]
- Number of levels [1, 2, 3, 4, 5, 6, 7, 8] (HSS only)

Algorithm Functional Test

For each supported combination of the above parameters, the evaluator shall generate 10 signatures. The evaluator shall verify the correctness of the implementation by comparing values generated by the TOE with those generated by a known good implementation using the same input parameters.

For HSS, use the hierarchy created during the key generation using LMS trees. Level 1 testing is equivalent to an LMS test. At each supported level 2 through 8, generate 4 HSS signatures for each LMS tree found at that level. The evaluator shall verify the correctness of the implementation by comparing values generated by the TOE with those generated by a known good implementation using the same input parameters.

XMSS and XMSS^{MT} Signature Generation

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
XMSS	XMSS	Private key size = [selection: 192 bits with [selection: SHA256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]] , and tree height = [selection: 10, 16, 20]	RFC 8391 [XMSS] NIST SP 800-208 [parameters]
XMSS ^{MT}	Multitree version of XMSS	Private key size = [selection: 192 bits with [selection: SHA256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]] , (total tree height, number of levels) = [selection: (20, 2), (20, 4), (40, 2), (40, 4), (40, 8), (60, 3), (60, 6), (60, 12)]	RFC 8391 [XMSS ^{MT}] NIST SP 800-208 [parameters]

To test the TOE's ability to generate digital signatures using XMSS or XMSS^{MT}, the evaluator shall perform the XMSS Key Generation Test using the following input parameters:

- Hash algorithm [SHA-256/192, SHAKE256/192, SHA-256, SHAKE256]
- Tree height [10, 16, 20] (XMSS only)
- Tree height/levels [20/2, 20/4, 40/2, 40/4, 40/8, 60/3, 60/6, 60/12] (XMSS^{MT} only)

XMSS Key Generation Test

For each supported combination of the above parameters, the evaluator shall generate the following number of keys depending on the tree height:

Table 21: Number of Test Cases for XMSS and XMSS^{MT}

Height	Number of test cases
10	5
16	4
20	3
40	2
60	1

Note: The number of test cases is limited due to the extreme amount of time it can take to

generate XMSS trees.

The evaluator shall verify the correctness of the TSF's implementation by comparing values generated by the TSF with those generated by a known good implementation using the same input parameters.

ML-DSA Signature Generation

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
ML-DSA	ML-DSA SigGen	Parameter set = [selection: ML-DSA-44, ML-DSA-65, ML-DSA-87]	NIST FIPS PUB 204 (Section 5.2)
HashML-DSA	HashML-DSA SigGen	Parameter set = [selection: ML-DSA-44, ML-DSA-65, ML-DSA-87], and hash Function [selection: SHA-256, SHA-512/256, SHA3-256, SHAKE128, SHA-384, SHA3-384, SHA-512, SHA3-512, SHAKE256]	NIST FIPS PUB 204 (Section 5.4)

To test the TOE's ability to generate digital signatures using ML-DSA and HashML-DSA, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- Parameter set [ML-DSA-44, ML-DSA-65, ML-DSA-87]
- Seed [32 random bytes] (for non-deterministic signature testing), or
- Seed [32 zero bytes] (for deterministic signature testing)
- Message to sign [8-65535] bytes
- Mu value (if generated externally)
- Previously generated private key (sk)
- Context (for external interface testing)
- Hash algorithm (HashML-DSA only)

The permitted hash algorithms for HashML-DSA testing are as follows:

- HashML-DSA-87 [SHA-512, SHA3-512, SHAKE256]
- HashML-DSA-65, above plus [SHA-384, SHA3-384]
- HashML-DSA-44, above plus [SHA-256, SHA-512/256, SHA3-256, SHAKE128]

Algorithm Functional Test

For each combination of supported parameter set and capabilities, the evaluator shall require the implementation under test to generate 15 signatures pairs using 15 different randomly generated 32-byte seed values. For HashML-DSA testing, each supported and permitted hash or XOF need appear in only one of each group of 15 test cases. To determine correctness, the evaluator shall compare the resulting key pairs with those generated using a known-good implementation using the same inputs.

Known Answer Test for Rejection Cases

For each supported parameter set, the evaluator shall cause the TOE to generate signatures using the data in the below table and a deterministic seed of all 0's. Correctness is determined by comparing the hash of the resulting signature with the hash in the 5 th column.

Table 22: ML-DSA sigGen Known Answer Tests for Rejection Cases

Security Level	Seed to generate Key pair	Hash of keys SHA-256(pk sk)	Message	Hash of Resulting Signature SHA-256(sig)
ML-DSA-44	5C624FCC 18624524 52D0C665 840D8237 F43108E5 499EDCDC 108FBC49 D596E4B7	AC825C59 D8A4C453 A2C4EFEA 8395741C A404F300 0E28D56B 25D03BB4 02E5CB2F	951FDF54 73A4CBA6 D9E5B5DB 7E79FB81 73921BA5 B13E9271 401B8F90 7B8B7D5B	DCC71A42 1BC6FFAF B7DF0C7F 6D018A19 ADA154D1 E2EE360E D533CECD 5DC980AD
ML-DSA-44	836EABED B4D2CD9B E6A4D957 CF5EE6BF 48930413 6864C55C 48930413	E1FF40D9 6E3552FA B531D171 5084B7E3 8CCDBACC 0A8AF94C 30959FB4	199A0AB7 35E90041 63DD02D3 19A61CFE 81638E3B F47BB1E9 0E90D6E3	A2608BC2 7E60541D 27B6A14F 460D54A4 8C0298DC C3F45999 F29047A3

	6864C55C 2C5F01DA 5047D18B	C7F5A445	EA545247	135C4941	
ML-DSA-44	CA5A01E1 EA6552CB 5C980346 2B94C2F1 DC9D13BB 17A6ACE5 10D15705 6A2C6114	A4652DC4 A2710952 68DD84A5 B0744DFD BE2E642E 4D41FBC4 329C2FBA 534C0E13	8C8CAC8 8FFF52B9 33051053 7B3701B3 993F3726 136A650F 48F86045 51550832	B4B14220 9137397D AD504CAE D01D390A DAF49973 D8D2414F C3457FB7 AF775189	
ML-DSA-44	9C005F15 50B4F318 55C6B92F 97873673 3F37791C B39DD182 D7BA5732 BDC2483E	2485AA99 345F1B33 4D4D94B6 10FBFFCC B626CBFD 4E9FF0E1 F6FC3509 3C423544	B744343F 30F7FEE0 88998BA5 74E799F1 BF3939C0 6C29BF9A C10F3588 A57E21E2	5B80A60B AA480B9D 0C7D2C05 B50928C4 BF6808DD A6936420 58A3EB77 EAA768FC	
ML-DSA-44	4FAB5485 B009399E 8AE6FC3D 3EEFBFE8 E09796E4 477AABD5 EB1CC908 FA734DE3	CB56909A 7CF3008A 662DC635 EDCB79DC 151CA7AC BAE17B54 4384ABD9 1BBBC1E9	7CAB0FDC F4BEA5F0 39137478 AA45C9C4 8EF96D90 6FC49F6E 2F138111 BF1B4A4E	6CC38D73 D639682A BC556DC6 DCF436DE 24033091 F34004F4 10FABC68 87F77AB0	
ML-DSA-65	CCD61917 2D0978FD B584D433 CB5A044C 8D24592D AD4D1E57 ECF1FD62 C40A309B	756C734D B013F83E 295F2878 B32F1633 5D576249 B16D83AF EDE1F5D4 CC36D24F	8A32D4B5 D3C8537A A9C7C952 F63959C6 6162A68D 5F3D02E6 C5F96E2C EA41D2EF	958287F1 646D855B B065895A 6C6DA3DF 6A3F7AB2 A430C9DC 559D313E 7DD0A527	
ML-DSA-65	C6315FC7 19895D16 454B7D62 084F0C8A 2903D8D0 0DC1D82E B3F45F06 463C6FBD	CEE1A1C7 F966A411 BB94C38A 0E33E1F7 102D3130 FA9C5D27 96F3F7F8 6ECF4B1D	D8CB8B23 931495FD F71477DB 7C335A15 1C6A9096 97F1C39A 3175133B 68881F28	BD57A932 31EFEF6B 4E7FE374 E2194DB7 E00202EA F5EFC60D F5F9FE1C 5F579D06	
ML-DSA-65	F005E473 8B528F95 3669A2BC A3925266 DBD23909 CD2C4DCE 50B980D7 89EBD0D4	D3E33502 CCC035C9 B9195A27 14FE7ECE DD13DFF4 B854F237 6D993D38 A8E8AFF2	EF1FE025 F8DF1FDC FDAFD188 F68B9D10 85AE8D09 234EBDAD 67DE985B A7347DE4	9E7B668C 51B250B1 2ED76665 BB4315CE 4BDBAF00 BF927F6D 895F0601 0D3BBC0E	
ML-DSA-65	F215BA22 80D86F14 2012FC05 FFC04F2C 7D22FF5D D7D69AA0 EFB081E3 A53E9318	17FBD1D1 7DAACEA7 A2F6DA1F 22835E86 30E8AE8E F1A66E8B 7935CC6C C762532D	A4FADC3C 232F2ABC 8FCBB9C1 11F261E0 3DC2FF2D 57280A42 42936A63 E481AFE6	C027D21B 21FA75AB E7F35CD8 4A54E2E8 3BD35214 0BC8C49E AB2C4500 4E7268A7	
ML-DSA-65	A8E6C084 B3AAE469 0724631C AA57C10D F5973F95 38D25493 E264A4E2 B2C5A4E9	D8B7DE2D A326EBAE 241D657E C090F4CA 3438DFFE ECE1BD05 D9CE7DFC 5204C6DC	A45A91B6 B2B392B7 087152D2 3E57E39A A78A42AB 91AAD034 4FB80393 F22FB0AE	C9DB2B64 2F739B32 ED5B14B8 FEEE6C77 9BAE7297 17D4FF11 CA281954 D8FF1B1D	
ML-DSA-87	5AC68A41 71730B1E 920CC3E7	2446AB05 EEC3977C 40650338	172F6D49 AF757918 823A75E9	3784755A C5A2D572 0623E504	

		CC4ACA79 C25A3621 0057373B 6BCEBCDF A144CE18	983EEBF7 8942AC31 F5E94454 3E87DBAC 0A4889C1	81D605DD AF74BF21 009AC836 D8B4C0AA BB49C14C	707C3088 61EF4177 A6460FBE B4DB257A AA245B55
ML-DSA-87		E45F9CC0 43C2C0F4 BEBCAD28 60CAF77 C8211237 D7AAA108 A56E3ACA 92D207F7	F5B727CA 02B6F302 5135926A 5FCA2A64 A800579C BFD44863 A08ABA5F E6C33B46	86B5A936 1F73427E BA3EEF5D 46112B74 67CEDFB C77EF36C 94EF0666 C1AD37B6	E8276BF4 D57752D7 7C6EAE2B 80050ED2 OCF15344 B69E5150 F9479290 3EA3790A
ML-DSA-87		5E37A143 C0FFAEF6 00F33C37 6589069A 7A0CE2FA C36DBEFE C42C5A60 167D5A12	C210312C 242E0642 F990328A BFCD1189 D24EB8E9 C122BB6D FEFCF02D 4FCF6224	9A72DFEB 5CDAD43D 3A416F8A D7B6676D 5528DDDA 661C3513 B6A460DB 74331F51	B39E8111 5160026D A5528C40 B90EA146 64BFC22E 261023A7 DC419451 288ED93F
ML-DSA-87		51DF520B 9084E48B 72EAEBA7 FE36B540 05CD963B 58CC25DE 79339948 FD561065	3ECF7F6A 89387291 18CC21A1 5B2B5933 7B24FD34 38FB132D 0162E53C 28CB374C	28EFCAD1 C1B528E0 E46CB25D 28FA21DB A893010B 3C741D73 1460988B 66985D78	02FA4CF7 BF7F5BD1 3874C77B 30DAF708 BAA3E2C0 97D4298B F242A07B F68D7AD6
ML-DSA-87		6857AF5C 878EFF78 92F1722D 8CE11F47 84B9D144 B50B23B5 3070963B 501054E6	9A2B47D3 4624BA79 7ECE8C7C 67FAADB2 B2DA6C5C 802B3CFB 22D8167F 4B52D6EB	3165118C 135D81E4 6700B182 80A8D01D F39A4B1A 9C24748A EE3FC320 62DD251E	697E02D5 0185F96C 420015F1 C03A2DD4 64593E0A BD0493E0 99D8774B 26C30C2F

Known Answer Test for Large Number of Rejection Cases

For each supported parameter set, the evaluator shall cause the TOE to generate signatures using the data in the below table and a deterministic seed of all 0's. Correctness is determined by comparing the hash of the resulting signature with the hash in the 6 th column.

Table 23: ML-DSA sigGen Known Answer Tests for Large Number of Rejection Cases

Security Level	Rejection Count	Seed to generate Key pair	Hash of keys SHA-256(pk sk)	Message	Hash of Resulting Signature SHA-256(sig)
ML-DSA-44	77	090D97C1 F4166EB3 2CA67C5F B564ACBE 0735DB4A F4B8DB3A 7C2CE740 2357CA44	26D79E40 68040E99 6BC9EB50 34C20489 C0AD38DC 2FEC1918 D0760C86 21872408	E3838364 B37F47ED FCA2B577 B20B80C3 CB51B9F5 6E0E4CDB 7DF002C8 74039252	CD91150C 610FF02D E1DD7049 C309EFE8 00CE5C1B C2E5A32D 752AB62C 5BF5E16F
ML-DSA-44	100	CFC73D07 A883543A 804F7700 70861825 143A62F2 F97D05FC E00FD8B2 5D29A43F	89142AB2 6D6EB6C0 1FA3F189 A9C87759 7740D685 983F29BB DD359664 8266AE0E	0960C13E 9BA467A9 38450120 CC96FF6F 04B7E557 C99A8386 19A48F9A 38738AB8	B6296FFF 0C1F23DE 4906D581 44B00A2D B13AD25E 49B4B857 3A62EFEE CB544DD7
ML-DSA-65	111	111BDFD1 3CF30B4A 05F8C56E 91E20025 B284EFDC	C06FE457 14696FF2 C77BB4CD 96E70BE9 539117AC	A30975C7 C58ABC8F E7FAE442 FE20F964 410B74E9	CADA29AE EC8E59CD 70747C2E 4C83F963 7E3C2495

		<i>661C349D 430FB988 149219EE</i>	<i>3D2E3F77 C736B060 8D9E78B6</i>	<i>B4C1D47E 440223C5 A46DA72C</i>	<i>3F11ADEE F586F786 35B3E60A</i>
<i>ML-DSA-65</i>	<i>96</i>	<i>F3A3F2C3 263A7042 95E9D9F7 3CD97D02 F4682BEE 5949C416 BC42C85B 7C864446</i>	<i>997CEE99 5EECE252 8155E1AE 0095116C 6D97B150 8B76AD25 BAE4ADF6 B60AE6A2</i>	<i>1C00F3E4 CF07BD4F B797D683 76EEC537 01730C49 09EC404F C93A6B7F 597F81B5</i>	<i>006B205B FA8DFF6C 2AA4237A 6BB5A33D BD1B3D97 13B99A9D 5AF9A882 CD0BA1E0</i>
<i>ML-DSA-87</i>	<i>66</i>	<i>C4B614E8 3CF6E25A 159A542B 9E132AA0 68FACCD8 755AA8B4 E22C6F6C 0438BF16</i>	<i>5BCAD035 7C6F3911 68B00523 CD7B1333 5F95996B F5432545 5484B830 15925580</i>	<i>B9CFA245 C90359EF 041163A4 7231885E 56CB0215 984DE8A8 9941FE44 3CACCEB61</i>	<i>5B23E5CE C5B09134 2EF7D5BB 8C50285A 9666CF93 7BBE1758 532B341B 0942994B</i>
<i>ML-DSA-87</i>	<i>77</i>	<i>771E9543 4E410291 93D076B8 06F2C3C2 2A7F2060 287791E7 0F105ECA EAB7AD69</i>	<i>C56A924B F6B046DA 3CAC10B 72749ECF 54266B38 A7E3D5C5 81D0A44F 1F3995D8</i>	<i>C367382D 0E3FEE86 D29BAB0E E5FD6AE9 1B3A5A70 17A024CF 145A25F5 6A62B0B1</i>	<i>4996F774 3E90DAEB 61B5FF86 A868C9E5 195F201C 4E5F5A75 F4C79031 AAA6C544</i>

FCS_COP.1/SigVer Cryptographic Operation - Signature Verification

The inclusion of this selection-based component depends upon selection in FDP_ITC_EXT.1.2, FPT_ROT_EXT.2.1, FPT_TUD_EXT.1.1.

This component may also be included in the ST as if optional.

FCS_COP.1.1/SigVer

The TSF shall perform [digital signature verification] in accordance with a specified cryptographic algorithm [**selection**: *Cryptographic algorithm*] and cryptographic key sizes [**selection**: *Cryptographic key sizes*] that meet the following: [**selection**: *List of standards*]

The following table provides the recommended choices for completion of the selection operations of [FCS_COP.1/SigVer](#).

Table 24: Recommended choices for FCS_COP.1/SigVer

Identifier	Cryptographic algorithm	Cryptographic key sizes	List of standards
RSA-PKCS	RSASSA-PKCS1-v1_5	Modulus of size [selection : 2048, 3072, 4096] bits, hash or XOF [selection : SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512]	RFC 8017 (Section 8.2) [PKCS #1 v2.2] FIPS PUB 186-5 (Section 5.4) [RSASSA-PKCS1-v1_5]
RSA-PSS	RSASSA-PSS	Modulus of size [selection : 2048, 3072, 4096] bits, hash or XOF [selection : SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE128, SHAKE256]	RFC 8017 (Section 8.1) [PKCS#1 v2.2] FIPS PUB 186-5 (Section 5.4) [RSASSA-PSS]
DSA	DSA	Domain parameters for (L, N) = [selection : (2048, 224), (2048, 256), (3072, 256)] bits	FIPS PUB 186-4 (Section 4.7)

			[DSA Signature Verification]
ECDSA	ECDSA	Elliptic Curve [selection : <i>NIST P-256, brainpoolP256r1, NIST P-384, brainpoolP384r1, NIST P-521, brainpoolP512r1</i>] using hash or XOF [selection : <i>SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE128, SHAKE256</i>]	[selection : <i>ISO/IEC 14888-3:2018 (Subclause 6.6), FIPS PUB 186-5 (Section 6.4.2)</i>] [ECDSA]
EdDSA	Edwards-Curve Digital Signature Algorithm	Domain parameters approved for elliptic curves [selection : <i>Edwards25519, Edwards448</i>]	[selection : <i>RFC 5639 (Section 3) [Brainpool Curves], NIST SP-800 186 (Section 4) [NIST Curves]</i>] NIST FIPS PUB 186-5 (Section 7.6) [EdDSA]
LMS	LMS	Private key size = [selection : <ul style="list-style-type: none">• <i>192 bits with [selection: SHA-256/192, SHAKE256/192]</i>• <i>256 bits with [selection: SHA-256, SHAKE256]</i>] Winternitz parameter = [selection : <i>1, 2, 4, 8</i>] Tree height = [selection : <i>5, 10, 15, 20, 25</i>]	RFC 8554 [LMS] NIST SP 800-208 [parameters]
HSS	Multitree version of LMS	Private key size = [selection : <ul style="list-style-type: none">• <i>192 bits with [selection: SHA-256/192, SHAKE256/192]</i>• <i>256 bits with [selection: SHA-256, SHAKE256]</i>] Winternitz parameter = [selection : <i>1, 2, 4, 8</i>] Tree height = [selection : <i>5, 10, 15, 20, 25</i>] Number of levels = [selection : <i>1, 2, 3, 4, 5, 6, 7, 8</i>]	RFC 8554 [HSS] NIST SP 800-208 [parameters]
XMSS	XMSS	Private key size = [selection : <ul style="list-style-type: none">• <i>192 bits with [selection: SHA-256/192, SHAKE256/192]</i>• <i>256 bits with [selection: SHA-256, SHAKE256]</i>] Tree height = [selection : <i>10, 16, 20</i>]	RFC 8391 [XMSS] NIST SP 800-208 [parameters]
XMSS(MT)	Multitree version of XMSS	Private key size = [selection : <ul style="list-style-type: none">• <i>192 bits with [selection: SHA-256/192, SHAKE256/192]</i>]	RFC 8391 [XMSS(MT)] NIST SP 800-208

		<ul style="list-style-type: none"> • 256 bits with [selection: SHA-256, SHAKE256] [parameters]
		(Total Tree height, Number of Levels) = [selection : (20, 2), (20, 4), (40, 2), (40, 4), (40, 8), (60, 3), (60, 6), (60, 12)]
ML-DSA	ML-DSA Signature Verification	Parameter set = [selection : ML-DSA-44, ML-DSA-65, ML-DSA-87] NIST FIPS 204 (Section 5.3)
HashML-DSA	HashML-DSA Signature Generation	Parameter set = [selection : ML-DSA-44, ML-DSA-65, ML-DSA-87] and hash function [selection : SHA-256, SHA-512/256, SHA3-256, SHAKE128, SHA-384, SHA3-384, SHA-512, SHA3-512, SHAKE256] NIST FIPS 204 (Section 5.3)

Application Note: This SFR must be included in the ST if digital signature verification is a service provided by the TOE to tenant software, or if digital signature verification is used by the TOE itself to support or implement PP-specified security functionality.

Specifically, this SFR must be included if the ST Author chooses "*implement an authenticated platform firmware update mechanism as described in FPT_TUD_EXT.2*" or "*implement a delayed-authentication platform firmware update mechanism as described in FPT_TUD_EXT.3*" in [FPT_TUD_EXT.1](#); or if the ST Author selects "*verification of a digital signature by trusted code/data*" in [FPT_ROT_EXT.2](#).

If this SFR is included in the ST, then [FCS_COP.1/Hash](#) must also be claimed.

The ST Author should choose the algorithm implemented to perform verification of digital signatures. For the algorithm chosen, the ST Author should make the appropriate assignments/selections to specify the parameters that are implemented for that algorithm. In particular, if ECDSA is selected as one of the signature algorithms, the key size specified must match the selection for the curve used in the algorithm.

For elliptic curve-based schemes, the key size refers to the binary logarithm (log2) of the order of the base point. As the preferred approach for digital signatures, elliptic curves will be required after all the necessary standards and other supporting information are fully established.

From catalog The TOE may contain a public key which is integrity protected (e.g., in hardware), in which case the FDP_ITC.1 and FDP_ITC.2 dependencies do not apply. In this case, no dependencies may be chosen. For signature verifications, private keys are not necessary, so there are no dependencies required for generating or destroying cryptographic keys.

Evaluation Activities ▾

[FCS_COP.1/SigVer](#)
TSS
TBD

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

RSA-PKCS Signature Verification

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
RSA-PKCS	RSASSA-PKCS1-v1_5	Modulus of size [selection : 2048, 3072,	RFC 8017 (Section 8.2)

		<i>4096] bits, hash or XOF [selection: SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512]</i>	<i>[PKCS #1 v2.2] NIST FIPS PUB 186-5 (Section 5.4) [RSASSA-PKCS1-v1_5]</i>
--	--	--	---

To test the TOE's ability to perform RSA Digital Signature Verification using PKCS1-v1,5 signature type, the evaluator shall perform Generated Data Test using the following input parameters:

- Modulus size [2048, 3072, 4096] bits
- Hash algorithm [SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512]

Generated Data Test

For each supported combination of the above parameters, the evaluator shall cause the TOE to generate three test cases using a random message and its signature. A certain number of these must be modified so that the verification fails. [How many? How modified?] The TOE must correctly verify the unmodified signatures and fail to verify the modified signatures.

RSA-PSS Signature Verification

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
RSA-PSS	RSASSA-PSS	Modulus of size [selection: 2048, 3072, 4096] bits, hash or XOF [selection: SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE128, SHAKE256]	<i>RFC 8017 (Section 8.2) [PKCS #1 v2.2] NIST FIPS PUB 186-5 (Section 5.4) [RSASSA-PSS]</i>

To test the TOE's ability to perform RSA Digital Signature Verification using PSS signature type, the evaluator shall perform the Generated Data Test using the following input parameters:

- Modulus size [2048, 3072, 4096] bits
- Hash or XOF algorithm [SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE128, SHAKE256]
- Salt length [0-hash length] bits Is this paired with hash alg?
- Mask function [MGF1, SHAKE128, SHAKE256]

Generated Data Test

For each supported combination of the above parameters, the evaluator shall cause the TOE to generate three test cases using random data. . A certain number of these must be modified so that the verification fails. [How many? How modified?] The TOE must correctly verify the unmodified signatures and fail to verify the modified signatures.

DSA Signature Verification

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
DSA	DSA	Domain parameters for (L, N) = [selection: (2048, 224) (2048, 256), (3072, 256)] bits	<i>FIPS PUB 186-4 (Section 4.7) [DSA Signature Verification]</i>

To test the TOE's ability to perform DSA Digital Signature Verification, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- $(L, N) = (2048, 224), (2048, 256), (3072, 256)$
- Hash algorithm [SHA-1, SHA-224, SHA-256, SHA-384, SHA-512, SHA-512/224, SHA-512/256]

Algorithm Functional Test

For each supported combination of the above parameters, the evaluator shall cause the TOE to generate 15 test cases consisting of messages and signatures. A certain number of these must be modified so that the verification fails. [How many? How modified?] The TOE must correctly verify the unmodified signatures and fail to verify the modified signatures.

ECDSA Signature Verification

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
ECDSA	ECDSA	<p><i>Elliptic Curve [selection: P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1], per-message secret number generation [selection: extra random bits, rejection sampling, deterministic] and hash or XOF function using [selection: SHA256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE-128, SHAKE256]</i></p>	<p>[selection: ISO/IEC 14888-3:2018 (Subclause 6.6), NIST FIPS PUB 186-5 (Sections 6.3.1, 6.4.1) [ECDSA]]</p> <p>[selection: RFC 5639 (Section 3) [Brainpool Curves], NIST SP-800 186 (Section 4) [NIST Curves]]</p>

To test the TOE's ability to perform ECDSA Digital Signature Verification, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- *Elliptic Curve [P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1]*
- *Hash algorithm [SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512, SHAKE-128, SHAKE-256]*

Algorithm Functional Test

For each supported combination of the above parameters, the evaluator shall cause the TOE to generate 10 test cases consisting of messages and signatures. A certain number of these must be modified so that the verification fails. [How many? How modified?] The TOE must correctly verify the unmodified signatures and fail to verify the modified signatures.

EdDSA Signature Verification

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
EdDSA	Edwards-Curve Digital Signature Algorithm	<p><i>Domain parameters approved for elliptic curves [selection: Edwards25519, Edwards448]</i></p>	<p>NIST FIPS PUB 186-5 (Section 7.6) [EdDSA]</p> <p>RFC 8032 [Edwards Curves]</p>

To test the TOE's ability to perform EdDSA Digital Signature Verification, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- *Elliptic Curve [Edwards25519, Edwards448]*

Algorithm Functional Test

For each supported combination of the above parameters, the evaluator shall cause the TOE to generate 10 test cases consisting of a signed message and signing key. A certain number of these must be modified so that the verification fails. [How many? How modified?] The TOE must correctly verify the unmodified signatures and fail to verify the modified signatures.

LMS and HSS Signature Verification

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
LMS	LMS	<p><i>Private key size = [selection: 192 bits with [selection: SHA256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]], Winternitz parameter = [selection: 1, 2, 4, 8], and tree height = [selection: 5, 10, 15, 20, 25]</i></p>	<p>RFC 8554 [LMS]</p> <p>NIST SP 800-208 [parameters]</p>
HSS	Multitree	<p><i>Private key size = [selection: 192 bits with</i></p>	<p>RFC 8554</p>

	version of LMS	[selection: SHA256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]], Winternitz parameter = [selection: 1, 2, 4, 8], tree height = [selection: 5, 10, 15, 20, 25] and number of levels [selection: 1, 2, 3, 4, 5, 6, 7, 8]	[HSS] NIST SP 800-208 [parameters]
--	----------------	--	--

To test the TOE's ability to verify cryptographic digital signature using LMS or HSS, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- Hash algorithm [SHA-256/192, SHAKE256/192, SHA-256, SHAKE256]
- Winterlitz [1, 2, 4, 8]
- Tree height [5, 10, 15, 20, 25]
- Number of levels [1, 2, 3, 4, 5, 6, 7, 8] (HSS only)

Algorithm Functional Test

For each supported combination of the above parameters, the evaluator shall generate 4 test cases consisting of signed messages and keys, such that

- One test case is unmodified (i.e. correct)
- For one test case modify the message, i.e. the message is different
- For one test case modify the signature, i.e. signature is different
- For one test case modify the signature header so that it is a valid header for a different LMS parameter set.

The TOE must correctly verify the unmodified test case and fail to verify the modified test cases.

For HSS, use the hierarchy and signatures generated previously in the tests for [FCS_COP.1/SigGen](#). For each hash algorithm, for each level, and for each LMS tree at that level, generate up to 11 test cases, such that:

- One test case is unmodified (i.e. correct)
- For one test case modify the message, i.e. the message is different
- For one test case modify the signature, i.e. signature is different
- For each HSS hierarchy level generate one test case by modifying the signature header such that the certificate at that level is valid for a different LMS parameter set.

The evaluator shall verify that the signature verification fails for these test cases except for the unmodified case.

XMSS and XMSS^{MT} Signature Verification

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
XMSS	XMSS	Private key size = [selection: 192 bits with [selection: SHA256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]], and tree height = [selection: 10, 16, 20]	RFC 8391 [XMSS] NIST SP 800-208 [parameters]
XMSSMT	Multitree version of XMSS	Private key size = [selection: 192 bits with [selection: SHA256/192, SHAKE256/192], 256 bits with [selection: SHA-256, SHAKE256]], (total tree height, number of levels) = [selection: (20, 2), (20, 4), (40, 2), (40, 4), (40, 8), (60, 3), (60, 6), (60, 12)]	RFC 8391 [XMSS ^{MT}] NIST SP 800-208 [parameters]

To test the TOE's ability to verify digital cryptographic digital signatures using XMSS or XMSS MT , the evaluator shall perform the XMSS Key Generation Test using the following input parameters:

- Hash algorithm [SHA-256/192, SHAKE256/192, SHA-256, SHAKE256]
- Tree height [10, 16, 20] (XMSS only)
- Tree height/levels [20/2, 20/4, 40/2, 40/4, 40/8, 60/3, 60/6, 60/12] (XMSS^{MT} only)

XMSS Key Generation Test

For each supported combination of the above parameters, the evaluator shall generate the following number of keys depending on the tree height:

Table 25: Number of Test Cases for XMSS and XMSS^{MT}

Height	Number of test cases
10	5
16	4

20	3
40	2
60	1

Note: The number of test cases is limited due to the extreme amount of time it can take to generate XMSS trees.

The evaluator shall verify the correctness of the TSF's implementation by comparing values generated by the TSF with those generated by a known good implementation using the same input parameters.

ML-DSA Signature Verification

Identifier	Cryptographic Algorithm Parameters	Cryptographic Key Sizes	List of Standards
ML-DSA	ML-DSA SigVer	Parameter set = [selection: ML-DSA-44, ML-DSA-65, ML-DSA-87]	NIST FIPS PUB 204 (Section 5.2)
HashML-DSA	HashML-DSA SigVer	Parameter set = [selection: ML-DSA-44, ML-DSA-65, ML-DSA-87]	NIST FIPS PUB 204 (Section 5.2)

To test the TOE's ability to validate digital signatures using ML-DSA and HashML-DSA, the evaluator shall perform the Algorithm Functional Test using the following input parameters:

- Parameter set [ML-DSA-44, ML-DSA-65, ML-DSA-87]
- Previously generated signed Message [8-65535] bytes
- Mu value (if generated externally)
- Context (for external interface testing)
- Hash algorithm (HashML-DSA only)
- Previously generated Public key (pk)
- Previously generated Signature

The permitted hash algorithms for HashML-DSA testing are as follows:

- HashML-DSA-87 [SHA-512, SHA3-512, SHAKE256]
- HashML-DSA-65, above plus [SHA-384, SHA3-384]
- HashML-DSA-44, above plus [SHA-256, SHA-512/256, SHA3-256, SHAKE128]

Algorithm Functional Test

For each combination of supported parameter set and capabilities, the evaluator shall require the implementation under test to validate 15 signatures. For HashML-DSA testing, each supported and permitted hash or XOF need appear in only one of each group of 15 test cases.

For each group of 15 test cases, at least three tests must be modified in each of the following manners:

- No modification. Signature is valid.
- Signed message is modified. The signature is not valid.
- A component of the signature, the bytes that commit the signer to the message, is modified. The signature is not valid.
- A component of the signature, the bytes that allow the verifier to construct the vector z, is modified. The signature is not valid.
- A component of the signature, the bytes that allow the verifier to construct the hint array, is modified. The signature is not valid.

The TOE must correctly verify the unmodified signatures and fail to verify the modified signatures.

FCS_COP.1/SKC Cryptographic Operation - Symmetric Key Cryptography

The inclusion of this selection-based component depends upon selection in FCS_STG_EXT.3.1, FDP_ITC_EXT.1.2.

This component must be included in the ST if any of the following SFRs are included:

- [FCS_IPSEC_EXT.1](#)
- [FCS_STG_EXT.2](#)

This component may also be included in the ST as if optional.

FCS_COP.1.1/SKC

The TSF shall perform [symmetric-key encryption/decryption] in accordance with a specified cryptographic algorithm [selection: Cryptographic algorithm] and cryptographic key sizes [selection: Cryptographic key sizes] that meet the following: [selection: List of standards]

The following table provides the recommended choices for completion of the selection operations of [FCS_COP.1/SKC](#).

Table 26: Recommended choices for FCS_COP.1/SKC

Identifier	Cryptographic algorithm	Cryptographic key sizes	List of standards
AES-CBC	AES in CBC mode with non-repeating and unpredictable IVs	[selection: 128, 192, 256] bits	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES] [selection: ISO/IEC 10116:2017 (Clause 7), NIST SP 800-38A] [CBC]
XTS-AES	AES in XTS mode with unique tweak values that are consecutive non-negative integers starting at an arbitrary non-negative integer	[selection: 256, 512] bits	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES] [selection: IEEE Std. 1619-2018, NIST SP 800-38E] [XTS]
AES-CTR	AES in Counter Mode with a non-repeating initial counter and with no repeated use of counter values across multiple messages with the same secret key	[selection: 128, 192, 256] bits	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES] [selection: ISO/IEC 10116:2017 (Clause 10), NIST SP 800-38A] [CBC]

Application Note: This SFR must be included in the ST if symmetric-key cryptography is a service provided by the TOE to tenant software, or if the TOE itself uses SKC to support or implement PP-specified security functionality.

Specifically, this SFR must be included if the ST includes [FCS_IPSEC_EXT.1](#) or [FCS_STG_EXT.2](#), or includes any of the following selections:

- "CTR_DRBG (AES)" in [FCS_RBG.1](#)
- "FCIES" in [FCS_COP.1/KAT](#)
- "AES-*" in [FCS_STG_EXT.3](#)

From catalog If the selected "cryptographic algorithm" requires an IV, counter, or tweak value, then [FCS_OTV_EXT.1](#) must be claimed.

Evaluation Activities ▼

[FCS_COP.1/SKC](#)

TSS

The evaluator shall check that the TSS includes a description of encryption functions used for symmetric key encryption. The evaluator should check that this description of the selected encryption function includes the key sizes and modes of operations as specified in Table 26.

The evaluator shall check that the TSS describes the means by which the TOE satisfies

constraints on algorithm parameters included in the selections made for "cryptographic algorithm" and "list of standards."

Guidance

If the product supports multiple modes, the evaluator shall examine the AGD to determine that the method of choosing a specific mode/key size is described.

KMD

The evaluator shall examine the KMD to ensure that the points at which symmetric key encryption and decryption occurs are described, and that the complete data path for symmetric key encryption is described. The evaluator checks that this description is consistent with the relevant parts of the TSS.

Assessment of the complete data path for symmetric key encryption includes confirming that the KMD describes the data flow from the device's host interface to the device's non-volatile memory storing the data, and gives information enabling the user data path to be distinguished from those situations in which data bypasses the data encryption engine (e.g. read-write operations to an unencrypted Master Boot Record area). The evaluator shall ensure that the documentation of the data path is detailed enough that it thoroughly describes the parts of the TOE that the data passes through (e.g. different memory types, processors and co-processors), its encryption state (i.e. encrypted or unencrypted) in each part, and any places where the data is stored. For example, any caching or buffering of the data should be identified and distinguished from the final destination in non-volatile memory (the latter represents the location from which the host will expect to retrieve the data in future).

If support for AES-CTR is claimed and the counter value source is internal to the TOE, the evaluator shall verify that the KMD describes the internal counter mechanism used to ensure that it provides unique counter block values.

Tests

The following tests require the developer to provide access to a test platform that provides the evaluator with tools that are typically not found on factory products.

The following tests are conditional based upon the selections made in the SFR. The evaluator shall perform the following test or witness respective tests executed by the developer. The tests must be executed on a platform that is as close as practically possible to the operational platform (but which may be instrumented in terms of, for example, use of a debug mode). Where the test is not carried out on the TOE itself, the test platform shall be identified and the differences between test environment and TOE execution environment shall be described.

AES-CBC

Identifier	Cryptographic Algorithm	Cryptographic Key Sizes	List of Standards
AES-CBC	AES in CBC mode with non-repeating and unpredictable IVs	[selection: 128, 192, 256] bits	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES] [selection: ISO/IEC 10116:2017 (Clause 7), NIST SP 800-38A] [CBC]

To test the TOE's ability to encrypt/decrypt data using AES in CBC mode, the evaluator shall perform Algorithm Functional Tests and Monte Carlo Tests using the following input parameters:

- Key size [128, 192, 256] bits
- Direction [encryption, decryption]

Algorithm Functional Tests

Algorithm Functional Tests are designed to verify the correct operation of the logical components of the algorithm implementation under normal operation using different block sizes. For AES-CBC, there are two types of AFTs:

Known-Answer Tests

For each combination of direction and claimed key size, the TOE must be tested using the GFSbox, KeySbox, VarTxt, and VarKey test cases listed in Appendixes B through E of The Advanced Encryption Standard Algorithm Validation Suite (AESAVS), NIST, 15 November 2002.

Multi-Block Message Tests

For each combination of direction and claimed key size, the TOE must be tested against 10 test cases consisting of a random IV, random key, and random plaintext/ciphertext. The plaintext/ciphertext starts with a length of 16 bytes and increases by 16 bytes for each test case until reaching 160 bytes.

Monte Carlo Tests

Monte Carlo tests are intended to test the implementation under strenuous conditions. The TOE must process the test cases according to the following algorithm once for each combination of direction and key size:

```
Key[0] = Key
IV[0] = IV
PT[0] = PT
for i = 0 to 99 {
    Output Key[i], IV[i], PT[0]
    for j = 0 to 999 {
        if (j == 0) {
            CT[j] = AES-CBC-Encrypt(Key[i], IV[i], PT[j])
            PT[j+1] = IV[i]
        } else {
            CT[j] = AES-CBC-Encrypt(Key[i], PT[j])
            PT[j+1] = CT[j-1]
        }
    }
    Output CT[j]
    AES_KEY_SHUFFLE(Key, CT)
    IV[i+1] = CT[j]
    PT[0] = CT[j-1]
}
```

where

AES_KEY_SHUFFLE

is defined as:

```
If (keylen = 128)
    Key[i+1] = Key[i] xor MSB(CT[j], 128)
If (keylen = 192)
    Key[i+1] = Key[i] xor (LSB(CT[j-1], 64) || MSB(CT[j], 128))
If (keylen = 256)
    Key[i+1] = Key[i] xor (MSB(CT[j-1], 128) || MSB(CT[j], 128))
```

The initial IV, key, and plaintext/ciphertext should be random.

The ciphertext computed in the 1000th iteration (CT[999]) is the result for each of the 100 3-tuples for each selected key size. This result shall be compared to the result of running 1000 iterations with the same values using a known good implementation.

The evaluator shall test the decrypt functionality using the same test as above, exchanging CT and PT, and replacing AES-CBC-Encrypt with AES-CBC-Decrypt.

XTS-AES

Identifier	Cryptographic Algorithm	Cryptographic Key Sizes	List of Standards
XTS-AES	AES in XTS mode with unique tweak values that are consecutive non-negative integers starting at an arbitrary non-negative integer	[selection: 256, 512] bits	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197] [AES] [selection: IEEE Std. 1619-2018, NIST SP 800-38E] [XTS]

To test the TOE's ability to encrypt/decrypt data using AES in XTS mode, the evaluator shall perform the Single Data Unit Test and the Multiple Data Unit Test using the following input parameters:

- Direction [encryption, decryption]
- Key size [128, 256] bits
- Tweak value format [128-bit hex string, data unit sequence number]

Single Data Unit Test

For each combination of claimed key size, direction, and supported tweak value format, the evaluator shall generate 50 test cases consisting of random payload data. The payload data size is determined randomly for each test case from supported values within the range [128-65536] bits. The payload size and data unit size must be equal.

Multiple Data Unit Test

For each combination of claimed key size, direction, and supported tweak value format, the evaluator shall generate 50 test cases consisting of random payload data. The payload data size is determined randomly for each test case from supported values within the range [128-65536] bits. Likewise, the data unit size is determined randomly for each test case from supported values within the range [128-65535] bits. The payload size and data unit size must not be equal.

The evaluator shall verify the correctness of the TSF's implementation by comparing values generated by the TSF with those generated by a known good implementation using the same input parameters.

AES-CTR

Identifier	Cryptographic Algorithm	Cryptographic Key Sizes	List of Standards
AES-CTR	AES in Counter Mode with a non-repeating initial counter and with no repeated use of counter values across multiple messages with the same secret key.	[selection: 128, 192, 256] bits	[selection: ISO/IEC 18033-3:2010 (Subclause 5.2), FIPS PUB 197 [AES] [selection: ISO/IEC 10116:2017 (Clause 10), NIST SP 800-38A] [CTR]

To test the TOE's ability to encrypt/decrypt data using AES in CTR mode, the evaluator shall perform the Algorithm Functional Test and the Counter Test using the following input parameters:

- Direction [encryption, decryption]
- Key size [128, 192, 256] bits

Algorithm Functional Tests

Algorithm Functional Tests are designed to verify the correct operation of the logical components of the algorithm implementation under normal operation using different block sizes. For AES-CTR, there are three types of AFTs:

Known-Answer Tests

For each combination of direction and claimed key size, the TOE must be tested using the GFSbox, KeySbox, VarTxt, and VarKey test cases listed in Appendixes B through E of The Advanced Encryption Standard Algorithm Validation Suite (AESAVS), NIST, 15 November 2002.

Single Block Message Tests

For each combination of direction and claimed key, the evaluator shall generate 10 test cases with a data size of 128 bits.

Partial Block Message Tests

Monte Carlo tests are intended to test the implementation under strenuous conditions. The TOE must process the test cases according to the following algorithm once for each combination of direction and key size:

For each combination of direction and claimed key, the evaluator shall generate five test cases such that the data size is not a multiple of 128 bits.

The evaluator shall verify the correctness of the TSF's implementation by comparing values generated by the TSF with those generated by a known good implementation using the same input parameters.

Counter Test

The evaluator shall generate a single message of 1000 blocks (128000 bits) and either encrypt or decrypt it. Back-compute the IVs used. Verify that they are unique and increasing (encryption) or decreasing (decryption).

FCS_HTTPS_EXT.1 HTTPS Protocol

The inclusion of this selection-based component depends upon selection in [FTP_ITC_EXT.1.1](#).

FCS_HTTPS_EXT.1.1

The TSF shall implement the HTTPS protocol that complies with RFC 2818.

Application Note: This SFR is included in the ST if the ST Author selects "TLS/HTTPS" in [FTP_ITC_EXT.1.1](#).

If this SFR is included in the ST, then the [Functional Package for Transport Layer Security \(TLS\), version 2.1](#) must also be claimed.

FCS_HTTPS_EXT.1.2

The TSF shall implement HTTPS using TLS.

Evaluation Activities ▾

[FCS_HTTPS_EXT.1](#)

TSS

The evaluator shall check the TSS to ensure that it is clear on how HTTPS uses TLS to establish an administrative session, focusing on any client authentication required by the TLS protocol vs. security administrator authentication which may be done at a different level of the processing stack.

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

Testing for this activity is done as part of the TLS testing; this may result in additional testing if the TLS tests are done at the TLS protocol level.

FCS_IPSEC_EXT.1 IPsec Protocol

The inclusion of this selection-based component depends upon selection in [FTP_ITC_EXT.1.1](#).

FCS_IPSEC_EXT.1.1

The TSF shall implement the IPsec architecture as specified in RFC 4301.

Application Note: This SFR must be included in the ST if the ST Author selects "IPsec" in [FTP_ITC_EXT.1.1](#).

If this SFR is claimed, then [FCS_COP.1/KeyedHash](#) and [FCS_RBG.1](#) must also be claimed.

RFC 4301 calls for an IPsec implementation to protect IP traffic through the use of a Security Policy Database (SPD). The SPD is used to define how IP packets are to be handled: PROTECT the packet (e.g., encrypt the packet), BYPASS the IPsec services (e.g., no encryption), or DISCARD the packet (e.g., drop the packet). The SPD can be implemented in various ways, including router access control lists, firewall rule-sets, a "traditional" SPD, etc. Regardless of the implementation details, there is a notion of a "rule" that a packet is "matched" against and a resulting action that takes place.

While there must be a means to order the rules, a general approach to ordering is not mandated, as long as the TOE can distinguish the IP packets and apply the rules accordingly. There may be multiple SPDs (one for each network interface), but this is not required.

FCS_IPSEC_EXT.1.2

The TSF shall implement [**selection**: *transport mode, tunnel mode*].

Application Note: If the TOE is used to connect to a VPN gateway for the purposes of establishing a secure connection to a private network, the ST Author should select tunnel mode. If the TOE uses IPsec to establish an end-to-end connection to another IPsec VPN Client, the ST Author should select transport mode. If the TOE uses IPsec to establish a connection to a specific endpoint device for the purpose of secure remote administration, the ST Author should select transport mode.

FCS_IPSEC_EXT.1.3

The TSF shall have a nominal, final entry in the SPD that matches anything that is otherwise unmatched, and discards it.

FCS_IPSEC_EXT.1.4

The TSF shall implement the IPsec protocol ESP as defined by RFC 4303 using the cryptographic algorithms [AES-GCM-128, AES-GCM-256 (as specified in RFC 4106), [**selection**: *AES-CBC-128 (specified in RFC 3602), AES-CBC-256 (specified in RFC 3602), no other algorithms*]] together with a Secure Hash Algorithm (SHA)-based HMAC.

FCS_IPSEC_EXT.1.5

The TSF shall implement the protocol:

[selection]

- *IKEv1, using Main Mode for Phase 1 exchanges, as defined in RFC 2407,*

RFC 2408, RFC 2409, RFC 4109, [selection, choose one of: no other RFCs for extended sequence numbers, RFC 4304 for extended sequence numbers], [selection, choose one of: no other RFCs for hash functions, RFC 4868 for hash functions], and [selection, choose one of: support for XAUTH, no support for XAUTH]

- *IKEv2 as defined in RFC 7296 (with mandatory support for NAT traversal as specified in section 2.23), RFC 8784, RFC 8247, and [selection, choose one of: no other RFCs for hash functions, RFC 4868 for hash functions]*

].

Application Note: If the TOE implements SHA-2 hash algorithms for IKEv1 or IKEv2, the ST Author should select RFC 4868.

FCS_IPSEC_EXT.1.6

The TSF shall ensure the encrypted payload in the [**selection: IKEv1, IKEv2**] protocol uses the cryptographic algorithms AES-CBC-128, AES-CBC-256 as specified in RFC 6379 and [**selection: AES-GCM-128 as specified in RFC 5282, AES-GCM-256 as specified in RFC 5282, no other algorithm**].

FCS_IPSEC_EXT.1.7

The TSF shall ensure that [**selection**:

- *IKEv2 SA lifetimes can be configured by [selection: an Administrator, a VPN Gateway] based on [selection: number of packets/number of bytes, length of time]*
- *IKEv1 SA lifetimes can be configured by [selection: an Administrator, a VPN Gateway] based on [selection: number of packets/number of bytes, length of time]*
- *IKEv1 SA lifetimes are fixed based on [selection: number of packets/number of bytes, length of time]. If length of time is used, it must include at least one option that is 24 hours or less for Phase 1 SAs and 8 hours or less for Phase 2 SAs.*

].

Application Note: The ST Author is afforded a selection based on the version of IKE in their implementation. There is a further selection within this selection that allows the ST Author to specify which entity is responsible for “configuring” the life of the SA. An implementation that allows an administrator to configure the client or a VPN gateway that pushes the SA lifetime down to the client are both acceptable.

As far as SA lifetimes are concerned, the TOE can limit the lifetime based on the number of bytes transmitted, or the number of packets transmitted. Either packet-based or volume-based SA lifetimes are acceptable; the ST Author makes the appropriate selection to indicate which type of lifetime limits are supported.

The ST Author chooses either the IKEv1 requirements or IKEv2 requirements (or both, depending on the selection in [FCS_IPSEC_EXT.1.5](#)). The IKEv1 requirement can be accomplished either by providing Authorized Administrator-configurable lifetimes (with appropriate instructions in documents mandated by AGD_OPE), or by “hard coding” the limits in the implementation. For IKEv2, there are no hard-coded limits, but in this case it is required that an administrator be able to configure the values. In general, instructions for setting the parameters of the implementation, including lifetime of the SAs, should be included in the operational guidance generated for AGD_OPE. It is appropriate to refine the requirement in terms of number of MB/KB instead of number of packets, as long as the TOE is capable of setting a limit on the amount of traffic that is protected by the same key (the total volume of all IPsec traffic protected by that key).

FCS_IPSEC_EXT.1.8

The TSF shall ensure that all IKE protocols implement DH groups [*19 (256-bit Random ECP), 20 (384-bit Random ECP), and [selection: 24 (2048-bit MODP with 256-bit POS), 15 (3072-bit MODP), 14 (2048-bit MODP), no other DH groups]*].

Application Note: The selection is used to specify additional DH groups supported. This applies to IKEv1 and IKEv2 exchanges. It should be noted that if any additional DH groups are specified, they must comply with the requirements (in terms of the ephemeral keys that are established) listed in [FCS_CKM.1](#).

Since the implementation may allow different Diffie-Hellman groups to be negotiated for use in forming the SAs, the assignments in [FCS_IPSEC_EXT.1.9](#) and [FCS_IPSEC_EXT.1.10](#) may contain multiple values. For each DH group supported, the ST Author consults Table 2 in 800-57 to determine the “bits of security” associated with the DH group. Each unique value is then used to fill in the assignment (for 1.9 they are doubled; for 1.10 they are inserted directly into the assignment). For example, suppose the implementation supports DH group 14 (2048-bit MODP) and group 20 (ECDH using NIST curve P-384). From Table 2, the bits of security value for group 14 is 112, and for group 20 it is 192. For [FCS_IPSEC_EXT.1.9](#), then, the assignment would read “[224, 384]” and for

[FCS_IPSEC_EXT.1.10](#) it would read “[112, 192]” (although in this case the requirement should probably be refined so that it makes sense mathematically).

FCS_IPSEC_EXT.1.9

The TSF shall generate the secret value x used in the IKE Diffie-Hellman key exchange (“x” in $gx \bmod p$) using the random bit generator specified in [FCS_RBG.1](#), and having a length of at least **[assignment: (one or more) number(s) of bits that is at least twice the “bits of security” value associated with the negotiated Diffie-Hellman group as listed in Table 2 of NIST SP 800-57, Recommendation for Key Management - Part 1: General]** bits.

FCS_IPSEC_EXT.1.10

The TSF shall generate nonces used in IKE exchanges in a manner such that the probability that a specific nonce value will be repeated during the life of a specific IPsec SA is less than 1 in $2^{[assignment: (one or more) “bits of security” value(s) associated with the negotiated Diffie-Hellman group as listed in Table 2 of NIST SP 800-57, Recommendation for Key Management - Part 1: General]}$.

FCS_IPSEC_EXT.1.11

The TSF shall ensure that all IKE protocols perform peer authentication using a **[selection: RSA, ECDSA]** that use X.509v3 certificates that conform to RFC 4945 and **[selection, choose one of: Pre-shared Keys, no other method]**.

Application Note: At least one public-key-based Peer Authentication method is required in order to conform to this PP. One or more of the public key schemes is chosen by the ST Author to reflect what is implemented. The ST Author also ensures that appropriate FCS requirements reflecting the algorithms used (and key generation capabilities, if provided) are listed to support those methods. Applicable claims from the [, version](#) are made to support X.509 validation functionality, most notably FIA_XCU_EXT.1 (mandatory requirement defining the TOE's use of certificates), FIA_X509_EXT.1 (X.509 certificate validation) and FIA_X509_EXT.2 (X.509 certificate authentication).

FCS_IPSEC_EXT.1.12

The TSF shall not establish an SA if the **[selection: IP address, Fully Qualified Domain Name (FQDN), user FQDN, Distinguished Name (DN)]** and **[selection, choose one of: no other reference identifier type, [assignment: other supported reference identifier types]]** contained in a certificate does not match the expected value(s) for the entity attempting to establish a connection.

Application Note: The TOE must support at least one of the following identifier types: IP address, Fully Qualified Domain Name (FQDN), user FQDN, or Distinguished Name (DN). In the future, the TOE will be required to support all of these identifier types. The TOE is expected to support as many IP address formats (IPv4 and IPv6) as IP versions supported by the TOE in general. The ST Author may assign additional supported identifier types in the second selection.

FCS_IPSEC_EXT.1.13

The TSF shall not establish an SA if the presented identifier does not match the configured reference identifier of the peer.

Application Note: At this time, only the comparison between the presented identifier in the peer's certificate and the peer's reference identifier is mandated by the testing below. However, in the future, this requirement will address two aspects of the peer certificate validation: 1) comparison of the peer's ID payload to the peer's certificate which are both presented identifiers, as required by RFC 4945 and 2) verification that the peer identified by the ID payload and the certificate is the peer expected by the TOE (per the reference identifier). At that time, the TOE will be required to demonstrate both aspects (i.e. that the TOE enforces that the peer's ID payload matches the peer's certificate which both match configured peer reference identifiers).

Excluding the DN identifier type (which is necessarily the Subject DN in the peer certificate), the TOE may support the identifier in either the Common Name or Subject Alternative Name (SAN) or both. If both are supported, the preferred logic is to compare the reference identifier to a presented SAN, and only if the peer's certificate does not contain a SAN, to fall back to a comparison against the Common Name. In the future, the TOE will be required to compare the reference identifier to the presented identifier in the SAN only, ignoring the Common Name.

FCS_IPSEC_EXT.1.14

The **[selection: TSF, VPN Gateway]** shall be able to ensure by default that the strength of the symmetric algorithm (in terms of the number of bits in the key) negotiated to protect the **[selection: IKEv1 Phase 1, IKEv2 IKE_SA]** connection is greater than or equal to the strength of the symmetric algorithm (in terms of the number of bits in the key) negotiated to protect the **[selection: IKEv1 Phase 2, IKEv2 CHILD_SA]** connection.

Application Note: If this functionality is configurable, the TSF may be

configured by a VPN Gateway or by an Administrator of the TOE itself.

The ST Author chooses either or both of the IKE selections based on what is implemented by the TOE. Obviously, the IKE version(s) chosen should be consistent not only in this element, but with other choices for other elements in this component. While it is acceptable for this capability to be configurable, the default configuration in the evaluated configuration (either "out of the box" or by configuration guidance in the AGD documentation) must enable this functionality.

Evaluation Activities ▼

[FCS_IPSEC_EXT.1](#)

TSS

In addition to the TSS EAs for the individual [FCS_IPSEC_EXT.1](#) elements below, the evaluator shall perform the following:

If the TOE boundary includes a general-purpose operating system or mobile device, the evaluator shall examine the TSS to ensure that it describes whether the VPN client capability is architecturally integrated with the platform itself or whether it is a separate executable that is bundled with the platform.

Guidance

In addition to the AGD EAs for the individual [FCS_IPSEC_EXT.1](#) elements below, the evaluator shall perform the following:

If the configuration of the IPsec behavior is from an environmental source, most notably a VPN gateway (e.g. through receipt of required connection parameters from a VPN gateway), the evaluator shall ensure that the AGD contains any appropriate information for ensuring that this configuration can be properly applied.

Note in this case that the implementation of the IPsec protocol must be enforced entirely within the TOE boundary; i.e. it is not permissible for a software application TOE to be a graphical front-end for IPsec functionality implemented totally or in part by the underlying OS platform. The behavior referenced here is for the possibility that the configuration of the IPsec connection is initiated from outside the TOE, which is permissible so long as the TSF is solely responsible for enforcing the configured behavior. However, it is allowable for the TSF to rely on low-level platform-provided networking functions to implement the SPD from the client (e.g., enforcement of packet routing decisions).

Tests

As a prerequisite for performing the Test EAs for the individual [FCS_IPSEC_EXT.1](#) elements below, the evaluator shall do the following:

The evaluator shall minimally create a test environment equivalent to the test environment illustrated below. The traffic generator used to construct network packets should provide the evaluator with the ability manipulate fields in the ICMP, IPv4, IPv6, UDP, and TCP packet headers. The evaluator shall provide justification for any differences in the test environment.

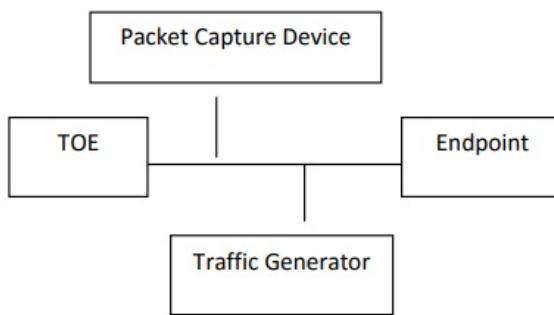


Figure 2: IPsec Test Environment

[FCS_IPSEC_EXT.1.1](#)

TSS

The evaluator shall examine the TSS and determine that it describes how the IPsec capabilities are implemented.

The evaluator shall ensure that the TSS describes at a high level the architectural relationship between the IPsec implementation and the rest of the TOE.

The evaluator shall ensure that the TSS describes how the SPD is implemented and the rules for processing both inbound and outbound packets in terms of the IPsec policy. The TSS describes the rules that are available and the resulting actions available after matching a rule. The TSS describes how the available rules and actions form the SPD using terms defined in RFC 4301 such as BYPASS (e.g., no encryption), DISCARD (e.g., drop the packet), and PROTECT (e.g., encrypt the packet) actions defined in RFC 4301.

As noted in section 4.4.1 of RFC 4301, the processing of entries in the SPD is non-trivial and the evaluator shall determine that the description in the TSS is sufficient to determine which rules

will be applied given the rule structure implemented by the TOE. For example, if the TOE allows specification of ranges, conditional rules, etc., the evaluator shall determine that the description of rule processing (for both inbound and outbound packets) is sufficient to determine the action that will be applied, especially in the case where two different rules may apply. This description shall cover both the initial packets (that is, no SA is established on the interface or for that particular packet) as well as packets that are part of an established SA.

Guidance

The evaluator shall examine the AGD to verify it instructs the Administrator how to construct entries into the SPD that specify a rule for processing a packet. The description includes all three cases - a rule that ensures packets are encrypted/decrypted, dropped, and flow through the TOE without being encrypted. The evaluator shall determine that the description in the AGD is consistent with the description in the TSS, and that the level of detail in the AGD is sufficient to allow the administrator to set up the SPD in an unambiguous fashion. This includes a discussion of how ordering of rules impacts the processing of an IP packet.

Tests

The evaluator uses the operational guidance to configure the TOE to carry out the following tests:

- Test FCS_IPSEC_EXT.1.1:1: The evaluator shall configure the SPD such that there is a rule for dropping a packet, encrypting a packet, and allowing a packet to flow in plaintext. The selectors used in the construction of the rule shall be different such that the evaluator can generate a packet and send packets to the gateway with the appropriate fields (fields that are used by the rule - e.g., the IP addresses, TCP/UDP ports) in the packet header. The evaluator performs both positive and negative test cases for each type of rule (e.g., a packet that matches the rule and another that does not match the rule). The evaluator observes via the audit trail, and packet captures that the TOE exhibited the expected behavior: appropriate packets were dropped, allowed to flow without modification, encrypted by the IPsec implementation.
- Test FCS_IPSEC_EXT.1.1:2: The evaluator shall devise several tests that cover a variety of scenarios for packet processing. As with Test 1, the evaluator ensures both positive and negative test cases are constructed. These scenarios shall exercise the range of possibilities for SPD entries and processing modes as outlined in the TSS and operational guidance. Potential areas to cover include rules with overlapping ranges and conflicting entries, inbound and outbound packets, and packets that establish SAs as well as packets that belong to established SAs. The evaluator shall verify, via the audit trail and packet captures, for each scenario that the expected behavior is exhibited, and is consistent with both the TSS and the operational guidance.

[**FCS_IPSEC_EXT.1.2**](#)

TSS

The evaluator checks the TSS to ensure it states that an IPsec VPN can be established to operate in tunnel mode or transport mode (as selected).

Guidance

The evaluator shall confirm that the AGD contains instructions on how to configure the connection in each mode selected.

If both transport mode and tunnel mode are implemented, the evaluator shall review the AGD to determine how the use of a given mode is specified.

Tests

The evaluator shall perform the following test(s) based on the selections chosen:

- Test FCS_IPSEC_EXT.1.2:1: [conditional] If tunnel mode is selected, the evaluator uses the operational guidance to configure the TOE/platform to operate in tunnel mode and also configures a VPN peer to operate in tunnel mode. The evaluator configures the TOE/platform and the VPN peer to use any of the allowable cryptographic algorithms, authentication methods, etc. to ensure an allowable SA can be negotiated. The evaluator shall then initiate a connection from the TOE/Platform to the VPN peer. The evaluator observes (for example, in the audit trail and the captured packets) that a successful connection was established using the tunnel mode.
- Test FCS_IPSEC_EXT.1.2:2: [conditional] If transport mode is selected, the evaluator uses the operational guidance to configure the TOE/platform to operate in transport mode and also configures a VPN peer to operate in transport mode. The evaluator configures the TOE/platform and the VPN peer to use any of the allowed cryptographic algorithms, authentication methods, etc. to ensure an allowable SA can be negotiated. The evaluator then initiates a connection from the TOE/platform to connect to the VPN peer. The evaluator observes (for example, in the audit trail and the captured packets) that a successful connection was established using the transport mode.

[**FCS_IPSEC_EXT.1.3**](#)

TSS

There are no additional TSS evaluation activities for this element.

Guidance

The evaluator shall check that the AGD provides instructions on how to construct or acquire the SPD and uses the AGD to configure the TOE for the following test.

If both transport mode and tunnel mode are implemented, the evaluator shall review the AGD to determine how the use of a given mode is specified.

Tests

The evaluator shall perform the following test:

The evaluator shall configure the SPD such that it has entries that contain operations that DISCARD, PROTECT, and (if applicable) BYPASS network packets. The evaluator may use the SPD that was created for verification of [FCS_IPSEC_EXT.1.1](#). The evaluator shall construct a network packet that matches a BYPASS entry and send that packet. The evaluator should observe that the network packet is passed to the proper destination interface with no modification. The evaluator shall then modify a field in the packet header; such that it no longer matches the evaluator-created entries (there may be a "TOE-created" final entry that discards packets that do not match any previous entries). The evaluator sends the packet, and observes that the packet was not permitted to flow to any of the TOE's interfaces.

[FCS_IPSEC_EXT.1.4](#)

TSS

The evaluator shall examine the TSS to verify that the algorithms AES-GCM-128 and AES-GCM-256 are implemented. If the ST Author has selected either AES-CBC-128 or AES-CBC-256 in the requirement, then the evaluator verifies the TSS describes these as well. In addition, the evaluator ensures that the SHA-based HMAC algorithm conforms to the algorithms specified in [FCS_COP.1/KeyedHash](#) Cryptographic Operations (Keyed Hash Algorithms).

Guidance

The evaluator checks the AGD to ensure it provides instructions on how the TOE is configured to use the algorithms selected in this component and whether this is performed through direct configuration, defined during initial installation, or defined by acquiring configuration settings from an environmental component.

Tests

The evaluator shall perform the following test:

The evaluator shall configure the TOE/platform as indicated in the operational guidance configuring the TOE/platform to use each of the supported algorithms, attempt to establish a connection using ESP, and verify that the attempt succeeds.

[FCS_IPSEC_EXT.1.5](#)

TSS

The evaluator shall examine the TSS to verify that IKEv1 and/or IKEv2 are implemented. If IKEv1 is implemented, the evaluator shall verify that the TSS indicates whether or not XAUTH is supported, and that aggressive mode is not used for IKEv1 Phase 1 exchanges (i.e. only main mode is used). It may be that these are configurable options.

Guidance

The evaluator shall check the AGD to ensure it instructs the administrator how to configure the TOE to use IKEv1 and/or IKEv2 (as selected), and uses the guidance to configure the TOE to perform NAT traversal for the test below. If XAUTH is implemented, the evaluator shall verify that the AGD provides instructions on how it is enabled or disabled.

If the TOE supports IKEv1, the evaluator shall verify that the AGD either asserts that only main mode is used for Phase 1 exchanges, or provides instructions for disabling aggressive mode.

Tests

Tests are performed in conjunction with the other IPsec evaluation activities with the exception of the activities below:

- Test FCS_IPSEC_EXT.1.5:1: The evaluator shall configure the TOE so that it will perform NAT traversal processing as described in the TSS and RFC 7296, section 2.23. The evaluator shall initiate an IPsec connection and determine that the NAT is successfully traversed. If the TOE supports IKEv1 with or without XAUTH, the evaluator shall verify that this test can be successfully repeated with XAUTH enabled and disabled in the manner specified by the operational guidance. If the TOE only supports IKEv1 with XAUTH, the evaluator shall verify that connections not using XAUTH are unsuccessful. If the TOE only supports IKEv1 without XAUTH, the evaluator shall verify that connections using XAUTH are unsuccessful.
- Test FCS_IPSEC_EXT.1.5:2: [conditional] If the TOE supports IKEv1, the evaluator shall perform any applicable operational guidance steps to disable the use of aggressive mode and then attempt to establish a connection using an IKEv1 Phase 1 connection in aggressive mode. This attempt should fail. The evaluator shall show that the TOE will reject a VPN gateway from initiating an IKEv1 Phase 1 connection in aggressive mode. The evaluator should then show that main mode exchanges are supported.

[FCS_IPSEC_EXT.1.6](#)

TSS

The evaluator shall ensure the TSS identifies the algorithms used for encrypting the IKEv1 and/or IKEv2 payload, and that the algorithms AES-CBC-128, AES-CBC-256 are specified, and if others are chosen in the selection of the requirement, those are included in the TSS discussion.

Guidance

The evaluator checks the AGD to ensure it provides instructions on how the TOE is configured to use the algorithms selected in this component and whether this is performed through direct configuration, defined during initial installation, or defined by acquiring configuration settings from an environmental component.

Tests

The evaluator shall use the operational guidance to configure the TOE (or to configure the

(Operational Environment to have the TOE receive configuration) to perform the following test for each ciphersuite selected:

The evaluator shall configure the TOE to use the ciphersuite under test to encrypt the IKEv1 and/or IKEv2 payload and establish a connection with a peer device, which is configured to only accept the payload encrypted using the indicated ciphersuite. The evaluator will confirm the algorithm was that used in the negotiation. The evaluator will confirm that the connection is successful by confirming that data can be passed through the connection once it is established. For example, the evaluator may connect to a webpage on the remote network and verify that it can be reached.

FCS_IPSEC_EXT.1.7

TSS

There are no additional TSS evaluation activities for this element.

Guidance

The evaluator shall check the AGD to ensure it provides instructions on how the TOE configures the values for SA lifetimes. In addition, the evaluator shall check that the AGD has the option for either the Administrator or VPN Gateway to configure Phase 1 SAs if time-based limits are supported. Currently there are no values mandated for the number of packets or number of bytes, the evaluator shall simply check the AGD to ensure that this can be configured if selected in the requirement.

Tests

When testing this functionality, the evaluator needs to ensure that both sides are configured appropriately. From the RFC "A difference between IKEv1 and IKEv2 is that in IKEv1 SA lifetimes were negotiated. In IKEv2, each end of the SA is responsible for enforcing its own lifetime policy on the SA and rekeying the SA when necessary. If the two ends have different lifetime policies, the end with the shorter lifetime will end up always being the one to request the rekeying. If the two ends have the same lifetime policies, it is possible that both will initiate a rekeying at the same time (which will result in redundant SAs). To reduce the probability of this happening, the timing of rekeying requests SHOULD be jittered."

Each of the following tests shall be performed for each version of IKE selected in the FCS_IPSEC_EXT.1.5 protocol selection:

- Test FCS_IPSEC_EXT.1.7.1: [conditional] The evaluator shall configure a maximum lifetime in terms of the # of packets (or bytes) allowed following the operational guidance. The evaluator shall establish an SA and determine that once the allowed # of packets (or bytes) through this SA is exceeded, the connection is closed.
- Test FCS_IPSEC_EXT.1.7.2: [conditional] The evaluator shall construct a test where a Phase 1 SA is established and attempted to be maintained for more than 24 hours before it is renegotiated. The evaluator shall observe that this SA is closed or renegotiated in 24 hours or less. If such an action requires that the TOE be configured in a specific way, the evaluator shall implement tests demonstrating that the configuration capability of the TOE works as documented in the operational guidance.
- Test FCS_IPSEC_EXT.1.7.3: [conditional] The evaluator shall perform a test similar to Test 2 for Phase 2 SAs, except that the lifetime will be 8 hours or less instead of 24 hours or less.
- Test FCS_IPSEC_EXT.1.7.4: [conditional] If a fixed limit for IKEv1 SAs is supported, the evaluator shall establish an SA and observe that the connection is closed after the fixed traffic and/or time value is reached.

FCS_IPSEC_EXT.1.8

TSS

The evaluator shall check to ensure that the DH groups specified in the requirement are listed as being supported in the TSS. If there is more than one DH group supported, the evaluator checks to ensure the TSS describes how a particular DH group is specified/negotiated with a peer.

Guidance

There are no additional Guidance evaluation activities for this element.

Tests

The evaluator shall perform the following test:

For each supported DH group, the evaluator shall test to ensure that all supported IKE protocols can be successfully completed using that particular DH group.

FCS_IPSEC_EXT.1.9

TSS

The evaluator shall check to ensure that, for each DH group supported, the TSS describes the process for generating "x" (as defined in FCS_IPSEC_EXT.1.9) and each nonce. The evaluator shall verify that the TSS indicates that the random number generated that meets the requirements in this EP is used, and that the length of "x" and the nonces meet the stipulations in the requirement.

Guidance

There are no additional Guidance evaluation activities for this element.

Tests

There are no test activities for this element.

FCS_IPSEC_EXT.1.10

[FCS_IPSEC_EXT.1.11](#)

TSS

The evaluator ensures that the TSS identifies RSA and/or ECDSA as being used to perform peer authentication.

If pre-shared keys are chosen in the selection, the evaluator shall check to ensure that the TSS describes how pre-shared keys are established and used in authentication of IPsec connections. The description in the TSS shall also indicate how pre-shared key establishment is accomplished depending on whether the TSF can generate a pre-shared key, accept a pre-shared key, or both.

The evaluator shall ensure that the TSS describes how the TOE compares the peer's presented identifier to the reference identifier. This description shall include whether the certificate presented identifier is compared to the ID payload presented identifier, which field(s) of the certificate are used as the presented identifier (DN, Common Name, or SAN) and, if multiple fields are supported, the logical order comparison. If the ST Author assigned an additional identifier type, the TSS description shall also include a description of that type and the method by which that type is compared to the peer's presented certificate.

Guidance

The evaluator shall check that the AGD describes how pre-shared keys are to be generated and established.

The evaluator ensures the AGD describes how to set up the TOE to use the cryptographic algorithms RSA and/or ECDSA.

In order to construct the environment and configure the TOE for the following tests, the evaluator will ensure that the AGD also describes how to configure the TOE to connect to a trusted CA, and ensure a valid certificate for that CA is loaded into the TOE as a trusted CA.

The evaluator shall also ensure that the AGD includes the configuration of the reference identifier(s) for the peer.

Tests

For efficiency's sake, the testing that is performed here has been combined with the testing for X.509 certificate validation defined by [version](#), [FCS_IPSEC_EXT.1.12](#), and [FCS_IPSEC_EXT.1.13](#). The following tests shall be repeated for each peer authentication protocol selected in the [FCS_IPSEC_EXT.1.11](#) selection above:

- Test FCS_IPSEC_EXT.1.11:1: The evaluator shall have the TOE generate a public-private key pair, and submit a CSR (Certificate Signing Request) to a CA (trusted by both the TOE and the peer VPN used to establish a connection) for its signature. The values for the DN (Common Name, Organization, Organizational Unit, and Country) will also be passed in the request. Alternatively, the evaluator may import to the TOE a previously generated private key and corresponding certificate.
- Test FCS_IPSEC_EXT.1.11:2: The evaluator shall configure the TOE to use a private key and associated certificate signed by a trusted CA and shall establish an IPsec connection with the peer.
- Test FCS_IPSEC_EXT.1.11:3: The evaluator shall test that the TOE can properly handle revoked certificates - conditional on whether CRL or OCSP is selected; if both are selected, then a test is performed for each method. For this current version of the PP-Module, the evaluator has to only test one up in the trust chain (future drafts may require to ensure the validation is done up the entire chain). The evaluator shall ensure that a valid certificate is used, and that the SA is established. The evaluator then attempts the test with a certificate that will be revoked (for each method chosen in the selection) to ensure when the certificate is no longer valid that the TOE will not establish an SA.
- Test FCS_IPSEC_EXT.1.11:4: [conditional] The evaluator shall generate a pre-shared key and use it, as indicated in the operational guidance, to establish an IPsec connection with the VPN GW peer. If the generation of the pre-shared key is supported, the evaluator shall ensure that establishment of the key is carried out for an instance of the TOE generating the key as well as an instance of the TOE merely taking in and using the key.

For each supported identifier type (excluding DNs), the evaluator shall repeat the following tests:

- Test FCS_IPSEC_EXT.1.11:5: For each field of the certificate supported for comparison, the evaluator shall configure the peer's reference identifier on the TOE (per the administrative guidance) to match the field in the peer's presented certificate and shall verify that the IKE authentication succeeds.
- Test FCS_IPSEC_EXT.1.11:6: For each field of the certificate support for comparison, the evaluator shall configure the peer's reference identifier on the TOE (per the administrative guidance) to not match the field in the peer's presented certificate and shall verify that the IKE authentication fails.

The following tests are conditional:

- Test FCS_IPSEC_EXT.1.11:7: [conditional] If, according to the TSS, the TOE supports both Common Name and SAN certificate fields and uses the preferred logic outlined in the Application Note, the tests above with the Common Name field shall be performed using peer certificates with no SAN extension. Additionally, the evaluator shall configure the peer's reference identifier on the TOE to not match the SAN in the peer's presented certificate but to match the Common Name in the peer's presented certificate, and verify

that the IKE authentication fails.

- Test FCS_IPSEC_EXT.1.11:8: [conditional] If the TOE supports DN identifier types, the evaluator shall configure the peer's reference identifier on the TOE (per the administrative guidance) to match the subject DN in the peer's presented certificate and shall verify that the IKE authentication succeeds. To demonstrate a bit-wise comparison of the DN, the evaluator shall change a single bit in the DN (preferably, in an Object Identifier (OID) in the DN) and verify that the IKE authentication fails. To demonstrate a comparison of DN values, the evaluator shall change any one of the four DN values and verify that the IKE authentication fails.
- Test FCS_IPSEC_EXT.1.11:9: [conditional] If the TOE supports both IPv4 and IPv6 and supports IP address identifier types, the evaluator must repeat test 1 and 2 with both IPv4 address identifiers and IPv6 identifiers. Additionally, the evaluator shall verify that the TOE verifies that the IP header matches the identifiers by setting the presented identifiers and the reference identifier with the same IP address that differs from the actual IP address of the peer in the IP headers and verifying that the IKE authentication fails.
- Test FCS_IPSEC_EXT.1.11:10: [conditional] If, according to the TSS, the TOE performs comparisons between the peer's ID payload and the peer's certificate, the evaluator shall repeat the following test for each combination of supported identifier types and supported certificate fields (as above). The evaluator shall configure the peer to present a different ID payload than the field in the peer's presented certificate and verify that the TOE fails to authenticate the IKE peer.

[FCS_IPSEC_EXT.1.2](#)

EAs for this element are tested through EAs for [FCS_IPSEC_EXT.1.11](#).

[FCS_IPSEC_EXT.1.13](#)

EAs for this element are tested through EAs for [FCS_IPSEC_EXT.1.11](#).

[FCS_IPSEC_EXT.1.14](#)

TSS

The evaluator shall check that the TSS describes the potential strengths (in terms of the number of bits in the symmetric key) of the algorithms that are allowed for the IKE and ESP exchanges. The TSS shall also describe the checks that are done when negotiating IKEv1 Phase 2 and/or IKEv2 CHILD_SA suites to ensure that the strength (in terms of the number of bits of key in the symmetric algorithm) of the negotiated algorithm is less than or equal to that of the IKE SA this is protecting the negotiation.

Guidance

There are no additional Guidance evaluation activities for this element.

Tests

The evaluator follows the guidance to configure the TOE to perform the following tests for each version of IKE supported:

- Test FCS_IPSEC_EXT.1.14:1: The evaluator shall successfully negotiate an IPsec connection using each of the supported algorithms and hash functions identified in the requirements.
- Test FCS_IPSEC_EXT.1.14:2: [conditional] The evaluator shall attempt to establish an SA for ESP that selects an encryption algorithm with more strength than that being used for the IKE SA (i.e., symmetric algorithm with a key size larger than that being used for the IKE SA). Such attempts should fail.
- Test FCS_IPSEC_EXT.1.14:3: The evaluator shall attempt to establish an IKE SA using an algorithm that is not one of the supported algorithms and hash functions identified in the requirements. Such an attempt should fail.
- Test FCS_IPSEC_EXT.1.14:4: The evaluator shall attempt to establish an SA for ESP (assumes the proper parameters where used to establish the IKE SA) that selects an encryption algorithm that is not identified in [FCS_IPSEC_EXT.1.4](#). Such an attempt should fail.

FCS_OTV_EXT.1 One-Time Value

This component must be included in the ST if any of the following SFRs are included:

- [FCS_COP.1/SKC](#)

FCS_OTV_EXT.1.1

The TSF shall perform cryptographic one-time value generation for **[selection: Algorithm or mode]** using the output of a **[selection: random bit generator as defined in [FCS_RB.G.1](#), deterministic OTV construction, [assignment: OTV construction method]]** and sizes of length that meet the following: **[selection: List of standards]**

The following table provides the recommended choices for completion of the selection operations of [FCS_COP.1/XOF](#).

Table 27: Recommended choices and guidance for FCS OTV EXT.1

Algorithm or mode	List of standards	Notes
HMAC	FIPS PUB 198-1, NIST SP 800-56C Revision 2	Depending on the use case, salts can be secret or known, randomly generated or all zero. Secret IVs may be required, e.g., for key derivation. Refer to the relevant standards for your use case.
KMAC	NIST SP 800-185, NIST SP 800-56C Revision 2	Depending on the use case, salts can be secret or known, randomly generated or all zero. Secret IVs may be required, e.g., for key derivation. Refer to the relevant standards for your use case.
KDF	NIST SP 800-108 Revision 1, NIST SP 800-135 Revision 1, ISO/IEC 11770-6:2016 (Subclause 7.3.2)	Salts and IVs are generated as directed for HMAC and AES cryptographic algorithms. Refer to the relevant standards.
PBKDF	NIST SP 800-132	Salts are generated and used as directed in PBKDFs.
CTR	NIST SP 800-38A	"Initial Counter" (nonce) shall be non-repeating. No counter value shall be repeated across multiple messages with the same secret key.
CBC	NIST SP 800-38A Appendix C	Depending on the use case, IVs shall be unpredictable. Repeating IVs leak information about whether the first one or more blocks are shared between two messages, so IVs should be non-repeating in such situations. Refer to the relevant standards for your use case.
OFB	NIST SP 800-38A	IVs shall be non-repeating and shall not be generated by invoking the cipher on another IV. OFB may require the IV to be a nonce.
CFB	NIST SP 800-38A	IVs should be non-repeating as repeating IVs leak information about the first plaintext block and about common shared prefixes in messages
XTS	NIST SP 800-38E, IEEE Std 1619-2018	Tweak values shall be non-negative integers, assigned consecutively, and starting at an arbitrary non-negative integer (i.e., sequential nonces).
CMAC	NIST SP 800-38B	IV is all zeroes
KW, KWP	NIST SP 800-38F	Depending on the use case, nonces may be required. Please reference the relevant standards for your use case.
CCM	NIST SP 800-38C	Nonces shall be non-repeating.
GCM	NIST SP 800-38D	For RBG-based IV construction (section 8.2.2) the number of invocations of GCM shall not exceed 2^{32} for a given secret key.
RSA-OAEP	NIST SP 800-56B Revision 2	Mask for padding shall be randomly generated

Application Note: See the algorithm- or mode-specific Notes above for guidance on completing the second selection. This SFR must be included in the ST if it is a service provided by the TOE to tenant software, or if it is used by the TOE itself to support or implement PP-specified security functionality.

Evaluation Activities ▾

[FCS_OTV_EXT.1](#)

TSS

The evaluator shall ensure the TSS describes how one-time values are generated using the RBG.

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

The evaluator shall confirm by testing that the one-time values obtained in the cryptographic operations that use the one-time values are of the length specified in [FCS_OTV_EXT.1](#), are obtained from the RBG, and are fresh on each invocation.

This testing may be carried out as part of the testing for the relevant cryptographic operations.

FCS_RBG.1 Random Bit Generation (RBG)

The inclusion of this selection-based component depends upon selection in FCS_CKM.5.1.

This component must be included in the ST if any of the following SFRs are included:

- [FCS_CKM.1/AKG](#)
- [FCS_CKM.1/SKG](#)
- [FCS_COP.1/SigGen](#)
- [FCS_IPSEC_EXT.1](#)
- [FCS_OTV_EXT.1](#)

This component may also be included in the ST as if optional.

FCS_RBG.1.1

TSF shall perform deterministic random bit generation services using [selection: DRBG Algorithm] in accordance with [selection: List of standards] after initialization.

The following table provides the recommended choices for completion of the selection operations of [FCS_RBG.1](#).

Table 28: Recommended choices for FCS_RBG.1.1

Identifier	DRBG Algorithm	List of standards
HASH_DRBG	Hash_DRBG with [selection: SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512]	[selection: ISO/IEC 18031: 2011 (Section C.2.2), NIST SP 800-90A Revision 1 Section 10.1.1]
HMAC_DRBG	HMAC_DRBG with [selection: SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512]	[selection: ISO/IEC 18031: 2011 (Section C.2.3), NIST SP 800-90A Revision 1 Section 10.1.2]
CTR_DRBG	CTR_DRBG with [selection: AES-128, AES-192, AES-256]	[selection: ISO/IEC 18031: 2011 (Section C.3.2), NIST SP800-90A Revision 1 Section 10.2.1]

Application Note: NIST SP 800-90A contains three different methods of generating random numbers; each of these, in turn, depends on underlying cryptographic primitives (hash functions/ciphers). The ST author will select the function used and include the specific underlying cryptographic primitives used in the requirement or in the TSS. While any of the identified hash functions (SHA-224, SHA-256, SHA-384, SHA-512) are allowed for Hash_DRBG or HMAC_DRBG, only AES-based implementations for CTR_DRBG are allowed. This SFR must be included in the ST if random bits are provided by the TOE to tenant software, or if it is used by the TOE itself to support or implement PP-specified security functionality.

This SFR is also needed if the following SFRs are included in the ST: [FCS_IPSEC_EXT.1](#), [FCS_OTV_EXT.1](#), [FCS_CKM.1/AKG](#), [FCS_CKM.1/SKG](#), and [FCS_COP.1/SigGen](#).

Also, this SFR must be claimed if "KDF-CTR," "KDF-FB," or "KDF-DPI" is selected in [FCS_CKM.5](#).

If "HMAC_DRBG (any)" is selected, then [FCS_COP.1/KeyedHash](#) must be claimed.

If "Hash_DRBG (any)" is selected, then [FCS_COP.1/Hash](#) must be claimed. If "CTR_DRBG (any)" is selected, then [FCS_COP.1/SKC](#) must be claimed.

The TSF shall use a [**selection**: *TSF noise source* [**assignment**: *name of noise source*], *TSF interface for seeding*] for initialization and reseeding.

Application Note: For the selection in this requirement, the ST author selects "TSF noise source" if a single noise source is used as input to the DRBG. The ST author selects "multiple TSF noise sources" if a seed is formed from a combination of two or more noise sources within the TOE boundary. If the TSF implements two or more separate DRBGs that are seeded in separate manners, this SFR should be iterated for each DRBG. If multiple distinct noise sources exist such that each DRBG only uses one of them, then each iteration would select "TSF noise source"; "multiple TSF noise sources" is only selected if a single DRBG uses multiple noise sources for its seed. The ST author selects "TSF interface for seeding" if noise source data is generated outside the TOE boundary.

If "TSF noise source" is selected, [FCS_RBG.3](#) must be claimed.

If "multiple TSF noise sources" is selected, [FCS_RBG.4](#) and [FCS_RBG.5](#) must be claimed.

If "TSF interface for seeding" is selected, [FCS_RBG.2](#) must be claimed.

The security strength of the entropy used for seeding depends on the functions for which the TSF uses entropy. The security strength for the various functions is defined in Tables 2 and 3 of NIST SP 800-57A.

The TSF shall update the DRBG state by [**selection**: *reseeding, uninstantiating and re-instantiating*] using a [**selection**: *TSF entropy source* [**assignment**: *name of entropy source*], *TSF interface for obtaining entropy* [**assignment**: *name of the interface*]] in the following situations: [**selection**:

- *never*
- *on demand*
- *on the condition: [assignment: condition]*
- *after [assignment: time]*

] in accordance with [**assignment**: *list of standards*].

Application Note: [From catalog](#) No rationale is acceptable for not satisfying one of these dependencies.

If a reseeding is selected in the first selection and something other than "never" is selected in the third selection of [FCS_RBG.1.3](#), but reseeding is not feasible, the TSF will uninstantiate RBGs, rather than produce output that is of insufficient quality. The listed standards should specify the reseed interval and procedure for uninstantiating and reseeding. The remaining selection allows the PP Author to require application-specific conditions for reseeding.

"Uninstantiate" means that the internal state of the DRBG is no longer available for use. In the second selection of [FCS_RBG.1.3](#), "on demand" means that a TOE presents an interface to reseed as a TSFI (e.g., an API call). The interface causes the DRBG to reseed at the request of an authorized user, either with an internal source, an external source, or from input provided through the TSFI (e.g., the API call).

Evaluation Activities ▼

[FCS_RBG.1.1](#)

TSS

The evaluator shall verify that the TSS identifies the DRBGs used by the TOE.

Guidance

If the DRBG functionality is configurable, the evaluator shall verify that the operational guidance includes instructions on how to configure this behavior.

Tests

The evaluator shall perform the following tests:

The evaluator shall perform 15 trials for the RNG implementation. If the RNG is configurable, the evaluator shall perform 15 trials for each configuration. The evaluator shall also confirm that the operational guidance contains appropriate instructions for configuring the RNG functionality.

If the RNG has prediction resistance enabled, each trial consists of (1) instantiate DRBG, (2) generate the first block of random bits (3) generate a second block of random bits (4) uninstantiate. The evaluator verifies that the second block of random bits is the expected value. The evaluator shall generate eight input values for each trial. The first is a count (0 - 14). The next three are entropy input, nonce, and personalization string for the instantiate operation. The next two are additional input and entropy input for the first call to generate. The final two are additional input and entropy input for the second call to generate. These values are randomly generated. "generate one block of random bits" means to generate random bits with number of

returned bits equal to the Output Block Length (as defined in NIST SP 800-90A).

If the RNG does not have prediction resistance, each trial consists of (1) instantiate DRBG, (2) generate the first block of random bits (3) reseed, (4) generate a second block of random bits (5) uninstantiate. The evaluator verifies that the second block of random bits is the expected value. The evaluator shall generate eight input values for each trial. The first is a count (0 - 14). The next three are entropy input, nonce, and personalization string for the instantiate operation. The fifth value is additional input to the first call to generate. The sixth and seventh are additional input and entropy input to the call to reseed. The final value is additional input to the second generate call.

The following list contains more information on some of the input values to be generated/selected by the evaluator.

- **Entropy input:** The length of the entropy input value must equal the seed length.
- **Nonce:** If a nonce is supported (CTR_DRBG with no Derivation Function does not use a nonce), the nonce bit length is one-half the seed length.
- **Personalization string:** The length of the personalization string must be less than or equal to seed length. If the implementation only supports one personalization string length, then the same length can be used for both values. If more than one string length is support, the evaluator shall use personalization strings of two different lengths. If the implementation does not use a personalization string, no value needs to be supplied.
- **Additional input:** The additional input bit lengths have the same defaults and restrictions as the personalization string lengths.

FCS_RBG.1.2

Documentation will be produced - and the evaluator shall perform the activities - in accordance with and the [Clarification to the Entropy Documentation and Assessment Annex](#).

FCS_RBG.1.3

TSS

The evaluator shall verify that the TSS identifies how the DRBG state is updated, and the situations under which this may occur.

Guidance

If the ST claims that the DRBG state can be updated on demand, the evaluator shall verify that the operational guidance has instructions for how to perform this operation.

Tests

There are no test activities for this element.

FCS_RBG.2 Random Bit Generation (External Seeding)

The inclusion of this selection-based component depends upon selection in FCS_RBG.1.2.

FCS_RBG.2.1

The TSF shall be able to accept a minimum input of [assignment: minimum input length greater than zero] from a TSF interface for the purpose of obtaining entropy.

Application Note: This requirement is claimed when a DRBG is seeded with entropy from one or more noise source that is outside the TOE boundary. In the case of a general purpose computing platform this would likely only occur when the entropy source is a Dedicated Security Component that is integrated with the TOE. Typically the entropy produced by an environmental noise source is conditioned such that the input length has full entropy and is therefore usable as the seed. However, if this is not the case, it should be noted what the minimum entropy rate of the noise source is so that the TSF can collect a sufficiently large sample of noise data to be conditioned into a seed value. [From catalog](#) In order to maintain compliance with NIST SP 800-90A Revision 1, the TSF accepts enough bits of input from an external noise source to satisfy the entropy requirements of the DRBG. The TSF should also protect the integrity and confidentiality of the entropy it receives from the external noise source.

The TSF interface for the purpose of seeding here is the interface used to gather entropy for initializing the seed.

Evaluation Activities ▼

FCS_RBG.2

The evaluator shall examine the entropy documentation required by FCS_RBG.1.2 to verify that it identifies, for each DRBG function implemented by the TOE, the TSF external interface used to seed the TOE's DRBG. The evaluator shall verify that this includes the amount of sampled data and the min-entropy rate of the sampled data such that it can be determined that sufficient entropy can be made available for the highest strength keys that the TSF can generate (e.g., 256 bits). If the seed data cannot be assumed to have full entropy (e.g., the min-entropy of the

sampled bits is less than 1), the evaluator shall ensure that the entropy documentation describes the method by which the TOE estimates the amount of entropy that has been accumulated to ensure that sufficient data is collected and any conditioning that the TSF applies to the output data to create a seed of sufficient size with full entropy.

FCS_RBG.3 Random Bit Generation (Internal Seeding - Single Source)

The inclusion of this selection-based component depends upon selection in FCS_RBG.1.2.

FCS_RBG.3.1

The TSF shall be able to seed the DRBG using a [**selection, choose one of:** *TSF software-based entropy source, TSF hardware-based entropy source* [**assignment:** *name of entropy source*]] with [**assignment:** *number of bits*] bits of min-entropy.

Application Note: This requirement is claimed when a DRBG is seeded with entropy from a single noise source that is within the TOE boundary. Min-entropy should be expressed as a ratio of entropy bits to sampled bits so that the total amount of data needed to ensure full entropy is known, as well as the conditioning function by which that data is reduced in size to the seed. **From catalog** If an ST Author wishes to use multiple internal noise sources, they iterate this requirement for each noise source used by the TSF.

Hardware-based noise sources are entropy sources whose primary function is noise generation, such as ring oscillators, diodes, and thermal noise. While a TOE may use software to collect the noise from these hardware sources, these are not software-based. Software-based noise sources are those sources that have some other primary function, and the noise is a byproduct of their normal operation. Examples of software-based noise sources are user or system-based events, reading the least significant bits from an event timer, etc.

Hardware-based noise sources may be stochastically modelled, in which case the amount of entropy is well understood. Software-based noise sources are usually less well understood and therefore will typically take a more conservative approach, gathering larger numbers of bits than required, then performing a compression function to derive the final output. Software-based noise sources often rely on an entropy estimator.

Evaluation Activities ▾

FCS_RBG.3

The evaluator shall examine the entropy documentation required by FCS_RBG.1.2 to verify that it identifies, for each DRBG function implemented by the TOE, the TSF noise source used to seed the TOE's DRBG. The evaluator shall verify that this includes the amount of sampled data and the min-entropy rate of the sampled data such that it can be determined that sufficient entropy can be made available for the highest strength keys that the TSF can generate (e.g., 256 bits). If the seed data cannot be assumed to have full entropy (e.g., the min-entropy of the sampled bits is less than 1), the evaluator shall ensure that the entropy documentation describes the method by which the TOE estimates the amount of entropy that has been accumulated to ensure that sufficient data is collected and any conditioning that the TSF applies to the output data to create a seed of sufficient size with full entropy.

FCS_RBG.4 Random Bit Generation (Internal Seeding - Multiple Sources)

FCS_RBG.4.1

The TSF shall be able to seed the DRBG using [**selection: [assignment: number] TSF software-based entropy source(s), [assignment: number] TSF hardware-based entropy source(s)**].

Application Note: This requirement is claimed when a DRBG is seeded with entropy from multiple noise sources that are within the TOE boundary. **FCS_RBG.5** defines the mechanism by which these sources are combined to ensure sufficient minimum entropy.

Evaluation Activities ▾

FCS_RBG.4

The evaluator shall examine the entropy documentation required by FCS_RBG.1.2 to verify that it identifies, for each DRBG function implemented by the TOE, each TSF noise source used to seed the TOE's DRBG. The evaluator shall verify that this includes the amount of sampled data

and the min-entropy rate of the sampled data from each data source.

FCS_RBG.5 Random Bit Generation (Combining Entropy Sources)

FCS_RBG.5.1

The TSF shall [**selection**: hash, concatenate and hash, XOR, input into a linear feedback shift register, [**assignment**: combining operation]] [**selection**: output from TSF entropy source(s), input from TSF interface(s) for obtaining entropy] resulting in a minimum of [**assignment**: number of bits] bits of min-entropy to create the entropy input into the derivation function as defined in [**selection**: ISO/IEC 18031:2011, NIST SP 800-90A Revision 1]

Application Note: From catalog One can apply NIST SP 800-90B (or AIS-31) statistical tests against internal noise sources (a.k.a. raw entropy) to confirm the min-entropy of the noise sources either in aggregate or individually. One should not apply NIST SP 800-90B (or AIS-31) statistical tests against external noise sources since the TOE is unable to enforce entropy requirements or conditioning requirements against external sources of entropy. However, the TSS may include estimates for min-entropy from external sources that contribute to the overall entropy requirements for either the DRBG or for [FCS_OTV_EXT.1](#).

[FCS_RBG.5](#) specifies the combining operation such that the combined min-entropy of all the internal sources and the estimated entropy of the external sources is greater than or equal to the desired entropy of the output of the combining operation. The output could be used as a nonce or a seed for a DRBG. The combining operation should avoid crushing the entropy of the sources such that the desired entropy of the output cannot be met.

The TSF interface(s) for seeding here is the interface used to gather entropy for initializing the seed.

Evaluation Activities ▾

[FCS_RBG.5](#)

Using the entropy sources specified in [FCS_RBG.4](#), the evaluator shall examine the entropy documentation required by [FCS_RBG.1.2](#) to verify that it describes the method by which the various entropy sources are combined into a single seed. This should include an estimation of the rate at which each noise source outputs data and whether this is dependent on any system-specific factors so that each source's relative contribution to the overall entropy is understood. The evaluator shall verify that the resulting combination of sampled data and the min-entropy rate of the sampled data is described in sufficient detail to determine that sufficient entropy can be made available for the highest strength keys that the TSF can generate (e.g., 256 bits). If the seed data cannot be assumed to have full entropy (e.g., the min-entropy of the sampled bits is less than 1), the evaluator shall ensure that the entropy documentation describes the method by which the TOE estimates the amount of entropy that has been accumulated to ensure that sufficient data is collected and any conditioning that the TSF applies to the output data to create a seed of sufficient size with full entropy.

FCS_STG_EXT.2 Key Storage Encryption

The inclusion of this selection-based component depends upon selection in [FCS_STG_EXT.1.1](#).

FCS_STG_EXT.2.1

The TSF shall encrypt [AKs, SKs, KEKs, and [**selection**: long-term trusted channel key material, all software-based key storage, no other keys]] using [**selection**: AES-CCM, AES-GCM, AES-KW, AES-KWP].

Application Note: This SFR is included in the ST if "software-based" is selected in [FCS_STG_EXT.1](#).

Evaluation Activities ▾

[FCS_STG_EXT.2](#)

TSS

The evaluator shall review the TSS to determine that the TSS describes the protection of symmetric keys, KEKs, long-term trusted channel key material, and software-based key storage as claimed in [FCS_STG_EXT.2.1](#).

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

There are no test activities for this component.

FCS_STG_EXT.3 Key Integrity Protection

The inclusion of this selection-based component depends upon selection in FCS_STG_EXT.1.1.

FCS_STG_EXT.3.1

The TSF shall protect the integrity of any encrypted [AKs, SKs, KEKs, and **[selection]**: long-term trusted channel key material, all software-based key storage, no other keys] by using **[selection]**:

- Symmetric encryption in **[selection]**: AES_CCM, AES_GCM, AES_KW, AES_KWP mode in accordance with [FCS_COP.1/SC](#)
- A keyed hash of the stored key in accordance with [FCS_COP.1/KeyedHash](#)
- A digital signature of the stored key in accordance with [FCS_COP.1/SigGen](#) using an asymmetric key that is protected in accordance with [FCS_STG_EXT.2](#)
- An immediate application of the key for decrypting the protected data followed by a successful verification of the decrypted data with previously known information

].

Application Note: This SFR is included in the ST if "software-based" is selected in [FCS_STG_EXT.1](#).

FCS_STG_EXT.3.2

The TSF shall verify the integrity of the **[selection]**: digital signature, MAC of the stored key prior to use of the key.

Application Note: This requirement is not applicable to derived keys that are not stored. It is not expected that a single key will be protected from corruption by multiple of these methods; however, a product may use one integrity-protection method for one type of key and a different method for other types of keys.

Evaluation Activities ▾**[FCS_STG_EXT.3](#)****TSS**

The evaluator shall examine the TSS and ensure that it contains a description of how the TOE protects the integrity of its keys.

Guidance

There are no additional Guidance evaluation activities for this component.

KMD

The documentation of the product's encryption key management should be detailed enough that, after reading, the evaluator will thoroughly understand the product's key management and how it meets the requirements to ensure the keys are adequately protected. This documentation should include an essay and diagrams. This documentation may be marked as developer proprietary.

Tests

There are no test activities for this component.

B.4 Class: User Data Protection (FDP)**FDP_ITC_EXT.1 Key/Credential Import**

The inclusion of this selection-based component depends upon selection in FCS_STG_EXT.1.2.

FDP_ITC_EXT.1.1

The TSF shall support importing keys/key material using **[selection]**: physically protected channels as specified in [FTP_ITP_EXT.1](#), encrypted data buffers as specified in [FTP_ITE_EXT.1](#), cryptographically protected data channels as

specified in [FTP_ITC_EXT.1](#).

FDP_ITC_EXT.1.2

The TSF shall verify the integrity of imported keys/key material using [selection]:

- cryptographic hash as specified in [FCS_COP.1/Hash](#)
- keyed hash as specified in [FCS_COP.1/KeyedHash](#)
- integrity-providing encryption algorithm as specified in [FCS_COP.1/SKC](#)
[selection: AES-CCM, AES-GCM, AES-KW, AES-KWP]
- digital signature as specified in [FCS_COP.1/SigVer](#)
- integrity verification supported by [FTP_ITC_EXT.1](#)

].

Application Note: This SFR is included in the ST when "importing keys/secrets into the TOE" is selected in [FCS_STG_EXT.1](#).

The way the TSF checks the integrity of the keys depends on the method of importation. For example, the encrypted data channel may provide data integrity as part of its service.

Evaluation Activities ▾

[FDP_ITC_EXT.1](#)

TSS

The evaluator shall confirm the TSS contains descriptions of the supported methods the TSF uses to import keys and key material into the TOE. For each import method selected, the TSS shall describe integrity verification schemes employed.

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

For each supported import method selected in [FDP_ITC_EXT.1.1](#) and for each supported integrity verification method selected in [FDP_ITC_EXT.1.2](#), used by the selected import method, provide one key/credential with valid integrity credentials, one with invalid integrity credentials (e.g. hash). The operations with invalid integrity credentials must result in error. The operations with valid integrity credentials must accept the keys/credentials.

B.5 Class: Identification and Authentication (FIA)

FIA_AFL_EXT.1 Authentication Failure Handling

The inclusion of this selection-based component depends upon selection in [FMT_SMR.1.1](#).

This component must also be included in the ST if any of the following use cases are selected:

- [Server-Class Platform, Physically Secure Environment](#)
- [Server-Class Platform, Enhanced Security Requirements](#)

FIA_AFL_EXT.1.1

The TSF shall consider password and [no other] as critical authentication mechanisms.

Application Note: This SFR is included in the ST if the "Administrator" role is selected in [FMT_SMR.1](#), or if the "Server-Class Platform, Basic" or "Server-Class Platform, Enhanced" use cases are selected.

If this SFR is included in the ST, then [FCS_CKM.6](#) must also be claimed.

This SFR specifies the actions to be taken in the event of multiple authentication failures.

This requirement applies to both critical and non-critical authentication mechanisms. The difference between the two is that excessive authentication failures of critical authentication mechanisms result in the wiping of all protected data (see [FIA_AFL_EXT.1.5](#)). If the TOE implements multiple Authentication Factor interfaces (for example, a DAR decryption interface, a lockscreen interface, an auxiliary boot mode interface), this element applies to all available interfaces. For example, a password is a critical authentication mechanism regardless of if it is being entered at the DAR decryption interface or at a lockscreen interface.

FIA_AFL_EXT.1.2

The TSF shall detect when a configurable positive integer within [**assignment**: range of acceptable values for each authentication mechanism] of [**selection**, **choose one of**: unique, non-unique] unsuccessful authentication attempts occur related to last successful authentication for each authentication mechanism.

Application Note: The positive integer is configured according to [Table 6](#) in [FMT_SMF.1.1](#).

An unique authentication attempt is defined as any attempt to verify an authentication attempt in which the input is different from a previous attempt. "Unique" must be selected if the authentication system increments the counter only for unique unsuccessful authentication attempts. For example, if the same incorrect password is attempted twice the authentication system increments the counter once. "Non-unique" must be selected if the authentication system increments the counter for each unsuccessful authentication attempt, regardless of whether the input is unique. For example, if the same incorrect password is attempted twice the authentication system increments the counter twice.

If the TOE supports multiple authentication mechanisms per [FIA_UAU.5.1](#), this element applies to all authentication mechanisms. It is acceptable for each authentication mechanism to utilize an independent counter or for multiple authentication mechanisms to utilize a shared counter. The interaction between the authentication factors with regard to the authentication counter must be in accordance with [FIA_UAU.5.2](#).

If the TOE implements multiple Authentication Factor interfaces (for example, a DAR decryption interface, a lockscreen interface, an auxiliary boot mode interface), this element applies to all available interfaces. However, it is acceptable for each Authentication Factor interface to be configurable with a different number of unsuccessful authentication attempts.

FIA_AFL_EXT.1.3

The TSF shall maintain the number of unsuccessful authentication attempts that have occurred upon power off.

Application Note: The TOE may implement an Authentication Factor interface that precedes another Authentication Factor interface in the boot sequence (for example, a volume DAR decryption interface which precedes the lockscreen interface) before the user can access the GPCP. In this situation, because the user must successfully authenticate to the first interface to access the second, the number of unsuccessful authentication attempts need not be maintained for the second interface.

FIA_AFL_EXT.1.4

When the defined number of unsuccessful authentication attempts has exceeded the maximum allowed for a given authentication mechanism, all future authentication attempts shall be limited to other available authentication mechanisms, unless the given mechanism is designated as a critical authentication mechanism.

Application Note: See [FIA_AFL_EXT.1.5](#) for exceeding the maximum failure threshold for critical authentication mechanisms.

In accordance with [FIA_AFL_EXT.1.3](#), this requirement also applies after the TOE is powered off and powered back on.

FIA_AFL_EXT.1.5

When the defined number of unsuccessful authentication attempts for the last available authentication mechanism or a critical authentication mechanism has been surpassed, the TSF shall [**selection**:

- *perform a wipe of all protected data*
 - *exclude the current User/Administrator from further authentication attempts*
 - *exclude the current User/Administrator from further authentication attempts for a period of [**assignment**: greater than zero seconds] time*
-].

Application Note: Wipe is performed in accordance with [FCS_CKM.6](#). Protected data is all non-TSF data, including all user or enterprise data. Some or all of this data may be considered sensitive data as well.

If the TOE implements multiple Authentication Factor interfaces (for example, a DAR decryption interface, a lockscreen interface, an auxiliary boot mode interface), this element applies to all available interfaces.

FIA_AFL_EXT.1.6

The TSF shall increment the number of unsuccessful authentication attempts prior to notifying the user that the authentication was unsuccessful.

Application Note: This requirement is to ensure that if power is cut to the device directly after an authentication attempt, the counter will be incremented

to reflect that attempt.

Evaluation Activities ▼

[FIA_AFL_EXT.1](#)

TSS

The evaluator shall ensure that the TSS describes that a value corresponding to the number of unsuccessful authentication attempts since the last successful authentication is kept for each Authentication Factor interface. The evaluator shall ensure that this description also includes if and how this value is maintained when the TOE loses power, either through a graceful powered off or an ungraceful loss of power. The evaluator shall ensure that if the value is not maintained, the interface is after another interface in the boot sequence for which the value is maintained.

If the TOE supports multiple authentication mechanisms, the evaluator shall ensure that this description also includes how the unsuccessful authentication attempts for each mechanism selected in [FIA_UAU.5.1](#) is handled. The evaluator shall verify that the TSS describes if each authentication mechanism utilizes its own counter or if multiple authentication mechanisms utilize a shared counter. If multiple authentication mechanisms utilize a shared counter, the evaluator shall verify that the TSS describes this interaction.

The evaluator shall confirm that the TSS describes how the process used to determine if the authentication attempt was successful. The evaluator shall ensure that the counter would be updated even if power to the device is cut immediately following notifying the TOE user if the authentication attempt was successful or not.

Guidance

The evaluator shall verify that the AGD describes how the Administrator configures the maximum number of unique unsuccessful authentication attempts, and the lockout time period, if applicable.

The evaluator shall verify that the AGD describes how an Administrator may recover from authentication failure when another Administrator is locked out.

Tests

The evaluator shall configure the device with all authentication mechanisms selected in [FIA_UAU.5.1](#), and configure a maximum number of unsuccessful authentication attempts for each mechanism.

- Test FIA_AFL_EXT.1.1: The evaluator shall for each authentication mechanism make unsuccessful authentication attempts until the maximum is exceeded and verify that the number of failures corresponds to the configured maximum and that no further authentication attempts can be made using that mechanism.
- Test FIA_AFL_EXT.1.2: [conditional] If the mechanism is critical or if all authentication mechanisms are exhausted, then if "perform a wipe of all protected data" is selected in [FIA_AFL_EXT.1.5](#) the evaluator shall verify that the wipe is implemented.
- Test FIA_AFL_EXT.1.3: [conditional] If the mechanism is critical or if all authentication mechanisms are exhausted, then if "exclude the current User/Administrator from further authentication attempts" is selected in [FIA_AFL_EXT.1.5](#) the evaluator shall verify that the User/Administrator can make no further authentication attempts.
- Test FIA_AFL_EXT.1.4: [conditional] If the mechanism is critical or if all authentication mechanisms are exhausted, then if "exclude the current User/Administrator from further authentication attempts for a period of [assignment: greater than zero seconds] time" is selected in [FIA_AFL_EXT.1.5](#) the evaluator shall verify that the User/Administrator can make no further authentication attempts until the specified time period has expired.

FIA_PMG_EXT.1 Password Management

The inclusion of this selection-based component depends upon selection in [FMT_SMR.1.1](#).

This component must also be included in the ST if any of the following use cases are selected:

- [Server-Class Platform, Physically Secure Environment](#)
- [Server-Class Platform, Enhanced Security Requirements](#)

FIA_PMG_EXT.1.1

The TSF shall support the following for the Password Authentication Factor:

1. Passwords shall be able to be composed of any combination of **[selection: upper and lower case letters, [assignment: a character set of at least 52 characters]], numbers, and special characters: [selection: "!", "@", "#", "\$", "%", "^", "&", "*"], [assignment: other characters]]**
2. Password length up to **[assignment: an integer greater than or equal to 14]** characters shall be supported.

Application Note: This SFR is included in the ST if the "Administrator" role is selected in [FMT_SMR.1](#), or if the "Server-Class Platform, Basic" or "Server-Class Platform, Enhanced" use cases are selected.

While some corporate policies require passwords of 14 characters or better, the use of a Root Encryption Key for DAR protection and key storage protection and the anti-hammer requirement ([FIA_TRT_EXT.1](#)) addresses the threat of attackers with physical access using much smaller and less complex passwords.

The ST Author selects the character set: either the upper and lower case Basic Latin letters or another assigned character set containing at least 52 characters. The assigned character set must be well defined: either according to an international encoding standard (such as Unicode) or defined in the assignment by the ST Author. The ST Author also selects the special characters that are supported by TOE; they may optionally list additional special characters supported using the assignment.

Evaluation Activities ▼

[FIA_PMG_EXT.1](#)

TSS

There are no additional TSS evaluation activities for this component.

Guidance

The evaluator shall examine the AGD to determine that it provides guidance to security administrators on the composition of strong passwords, and that it provides instructions on setting the minimum password length. The evaluator shall also perform the following tests. Note that one or more of these tests can be performed with a single test case.

Tests

The evaluator shall perform the following test:

The evaluator shall compose passwords that either meet the requirements, or fail to meet the requirements, in some way. For each password, the evaluator shall verify that the TOE supports the password. While the evaluator is not required (nor is it feasible) to test all possible compositions of passwords, the evaluator shall ensure that all characters, rule characteristics, and a minimum length listed in the requirement are supported, and justify the subset of those characters chosen for testing.

FIA_UAU.5 Multiple Authentication Mechanisms

The inclusion of this selection-based component depends upon selection in [FMT_SMR.1.1](#).

This component must also be included in the ST if any of the following use cases are selected:

- [Server-Class Platform, Physically Secure Environment](#)
- [Server-Class Platform, Enhanced Security Requirements](#)

FIA_UAU.5.1

The TSF shall provide [password and **[selection: X.509 certificate-based authentication, SSH-based authentication, biometric authentication, hybrid authentication, no other authentication mechanism]**] to support user authentication.

Application Note: This SFR is included in the ST if the "Administrator" role is selected in [FMT_SMR.1](#), or if the "Server-Class Platform, Basic" or "Server-Class Platform, Enhanced" use cases are selected.

A "user" in the context of this SFR is an Administrator.

The TSF must support a Password Authentication Factor and may optionally implement a biometric authentication factor. A hybrid authentication factor is where a user has to submit a combination of PIN/password and biometric sample where both have to pass and if either fails the user is not made aware of which factor failed.

The Password Authentication Factor is configured according to [FIA_PMG_EXT.1](#). If "hybrid" is selected, a biometric modality does not need to be selected, but should be selected if the biometric authentication can be used independent of the hybrid authentication, i.e. without having to enter a PIN/password.

If "X.509 certificate-based authentication" is selected, then the ST must include [FIA_X509_EXT.1](#) and [FIA_X509_EXT.2](#) from , [version](#) .

The ST Author should select "SSH-based authentication" if the TOE supports SSH-based authentication, whether public key-, password-, or certificate-based. In this case, the ST claims the [Functional Package for Secure Shell \(SSH\)](#),

FIA_UAU.5.2

The TSF shall authenticate any user's claimed identity according to the **[assignment: rules describing how the multiple authentication mechanisms provide authentication]**.

Application Note: Rules regarding how the authentication factors interact in terms of unsuccessful authentication are covered in [FIA_AFL_EXT.1](#).

Evaluation Activities ▼

[FIA_UAU.5](#)

TSS

The evaluator shall ensure that the TSS describes each mechanism provided to support user authentication and the rules describing how the authentication mechanism(s) provide authentication.

Specifically, for all authentication mechanisms specified in [FIA_UAU.5.1](#), the evaluator shall ensure that the TSS describes the rules as to how each authentication mechanism is used.

Example rules are how the authentication mechanism authenticates the user (i.e. how does the TSF verify that the correct password or biometric sample was entered), the result of a successful authentication (i.e. is the user input used to derive or unlock a key) and which authentication mechanism can be used at which authentication factor interfaces (i.e. if there are times, for example, after a reboot, that only specific authentication mechanisms can be used). If multiple Biometric Authentication Factors (BAF) are supported per [FIA_UAU.5.1](#), the interaction between the BAFs must be described. For example, whether the multiple BAFs can be enabled at the same time.

Guidance

The evaluator shall verify that configuration information for each authentication mechanism is addressed in the AGD guidance.

Tests

The evaluator shall perform the following tests:

- *Test FIA_UAU.5.1: For each authentication mechanism selected in [FIA_UAU.5.1](#), the evaluator shall enable that mechanism and verify that it can be used to authenticate the user at the specified authentication factor interfaces.*
- *Test FIA_UAU.5.2: For each authentication mechanism rule, the evaluator shall ensure that the authentication mechanism behaves accordingly.*

FIA_UAU.7 Protected Authentication Feedback

The inclusion of this selection-based component depends upon selection in [FMT_SMR.1.1](#).

This component must also be included in the ST if any of the following use cases are selected:

- ***Server-Class Platform, Physically Secure Environment***
- ***Server-Class Platform, Enhanced Security Requirements***

FIA_UAU.7.1

The TSF shall provide only [obscured feedback] to the user while the authentication is in progress.

Application Note: This SFR is included in the ST if the "Administrator" role is selected in [FMT_SMR.1](#), or if the "Server-Class Platform, Basic" or "Server-Class Platform, Enhanced" use cases are selected.

This requirement applies to all authentication mechanisms specified in [FIA_UAU.5.1](#) that provide feedback to a user or Administrator during authentication.

For authentication mechanisms that require the user or Administrator to enter a password or PIN, the TSF may briefly (1 second or less) display each character or provide an option to allow the user to unmask the user input; however, the user input must be obscured by default.

If a BAF is selected in [FIA_UAU.5.1](#), the TSF must not display sensitive information regarding the biometric that could aid an adversary in identifying or spoofing the respective biometric characteristics of a given human user. While it is true that biometric samples, by themselves, are not secret, the analysis performed by the respective biometric algorithms, as well as output data from these biometric algorithms, is considered sensitive and must be kept secret. Where applicable, the TSF must not reveal or make public the reasons for

authentication failure.

In the cases of SSH- or X.509-based authentication, the TSF must likewise not display sensitive information regarding the authentication factors that could aid an adversary in spoofing or circumventing the authentication protocols.

Evaluation Activities ▼

[FIA_UAU.7](#)

TSS

The evaluator shall ensure that the TSS describes the means of obscuring the authentication information for all authentication methods specified in [FIA_UAU.5.1](#).

Guidance

The evaluator shall verify that any configuration of this requirement is addressed in the AGD guidance and that user authentication input is obscured by default.

Tests

The evaluator shall perform the following tests:

- *Test FIA_UAU.7:1: The evaluator shall enter passwords on the device, including at least the Password Authentication Factor at lockscreen, and verify that the password is not displayed on the device.*
- *Test FIA_UAU.7:2: [conditional] For each Biometric Authentication Factor (BAF) selected in [FIA_UAU.5.1](#), the evaluator shall authenticate by producing a biometric sample at lockscreen. As the biometric algorithms are performed, the evaluator shall verify that sensitive images, audio, or other information identifying the user are kept secret and are not revealed to the user. Additionally, the evaluator shall produce a biometric sample that fails to authenticate and verify that the reason(s) for authentication failure (user mismatch, low sample quality, etc.) are not revealed to the user. It is acceptable for the BAF to state that it was unable to physically read the biometric sample, for example, if the sensor is unclean or the biometric sample was removed too quickly. However, specifics regarding why the presented biometric sample failed authentication shall not be revealed to the user. [conditional] For each SSH- or X.509-based authentication mechanism, the evaluator shall examine whether the TSF displays sensitive information during the authentication process for both successful and failed authentication attempts.*

[FIA_UIA_EXT.1 Administrator Identification and Authentication](#)

The inclusion of this selection-based component depends upon selection in [FMT_SMR.1.1](#).

This component must also be included in the ST if any of the following use cases are selected:

- ***[Server-Class Platform, Physically Secure Environment](#)***
- ***[Server-Class Platform, Enhanced Security Requirements](#)***

FIA_UIA_EXT.1.1

The TSF shall require Administrators to be successfully identified and authenticated using one of the methods in [FIA_UAU.5](#) before allowing any TSF-mediated management function to be performed by that Administrator.

Application Note: This SFR is included in the ST if the "Administrator" role is selected in [FMT_SMR.1](#), or if the "Server-Class Platform, Basic" or "Server-Class Platform, Enhanced" use cases are selected.

Ordinary unprivileged users of the platform need not authenticate to the platform, though they may well have to authenticate themselves to tenant software such as an Operating System.

The TSF-mediated management functions are listed in the management functions table ([Table 6](#)) in [FMT_SMF.1](#).

Evaluation Activities ▼

[FIA_UIA_EXT.1](#)

TSS

The evaluator shall examine the TSS to determine that it describes the logon process for each logon method (local, remote (HTTPS, SSH, etc.)) supported for the platform. This description shall contain information pertaining to the credentials allowed/used, any protocol transactions that take place, and what constitutes a "successful logon."

Guidance

The evaluator shall examine the AGD to determine that any necessary preparatory steps (e.g.,

establishing credential material such as pre-shared keys, tunnels, certificates) to logging in are described. For each supported login method, the evaluator shall ensure the AGD provides clear instructions for successfully logging on. If configuration is necessary to ensure the services provided before login are limited, the evaluator shall determine that the AGD provides sufficient instruction on limiting the allowed services.

Tests

There are no test activities for this component.

B.6 Class: Protection of the TSF (FPT)

FPT_FLS.1 Failure with Preservation of Secure State

The inclusion of this selection-based component depends upon selection in FCS_CKM.5.1.

This component must be included in the ST if any of the following SFRs are included:

- [FCS_CKM.1/AKG](#)
- [FCS_CKM.1/SKG](#)
- [FCS_COP.1/SigGen](#)
- [FCS_IPSEC_EXT.1](#)
- [FCS_OTV_EXT.1](#)

This component may also be included in the ST as if optional.

FPT_FLS.1.1

The TSF shall preserve a secure state when the following types of failures occur: [DRBG self-test failure].

Application Note: The intent of this requirement is to ensure that cryptographic services requiring random bit generation cannot be performed if a failure of a self-test defined in [FPT_TST.1](#) occurs.

Evaluation Activities ▾

[FPT_FLS.1](#)

TSS

The evaluator shall verify that the TSF describes how the TOE enters an error state in the event of a DRBG self-test failure.

Guidance

The evaluator shall verify that the guidance documentation describes the error state that results from a DRBG self-test failure and the actions that a user or administrator should take in response to attempt to resolve the error state.

Tests

There are no test activities for this component.

FPT_JTA_EXT.2 JTAG/Debug Port Disablement

This component must also be included in the ST if any of the following use cases are selected:

- [Server-Class Platform, Enhanced Security Requirements](#)
- [Portable Clients \(laptops, tablets\), Enhanced Security Requirements](#)
- [CSfC EUD](#)
- [Tactical EUD](#)
- [IoT Devices](#)

FPT_JTA_EXT.2.1

The TSF shall [selection, choose one of: disable access through hardware, control access by a signing key] to JTAG or other debug interfaces.

Application Note: This requirement should be included in the ST for use cases that include the threat [T.PHYSICAL](#).

Evaluation Activities ▾

[FPT_JTA_EXT.2](#)

TSS

If "disable access through hardware" is selected:

The evaluator shall examine the TSS to determine the location of the JTAG ports on the TSF, to include the order of the ports (i.e. Data In, Data Out, Clock, etc.).

If "control access by a signing key" is selected:

The evaluator shall examine the TSS to determine how access to the JTAG is controlled by a signing key. The evaluator shall examine the TSS to determine when the JTAG can be accessed, i.e. what has the access to the signing key.

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

The following test requires the developer to provide access to a test platform that provides the evaluator with chip level access.

[conditional] If "disable access through hardware" is selected:

The evaluator shall connect a packet analyzer to the JTAG ports. The evaluator shall query the JTAG port for its device ID and confirm that the device ID cannot be retrieved.

FPT_PHP.1 Passive detection of physical attack

This component must also be included in the ST if any of the following use cases are selected:

- [Portable Clients \(laptops, tablets\), Enhanced Security Requirements](#)
- [IoT Devices](#)

This component may also be included in the ST as if optional, but may be mandatory in the future.

FPT_PHP.1.1

The TSF shall provide unambiguous detection of physical tampering that can compromise the TSF.

FPT_PHP.1.2

The TSF shall provide the capability to determine whether physical tampering with the TSF's devices or TSF's elements has occurred.

Application Note: This SFR should be included in the ST if the TOE implements the following use cases:

1. Portable Clients (laptops, tablets), Enhanced
2. IoT Devices

CSfC EUDs also require detection of physical attack, but in this case [FPT_PHP.2](#) is required instead.

Evaluation Activities ▾

[FPT_PHP.1](#)

TSS

The evaluator shall examine the TSS to ensure it describes the methods used by the TOE to detect physical tampering and how tampering is indicated when detected.

Guidance

The evaluator shall ensure that the AGD describes how the TOE indicates to users and Administrators that it has detected tampering.

Tests

The evaluator shall verify that attempts to open the TOE enclosure result in indications consistent with the operational guidance. Such indications could include damaged tamper seals, logged events, or other physical or electronic manifestations.

FPT_PHP.2 Notification of Physical Attack

This component must also be included in the ST if any of the following use cases are selected:

- [Server-Class Platform, Enhanced Security Requirements](#)

This component may also be included in the ST as if optional, but may be mandatory in the future.

FPT_PHP.2.1

The TSF shall provide unambiguous detection of physical tampering that can compromise the TSF.

FPT_PHP.2.2

The TSF shall provide the capability to determine whether physical tampering with the TSF's devices or TSF's elements has occurred.

FPT_PHP.2.3

For [assignment: list of TSF devices/elements for which active detection is required], the TSF shall monitor the devices and elements and notify [assignment: a designated user or role] when physical tampering with the TSF's devices or TSF's elements has occurred.

Application Note: This SFR should be included in the ST if the TOE implements the following use cases:

1. Server-Class Platform, Enhanced
2. CSfC EUD

FPT_PHP.2 is hierarchical to FPT_PHP.1 which means that all requirements of FPT_PHP.1 are also included as part of FPT_PHP.2. A TOE that conforms to FPT_PHP.2 therefore does not claim FPT_PHP.1.

Evaluation Activities ▼

FPT_PHP.2

TSS

The evaluator shall examine the TSS to ensure it describes the methods used by the TOE to detect physical tampering and how the TOE will respond when physical tampering has been detected for each device/element specified in FPT_PHP.2.3.

Guidance

The evaluator shall ensure that the AGD describes how the TOE notifies users or Administrators that it has detected tampering.

Tests

The evaluator shall perform the following tests:

- Test FPT_PHP.2.1: The evaluator shall verify that attempts to open the TOE enclosure result in indications consistent with the operational guidance. Such indications could include damaged tamper seals, logged events, or other physical or electronic manifestations.
- Test FPT_PHP.2.2: For each device/element listed in FPT_PHP.2.3, the evaluator shall verify that attempts to physically tamper with the device/element results in notification to the designated users or roles consistent with the operational guidance.

FPT_PHP.3 Resistance to Physical Attack

This component must also be included in the ST if any of the following use cases are selected:

- **Server-Class Platform, Enhanced Security Requirements**
- **Tactical EUD**

FPT_PHP.3.1

The TSF shall resist [assignment: physical tampering scenarios] to the [assignment: list of TSF devices/elements] by responding automatically such that the SFRs are always enforced.

Application Note: This SFR should be included in the ST if the TOE implements the following use cases:

1. Server-Class Platform, Enhanced
2. Tactical EUD

Evaluation Activities ▼

FPT_PHP.3

TSS

The evaluator shall examine the TSS to ensure it describes the methods used by the TOE to detect physical tampering and how the TOE will respond when physical tampering has been detected such that SFRs are always enforced.

Guidance

The evaluator shall examine the AGD to ensure that it describes the expected response of the TOE when physical tampering is detected.

Tests

The evaluator shall perform the following test:

For each physical tampering scenario and device/element listed in [FPT_PHP.3.1](#), the evaluator shall verify that tampering attempts result in a response from the TSF consistent with the operational guidance.

FPT_RVR_EXT.1 Platform Firmware Recovery

The inclusion of this selection-based component depends upon selection in FPT_ROT_EXT.2.2, FPT_TUD_EXT.2.5, FPT_TUD_EXT.3.4.

FPT_RVR_EXT.1.1

The TSF shall implement a mechanism for recovering from boot firmware failure consisting of [selection]:

- the secure local update mechanism described in [FPT_TUD_EXT.4](#)
 - installation of a known-good or recovery firmware image
 - reversion to the prior firmware image
 - installation of a recovery image that puts the TOE into a maintenance mode
- 1.

Application Note: This SFR must be included in the ST if:

- "Initiate a recovery process as specified in [FPT_RVR_EXT.1](#)" is selected in [FPT_ROT_EXT.2.2](#),
- "Initiate a recovery process as specified in [FPT_RVR_EXT.1](#)" is selected in [FPT_TUD_EXT.2.5](#),
- "Initiate a recovery process as specified in [FPT_RVR_EXT.1](#)" is selected in [FPT_TUD_EXT.3.4](#),
- The TOE implements a recovery mechanism for firmware corruption not necessarily related to integrity or update failure.

If the ST Author selects "the secure local update mechanism described in [FPT_TUD_EXT.4](#)," then [FPT_TUD_EXT.4](#) must be claimed in the ST.

As indicated above, in addition to integrity or update failure, the TOE may use a recovery mechanism to deal with non-security-related failures, such as a power outage during update or a power surge during normal operation.

The recovery process may be initiated automatically on failure, as the result of physically present user action, or as the result of pre-configured policy. The action taken may depend on the nature of the failure as specified in [FPT_ROT_EXT.2.2](#) and [FPT_TUD_EXT.2.5](#).

Evaluation Activities ▼**FPT_RVR_EXT.1****TSS**

The evaluator shall examine the TSS section to confirm that it describes how the platform firmware recovery mechanism works and the conditions under which it is invoked.

Guidance

The evaluator shall examine the AGD to ensure that it describes how to configure the conditions under which the recovery mechanism is initiated (if configurable).

Tests

The evaluator shall perform the following tests:

- Test FPT_RVR_EXT.1:1: To test this requirement, the evaluator shall trigger the recovery process either by forcing an update error or a boot integrity failure and observing that the recovery process has been initiated.
- Test FPT_RVR_EXT.1:2: The evaluator will engage with the recovery process as necessary, and after recovery will determine the version of the current firmware image. The test is passed if the resultant image is as expected in accordance with policy and the selections in [FPT_RVR_EXT.1.1](#). If the recovery process uses the secure local update process as specified in [FPT_TUD_EXT.4](#), then this test is satisfied by testing of that requirement.

FPT_TST.1 TSF Self-Testing

The inclusion of this selection-based component depends upon selection in FCS_CKM.5.1.

This component must be included in the ST if any of the following SFRs are included:

- [FCS_CKM.1/AKG](#)
- [FCS_CKM.1/SKG](#)
- [FCS_COP.1/SigGen](#)
- [FCS_IPSEC_EXT.1](#)
- [FCS_OTV_EXT.1](#)

This component may also be included in the ST as if optional.

FPT_TST.1.1

The TSF shall run a suite of the following self-tests [**selection**: during initial start-up, periodically during normal operation, at the request of the authorized user, at the conditions [**assignment**: conditions under which self-test should occur]] to demonstrate the correct operation of [TSF DRBG specified in [FCS_RB.G.1](#)].

FPT_TST.1.2

The TSF shall provide authorized users with the capability to verify the integrity of [[DRBG seed/output data]].

FPT_TST.1.3

The TSF shall provide authorized users with the capability to verify the integrity of [[TSF DRBG specified in [FCS_RB.G.1](#)]].

Application Note: This SFR is a required dependency of [FCS_RB.G.1](#). It is intended to require that any DRBG implemented by the TOE undergo health testing to ensure that the random bit generation functionality has not been degraded. If the TSF supports multiple DRBGs, this SFR should be iterated to describe the self-test behavior for each.

Evaluation Activities ▼

[FPT_TST.1](#)

TSS

The evaluator shall examine the TSS to ensure that it details the self-tests that are run by the TSF along with how they are run. This description should include an outline of what the tests are actually doing. The evaluator shall ensure that the TSS makes an argument that the tests are sufficient to demonstrate that the DRBG is operating correctly.

Note that this information may also be placed in the entropy documentation specified by .

Guidance

If a self-test can be executed at the request of an authorized user, the evaluator shall verify that the operational guidance provides instructions on how to execute that self-test.

Tests

For each self-test, the evaluator shall verify that evidence is produced that the self-test is executed when specified by [FPT_TST.1.1](#).

If a self-test can be executed at the request of an authorized user, the evaluator shall verify that following the steps documented in the operational guidance to perform the self-test will result in execution of the self-test.

FPT_TUD_EXT.2 Platform Firmware Authenticated Update Mechanism

The inclusion of this selection-based component depends upon selection in FPT_TUD_EXT.1.1.

FPT_TUD_EXT.2.1

The TSF shall authenticate the source of all platform firmware updates using a digital signature algorithm specified in [FCS_COP.1/SigVer](#) and using a key store that contains [**selection**: the public key, hash value of the public key].

Application Note: This SFR must be included in the ST if "an authenticated platform firmware update mechanism as described in [FPT_TUD_EXT.2](#)" is selected in [FPT_TUD_EXT.1.1](#).

The ST must include [FCS_COP.1/Hash](#) if "hash value of the public key" is

selected.

FPT_TUD_EXT.2.2

The TSF shall allow installation of updates only if the digital signature has been successfully verified as specified in [FCS_COP.1/SigVer](#) and [selection: the version number of the platform firmware update is more recent than the version number of the current installed platform firmware, no other conditions].

Application Note: The ST Author should select "the version number..." if the TSF supports rollback prevention. That is, the TSF does not allow "update" to an older version of the platform firmware. In general, rollback should be permitted only through a secure local update mechanism at the express direction of an physically present Administrator or User.

FPT_TUD_EXT.2.3

The TSF shall include a platform firmware version identifier that is accessible by the update mechanism and includes information that enables the update mechanism to determine the relative order of updates.

FPT_TUD_EXT.2.4

The TSF shall provide an observable indication of the success or failure of the update operation.

Application Note: For success, this indication should include the version number of the newly installed firmware. Notification of failure could include generation of an audit event by a management subsystem, a beep code, an updated version number on a splash screen, or simple failure to continue functioning.

FPT_TUD_EXT.2.5

The TOE shall take the following actions if a platform firmware integrity, authenticity, or rollback-prevention check fails, or a platform firmware update fails for any other reason:

- Do not install the update,
- Notify an [selection: Administrator, User] by [selection: generating an audit event, [assignment: notification method]],

and [selection, choose one of:

- Continue execution
- Halt
- Stop all execution and shut down
- Initiate recovery as specified in [FPT_RVR_EXT.1](#)

] [selection, choose one of:

- automatically
- in accordance with administrator-configurable policy
- by express determination of an [selection: Administrator, User]

].

Application Note: If "generating an audit event" is selected, then [FAU_GEN.1](#) and the other audit requirements must be claimed.

If "Initiate recovery as specified in [FPT_RVR_EXT.1](#)" is selected, then [FPT_RVR_EXT.1](#) must be included in the ST.

The platform firmware authenticated update mechanism employs digital signatures to ensure the authenticity of the firmware update image. The TSF includes a signature verification algorithm and a key store containing the public key needed to verify the signature on the firmware update image.

A hash of the public key may be stored if a copy of the public key is provided with firmware update images. In this case, the update mechanism hashes the public key provided with the update image, and ensure that it matches a hash which appears in the key store before using the provided public key to verify the signature of the update image. If the hash of the public key is selected, the ST Author may iterate the [FCS_COP.1/Hash](#) requirement to specify the hashing functions used.

An indication of success or failure can be generation of an audit event by a management subsystem, a beep code, an updated version number on a splash screen, or simple failure to continue functioning.

If the update mechanism generates audit events, the ST Author must make the appropriate selections from the audit events table ([Table 11](#)).

Evaluation Activities ▾

[FPT_TUD_EXT.2](#)

TSS

The evaluator shall ensure that the TSS includes a comprehensive description of how the

authentication of platform firmware updates is implemented by the TSF. The TSS should cover the initialization process and the activities that are performed to ensure that the digital signature of the update image is verified before modification of the firmware.

The evaluator shall examine the TSF to ensure that it describes the platform firmware version identifier and explains its meaning and encoding.

The evaluator shall also ensure that the TSS describes the actions taken by the TSF if an update image fails authentication.

Guidance

The evaluator shall examine the AGD to ensure that it describes the process for updating the platform firmware.

The evaluator shall examine the AGD to ensure that it documents the observable indications of update success or failure, and that it describes how to access the platform firmware version indicators.

Tests

The evaluator shall perform the following tests:

- *Test FPT_TUD_EXT.2:1: The evaluator determines the current version of the platform firmware, and obtains or produces a valid, authentic, and permissible update image of platform firmware. The evaluator initiates an update using this image through the process described in the operational guidance. After the process is complete, the evaluator checks the current firmware version to ensure that the new firmware version matches that of the update.*
- *Test FPT_TUD_EXT.2:2: The evaluator performs the same test, this time using a valid update image that is signed with an incorrect key. The update must fail.*
- *Test FPT_TUD_EXT.2:3: The evaluator performs the same test, this time using an update image that is corrupted but is signed with the correct key. The update must fail.*
- *Test FPT_TUD_EXT.2:4: The evaluator performs the same test, this time using a valid update image that is not signed. The update must fail.*
- *Test FPT_TUD_EXT.2:5: [conditional] If the TSF implements rollback protections, the evaluator performs the same test, this time using a valid, signed update image that has an earlier version number than the currently installed firmware. The update must fail.*

FPT_TUD_EXT.3 Platform Firmware Delayed-Authentication Update Mechanism

The inclusion of this selection-based component depends upon selection in FPT_TUD_EXT.1.1.

FPT_TUD_EXT.3.1

The TSF shall allow execution or use of platform firmware updates only if new platform firmware is integrity- and authenticity-checked using the mechanism described in [FPT_ROT_EXT.2](#) prior to its execution or use, and [**selection**: *the version number of the platform firmware update is more recent than the version number of the previously installed platform firmware, no other conditions*].

Application Note: This requirement must be included in the ST if "*implement a delayed-authentication platform firmware update mechanism as described in FPT_TUD_EXT.3*" is selected in [FPT_TUD_EXT.1.1](#).

This update mechanism does not require an integrity or authenticity check prior to installation, but the newly installed platform firmware must have its integrity and authenticity verified prior to being executed or used. This update mechanism takes advantage of the existing [FPT_ROT_EXT.2](#) requirement to avoid having to verify the integrity and authenticity of an update package at install time.

The ST Author should select "*the version number of the platform firmware update is more recent than the version number of the previously installed platform firmware*" if the TSF supports rollback prevention.

FPT_TUD_EXT.3.2

The TSF shall include an observable platform firmware version identifier that is accessible by the update mechanism and includes information that enables the update mechanism to determine the relative order of updates.

FPT_TUD_EXT.3.3

The TSF shall provide an observable indication of the success or failure of the update operation.

Application Note: For success, this should at least include an indication of the version number of the newly installed firmware. Notification of failure could include generation of an audit event by a management subsystem, a beep code, an updated version number on a splash screen, or simple failure to continue functioning.

The TOE shall take the following actions if a platform firmware update integrity, authentication, or rollback-prevention check fails, or a platform firmware update fails for any other reason:

- Notify an [**selection**: Administrator, User] by [**selection**: generating an audit event, [**assignment**: notification method]]

and [**selection**, choose one of:

- *Halt*
- *Stop all execution and shut down*
- *Initiate a recovery process as specified in FPT_RVR_EXT.1*

] [**selection**, choose one of:

- *automatically*
- *in accordance with administrator-configurable policy*
- *by express determination of an [selection]: Administrator, User*

].

Application Note: If "generating an audit event" is selected, then FAU_GEN.1 and the other audit SFRs must be claimed.

If "Initiate recovery as specified in FPT_RVR_EXT.1" is selected, then FPT_RVR_EXT.1 must be included in the ST.

The platform firmware unauthenticated update mechanism installs platform firmware updates without first checking their integrity or authenticity. Instead, this mechanism either invokes a special authentication/integrity check on the firmware *in situ* after install or relies on the firmware checks required by FPT_ROT_EXT.2 to ensure the integrity and authenticity of the update image. In either case, the integrity and authenticity of the update must be verified before the updated firmware is executed or used.

Likewise, if the TSF implements rollback prevention, this check must be made before the newly installed firmware is executed.

Evaluation Activities ▾

FPT_TUD_EXT.3

TSS

The evaluator shall ensure that the TSS includes a comprehensive description of how the authentication of platform firmware updates is implemented by the TSF. The TSS should cover the initialization process and the activities that are performed to ensure that the digital signature of the update image is verified before it is executed or used.

The evaluator shall examine the TSF to ensure that it describes the platform firmware version identifier and explains its meaning and encoding.

The evaluator shall also ensure that the TSS describes the actions taken by the TSF if an update image fails authentication, integrity, or rollback-prevention checks.

Guidance

The evaluator shall examine the AGD to ensure that it describes the process for updating the platform firmware.

The evaluator shall examine the AGD to ensure that it documents the observable indications of update success or failure, and that it describes how to access the platform firmware version indicators.

Tests

The evaluator shall perform the following tests:

- Test FPT_TUD_EXT.3:1: The evaluator determines the current version of the platform firmware, and obtains or produces a valid, authentic, and permissible update image of platform firmware. The evaluator initiates an update using this image through the process described in the operational guidance. After the process is complete, the evaluator checks the current firmware version to ensure that the new firmware version matches that of the update.
- Test FPT_TUD_EXT.3:2: The evaluator performs the same test, this time using an inauthentic update image. The update code must fail to execute.
- Test FPT_TUD_EXT.3:3: The evaluator performs the same test, this time using an update image that is corrupted but is otherwise authentic. The update code must fail to execute.
- Test FPT_TUD_EXT.3:4: [conditional] If the TSF implements rollback protections, the evaluator performs the same test, this time using a valid, signed update image that has an earlier version number than the currently installed firmware. The update code must fail to execute.

**The inclusion of this selection-based component depends upon selection in
[FPT_RVR_EXT.1.1](#), [FPT_TUD_EXT.1.1](#).**

FPT_TUD_EXT.4.1

The TSF shall provide a secure local update mechanism that requires an assertion of physical access to the TOE before installation of an update.

FPT_TUD_EXT.4.2

A user shall assert physical presence to the TSF through: [selection:

- *login to the TOE from a physically connected console or terminal*
- *physical connection of a jumper or cable*
- *connection to a debug port*
- **[assignment: description of other mechanism for asserting physical presence]**

].

Application Note: The requirement included in the ST if "the secure local update mechanism described in [FPT_TUD_EXT.4](#)" is selected in [FPT_RVR_EXT.1.1](#) or "implement a secure local platform firmware update mechanism described in [FPT_TUD_EXT.4](#)" is selected in [FPT_TUD_EXT.1.1](#).

This requirement pertains to platform firmware update mechanisms that do not use the authentication-based update mechanism described in [FPT_TUD_EXT.2](#) or the delayed-authentication described in [FPT_TUD_EXT.3](#). The secure local update mechanism ensures the authenticity and integrity of the firmware update image by requiring a user to be physically present at the TOE. An assertion of physical presence can take the form, for example, of requiring entry of a password at a boot screen, unlocking of a physical lock (e.g., a motherboard jumper), or inserting a USB cable before permitting platform firmware to be updated.

There is no requirement that the local update mechanism support rollback prevention.

The local update mechanism must be a designed mechanism. If update can be accomplished only through the physical removal and replacement of a part, then that is not a secure local update mechanism, and "make no provision for platform firmware update" should be selected in [FPT_TUD_EXT.1.1](#).

FPT_TUD_EXT.4.3

The TSF shall include a platform firmware version identifier that is accessible by the update mechanism or to the user who asserts physical presence.

FPT_TUD_EXT.4.4

The TSF shall provide an observable indication of the success or failure of the update operation.

Application Note: For success, this indication should include the version number of the newly installed firmware. Notification of failure could be through a beep code, an indication on a splash screen, or simple failure to continue functioning.

Evaluation Activities ▼

[FPT_TUD_EXT.4](#)

TSS

The evaluator shall check the TSS section to confirm that it clearly and thoroughly describes how the secure local update functionality is implemented.

Guidance

The evaluator shall examine the AGD to ensure that it describes instructions for using the local update mechanism, and how to validate that the update was successful.

Tests

The evaluator shall perform the following tests:

- *Test FPT_TUD_EXT.4.1: The evaluator tests the secure local update by following the instructions provided in the operational guidance to update the platform firmware image. The update must succeed.*
- *Test FPT_TUD_EXT.4.2: The evaluator next tries to update the platform firmware image without first asserting physical presence. The update must fail or be not possible.*

The inclusion of this selection-based component depends upon selection in FDP_ITC_EXT.1.1, FMT_SMF.1.1.

FTP_ITC_EXT.1.1

The TSF shall use [selection]:

- TLS as conforming to the [Functional Package for Transport Layer Security \(TLS\), version 2.1](#)
- TLS/HTTPS as conforming to [FCS HTTPS EXT.1](#)
- IPsec as conforming to [FCS_IPSEC_EXT.1](#)
- SSH as conforming to the [Functional Package for Secure Shell \(SSH\), version 2.0](#)

] protocols with [selection, choose one of:

- X.509 certificate-based authentication of the remote peer
- non-certificate-based authentication of the remote peer
- no authentication of the remote peer

] to provide a communication channel between itself and [selection]:

- audit servers (as required by [FAU_STG.1.1](#) if selected)
- remote administrators (as required by [FTP_TRP.1.1](#) if selected in [FMT_MOF.1](#))
- [assignment: other capabilities]
- no other capabilities

] that is logically distinct from other communication channels, provides assured identification of its end points, protects channel data from disclosure, and detects modification of the channel data.

Application Note: This SFR is included in the ST if a trusted channel is used to offload audit data or if the platform is administered remotely. That is, if "a trusted channel as specified in [FTP_ITC_EXT.1](#)" is selected in [FAU_STG.1.1](#), if "physically protected channels as specified in [FTP_ITP_EXT.1](#)" is selected in [FDP_ITC_EXT.1.1](#), or if "remotely" is selected in Management Function 1 in [FMT_SMF.1.1](#).

If the ST Author selects either "TLS" or "HTTPS," the TOE must be validated against the Functional Package for TLS. This PP does not mandate that a product implement TLS with mutual authentication, but if the product includes the capability to perform TLS with mutual authentication, then mutual authentication must be included within the TOE boundary.

If the ST Author selects "SSH," the TOE must conform to [Functional Package for Secure Shell \(SSH\), version 2.0](#).

If the ST Author selects "certificate-based authentication of the remote peer," then the TOE must conform to , [version](#) .

Claims from this package are only required to the extent that they are needed to support the functionality required by the trusted protocols that are claimed.

If the TSF implements a protocol that requires the validation of a certificate presented by an external entity, FIA_X509_EXT.1 and FIA_X509_EXT.2 will be claimed. FIA_TSM_EXT.1 may also be claimed if the TSF implements its own trust store. If the TSF implements a protocol that requires the presentation of any certificates to an external entity, FIA_XCU_EXT.2 will be claimed.

FIA_X509_EXT.3 will also be claimed, along with any applicable dependencies, depending on how the certificates presented by the TOE are obtained.

"No authentication of the remote peer" should be selected only if the TOE is acting as a server in a non-mutual authentication configuration.

.

Evaluation Activities ▾

[FTP_ITC_EXT.1](#)

TSS

The evaluator will review the TSS to determine that it lists all trusted channels the TOE uses for remote communications, including both the external IT entities and remote users that use the channel as well as the protocol that is used for each.

Guidance

The evaluator shall confirm that the AGD contains instructions for establishing connections to external IT entities and remote users.

Tests

The evaluator will configure the TOE to communicate with each external IT entity and type of remote user identified in the TSS. The evaluator will monitor network traffic while the VS

performs communication with each of these destinations. The evaluator will ensure that for each session a trusted channel was established in conformance with the protocols identified in the selection.

FTP_ITE_EXT.1 Encrypted Data Communications

The inclusion of this selection-based component depends upon selection in FDP_ITC_EXT.1.1.

FTP_ITE_EXT.1.1

The TSF shall encrypt data for transfer between the TOE and [assignment: list of entities external to the TOE] using a cryptographic algorithm and key size as specified in FCS_COP.1/SKC, and using [selection:

- Pre-shared keys
- Keys established according to FCS_CKM.2
- Keys exchanged using a physically protected communication mechanism conformant with FTP_ITP_EXT.1

].

Application Note: This SFR must be claimed if "encrypted data buffers as specified in FTP_ITE_EXT.1" is selected in FDP_ITC_EXT.1.

This requirement applies to encrypted data communications between the TOE and external entities that do not use a physically protected mechanism conforming to FTP_ITP_EXT.1, or a cryptographically protected data channel as conforming to FTP_ITC_EXT.1. For example, if data is transferred through encrypted buffers (or blobs), then this requirement applies. This requirement would apply, for example, for communications implemented through a shared data buffer.

Evaluation Activities ▼

FTP_ITE_EXT.1

TSS

The evaluator shall review the TSS to determine that it lists all encryption mechanisms the TOE uses for protected external communications, along with the types of communications protected using each mechanism.

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

The evaluator shall configure the TOE to communicate with each external entity identified in the TSS. The evaluator shall initiate a transaction that will result in data being transferred to the TOE through the mechanism and other data returned to the initiating entity through the mechanism. The evaluator must verify that the data returned to the entity was encrypted using the documented mechanism when received.

FTP_ITP_EXT.1 Physically Protected Channel

The inclusion of this selection-based component depends upon selection in FDP_ITC_EXT.1.1, FTP_ITE_EXT.1.1.

FTP_ITP_EXT.1.1

The TSF shall provide a physically protected communication channel between itself and [assignment: list of other IT entities within the same platform].

Application Note: This SFR must be claimed if "physically protected channels as specified in FTP_ITP_EXT.1" is selected in either FDP_ITC_EXT.1, or if "Keys exchanged using a physically protected communication mechanism conformant with FTP_ITP_EXT.1" is selected in FTP_ITE_EXT.1.1.

Evaluation Activities ▼

FTP_ITP_EXT.1

TSS

The evaluator shall review the TSS to determine that it lists all mechanisms the TOE uses for physically protected external communications, along with the types of communications protected using each mechanism.

Guidance

There are no additional Guidance evaluation activities for this component.

Tests

There are no test activities for this component.

FTP_TRP.1 Trusted Path

The inclusion of this selection-based component depends upon selection in FMT_SMF.1.1.

FTP_TRP.1.1

The TSF shall **use a trusted channel as specified in [FTP_ITC_EXT.1](#)** to provide a **trusted** communication path between itself and [remote] **Administrators** that is logically distinct from other communication paths and provides assured identification of its end points and protection of the communicated data from [*modification, disclosure*].

FTP_TRP.1.2

The TSF shall permit [remote **Administrators**] to initiate communication via the trusted path.

FTP_TRP.1.3

The TSF shall require the use of the trusted path for [*[all remote administration actions]*].

Application Note: This SFR is included in the ST if "remotely" is selected in Management Function 1 of [FMT_SMF.1.1](#).

Protocols used to implement the remote administration trusted channel must be selected in [FTP_ITC_EXT.1](#).

This requirement ensures that authorized remote Administrators initiate all communication with the TOE via a trusted path, and that all communications with the TOE by remote Administrators is performed over this path. The data passed in this trusted communication channel are encrypted as defined the protocol chosen in the first selection in [FTP_ITC_EXT.1](#).

Evaluation Activities ▼**[FTP_TRP.1](#)****TSS**

The evaluator shall examine the TSS to determine that the methods of remote TOE administration are indicated, along with how those communications are protected. The evaluator shall also confirm that all protocols listed in the TSS in support of TOE administration are consistent with those specified in the requirement, and are included in the requirements in the ST.

Guidance

The evaluator shall confirm that the AGD contains instructions for establishing the remote administrative sessions for each supported method.

Tests

The evaluator shall also perform the following tests:

- *Test FTP_TRP.1:1: The evaluator shall ensure that communications using each specified (in the AGD) remote administration method is tested during the course of the evaluation, setting up the connections as described in the AGD and ensuring that communication is successful.*
- *Test FTP_TRP.1:2: For each method of remote administration supported, the evaluator shall follow the AGD to ensure that there is no available interface that can be used by a remote user to establish remote administrative sessions without invoking the trusted path.*
- *Test FTP_TRP.1:3: The evaluator shall ensure, for each method of remote administration, the channel data is not sent in plaintext.*
- *Test FTP_TRP.1:4: The evaluator shall ensure, for each method of remote administration, modification of the channel data is detected by the TOE.*

Additional evaluation activities are associated with the specific protocols.

Appendix C - Extended Component Definitions

This appendix contains the definitions for all extended requirements specified in the PP.

C.1 Extended Components Table

All extended components specified in the PP are listed in this table:

Table 29: Extended Component Definitions

Functional Class	Functional Components
Class: Cryptographic Support (FCS)	FCS_CKM_EXT Cryptographic Key Management FCS_HTTPS_EXT HTTPS Protocol FCS_IPSEC_EXT IPsec Protocol FCS_OTV_EXT Cryptographic One-Time Value Generation FCS_STG_EXT Cryptographic Key Storage
Class: Identification and Authentication (FIA)	FIA_AFL_EXT Authentication Failure Handling FIA_PMG_EXT Password Management FIA_TRT_EXT Authentication Throttling FIA_UIA_EXT Administrator Identification and Authentication
Class: Protection of the TSF (FPT)	FPT_JTA_EXT Debug Port Access FPT_PPF_EXT Protection of Platform Firmware FPT_ROT_EXT Platform Integrity FPT_RVR_EXT Platform Firmware Recovery FPT_TUD_EXT Platform Firmware Update
Class: Security Management (FMT)	FMT_CFG_EXT Secure by Default
Class: Trusted Path/Channels (FTP)	FTP_ITC_EXT Trusted Channel Communications FTP_ITE_EXT Encrypted Data Communications FTP_ITP_EXT Physically Protected Channel
Class: User Data Protection (FDP)	FDP_ITC_EXT Key Import FDP_TEE_EXT Trusted Execution Environment

C.2 Extended Component Definitions

C.2.1 Class: Cryptographic Support (FCS)

This PP defines the following extended components as part of the FCS class originally defined by CC Part 2:

C.2.1.1 FCS_CKM_EXT Cryptographic Key Management

Family Behavior

This family defines requirements for management of cryptographic keys. Add any FCS_CKM extended components here ([FCS_CKM_EXT.3](#), [FCS_CKM_EXT.7](#), and [FCS_CKM_EXT.8](#)) is necessary to express requirements for key derivation, which are missing from Part 2.

Component Leveling



[FCS_CKM_EXT.3](#), Cryptographic Key Access, requires access to cryptographic keys stored outside the TOE to be performed in accordance with a specified access method.

[FCS_CKM_EXT.7](#), Cryptographic Key Agreement, requires that cryptographic key agreement be performed in accordance with specified standards.

[FCS_CKM_EXT.8](#), Password-Based Key Derivation, requires that password-based key derivation be performed in accordance with specified standards.

Management: FCS_CKM_EXT.3

There are no management functions foreseen.

Audit: FCS_CKM_EXT.3

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP, PP-Module, functional package or ST:

- minimal: Success and failure of the activity;

- basic: The object attribute(s), and object value(s) excluding any sensitive information.

FCS_CKM_EXT.3 Cryptographic Key Access

Hierarchical to: No other components.

Dependencies to:

[FCS_CKM.1 Cryptographic key generation, or
[FCS_CKM.5](#) Cryptographic key derivation, or
[FCS_CKM_EXT.8](#) Password-based key derivation],
[FCS_CKM.6](#) Timing and event of cryptographic key destruction
[\[FCS_COP.1/KeyEncap\]](#) Key Encapsulation, or
[FCS_COP.1/KeyWrap](#) Key Wrapping, or
[FCS_COP.1/SKC](#) Symmetric Key Cryptography, or
[FCS_COP.1/AEAD](#) Authenticated Encryption with Associated Data]

FCS_CKM_EXT.3.1

The TSF shall use specified cryptographic key access methods [**selection**: *key encapsulation, key wrapping, key encryption*] to access keys when performing [**selection**: *cryptographic key archival, cryptographic key backup, cryptographic key escrow, cryptographic key recovery, cryptographic key import, cryptographic key export*]

Management: FCS_CKM_EXT.7

There are no management functions foreseen.

Audit: FCS_CKM_EXT.7

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP, PP-Module, functional package or ST:

- minimal: Success and failure of the activity;
- basic: The object attribute(s), and object value(s) excluding any sensitive information.

FCS_CKM_EXT.7 Cryptographic Key Agreement

Hierarchical to: No other components.

Dependencies to:

[FDP_ITC.1 Import of user data without security attributes, or
FDP_ITC.2 Import of user data with security attributes, or
[FCS_CKM.1 Cryptographic key generation, or
[FCS_CKM.5](#) Cryptographic key derivation, or
[FCS_CKM_EXT.8](#) Password-based key derivation],
[\[FCS_CKM.2\]](#) Cryptographic key distribution, or
[FCS_COP.1](#) Cryptographic operation]
[FCS_CKM.6](#) Timing and event of cryptographic key destruction
[\[FCS_COP.1/CMAC\]](#) CMAC, or
[FCS_COP.1/Hash](#) Hashing, or
[FCS_COP.1/KeyedHash](#) Keyed Hashing, or
[FCS_COP.1/SKC](#) Symmetric Key Cryptography, or
[FCS_COP.1/AEAD](#) Authenticated Encryption with Associated Data]

FCS_CKM_EXT.7.1

The TSF shall derive shared cryptographic keys with input from multiple parties in accordance with specified cryptographic key agreement algorithms [**selection**: *Cryptographic algorithm*] and specified cryptographic parameters [**selection**: *Cryptographic parameters*] that meet the following: [**selection**: *List of standards*]

The following table provides the recommended choices for completion of the selection operations of [FCS_CKM_EXT.7](#).

Table 30: Recommended choices for FCS_CKM_EXT.7

Identifier	Cryptographic algorithm	Cryptographic parameters	List of standards
KAS2	RSA	Modulus size [selection : 2048, 3072, 4096, 6144, 8192] bits	NIST SP 800-56B Revision 2 (Section 8.3) [KAS2]
DH	Finite Field Cryptography Diffie-Hellman	Static domain parameters approved for [selection]: <ul style="list-style-type: none"> • IKE Groups [selection: MODP-2048, MODP-3072, MODP-4096, MODP-6144, 	NIST SP 800-56A Revision 3 (Section 5.7.1.1) [DH] [selection]: RFC 3526 [IKE groups], RFC 7919 [TLS groups]]

- MODP-8192]*
- *TLS Groups [selection: ffdhe2048, ffdhe3072, ffdhe4096, ffdhe6144, ffdhe8192]*

]

ECDH	Elliptic Curve Diffie-Hellman	Elliptic Curve [selection: <i>P-256, brainpoolP256r1, P-384, brainpoolP384r1, P-521, brainpoolP512r1</i>]	NIST SP 800-56A Revision 3 (Section 5.7.1.2) [ECDH] [selection: : <i>NIST SP 800-186 (Section 3.2.1) [NIST Curves], RFC 5639 (Section 3) [Brainpool curves]</i>]
ECDH-Ed	ECDH with Montgomery Curves	Domain parameters approved for elliptic curves [selection: <i>curve25519, curve448</i>]	RFC 7748 (Section 5) [ECDH-Ed] NIST SP 800-186 (Section 3.2.2) [Montgomery Curves]

Management: FCS_CKM_EXT.8

There are no management functions foreseen.

Audit: FCS_CKM_EXT.8

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP, PP-Module, functional package or ST:

- minimal: Success and failure of the activity;
- basic: The object attribute(s), and object value(s) excluding any sensitive information.

FCS_CKM_EXT.8 Password-Based Key Derivation

Hierarchical to: No other components.

Dependencies to:

[[FCS_CKM.2](#) Cryptographic key distribution, or
[FCS_COP.1](#) Cryptographic operation]
[FCS_CKM_EXT.7](#) Cryptographic Key Agreement],
[FCS_CKM.6](#) Timing and event of cryptographic key destruction
[FCS_OTV_EXT.1](#) One-Time Value Generation

FCS_CKM_EXT.8.1

The TSF shall perform password-based key derivation functions in accordance with a specified cryptographic algorithm [HMAC-[**selection:** *SHA-256, SHA-384, SHA-512, SHA3-256, SHA3-384, SHA3-512*], with iteration count of [**assignment:** *number of iterations*] using a randomly generated salt of length [**assignment:** *equal to or greater than 128*] and output cryptographic key sizes [**selection:** *128, 192, 256, 512*] bits that meet the following standard: [NIST SP 800-132 (Section 5.3) [PBKDF2]].

C.2.1.2 FCS_HTTPS_EXT HTTPS Protocol

Family Behavior

This family defines requirements for protecting HTTP communications between the TOE and an external IT entity.

Component Leveling



[FCS_HTTPS_EXT.1](#), HTTPS Protocol, defines requirements for the implementation of the HTTPS protocol.

Management: FCS_HTTPS_EXT.1

There are no management functions foreseen.

Audit: FCS_HTTPS_EXT.1

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP/ST:

- Failure to establish an HTTPS session.
- Establishment/termination of an HTTPS session.

FCS_HTTPS_EXT.1 HTTPS Protocol

Hierarchical to: No other components.

Dependencies to:

[FCS_TLSC_EXT.1 TLS Client Protocol, or
FCS_TLSC_EXT.2 TLS Client Protocol with Mutual Authentication, or
FCS_TLSS_EXT.1 TLS Server Protocol, or
FCS_TLSS_EXT.2 TLS Server Protocol with Mutual Authentication]

FCS_HTTPS_EXT.1.1

The TSF shall implement the HTTPS protocol that complies with RFC 2818.

FCS_HTTPS_EXT.1.2

The TSF shall implement HTTPS using TLS.

C.2.1.3 FCS_IPSEC_EXT IPsec Protocol

Family Behavior

This family defines requirements for protecting communications using IPsec.

Component Leveling



FCS_IPSEC_EXT.1, IPsec Protocol, requires that IPsec be implemented as specified manner.

Management: FCS_IPSEC_EXT.1

The following actions could be considered for the management functions in FMT:

- Managing the cryptographic functionality.

Audit: FCS_IPSEC_EXT.1

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP/ST:

- Failure to establish an IPsec SA.
- Establishment/Termination of an IPsec SA.

FCS_IPSEC_EXT.1 IPsec Protocol

Hierarchical to: No other components.

Dependencies to:

FCS_CKM.1 Cryptographic Key Generation
FCS_CKM.2 Cryptographic Key Establishment
FCS_COP.1 Cryptographic Operation
FCS_RBG.1 Random Bit Generation
FIA_X509_EXT.1 X.509 Certificate Validation

FCS_IPSEC_EXT.1.1

The TSF shall implement the IPsec architecture as specified in RFC 4301.

FCS_IPSEC_EXT.1.2

The TSF shall implement **assignment: IPsec modes**.

FCS_IPSEC_EXT.1.3

The TSF shall have a nominal, final entry in the SPD that matches anything that is otherwise unmatched, and discards it.

FCS_IPSEC_EXT.1.4

The TSF shall implement the IPsec protocol ESP as defined by RFC 4303 using the cryptographic algorithms **assignment: cryptographic algorithms** together with a Secure Hash Algorithm (SHA)-based HMAC.

FCS_IPSEC_EXT.1.5

The TSF shall implement the protocol: **assignment: key exchange protocol**.

FCS_IPSEC_EXT.1.6

The TSF shall ensure the encrypted payload in the **assignment: key exchange protocol** protocol uses the cryptographic algorithms **assignment: cryptographic algorithms**.

FCS_IPSEC_EXT.1.7

The TSF shall ensure that [**assignment**: key exchange protocol lifetime configuration rules].

FCS_IPSEC_EXT.1.8

The TSF shall ensure that all IKE protocols implement DH groups [**assignment**: DH Groups].

FCS_IPSEC_EXT.1.9

The TSF shall generate the secret value x used in the IKE Diffie-Hellman key exchange ("x" in $gx \bmod p$) using the random bit generator specified in [FCS_RB.G.1](#), and having a length of at least [**assignment**: (one or more) number(s) of bits that is at least twice the "bits of security" value associated with the negotiated Diffie-Hellman group as listed in Table 2 of NIST SP 800-57, Recommendation for Key Management - Part 1: General] bits.

FCS_IPSEC_EXT.1.10

The TSF shall generate nonces used in IKE exchanges in a manner such that the probability that a specific nonce value will be repeated during the life of a specific IPsec SA is less than 1 in $2^{[\text{assignment}: (\text{one or more}) \text{ "bits of security" value(s) associated with the negotiated Diffie-Hellman group as listed in Table 2 of NIST SP 800-57, Recommendation for Key Management - Part 1: General}]}$.

FCS_IPSEC_EXT.1.11

The TSF shall ensure that all IKE protocols perform peer authentication using a [**assignment**: IKE peer authentication algorithm] that use X.509v3 certificates that conform to RFC 4945 and [**assignment**: other IKE peer authentication mechanism].

FCS_IPSEC_EXT.1.12

The TSF shall not establish an SA if the [**assignment**: specific certificate reference identifier] and [**assignment**: other certificate reference identifier type] contained in a certificate does not match the expected value(s) for the entity attempting to establish a connection.

FCS_IPSEC_EXT.1.13

The TSF shall not establish an SA if the presented identifier does not match the configured reference identifier of the peer.

FCS_IPSEC_EXT.1.14


The [**assignment**: configuring entity] shall be able to ensure by default that the strength of the symmetric algorithm (in terms of the number of bits in the key) negotiated to protect the [**assignment**: connection type] connection is greater than or equal to the strength of the symmetric algorithm (in terms of the number of bits in the key) negotiated to protect the [**assignment**: connection type] connection.

C.2.1.4 FCS_OTV_EXT Cryptographic One-Time Value Generation

Family Behavior

This family defines requirements for generation of one-time values such as nonces, IVs, salts, and initialization counters.

Component Leveling



[FCS_OTV_EXT.1](#), One-Time Value, requires that values such as salts, nonces, IVs, and initial counters be generated using random bit generation.

Management: FCS_OTV_EXT.1

There are no management functions foreseen.

Audit: FCS_OTV_EXT.1

The following audit events should be considered if FAU_GEN Security audit data generation is included in the PP, PP-Module, functional package or ST:

- minimal: Success and failure of the activity;
- basic: The object attribute(s), and object value(s) excluding any sensitive information.

FCS_OTV_EXT.1 One-Time Value

Hierarchical to: No other components.

Dependencies to:

[FCS_RB.G.1](#) Random Bit Generation
[[FCS_COP.1/HMAC](#) Key Hash, or
[FCS_COP.1/SKC](#) Symmetric key cryptography, or
[FCS_CKM.5](#) Key Derivation, or

[FCS_CKM_EXT.8](#) Password-Based Key Derivation, or
[FCS_COP.1/CMAC](#) CMAC, or
[FCS_COP.1/KeyWrap](#) Key Wrapping
[FCS_COP.1/AEAD](#) Authenticated Encryption with Associated Data, or
[FCS_COP.1/KeyEncap](#) Key Encapsulation]

FCS_OTV_EXT.1.1

The TSF shall perform cryptographic one-time value generation for [**selection**: *Algorithm or mode*] using the output of a [**selection**: *random bit generator as defined in FCS_RBG.1, deterministic OTV construction, [assignment]: OTV construction method*] and sizes of length that meet the following: [**selection**: *List of standards*]

The following table provides the recommended choices for completion of the selection operations of FCS_COP.1/XOF.

Table 31: Recommended choices and guidance for FCS_OTV_EXT.1

Algorithm or mode	List of standards	Notes
HMAC	FIPS PUB 198-1, NIST SP 800-56C Revision 2	Depending on the use case, salts can be secret or known, randomly generated or all zero. Secret IVs may be required, e.g., for key derivation. Refer to the relevant standards for your use case.
KMAC	NIST SP 800-185, NIST SP 800-56C Revision 2	Depending on the use case, salts can be secret or known, randomly generated or all zero. Secret IVs may be required, e.g., for key derivation. Refer to the relevant standards for your use case.
KDF	NIST SP 800-108 Revision 1, NIST SP 800-135 Revision 1, ISO/IEC 11770-6:2016 (Subclause 7.3.2)	Salts and IVs are generated as directed for HMAC and AES cryptographic algorithms. Refer to the relevant standards.
PBKDF	NIST SP 800-132	Salts are generated and used as directed in PBKDFs.
CTR	NIST SP 800-38A	"Initial Counter" (nonce) shall be non-repeating. No counter value shall be repeated across multiple messages with the same secret key.
CBC	NIST SP 800-38A Appendix C	Depending on the use case, IVs shall be unpredictable. Repeating IVs leak information about whether the first one or more blocks are shared between two messages, so IVs should be non-repeating in such situations. Refer to the relevant standards for your use case.
OFB	NIST SP 800-38A	IVs shall be non-repeating and shall not be generated by invoking the cipher on another IV. OFB may require the IV to be a nonce.
CFB	NIST SP 800-38A	IVs should be non-repeating as repeating IVs leak information about the first plaintext block and about common shared prefixes in messages
XTS	NIST SP 800-38E, IEEE Std 1619-2018	Tweak values shall be non-negative integers, assigned consecutively, and starting at an arbitrary non-negative integer (i.e., sequential nonces).
CMAC	NIST SP 800-38B	IV is all zeroes
KW, KWP	NIST SP 800-38F	Depending on the use case, nonces may be required. Please reference the relevant standards for your use case.
CCM	NIST SP 800-38C	Nonces shall be non-repeating.
GCM	NIST SP 800-38D	For RBG-based IV construction (section 8.2.2) the number of invocations of GCM shall not exceed 2^{32} for a given secret key.
RSA-OAEP	NIST SP 800-56B Revision 2	Mask for padding shall be randomly generated

C.2.1.5 FCS_STG_EXT Cryptographic Key Storage

Family Behavior

This family defines requirements for ensuring the protection of keys and secrets.

Component Leveling



FCS_STG_EXT.1, Protected Storage, requires the TSF to enforce protected storage for keys and secrets so that they cannot be accessed or destroyed without authorization.

FCS_STG_EXT.2, Key Storage Encryption, requires the TSF to ensure the confidentiality of stored data using a specified method.

FCS_STG_EXT.3, Key Integrity Protection, requires the TSF to ensure the integrity of stored data using a specified method.

Management: FCS_STG_EXT.1

The following actions could be considered for the management functions in FMT:

- Ability to manage import and export keys/secrets to and from protected storage.

Audit: FCS_STG_EXT.1

There are no audit events foreseen.

FCS_STG_EXT.1 Protected Storage

Hierarchical to: No other components.

Dependencies to:

[FCS_CKM.6](#) Timing and Event of Cryptographic Key Destruction

FCS_STG_EXT.1.1

The TSF shall provide [**assignment**: *protected storage type*] protected storage for asymmetric private keys and [**assignment**: *secrets to be stored*].

FCS_STG_EXT.1.2

The TSF shall support the capability of [**assignment**: *capability for acquiring keys*] upon request of [**assignment**: *entity requesting storage*].

FCS_STG_EXT.1.3

The TSF shall be capable of destroying keys/secrets in the protected storage upon request of [**assignment**: *authorized subject*].

Management: FCS_STG_EXT.2

There are no management functions foreseen.

Audit: FCS_STG_EXT.2

There are no audit events foreseen.

FCS_STG_EXT.2 Key Storage Encryption

Hierarchical to: No other components.

Dependencies to:

[FCS_COP.1](#) Cryptographic Operation
[FCS_STG_EXT.1](#) Protected Storage

FCS_STG_EXT.2.1

The TSF shall encrypt [**assignment**: *types of key material*] using [**assignment**: *cryptographic algorithm*].

Management: FCS_STG_EXT.3

There are no management functions foreseen.

Audit: FCS_STG_EXT.3

There are no audit events foreseen.

FCS_STG_EXT.3 Key Integrity Protection

Hierarchical to: No other components.

Dependencies to:
FCS_COP.1 Cryptographic Operation

FCS_STG_EXT.3.1

The TSF shall protect the integrity of any encrypted [**assignment**: *types of key material*] by using [**assignment**: *integrity protection mechanism*].

FCS_STG_EXT.3.2

The TSF shall verify the integrity of the [**selection**: *digital signature, MAC*] of the stored key prior to use of the key.

C.2.2 Class: Identification and Authentication (FIA)

This PP defines the following extended components as part of the FIA class originally defined by CC Part 2:

C.2.2.1 FIA_AFL_EXT Authentication Failure Handling

Family Behavior

This family defines requirements for the TOE's behavior when repeated failed attempts to gain authorization to access TSF data occur.

Component Leveling



FIA_AFL_EXT.1, Authentication Failure Handling, requires the TSF to monitor authorization attempts, including counting and limiting the number of attempts at failed or passed authorizations. This extended component permits considerably more flexibility for dealing with multiple authentication mechanisms than FIA_AFL.

Management: FIA_AFL_EXT.1

The following actions could be considered for the management functions in FMT:

- Set authorization failure parameters

Audit: FIA_AFL_EXT.1

If FAU_GEN.1 is included in the ST, then the following audit events should be considered:

- Administrator authentication failures.

FIA_AFL_EXT.1 Authentication Failure Handling

Hierarchical to: No other components.

Dependencies to:
FCS_CKM.6 Timing and Event of Cryptographic Key Destruction
FIA_SMF.1 Specification of Management Functions

FIA_AFL_EXT.1.1

The TSF shall consider password and [**assignment**: *other authentication mechanisms*] as critical authentication mechanisms.\|

FIA_AFL_EXT.1.2

The TSF shall detect when a configurable positive integer within [**assignment**: *range of acceptable values for each authentication mechanism*] of [**selection, choose one of**: *unique, non-unique*] unsuccessful authentication attempts occur related to last successful authentication for each authentication mechanism.

FIA_AFL_EXT.1.3

The TSF shall maintain the number of unsuccessful authentication attempts that have occurred upon power off.

FIA_AFL_EXT.1.4

When the defined number of unsuccessful authentication attempts has exceeded the maximum allowed for a given authentication mechanism, all future authentication attempts shall be limited to other available authentication mechanisms, unless the given mechanism is designated as a critical authentication

mechanism.

FIA_AFL_EXT.1.5

When the defined number of unsuccessful authentication attempts for the last available authentication mechanism or a critical authentication mechanism has been surpassed, the TSF shall [selection]:

- *perform a wipe of all protected data*
- *exclude the current User/Administrator from further authentication attempts*
- *exclude the current User/Administrator from further authentication attempts for a period of [assignment: greater than zero seconds] time*

].

FIA_AFL_EXT.1.6


The TSF shall increment the number of unsuccessful authentication attempts prior to notifying the user that the authentication was unsuccessful.

C.2.2.2 FIA_PMG_EXT Password Management

Family Behavior

This family defines requirements for the composition of administrator passwords.

Component Leveling



FIA_PMG_EXT.1, Password Management, requires the TSF to support passwords with varying composition and length requirements.

Management: FIA_PMG_EXT.1

The following actions could be considered for the management functions in FMT:

- Ability to configure password composition and length requirements for authorization of Administrators.
- Ability to manage authentication methods and change default authorization factors

Audit: FIA_PMG_EXT.1

There are no audit events foreseen.

FIA_PMG_EXT.1 Password Management

Hierarchical to: No other components.

Dependencies to: No other components.

FIA_PMG_EXT.1.1

The TSF shall support the following for the Password Authentication Factor:

1. Passwords shall be able to be composed of any combination of [assignment: characters sets], numbers, and special characters: [assignment: special characters].
2. Password length up to [assignment: an integer greater than or equal to 14] characters shall be supported.

C.2.2.3 FIA_TRT_EXT Authentication Throttling

Family Behavior

This family defines requirements for the limiting administrator authentication attempts.

Component Leveling



FIA_TRT_EXT.1, Authentication Throttling, requires that the TSF enforce a limit on authentication attempts.

Management: FIA_TRT_EXT.1

The following actions could be considered for the management functions in FMT:

- Ability to configure an authentication throttling policy for the TOE.

Audit: FIA_TRT_EXT.1

The following should be considered for auditable events if [FAU_GEN.1](#) is included in the ST:

- Authentication throttling is triggered.

FIA_TRT_EXT.1 Authentication Throttling

Hierarchical to: No other components.

Dependencies to:
[FIA_UAU.5](#) Multiple Authentication Mechanisms

FIA_TRT_EXT.1.1

The TSF shall limit user authentication attempts by [**selection: preventing authentication via an external port, enforcing a delay between incorrect authentication attempts**] for all authentication mechanisms selected in [FIA_UAU.5.1](#).

FIA_TRT_EXT.1.2


The minimum delay between incorrect authentication attempts shall be such that no more than 10 attempts can be attempted per 500 milliseconds.

C.2.2.4 FIA_UIA_EXT Administrator Identification and Authentication

Family Behavior

This family defines requirements for ensuring that access to the TSF is not granted to unauthenticated subjects.

Component Leveling



[FIA_UIA_EXT.1](#), Administrator Identification and Authentication, requires the TSF to ensure that all subjects attempting to perform TSF-mediated actions are identified and authenticated prior to authorizing these actions to be performed.

Management: FIA_UIA_EXT.1

There are no management functions foreseen.

Audit: FIA_UIA_EXT.1

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP/ST:

- a. All use of the identification and authentication mechanism.

FIA_UIA_EXT.1 Administrator Identification and Authentication

Hierarchical to: No other components.

Dependencies to:
[FIA_UAU.5](#) Multiple Authentication Mechanisms

FIA_UIA_EXT.1.1

The TSF shall require Administrators to be successfully identified and authenticated using one of the methods in [FIA_UAU.5](#) before allowing any TSF-mediated management function to be performed by that Administrator.

C.2.3 Class: Protection of the TSF (FPT)


This PP defines the following extended components as part of the FPT class originally defined by CC Part 2:

C.2.3.1 FPT_JTA_EXT Debug Port Access

Family Behavior

This family defines requirements for access to debug ports during normal operation.

Component Leveling



[FPT_JTA_EXT.1](#), JTAG/Debug Port Access, requires that debug ports be accessible only to authorized Administrators.

[FPT_JTA_EXT.2](#), JTAG/Debug Port Disablement, requires that debug ports be disabled.

Management: FPT_JTA_EXT.1

There are no management functions foreseen.

Audit: FPT_JTA_EXT.1

There are no audit events foreseen.

FPT_JTA_EXT.1 JTAG/Debug Port Access

Hierarchical to: No other components.

Dependencies to: No dependencies.

FPT_JTA_EXT.1.1

The TSF shall allow access to JTAG or other debug ports only to an authorized Administrator through platform firmware or through assertion of physical presence.

Management: FPT_JTA_EXT.2

There are no management functions foreseen.

Audit: FPT_JTA_EXT.2

There are no audit events foreseen.

FPT_JTA_EXT.2 JTAG/Debug Port Disablement

Hierarchical to: No other components.

Dependencies to: No dependencies.

FPT_JTA_EXT.2.1

The TSF shall [selection, choose one of: disable access through hardware, control access by a signing key] to JTAG or other debug interfaces.

C.2.3.2 FPT_ROT_EXT Platform Integrity

Family Behavior

This family defines requirements for platform firmware and hardware integrity.

Component Leveling



[FPT_ROT_EXT.1](#), Platform Integrity Root, requires that the platform integrity be anchored in a root of trust.

[FPT_ROT_EXT.2](#), Platform Integrity Extension, specifies how platform integrity is extended from the integrity root to other platform firmware.

[FPT_ROT_EXT.3](#), Hardware component integrity, requires that the TOE support hardware supply chain integrity.

Management: FPT_ROT_EXT.1

There are no management functions foreseen.

Audit: FPT_ROT_EXT.1

There are no audit events foreseen.

FPT_ROT_EXT.1 Platform Integrity Root

Hierarchical to: No other components.

Dependencies to: No dependencies.

FPT_ROT_EXT.1.1

The integrity of platform firmware shall be rooted in [assignment: platform firmware root of trust].

Management: FPT_ROT_EXT.2

The following actions could be considered for the management functions in FMT:

- Configuration of action to take on integrity failure.

Audit: FPT_ROT_EXT.2

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP/ST:

- Failure of integrity verification.

FPT_ROT_EXT.2 Platform Integrity Extension

Hierarchical to: No other components.

Dependencies to:
[FPT_ROT_EXT.1](#) Platform Integrity Root

FPT_ROT_EXT.2.1

The integrity of all mutable platform firmware outside of the platform integrity root specified in [FPT_ROT_EXT.1](#) shall be verified prior to execution or use through: [assignment: method for extending the platform integrity root].

FPT_ROT_EXT.2.2

The TOE shall take the following actions if an integrity check specified in [FPT_ROT_EXT.2.1](#) fails:

1. Halt,
2. Notify an [selection: Administrator, User] by [assignment: notification method], and
3. [selection, choose one of:
 - Stop all execution and shut down
 - Initiate a recovery process
]

[selection, choose one of:

- automatically
- in accordance with Administrator-configurable policy
- by express determination of an [selection: Administrator, User]

].

Management: FPT_ROT_EXT.3

The following actions could be considered for the management functions in FMT:

- Configuration of action to take on integrity failure.

Audit: FPT_ROT_EXT.3

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP/ST:

- Detection of attempted intrusion.

FPT_ROT_EXT.3 Hardware component integrity

Hierarchical to: No other components.

Dependencies to:
[FPT_ROT_EXT.1](#) Platform Integrity Root

FPT_ROT_EXT.3.1

Outside of the integrity root specified in [FPT_ROT_EXT.1](#), the integrity of [assignment: critical platform hardware components] shall be verified prior to execution or use through: [assignment: method for ensuring integrity of platform hardware components].

FPT_ROT_EXT.3.2

The TOE shall take the following actions if an integrity check specified in [FPT_ROT_EXT.3.1](#) fails:

1. Halt,
2. Notify an [selection: Administrator, User] by [assignment: notification method], and
3. [selection, choose one of:
 - Stop all execution and shut down
 - Continue execution without the integrity-compromised component
 - Continue execution
]

[selection, choose one of:

- in accordance with administrator-configurable policy
- by express determination of an [selection: Administrator, User]

].

C.2.3.3 FPT_PPF_EXT Protection of Platform Firmware

Family Behavior

This family defines requirements for protecting platform firmware from unauthorized update.

Component Leveling



FPT_PPF_EXT.1, Protection of Platform Firmware and Critical Data, requires that the TSF prevent platform firmware from being modified outside of the update mechanisms defined in [FPT_TUD_EXT](#).

Management: FPT_PPF_EXT.1

There are no management functions foreseen.

Audit: FPT_PPF_EXT.1

There are no audit events foreseen.

FPT_PPF_EXT.1 Protection of Platform Firmware and Critical Data

Hierarchical to: No other components.

Dependencies to: No dependencies.

FPT_PPF_EXT.1.1


The TSF shall allow modification of platform firmware only through the update mechanisms described in [FPT_TUD_EXT.1](#).

C.2.3.4 FPT_RVR_EXT Platform Firmware Recovery

Family Behavior

This family defines requirements for recovering from a firmware integrity failure.

Component Leveling



FPT_RVR_EXT.1, Platform Firmware Recovery, defines mechanisms for recovering from a platform firmware integrity failure.

Management: FPT_RVR_EXT.1

The following actions could be considered for the management functions in FMT:

- Configuration of action to take on integrity failure.

Audit: FPT_RVR_EXT.1

There are no audit events foreseen.

FPT_RVR_EXT.1 Platform Firmware Recovery

Hierarchical to: No other components.

Dependencies to:
[FPT_TUD_EXT.4](#) Secure Local Update Mechanism

FPT_RVR_EXT.1.1


The TSF shall implement a mechanism for recovering from boot firmware failure consisting of [assignment: recovery mechanism].

C.2.3.5 FPT_TUD_EXT Platform Firmware Update

Family Behavior

This family defines requirements for updating platform firmware.

Component Leveling



FPT_TUD_EXT.1, TOE Firmware Update, requires that the TSF support update of platform firmware.

FPT_TUD_EXT.2, Platform Firmware Authenticated Update Mechanism, specifies the requirements for

authenticated update of platform firmware.

[FPT_TUD_EXT.3](#), Platform Firmware Delayed-Authentication Update Mechanism, specifies the requirements for delayed-authentication update of platform firmware.

[FPT_TUD_EXT.4](#), Secure Local Platform Firmware Update Mechanism, specifies the requirements for secure local update of platform firmware.

Management: FPT_TUD_EXT.1

The following actions could be considered for the management functions in FMT:

- Initiation of the update process.

Audit: FPT_TUD_EXT.1

There are no audit events foreseen.

FPT_TUD_EXT.1 TOE Firmware Update

Hierarchical to: No other components.

Dependencies to:

[FPT_TUD_EXT.2](#) Platform Firmware Authenticated Update Mechanism
[FPT_TUD_EXT.3](#) Platform Firmware Delayed-Authentication Update Mechanism
[FPT_TUD_EXT.4](#) Secure Local Platform Firmware Update Mechanism

FPT_TUD_EXT.1.1

The TSF shall implement [**assignment**: *update mechanism*].

Management: FPT_TUD_EXT.2

The following actions could be considered for the management functions in FMT:

- Configuration of action to take on an update failure.

Audit: FPT_TUD_EXT.2

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP/ST:

- Failure of update authentication/integrity check/rollback
- Failure of update operation
- Success of update operation

FPT_TUD_EXT.2 Platform Firmware Authenticated Update Mechanism

Hierarchical to: No other components.

Dependencies to:

FCS_COP.1 Cryptographic Operations

FPT_TUD_EXT.2.1

The TSF shall authenticate the source of all platform firmware updates using a digital signature algorithm specified in FCS_COP.1 and using a key store that contains [**selection**: *the public key, hash value of the public key*].

FPT_TUD_EXT.2.2

The TSF shall allow installation of updates only if the digital signature has been successfully verified as specified in FCS_COP.1 and [**assignment**: *additional constraints on updates*].

FPT_TUD_EXT.2.3

The TSF shall include a platform firmware version identifier that is accessible by the update mechanism and includes information that enables the update mechanism to determine the relative order of updates.

FPT_TUD_EXT.2.4

The TSF shall provide an observable indication of the success or failure of the update operation.

FPT_TUD_EXT.2.5

The TOE shall take the following actions if a platform firmware integrity, authenticity, or rollback-prevention check fails, or a platform firmware update fails for any other reason:

- Do not install the update,
- Notify an [**selection**: *Administrator, User*] by [**assignment**: *notification method*],

and [**selection, choose one of**:

- *Continue execution*

- *Halt*
- *Stop all execution and shut down*
- *Initiate recovery as specified in [FPT_RVR_EXT.1](#)*

]**[selection, choose one of:**

- *automatically*
- *in accordance with Administrator-configurable policy*
- *by express determination of an [selection: Administrator, User]*

].

Management: FPT_TUD_EXT.3

The following actions could be considered for the management functions in FMT:

- Configuration of action to take on an update failure.

Audit: FPT_TUD_EXT.3

The following actions should be auditable if FAU_GEN Security audit data generation is included in the PP/ST:

- Failure of update authentication/integrity check/rollback
- Failure of update operation
- Success of update operation

FPT_TUD_EXT.3 Platform Firmware Delayed-Authentication Update Mechanism

Hierarchical to: No other components.

Dependencies to: [FPT_ROT_EXT.2](#) Platform Integrity Extension

FPT_TUD_EXT.3.1

The TSF shall allow execution or use of platform firmware updates only if new platform firmware is integrity- and authenticity-checked using the mechanism described in [FPT_ROT_EXT.2](#) prior to its execution or use, and [assignment: *additional constraints on update*].

FPT_TUD_EXT.3.2

The TSF shall include an observable platform firmware version identifier that is accessible by the update mechanism and includes information that enables the update mechanism to determine the relative order of updates.

FPT_TUD_EXT.3.3

The TSF shall provide an observable indication of the success or failure of the update operation.

FPT_TUD_EXT.3.4

The TOE shall take the following actions if a platform firmware update integrity, authentication, or rollback-prevention check fails, or a platform firmware update fails for any other reason:

- Notify an [selection: *Administrator, User*] by [assignment: *notification method*]

and **[selection, choose one of:**

- *Halt*
- *Stop all execution and shut down*
- *Initiate a recovery process as specified in [FPT_RVR_EXT.1](#)*

]**[selection, choose one of:**

- *automatically*
- *in accordance with administrator-configurable policy*
- *by express determination of an [selection: *Administrator, User*]*

].

Management: FPT_TUD_EXT.4

There are no management functions foreseen.

Audit: FPT_TUD_EXT.4

There are no audit events foreseen.

FPT_TUD_EXT.4 Secure Local Platform Firmware Update Mechanism

Hierarchical to: No other components.

Dependencies to: No dependencies.

FPT_TUD_EXT.4.1

The TSF shall provide a secure local update mechanism that requires an assertion of physical access to the TOE before installation of an update.

FPT_TUD_EXT.4.2

A user shall assert physical presence to the TSF through: [assignment: method for asserting physical presence].

FPT_TUD_EXT.4.3

The TSF shall include a platform firmware version identifier that is accessible by the update mechanism or to the user who asserts physical presence.

FPT_TUD_EXT.4.4

The TSF shall provide an observable indication of the success or failure of the update operation.

C.2.4 Class: Security Management (FMT)

This PP defines the following extended components as part of the FMT class originally defined by CC Part 2:

C.2.4.1 FMT_CFG_EXT Secure by Default

Family Behavior

This family defines requirements for secure by default configuration of the TOE.

Component Leveling



FMT_CFG_EXT.1, Secure by Default Configuration, requires that default Administrator credentials be changed immediately after first use.

Management: FMT_CFG_EXT.1

There are no management functions foreseen.

Audit: FMT_CFG_EXT.1

There are no audit events foreseen.

FMT_CFG_EXT.1 Secure by Default Configuration

Hierarchical to: No other components.

Dependencies to:

FIA_UAU.1 Timing of Authentication
FMT_SMR.1 Security Roles

FMT_CFG_EXT.1.1

The TSF shall enforce that Administrator credentials be changed immediately after first use when configured with default Administrator credentials or with no Administrator credentials.

C.2.5 Class: Trusted Path/Channels (FTP)


This PP defines the following extended components as part of the FTP class originally defined by CC Part 2:

C.2.5.1 FTP_ITC_EXT Trusted Channel Communications

Family Behavior

This family defines requirements for protection of data in transit between the TOE and its operational environment.

Component Leveling



FTP_ITC_EXT.1, Trusted Channel Communication, requires the TSF to implement one or more cryptographic protocols to secure connectivity between the TSF and various external entities.

Management: FTP_ITC_EXT.1

The following actions could be considered for the management functions in FMT:

- a. Ability to configure the cryptographic functionality.

Audit: FTP_ITC_EXT.1

The following actions should be auditable if FAU_GEN Security audit data generation is included in the

PP/ST:

- a. Initiation of the trusted channel.
- b. Termination of the trusted channel.
- c. Failures of the trusted path functions.

FTP_ITC_EXT.1 Trusted Channel Communication

Hierarchical to: No other components.

Dependencies to: No dependencies.

FTP_ITC_EXT.1.1

The TSF shall use [**assignment: trusted channel protocols**] protocols with [**assignment: authentication mechanism**] to provide a communication channel between itself and [**assignment: external IT entities**] that is logically distinct from other communication channels, provides assured identification of its end points, protects channel data from disclosure, and detects modification of the channel data.

C.2.5.2 FTP_ITE_EXT Encrypted Data Communications

Family Behavior

This family defines requirements for encryption of TSF data that is transmitted to an external entity over an insecure channel.

Component Leveling



[FTP_ITE_EXT.1](#), Encrypted Data Communications, requires the TSF to encrypt data in the specified manner using key data that is provided to an external entity in the specified manner.

Management: FTP_ITE_EXT.1

There are no management functions foreseen.

Audit: FTP_ITE_EXT.1

There are no audit events foreseen.

FTP_ITE_EXT.1 Encrypted Data Communications

Hierarchical to: No other components.

Dependencies to:
FCS_COP.1 Cryptographic Operation

FTP_ITE_EXT.1.1

The TSF shall encrypt data for transfer between the TOE and [**assignment: list of entities external to the TOE**] using a cryptographic algorithm and key size as specified in FCS_COP.1, and using [**assignment: key establishment mechanism**].

C.2.5.3 FTP_ITP_EXT Physically Protected Channel

Family Behavior

This family defines requirements for use of physically protected communications mechanisms.

Component Leveling



[FTP_ITP_EXT.1](#), Physically Protected Channel, requires the TSF to use a physically protected channel for transmission of data to an external entity.

Management: FTP_ITP_EXT.1

There are no management functions foreseen.

Audit: FTP_ITP_EXT.1

There are no audit events foreseen.

FTP_ITP_EXT.1 Physically Protected Channel

Hierarchical to: No other components.

Dependencies to: No dependencies.

FTP_ITP_EXT.1.1

The TSF shall provide a physically protected communication channel between itself and [assignment: *list of other IT entities within the same platform*].

C.2.6 Class: User Data Protection (FDP)


This PP defines the following extended components as part of the FDP class originally defined by CC Part 2:

C.2.6.1 FDP_ITC_EXT Key Import

Family Behavior

This family defines requirements for importing cryptographic keys and credentials into the TOE.

Component Leveling



FDP_ITC_EXT.1, Key/Credential Import, requires the TSF to implement one or more means for importing keys and credentials into the TOE, which are not addressed by the FDP_ITC component.

Management: FDP_ITC_EXT.1

There are no management functions foreseen.

Audit: FDP_ITC_EXT.1

There are no audit events foreseen.

FDP_ITC_EXT.1 Key/Credential Import

Hierarchical to: No other components.

Dependencies to:

FCS_COP.1 Cryptographic Operation
FCS_STG_EXT.1 Key Storage Encryption
FTP_ITC_EXT.1 Trusted Channel Communications
FTP_ITE_EXT.1 Encrypted Data Communications
FTP_ITP_EXT.1 Physically Protected Channel

FTP_ITC_EXT.1.1

The TSF shall support importing keys/key material using [assignment: *import mechanism*].

FTP_ITC_EXT.1.2


The TSF shall verify the integrity of imported keys/key material using [assignment: *integrity verification method*].

C.2.6.2 FDP_TEE_EXT Trusted Execution Environment

Family Behavior

This family defines requirements for Trusted Execution Environments implemented by the TOE for the use of tenant software.

Component Leveling



FDP_TEE_EXT.1, Trusted Execution Environment for Tenant Software, requires the TSF to implement a trusted execution environment for the use of tenant software.

Management: FDP_TEE_EXT.1

There are no management functions foreseen.

Audit: FDP_TEE_EXT.1

There are no audit events foreseen.

FDP_TEE_EXT.1 Trusted Execution Environment for Tenant Software

Hierarchical to: No other components.

Dependencies to: No dependencies.

FDP_TEE_EXT.1.1

The TSF shall implement a trusted execution environment that conforms to the following standard:
[assignment: *Trusted Execution Environment standard*] and make this TEE available to tenant software.

Appendix D - Implicitly Satisfied Requirements

This appendix lists requirements that should be considered satisfied by products successfully evaluated against this PP. These requirements are not featured explicitly as SFRs and should not be included in the ST. They are not included as standalone SFRs because it would increase the time, cost, and complexity of evaluation. This approach is permitted by [CC] Part 1, 8.3 Dependencies between components.

This information benefits systems engineering activities which call for inclusion of particular security controls. Evaluation against the PP provides evidence that these controls are present and have been evaluated.

Table 32: Implicitly Satisfied Requirements

Requirement	Rationale for Satisfaction
FIA_UAU.1 – Timing of Authentication	FMT_CFG_EXT.1 has a dependency on FIA_UAU.1 because it cannot exist unless the TOE supports an authentication mechanism.

Appendix E - Entropy Documentation and Assessment

E.1 Design Description

Documentation shall include the design of the entropy source as a whole, including the interaction of all entropy source components. It will describe the operation of the entropy source to include how it works, how entropy is produced, and how unprocessed (raw) data can be obtained from within the entropy source for testing purposes. The documentation should walk through the entropy source design indicating where the random comes from, where it is passed next, any post-processing of the raw outputs (hash, XOR, etc.), if/where it is stored, and finally, how it is output from the entropy source. Any conditions placed on the process (e.g., blocking) should also be described in the entropy source design. Diagrams and examples are encouraged.

This design must also include a description of the content of the security boundary of the entropy source and a description of how the security boundary ensures that an adversary outside the boundary cannot affect the entropy rate.

E.2 Entropy Justification

There should be a technical argument for where the unpredictability in the source comes from and why there is confidence in the entropy source exhibiting probabilistic behavior (an explanation of the probability distribution and justification for that distribution given the particular source is one way to describe this). This argument will include a description of the expected entropy rate and explain how to ensure that sufficient entropy is going into the TOE randomizer seeding process. This discussion will be part of a justification for why the entropy source can be relied upon to produce bits with entropy.

E.3 Operating Conditions

Documentation will also include the range of operating conditions under which the entropy source is expected to generate random data. It will clearly describe the measures that have been taken in the system design to ensure the entropy source continues to operate under those conditions. Similarly, documentation shall describe the conditions under which the entropy source is known to malfunction or become inconsistent. Methods used to detect failure or degradation of the source shall be included.

E.4 Health Testing

More specifically, all entropy source health tests and their rationale will be documented. This will include a description of the health tests, the rate and conditions under which each health test is performed (e.g., at startup, continuously, or on-demand), the expected results for each health test, and rationale indicating why each test is believed to be appropriate for detecting one or more failures in the entropy source.

Appendix F - Equivalency Guidelines

F.1 Introduction

The purpose of equivalence in PP-based evaluations is to find a balance between evaluation rigor and commercial practicability—to ensure that evaluations meet customer expectations while recognizing that there is little to be gained from requiring that every variation in a product or platform be fully tested. Generally, if a product is found to be compliant with a PP on a particular platform, then all equivalent products on equivalent platforms are also considered to be compliant with the PP. In this case, since the GPCP is itself a platform, only equivalent GPCP products are considered in the analysis.

A vendor can make a claim of equivalence if the vendor believes that a particular instance of their product implements PP-specified security functionality in a way equivalent to the implementation of the same functionality on another instance of their product on which the functionality was tested. The product instances can differ in version number or feature level (model). Equivalence can be used to reduce the testing required across claimed evaluated configurations. It can also be used during Assurance Maintenance to reduce testing needed to add more evaluated configurations to a certification.

These equivalency guidelines do not replace Assurance Maintenance requirements or NIAP Policy #5 requirements for CAVP certificates. Nor may equivalence be used to leverage evaluations with expired certifications.

This appendix provides guidance for determining whether products are equivalent for purposes of evaluation against the GPCPP. This guidance differs from that provided in other PPs in that a GPCP is itself a platform, and thus the distinction between product and platform is somewhat blurred. This equivalency analysis is adjusted to reflect this.

For a GPCP, equivalence has two aspects:

1. **Product Equivalence:** To be considered equivalent, GPCPs must be produced by the same vendor and support the same tenant software.
2. **Technical Equivalence:** GPCPs may be considered equivalent if there are no differences between them with respect to their implementations of PP-specified security functionality.

The equivalency determination is made in accordance with these guidelines by the validator and scheme using information provided by the evaluator/vendor.

F.2 Approach to Equivalency Analysis

There are two scenarios for performing equivalency analysis. One is when a product has been certified and the vendor wants to show that a later product should be considered certified due to equivalence with the earlier product. The other is when multiple product variants are going through evaluation together and the vendor would like to reduce the amount of testing that must be done. The basic rules for determining equivalence are the same in both cases. But there is one additional consideration that applies to equivalence with previously certified products. That is, the product with which equivalence is being claimed must have a valid certification in accordance with scheme rules and the Assurance Maintenance process must be followed. If a product's certification has expired, then equivalence cannot be claimed with that product.

When performing equivalency analysis for a GPCP, the evaluator/vendor should first use the factors and guidelines for Product Equivalence to determine the set of products to be further considered.

Each non-equivalent product for which compliance is claimed must be fully tested.

Differences in PP-Specified Security Functionality Defined

PP-specified security functionality implemented by the TOE that differs in actual implementation between versions or product models break equivalence for that functionality. Likewise, the TOE invokes PP-specified security functionality differently in different versions or models of the TOE, then equivalence is broken for that functionality.

F.3 Specific Guidance for Determining Product Equivalence

Product Equivalence attempts to determine whether different feature levels or versions of the same product are equivalent for purposes of PP testing. For example, if a product has a “basic” edition and an “enterprise” edition, is it necessary to test both models? Or does testing one model provide sufficient confidence that both models are compliant?

Table 33: Factors for Determining Product Equivalence

Factor	Same/Different	Guidance
Product Type	Different	Products in different product classes are not equivalent. Servers, EUDs, and IoT devices are not equivalent.
Product Vendors	Different	Products manufactured by different vendors are not equivalent.
PP-Specified	Same	If differences between products affect only non-PP-specified functionality,

Functionality		then the models are equivalent.
	Different	If PP-specified security functionality is affected by the differences between products, then the products are not equivalent and must be tested separately. It is necessary to test only the functionality affected by the differences. If only differences are tested, then the differences must be enumerated, and for each difference the Vendor must provide an explanation of why each difference does or does not affect PP-specified functionality. If the products are fully tested separately, then there is no need to document the differences.

F.4 Technical Equivalence

Platform equivalence is based primarily on processor architecture and instruction sets.

Technical equivalence is based primarily on processor architecture, instruction sets, and firmware versions. It is determined on a per-SFR basis.

Platforms with different processor architectures and instruction sets are not equivalent. Processors with the same architecture that have instruction sets that are subsets or supersets of each other are not disqualified from being equivalent. If PP-specified security functionality takes the same code paths when executing on different processors of the same family, then the processors can be considered equivalent with respect to that functionality.

For example, if for some PP-specified security functionality, one code path is followed on platforms that support the AES-NI instruction and another on platforms that do not, then those two platforms are not equivalent with respect to that functionality. But if the same path is followed whether or not the platform supports AES-NI, then the platforms are equivalent with respect to that functionality.

Platforms that run the same versions of the same firmware are considered equivalent with respect to any PP-specified security functionality implemented by that firmware. If firmware versions are different, then more in-depth analysis is required to determine whether the security functionality is implemented equivalently.

The platforms are equivalent if they are equivalent with respect to all PP-specified security functionality.

Table 34: Factors for Determining Technical Equivalence

Factor	Same/Different/None	Guidance
Processor Vendors	Different	Functionality implemented through processors manufactured by different vendors is not equivalent.
Processor/Chipset Architecture	Different	Functionality implemented through processors with different processor and chipset architectures are not equivalent.
Firmware Versions	Same	Functionality implemented through equivalent processors by the same version of firmware is considered equivalent.
PP-Specified Functionality	Same	For PP-specified security functionality implemented through equivalent processors and different firmware versions, the platforms are equivalent with respect to the functionality if execution of the functionality follows the same code paths on both platforms.
PP-Specified Functionality	Different	For PP-specified security functionality implemented through equivalent processors and different firmware versions, the platforms are not equivalent with respect to the functionality if execution of the functionality follows different code paths on both platforms.

F.5 Level of Specificity for Tested and Claimed Equivalent Configurations

In order to make equivalency determinations, the vendor and evaluator must agree on the equivalency claims. They must then provide the scheme with sufficient information about the TOE instances and platforms that were evaluated, and the TOE instances and platforms that are claimed to be equivalent.

The ST must describe all configurations evaluated down to processor manufacturer, model number, and microarchitecture version.

Appendix G - Use Case Templates

G.1 Server-Class Platform, Physically Secure Environment

The configuration for *[USE CASE 1] Server-Class Platform, Physically Secure Environment* modifies the base requirements as follows:

- Include FAU_GEN.1 in the ST
- Include FAU_SAR.1 in the ST
- Include FAU_STG.1 in the ST
- Include FAU_STG.2 in the ST
- Include FAU_STG.5 in the ST

G.2 Server-Class Platform, Enhanced Security Requirements

The configuration for *[USE CASE 2] Server-Class Platform, Enhanced Security Requirements* modifies the base requirements as follows:

- Include FAU_GEN.1 in the ST
- Include FAU_SAR.1 in the ST
- Include FAU_STG.1 in the ST
- Include FAU_STG.2 in the ST
- Include FAU_STG.5 in the ST
- Include FPT_PHP.2 in the ST
- Include FPT_PHP.3 in the ST
- Include FPT_JTA_EXT.2 in the ST

G.3 Portable Clients (laptops, tablets), Enhanced Security Requirements

The configuration for *[USE CASE 3] Portable Clients (laptops, tablets), Enhanced Security Requirements* modifies the base requirements as follows:

- Include FPT_PHP.1 in the ST
- Include FPT_JTA_EXT.2 in the ST

G.4 CSfC EUD

The configuration for *[USE CASE 4] CSfC EUD* modifies the base requirements as follows:

- Include FPT_JTA_EXT.2 in the ST
- Include FAU_GEN.1 in the ST
- Include FAU_SAR.1 in the ST
- Include FAU_STG.1 in the ST
- Include FCS_STG_EXT.1 in the ST
- Include FPT_TUD_EXT.1 in the ST

G.5 Tactical EUD

The configuration for *[USE CASE 5] Tactical EUD* modifies the base requirements as follows:

- Include FPT_PHP.3 in the ST
- Include FPT_JTA_EXT.2 in the ST
- Include FIA_AFL_EXT.1 in the ST

G.6 Enterprise Desktop clients

The configuration for *[USE CASE 6] Enterprise Desktop clients* modifies the base requirements as follows:

- Include FAU_GEN.1 in the ST
- Include FAU_SAR.1 in the ST
- Include FAU_STG.1 in the ST
- Include FAU_STG.2 in the ST
- Include FAU_STG.5 in the ST

G.7 IoT Devices

The configuration for *[USE CASE 7] IoT Devices* modifies the base requirements as follows:

- Include FPT_PHP.1 in the ST
- Include FPT_JTA_EXT.2 in the ST

Appendix H - Acronyms

Table 35: Acronyms

Acronym	Meaning
AES	Advanced Encryption Standard
AK	Asymmetric Key
ANSI	American National Standards Institute
API	Application Programming Interface
BAF	Biometric Authentication Factor
Base-PP	Base Protection Profile
BMC	Baseboard Management Controller
CC	Common Criteria
CEM	Common Evaluation Methodology
CMAC	Cipher-based Message Authentication Code
CN	Common Names
cPP	Collaborative Protection Profile
CRL	Certificate Revocation List
CSfC	Commercial Solutions for Classified
CSP	Critical Security Parameters
DAR	Data-at-Rest
DH	Diffie-Hellman Key Exchange
DN	Distinguished Name
DRBG	Deterministic Random Bit Generator
DSS	Digital Signature Standard
DTLS	Datagram Transport Layer Security
ECDHE	Elliptic Curve Diffie-Hellman Ephemeral
ECDSA	Elliptic Curve Digital Signature Algorithm
ECIES	Elliptic Curve Integrated Encryption Scheme
EP	Extended Package
EUD	End-User Device
FIPS	Federal Information Processing Standards
FP	Functional Package
FQDN	Fully Qualified Domain Name
GPCP	General-Purpose Computing Platform
HMAC	Hash-based Message Authentication Code
HTTPS	Hypertext Transfer Protocol Secure
IEC	International Electrotechnical Commission
IEEE	Institute of Electrical and Electronics Engineers
IoT	Internet of Things
IP	Internet Protocol
ISO	International Organization for Standardization
IT	Information Technology
ITSEF	Information Technology Security Evaluation Facility

JTAG	Joint Test Action Group
KDF	Key-Derivation Function
KMAC	KECCAK Message Authentication Code
MAC	Message Authentication Code
MC	Management Controller
NIST	National Institute of Standards and Technology
OCSP	Online Certificate Status Protocol
OE	Operational Environment
OEM	Original Equipment Manufacturer
OID	Object Identifier
OMTP	Open Mobile Terminal Platform
OS	Operating System
PBKDF	Password-based Key-Derivation Function
PKCS	Public Key Cryptography Standards
PP	Protection Profile
PP-Configuration	Protection Profile Configuration
PP-Module	Protection Profile Module
RBG	Random Bit Generator
RFC	Request for Comment
RNG	Random Number Generator
RoT	Root of Trust
SA	Security Association
SAN	Subject Alternative Name
SAR	Security Assurance Requirement
SFR	Security Functional Requirement
SHA	Secure Hash Algorithm
SK	Symmetric Key
SPD	Security Policy Database
SSH	Secure Shell
ST	Security Target
SWID	Software Identification
TEE	Trusted Execution Environment
TLS	Transport Layer Security
TOE	Target of Evaluation
TSF	TOE Security Functionality
TSFI	TSF Interface
TSS	TOE Summary Specification
USB	Universal Serial Bus
VPN	Virtual Private Network
VS	Virtualization System
XCCDF	eXtensible Configuration Checklist Description Format
XOR	Exclusive Or

Appendix I - Bibliography

Table 36: Bibliography

Identifier Title

Identifier	Title
[CC]	Common Criteria for Information Technology Security Evaluation - <ul style="list-style-type: none">• Part 1: Introduction and general model, CCMB-2022-11-001, CC:2022, Revision 1, November 2022.• Part 2: Security functional requirements, CCMB-2022-11-002, CC:2022, Revision 1, November 2022.• Part 3: Security assurance requirements, CCMB-2022-11-003, CC:2022, Revision 1, November 2022.• Part 4: Framework for the specification of evaluation methods and activities, CCMB-2022-11-004, CC:2022, Revision 1, November 2022.• Part 5: Pre-defined packages of security requirements, CCMB-2022-11-005, CC:2022, Revision 1, November 2022.
[CEM]	Common Methodology for Information Technology Security Evaluation - <ul style="list-style-type: none">• Evaluation methodology, CCMB-2022-11-006, CC:2022, Revision 1, November 2022.
[ERR]	Errata and Interpretation for CC:2022 (Release 1) and CEM:2022 (Release 1), Version 1.1 , CCMB-2024-02-002, 22 July 2024.
[OMB]	Reporting Incidents Involving Personally Identifiable Information and Incorporating the Cost for Security in Agency Information Technology Investments , OMB M-06-19, July 12, 2006.