




Integrable Meter






Independent Meter

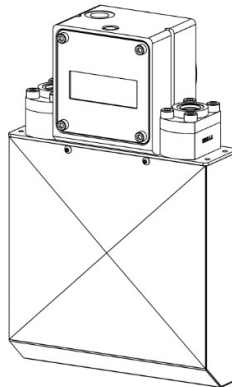

Fluid Control System

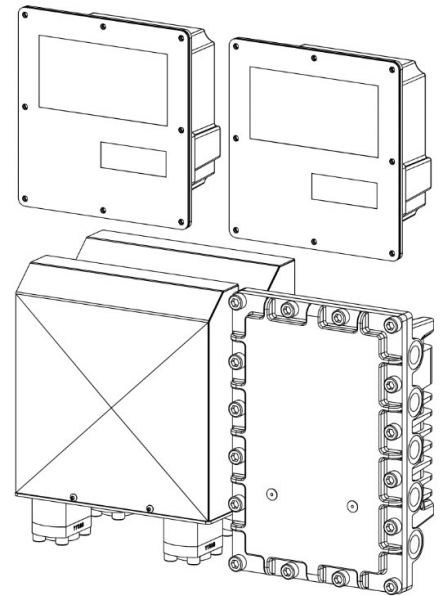

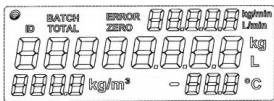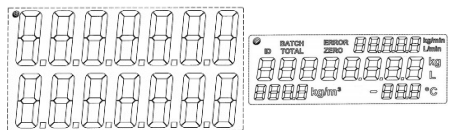Overview	Coriolis meter to be integrated into existing intrinsically-safe measuring systems	Standalone Coriolis meter with an integrated power supply and isolated communication. Suitable for integration into existing non-intrinsically-safe measuring systems.	1-2 Coriolis meters coupled with a C5000 controller system for smart monitoring and full fluid control in process control lines.
Measurement type	Batch (start/stop) Continuous	Batch (start/stop) Continuous	Batch (start/stop) Continuous
Power source	5V DC	12V DC 110-240V AC	110-240V AC
Inputs	Rx/Tx (IS*) - Meter Control: - Metering - Zeroing - Reset batch	RS485(Modbus) - Meter Control: - Metering - Zeroing - Reset batch Start/Stop Control - Integrated momentary start/stop button	Start/Stop control: - Software switch (RS485/Modbus) - GPIO switch (Master device) - Simple switch (Hazardous zone) External Temperature sensors External pressure transducers
Outputs	Rx/Tx (IS*) - Batch quantity - Flow rate - Temperature (gas) - Temperature (ambient) - Quantity totalizer - Density	RS485(Modbus) - Batch quantity - Flow rate - Temperature (gas) - Temperature (ambient) - Quantity totalizer - Density	RS485(Modbus) - Batch quantity - Flow rate - Temperature (gas) - Temperature (ambient) - Quantity totalizer 110-240V TRIAC outputs 7x low power TRIACs, customizable triggers CompacOnline - View batch and flow rate data via online portal
Display	3" Integrated Display 	3" Integrated Display 	6.7" Display + 3" Integrated Display 
Features	Low cost bare meter which can be integrated into existing systems of intrinsically-safe devices	Integrated ex-rated junction box with isolated RS485 communication allowing connection to standard RS485 devices	Controller with flexible TRIAC outputs which can be used for process control Online monitoring through CompacOnline