

Basilisk MPI CPU Benchmarks for Multiphase Flow

Vatsal Sanjay

Computational Multiphase Physics (CoMPhy) Lab

Department of Physics, Durham University

<https://comphy-lab.org/>

September 2026

Abstract

Basilisk is an open-source framework for solving interfacial flows on quadtree and octree meshes. Its pressure projection places a multigrid Poisson solve inside every incompressible time step, making communication across mesh levels a direct measure of the strong-scaling limit. This report sets out a portable CPU benchmark suite built from two stock Basilisk kernels and one representative two-phase calculation. Measurements on MareNostrum 5 and Snellius cover up to 16,384 MPI ranks for fixed-size kernel problems and up to 1,024 ranks for the application cases. The kernel data support small-to-medium system qualification and expose the onset of communication-limited scaling. Tests above 100 fully populated 192-core nodes remain a proposed campaign rather than a demonstrated result.

1 What the benchmark measures

An incompressible Basilisk calculation advances advection, viscosity and interfacial forces before projecting the velocity field onto a divergence-free space. The projection requires a multigrid Poisson solve. Restriction and prolongation transfer information between mesh levels, while the domain decomposition exchanges data between MPI ranks. At sufficiently large rank counts, this communication ceases to be hidden by the work performed on each rank. A fixed-size rank sweep therefore identifies both the useful strong-scaling range and the point at which adding CPUs no longer reduces the time to solution.

The proposed suite has three layers:

1. stock Poisson and Laplacian kernels for reproducible machine-to-machine comparison;
2. a verified two-phase migration problem that exercises the same solver stack with interface reconstruction and surface tension; and
3. a workload series in which spatial resolution or the number of drops is increased, testing whether a larger application postpones strong-scaling saturation.

The source cases, compact timing tables and plotting scripts are maintained at <https://github.com/comphy-lab/hpc-basilisk-scaling>. The stock kernel sources are retained without modification from the corresponding Basilisk tests [1, 2].

2 Poisson and Laplacian kernel scaling

The two-dimensional kernel uses a full quadtree at level $L = 14$, corresponding to 2^{28} cells. Figure 1 compares wall-clock and MPI time on MareNostrum 5 and Snellius with the published Curie measurements. On Snellius, the Poisson time continues to decrease through 8,192 ranks and then plateaus at 16,384 ranks. The simultaneous rise in the communication fraction identifies the large-rank regime as communication limited rather than compute limited.

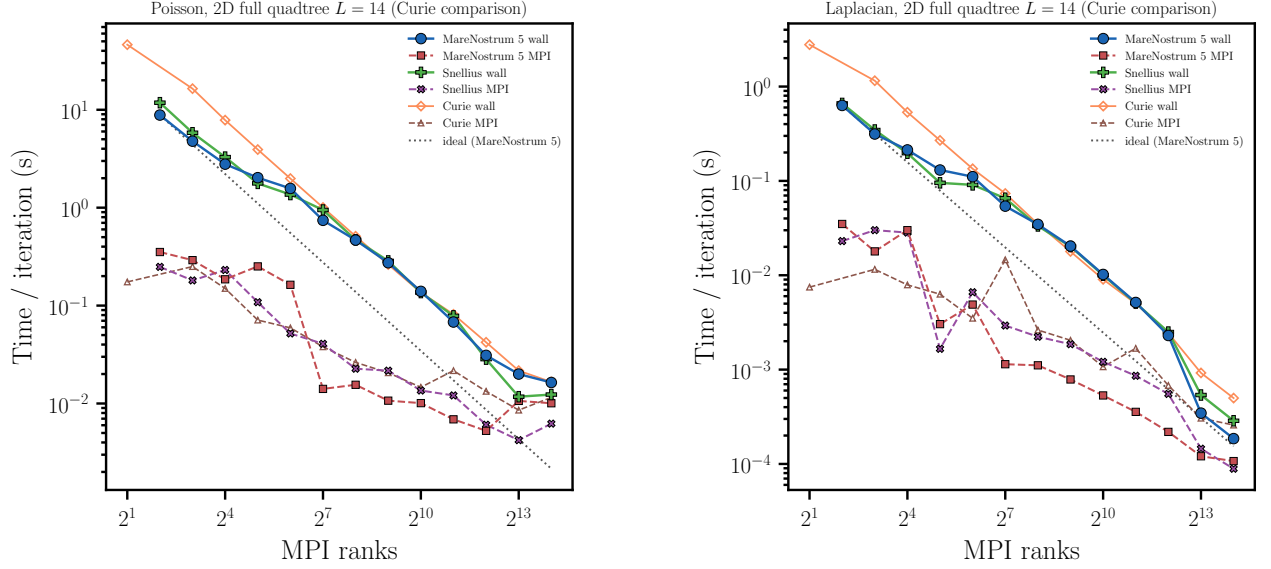


Figure 1: Strong scaling of the Poisson solve (left) and Laplacian operator (right) for the two-dimensional full-quadtree kernel at $L = 14$. Solid curves show wall time per iteration and dashed curves show the measured MPI contribution. The grey dotted line is ideal scaling from the MareNostrum 5 baseline. Curie data are the reference measurements distributed with the Basilisk test.

The three-dimensional kernel uses a full octree at $L = 9$, or 2^{27} cells. On Snellius, the Poisson time falls from 19.34 s at two ranks to 0.0333 s at 16,384 ranks. Most of the reduction has already been obtained by 4,096 ranks, where the corresponding time is 0.0390 s. Figure 2 therefore supplies both a broad scaling curve and a clear diagnostic of the strong-scaling limit. The Occigen measurements provide an independent reference for the same stock calculation.

A low-rank kernel timing measures core and memory performance, while the bend in its rank sweep measures the communication stack and collective operations. Both are relevant to production multiphase-flow calculations.

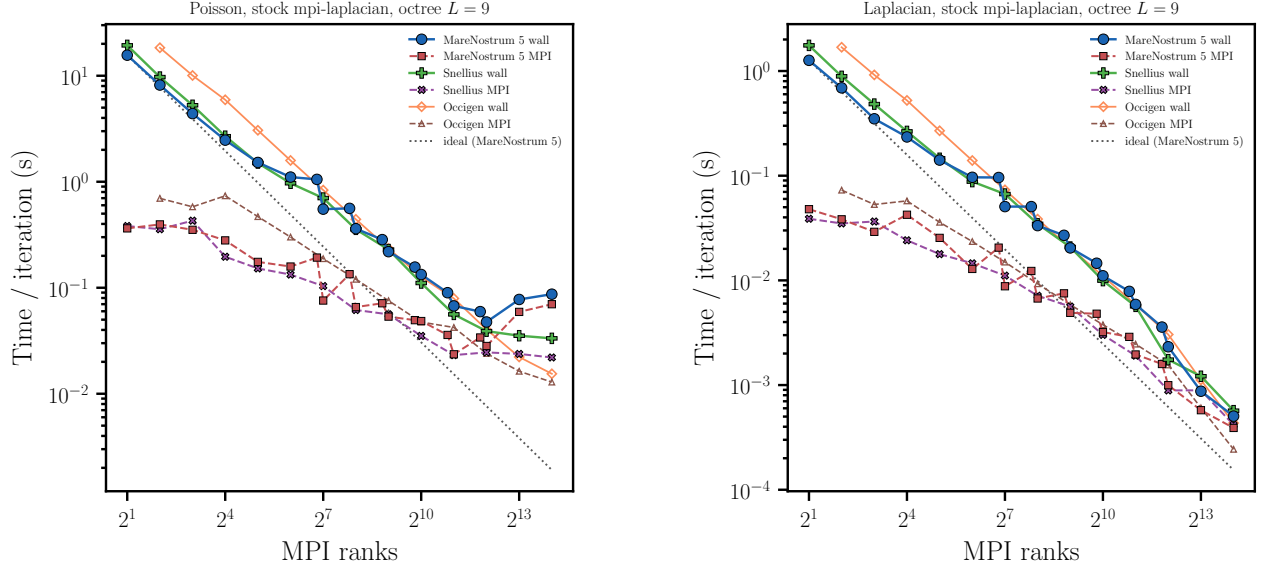


Figure 2: Strong scaling of the stock three-dimensional `mpi-laplacian` test on a full octree at $L = 9$. Symbols show MareNostrum 5 and Snellius measurements alongside the Occigen reference. Solid curves give wall time per iteration and dashed curves give MPI time. The flattening of the Poisson curve beyond a few thousand ranks marks the fixed-problem communication limit.

3 Active-drop scaling evidence

The application benchmark follows a drop driven by a surface-tension gradient. The numerical formulation is the conservative, balanced treatment of interfacial stresses described by Abu-Al-Saud, Popinet and Tchelepi [4]. The cluster case adds timing, restart and controlled output to the public Basilisk test without changing the physical validation target.

Figure 3 is the scaling figure used in the final MareNostrum 5 report. It varies the amount of work in two ways. Panel (a) increases the spatial resolution of an axisymmetric uniform mesh. Panel (b) increases the number of drops in a planar domain while retaining 64 points per radius. The larger problems continue to benefit from additional ranks after the smaller problems have saturated. This is the expected application behaviour: the useful rank count grows with the work available per rank. The present application dataset stops at 1,024 ranks, approximately 5.3 fully populated 192-core nodes, and should be used as small-scale evidence.

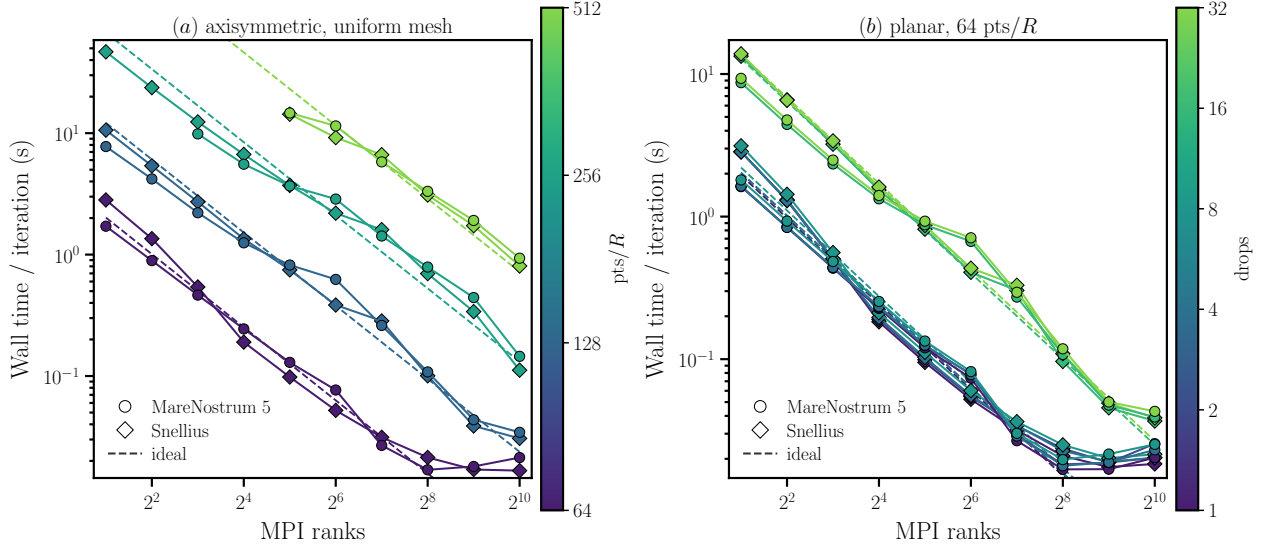


Figure 3: Abundant-fuel active-drop scaling on MareNostrum 5 GPP (circles) and Snellius Genoa (diamonds). (a) Uniform meshes at 64–512 points per radius. (b) Planar 1–32-drop workloads at 64 points per radius. Dashed lines show ideal scaling. Each point is one recorded run; the current tables do not measure run-to-run variability.

4 Verification and benchmark coverage

The application remains useful only if it solves the intended flow. Figure 4 compares the computed drop speed with the analytical terminal velocity and with the Basilisk reference data. The coarse-resolution error follows the expected second-order trend through 32 points per radius; the finer results approach the theoretical speed but should not be described as a single second-order convergence range because their error plateaus.

The stock kernels extend the measured rank range beyond the representative application. The active-drop figure then tests how the complete two-phase workload shifts the strong-scaling limit as resolution and interface count increase.

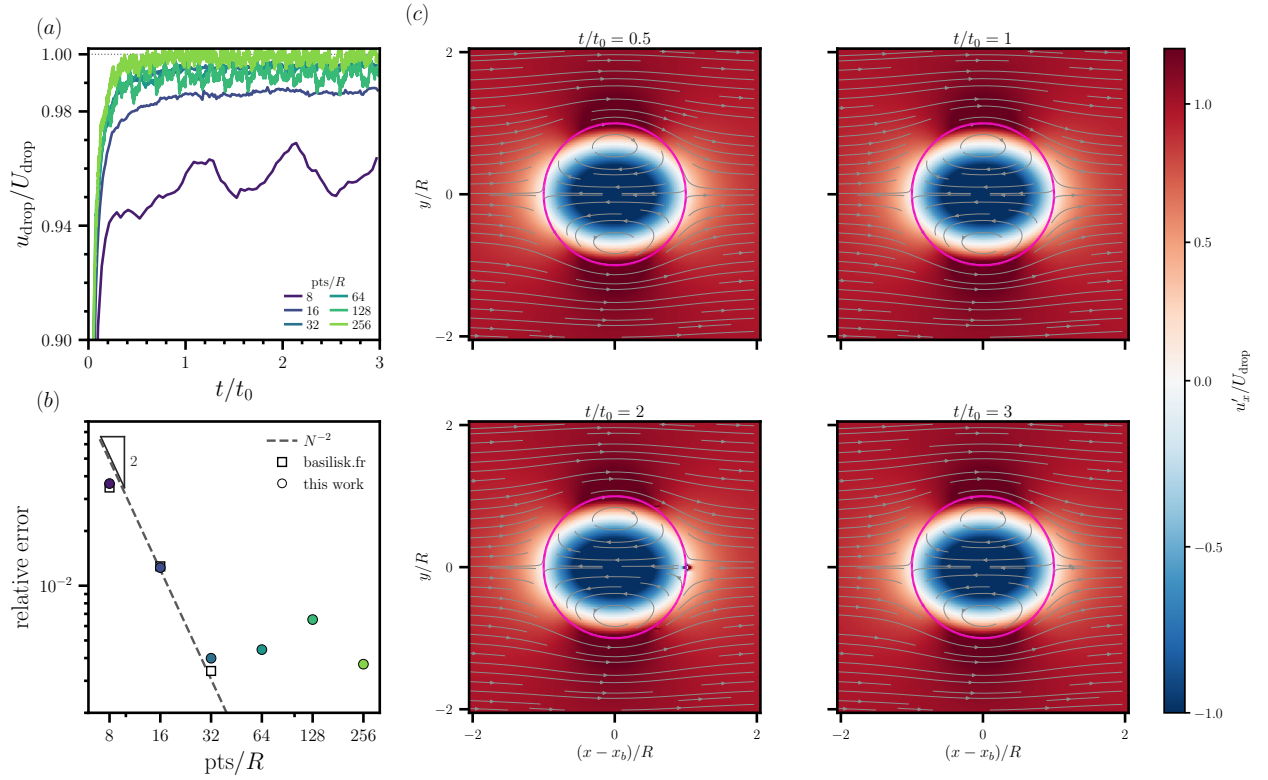


Figure 4: Validation of active-drop migration in the abundant-fuel limit. (a) Speed converges to the Young–Goldstein–Block prediction across 8–256 points per radius. (b) Relative error follows the N^{-2} trend on coarse grids. (c) Drop-frame axial velocity at 64 points per radius; magenta marks the interface.

5 Qualification matrix for a 192-core node

The present kernel measurements use powers of two in MPI rank count. They reach 16,384 ranks on Snellius, equivalent to 85.3 fully populated 192-core nodes. This brackets a 64-node test but does not demonstrate the requested class above 100 nodes. Exact node-aligned rank counts must also be tested; performance at 8,192 or 16,384 ranks should not be silently substituted for a 12,288-rank, 64-node measurement.

Class	Proposed nodes	MPI ranks	Present evidence
Small	1, 2, 4, 8, 10	192–1,920	Kernel curves bracket the range; application to 1,024 ranks
Medium	16, 32, 64	3,072–12,288	Kernel data at 4,096 and 8,192 ranks; 64 nodes bracketed
Large	128, 256	24,576–49,152	Not yet measured; requires a scaled problem and memory pilot

Table 1: Proposed node-aligned qualification points for a system with 192 CPU cores per node. Existing evidence and proposed measurements are deliberately separated.

For the small class, the current $L = 9$ three-dimensional and $L = 14$ two-dimensional problems can be retained as fixed-size strong-scaling tests. For 16–64 nodes, a three-dimensional $L = 10$ case should be added after a memory check. The 128- and 256-node points require a larger problem, such as an $L = 11$ octree, after a short pilot has established memory use and initialization cost. The purpose of the large case is to preserve enough cells per rank to measure the network at scale rather than to time an already saturated problem.

The representative two-phase case should accompany the kernels at small and medium scales. A large-scale application case should be promoted only after its domain size, interface area and output policy have been fixed so that each machine performs the same physical and numerical work.

6 Reproducibility and reporting

A procurement-quality result should record the following alongside every timing:

- the exact source revision and unmodified stock-test provenance;
- compiler, optimization flags, MPI implementation and launcher;
- node type, ranks per node, thread affinity and rank binding;
- mesh dimensionality, level, total cell count and cells per rank;
- wall time, MPI time, iteration count and any initialization excluded from the timed region; and
- at least three repeats after the initial qualification run, reporting the median and spread rather than only the best observation.

The current CSV files contain one observation for each configuration. They are sufficient to locate scaling regimes and design the next campaign, but they do not quantify system variability. Repeated node-aligned runs are therefore part of the proposed qualification procedure.

7 Conclusion

Basilisk provides a compact CPU benchmark with a direct connection to production multiphase-flow workloads. The stock Poisson and Laplacian kernels separate local computation from MPI

communication, while the verified two-phase case tests interface reconstruction, surface tension and the full projection step. Existing measurements cover the small class and bracket a 64-node, 192-core-per-node test. The next useful measurements are exact node-aligned repeats and scaled three-dimensional problems at 128 and 256 nodes. This distinction keeps present evidence separate from the capabilities that a future system must demonstrate.

References

- [1] S. Popinet, *Basilisk: MPI circle benchmark*, <https://basilisk.fr/src/test/mpi-circle.c>.
- [2] S. Popinet, *Basilisk: MPI Laplacian benchmark*, <https://basilisk.fr/src/test/mpi-laplacian.c>.
- [3] S. Popinet, An accurate adaptive solver for surface-tension-driven interfacial flows, *Journal of Computational Physics* **228** (2009), 5838–5866. doi:10.1016/j.jcp.2009.04.042.
- [4] M. O. Abu-Al-Saud, S. Popinet and H. A. Tchelepi, A conservative and well-balanced surface tension model, *Journal of Computational Physics* **371** (2018), 896–913. doi:10.1016/j.jcp.2018.02.022.