

PRODUCT CODE 0102

Royale Play Safari

Asian Paints Royale Play Safari collection consists of a water-based top coat finish with metallic pigments, available in a Silver or Gold base. The effects achieved with this product are inspired by nature and the jungles of Africa and are perfectly suitable for decoration of interior walls in classical and modern environments. Safari is an odourless and completely non-toxic paint.

PRODUCT BENEFITS

Special Effects

Five effects including classic, sleet, rainstorm, oceanwave and frost are created using a variety of tools from Asian Paints.

Easy Application

This product has been specially formulated so that it is easy to apply, allows the tools to move smoothly without

much effort, retaining the pattern left by the tool that created it. It provides sufficient open time to allow the creation of the effect.

Metallic Lustre

It provides a metallic lustre that lends elegance and style to the surface. There are coarse particles in the paint to add a textured feel to the finish.



WATER BASED

asianpaints

LEAD FREE*GUARANTEE

* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.


PRODUCT FEATURES

FINISH



Tough Texture: Lasts long and ensures low maintenance

WASHABILITY

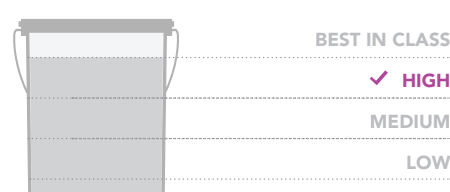

AVAILABLE PACKS



Shelf life: 2 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

COVERAGE


On smooth well-prepared surface by rolling followed by use of Special Effect Tools

1 COAT
40 – 60
sq.ft/ltr**

**Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

COLOURS AVAILABLE


32*



*Currently available in 5 effects per shade totaling to 160 combinations.

HOW TO APPLY

PRE PAINTING STEPS



PLASTER New masonry surfaces must be allowed to cure completely. It is recommended to allow 28 days as the curing time for new masonry surfaces.



CLEANING Surface should be free from any loose paint, dust or grease. Growths of fungus, algae or moss should be removed by wire brushing and water. In case of areas having excessive dampness use Asian Paints SmartCare Damp Block to limit further dampness. When the underlying surface exhibits chalkiness, in spite of thorough surface cleaning, use Asian Paints SmartCare Exterior Sealer.





FILLING FOR CRACKS For filling cracks upto 3mm use Asian Paints SmartCare Crack Seal.



FILLING FOR HOLES & DENTS In case of dents and holes use Asian Paints Acrylic Wall Putty or white cement and fine sand in the ratio 1:3

Royale Play Safari should not be applied on surfaces / substrates that are subjected to continuous seepage or dampness.

PAINT APPLICATION PROCESS

APPLICATION	CODE	THINNER	DILUTION %	APPLICATION VISCOSITY¹	RECOATING PERIOD
STEP 1 SANDING					
SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN					
STEP 2 DECOPRIME CEMENT PRIMER (ST) / DECOPRIME CEMENT PRIMER (WT) BRUSH / ROLLER / SPRAY	0359	MTO* OR WATER	BRUSH / ROLLER 8 - 10 SPRAY 15 - 20 80% – 100 %	BRUSH / ROLLER 30 - 40 SPRAY 20 - 25	6 - 8 HRS 4 - 6 HRS
	0360				
STEP 3 ACRYLIC WALL PUTTY PUTTY KNIFE	1354	 WATER	BASED ON REQUIREMENT	N/A	4 - 6 HRS
STEP 4 SANDING					
SAND THE SURFACE WITH SAND PAPER 180 AND WIPE CLEAN					
STEP 5 DECOPRIME CEMENT PRIMER (ST) / DECOPRIME CEMENT PRIMER (WT) BRUSH / ROLLER / SPRAY	0359	MTO* OR WATER	BRUSH / ROLLER 8 - 10 SPRAY 15 - 20 80% – 100 %	BRUSH / ROLLER 30 - 40 SPRAY 20 - 25	6 - 8 HRS 4 - 6 HRS
	0360				
STEP 6 SANDING					
SAND THE SURFACE WITH SAND PAPER 320 AND WIPE CLEAN					
STEP 7 BASECOAT FIRST & SECOND COAT PREMIUM EMULSION BRUSH / ROLLER**	0011	 WATER	BRUSH 40 - 45 ROLLER 65 - 70	BRUSH 30 - 45 ROLLER 22 - 25	3 - 4 HRS
	0102	AS SUCH	5% WATER V/V ONLY IF REQUIRED	N/A	8 - 10 HRS N/A
STEP 8 TOPCOAT FIRST & SECOND COAT ROYALE PLAY SAFARI FINISH BRUSH / SPONGE***					

1. As measured through a Ford cup.
2. Recoat period is quoted for 28° - 30°C and 60 - 65% Relative Humidity, these may vary under different conditions.

* Mineral Turpentine Oil

** Apply a 3rd coat of Royale Luxury Emulsion as Basecoat if required

*** Contractor training required

HOW TO CHOOSE COLOURS

Browse through Asian Paints colour tools to help you find the right colour combination

ROYALE PLAY DUNE & SAFARI
DECOR BOOK



ADDITIONAL INFORMATION

POST PAINTING CARE

To clean the surface use a dry cloth to wipe clean. Allow 2 weeks of drying time before cleaning the surface.

TECHNICAL DETAILS

a. Flash point IS101/1987 Part 1, Sec 6:

Water-based, non-flammable

b. Stability of thinned paint: To be used within 24 hours

PRECAUTIONS

- › Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- › Do not over-thin or over-extend the brush.
- › Tint using Asian Paints machine colourants only
- › Stir well and strain before use.
- › Tinted paints need thorough shaking immediately after tinter addition as well as before use.

SAFETY FEATURES

- › Kindly refer to the MSDS for Asian Paints Royale Play Safari which gives detailed information on safety measures while handling the paint, which is available on request.
- › Store the container with the lid tightly closed in an upright position, in a cool, dry place
- › Keep out of reach of children and away from eatables
- › May be harmful if swallowed. In case of ingestion seek immediate medical attention.
- › Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
- › In case of skin contact immediately wash skin with soap and plenty of water. Get medical attention if irritation develops or persists.
- › Do not breathe vapour or spray. It is recommended to wear suitable nose pad during sanding and surface preparation to avoid dust inhalation
- › Do not pour leftover paint down the drain or in water courses.
- › In the event of spills, contain spillage using sand or earth.
- › Safety Data Sheet available for professional user on request.
- › No added Lead, Mercury or Chromium compounds