

PRODUCT CODE 8134

## Apex Duracast PebbleTex

Asian Paints Apex Duracast PebbleTex is an acrylic, water-based exterior product specially designed to offer a bubble or headcut pattern through spraying for both exterior and interior wall surfaces.

### PRODUCT BENEFITS

#### Hides Fine Cracks

Apex Duracast PebbleTex hides surface undulations and fine cracks

#### Tough Textured

The tough texture finish lasts for long and ensures low maintenance

#### Anti-algal Formula

It resists fungal and algal growth when applied as system, with the recommended top coat

#### Unique Patterns

Apex Duracast PebbleTex can be used to obtain a 'bubble' or headcut pattern



asianpaints

LEAD FREE\*GUARANTEE



\* All Asian Paints products contain no added Lead, Mercury, Arsenic or Chromium from April 2008.

### PRODUCT FEATURES

#### FINISH



HEADCUT




BUBBLE

Tough Texture: Lasts long and ensures low maintenance


#### COLOURS AVAILABLE

1500+\*



APEX/APEX ULTIMA/ ULTIMA PROTEK TOP COAT to be applied as top coat

#### AVAILABLE PACKS

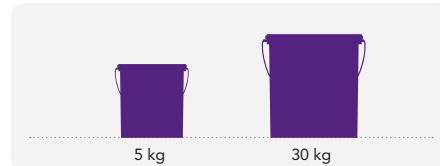

Shelf life: 3 years from date of manufacture in original tightly closed containers away from direct sunlight and excessive heat.

#### COVERAGE

On normal masonry surface by air-assisted spraying






1 COAT  
7-9 sq.ft/kg\*\*

\*\*Actual coverage may vary from the quoted coverage due to factors such as method and condition of application and surface roughness and porosity.

### Recommended Application

#### PAINT APPLICATION PROCESS

APPLICATION	PRODUCT CODE	THINNER	DILUTION % (BY VOLUME)	RECOATING PERIOD <sup>2</sup> (HOURS)
STEP 1 EXTERIOR WALL PRIMER / PROFESSIONAL EXTERIOR PRIMER BRUSH / SPRAY / ROLLER	8065 1019	 WATER	AS PER RECOMMENDED DILUTION FOR PRODUCT	4 HRS
HORIZONTAL SURFACES LIKE TOP OF WINDOWS, LEDGES SHOULD BE PAINTED WITH 3 COATS OF APEX ULTIMA FOR GREATER PROTECTION				
APPLICATION OF PRIMER IS MANDATORY				
STEP 2 FIRST COAT ASIAN PAINTS DURACAST PEBBLETEX AIR-ASSISTED SPRAY	8134	 WATER	1-5% IF REQUIRED	12 - 16 HRS
STEP 3 2-3 COATS ASIAN PAINTS APEX/ULTIMA/PROTEK TOP COAT BRUSH / SPRAY / ROLLER	1812 1868 1890	 WATER	AS PER RECOMMENDED DILUTION FOR PRODUCT	4 - 6 HRS

1. Recoat period is quoted for 25°C and 50% Relative Humidity, these may vary under different conditions.  
2. Some shades may require 3 coats for proper hiding.

## ADDITIONAL INFORMATION

### TECHNICAL DETAILS

- a. Drying time:** Surface dry time 12 - 16hrs
- b. Sheen levels:** NA
- c. Flash point IS101/1987 Part 1, Sec 6:** NA
- d. Stability of thinned paint** - To be used within 24 hours

### PRECAUTIONS

- > Do not apply when ambient temperature is less than 10°C or if the temperature might drop to this level within 4 hrs of application.
- > Use of Universal Stainers or colourants is not recommended.
- > Do not keep material open for a long time.
- > Product cannot be applied on surfaces/substrates that are subjected to continuous seepage or dampness.
- > Stir well before use.

### POST PAINTING CARE

For the best performance of the paint, ensure proper washing and cleaning of all algal and fungal growth, if any, at regular intervals of six months.

### SAFETY FEATURES

- > Store the container with the lid tightly closed in an upright position, in a cool, dry place.
- > Keep out of reach of children and away from eatables.
- > May be harmful if swallowed. In case of ingestion, seek immediate medical attention.
- > Wear eye protection during application. In case of contact with eyes, rinse immediately with plenty of clean water and seek medical advice.
- > In case of skin contact, immediately wash skin with soap and plenty of clean water. Get medical attention, if irritation develops or persists.
- > Do not breathe vapor or spray. It is recommended to wear mask during sanding and surface preparation to avoid dust inhalation.
- > Do not pour leftover paint down the drain or in water courses.
- > In the event of spills, contain spillage using sand or earth and dispose through authorized agency for waste management.
- > No added Lead, Mercury, Arsenic, Chromium & Ammonia compounds.
- > Left-Over paint disposal:
  - Left-over paint/drums should not be disposed in soil/drains. Consumer should consult a local recycling agency for disposal of paint/drums.
  - The pails/drums should not be used for storing food items.



For enquiries, feedback and complaints,  
please call toll-free number  
16600124680/9802033515 or write to us at  
[weassure@asianpaints.com.np](mailto:weassure@asianpaints.com.np)