


If cargo **is not prevented** from forward movement, follow these requirements:

Article Description	Required Minimum Number of Tie Downs Over Cargo
<ul style="list-style-type: none">• 1.52 m (5 ft) or shorter• 500 kg (1,100 lb) or lighter	1
<ul style="list-style-type: none">• 1.52 m (5 ft) or shorter• over 500 kg (1,100 lb)	2
Between 1.52 m (5+ft) and 3.04 m (10 ft)	2
Longer than 3.04 m (10 ft)	2 + 1 tie down for every additional 3.04 m (10 ft), or part thereof



If cargo **is prevented** from forward movement, follow these requirements:

Article Description	Required Minimum Number of Tie Downs Over Cargo
All Cargo	1 tie down for every 3.04 m (10 ft), or part thereof

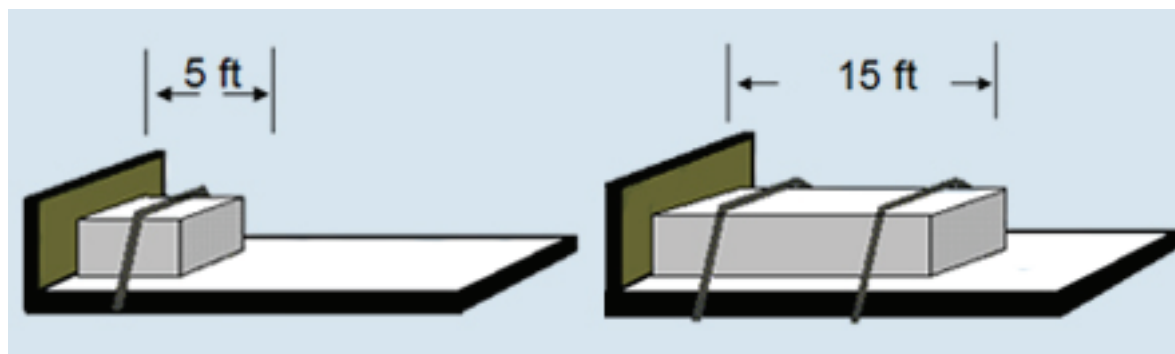

Exceptions to the Minimum Tie Down Requirements

Minimum number of tie downs does not apply to a vehicle transporting one or more articles of cargo such as, but not limited to machinery or fabricated structural items which must be fastened by special methods because of design, size, shape, or weight.

For example:

Steel or concrete beams, crane booms, girders, and trusses.

Any article of cargo carried on that vehicle must be securely and adequately fastened.