




Smart Integrated
Assembly:
The future of
Manufacturing




Assembly Solutions, Under One Roof

NEO AUTOMATION

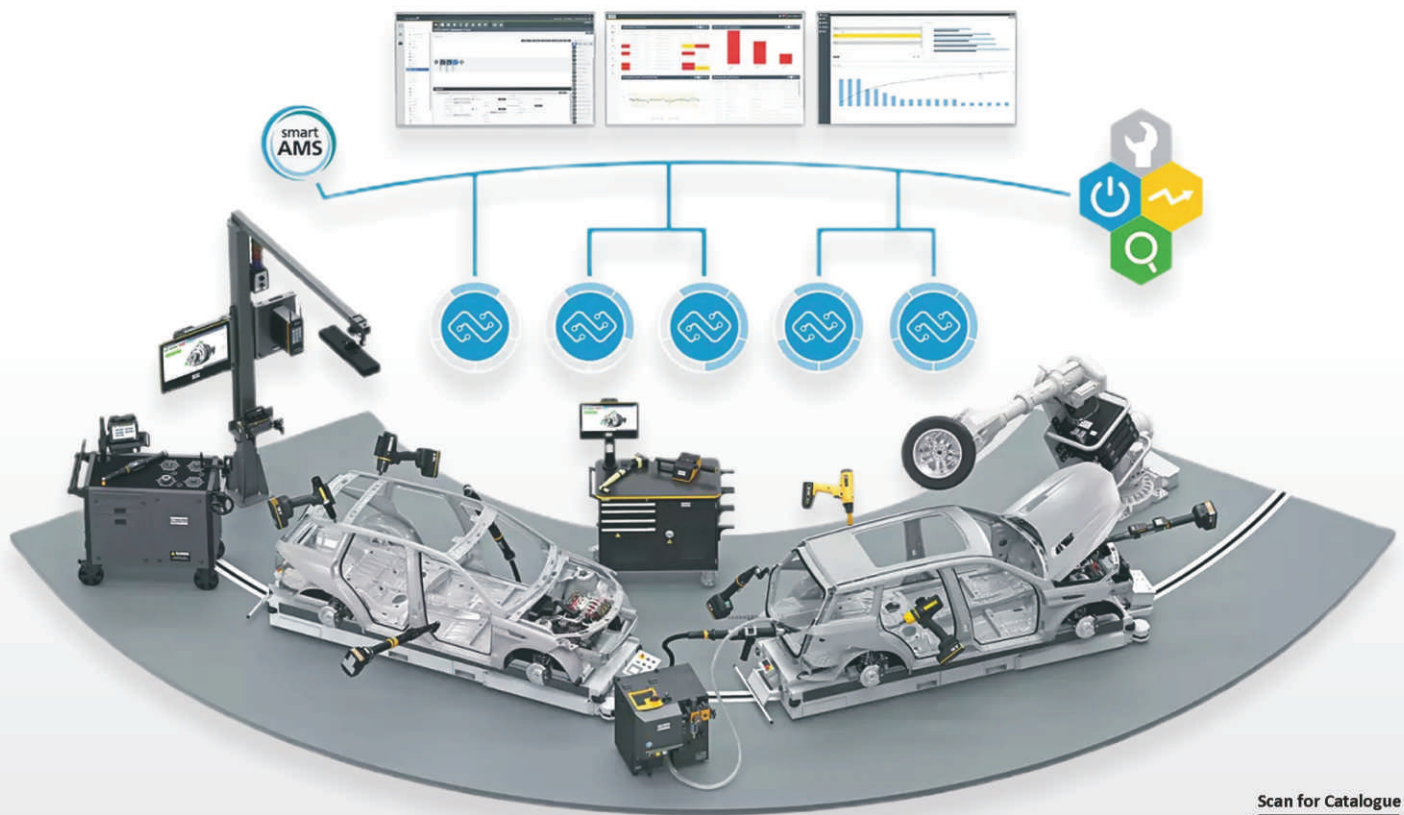

Scan for Catalogue

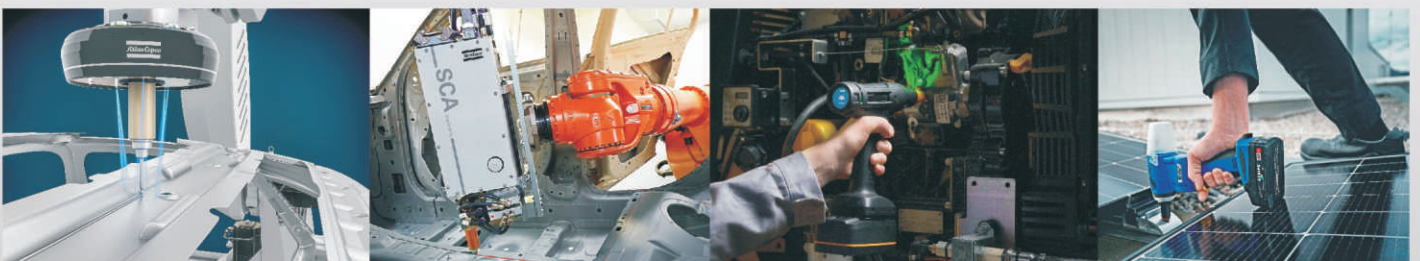

Smart Integrated Assembly: Industrial Manufacturing in the era of industry 4.0 and beyond


For people, prosperity and planet. Challenges and trends driving manufacturing towards Industry 5.0



Our 6 pillars of value

					
Increased Uptime	Reductions in Defects	New Product Introduction	Improved Productivity	Human Interaction	Reduction in Energy Use



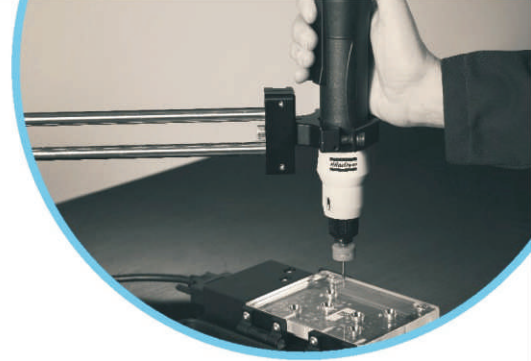

Tightening Tools

Impact Wrench



Adjustable Torque Wrench



Ratchet Wrench



Electric and Pneumatic screwdrivers



Material removal & percussive Tools



Die Grinder



Orbital Sander



Pistol Sander



Angle Grinder



Angle Polisher



Drill



Belt Sander



Chipping Hammer



Weld Flux Removal



Engraving Pen



Vertical Grinder / Sander





Pneumatic Assembly Tools



**Pistol
Screw Driver**



**GRS Impact
Wrench**



**Angle
Nut Runner**



**Pistol
Nut Runner**



**PTI
Pulse Tool**



**Straight
Screw Driver**

Pneumatic Assembly Shut-off Tools Torque range from 0.03 Nm – 3800 Nm

- Fast
- Accurate
- Operator Friendly
- Highest Possible Productivity
- Low Reaction Force
- The Lightweight Design

Accuracy of Tools:

± 15% of Ergo Pulse Tool & ± 10% of Screw Drivers & Nutrunners

Noise Level:

Below 78 dB(A) as per ISO 15744

Vibration Total Value:

<2.5 m/s² as per ISO 28927-2



Air Line Accessories



FRL Unit



**Smart
Coupling**




**Swivel
Multiflex**



**Recoiled
Hose**



**WP
Balancer**

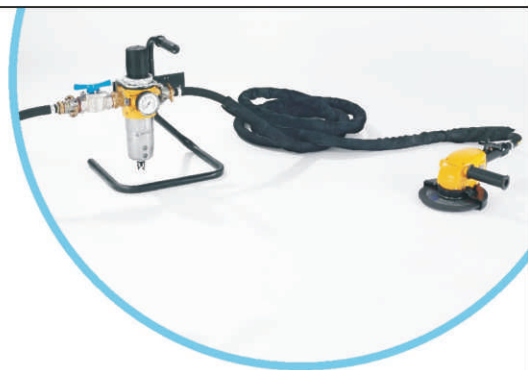

By using Atlas Copco Airline Accessories Get maximum productivity from your tools

Ensure that your tools achieve their full potential

- Productivity
- Energy Efficiency
- Safety
- Ergonomics
- Quality





Material Removal Tools



Random Orbital Sander



Turbine Grinder



Die Grinder



Extended Die Grinder



Chipping Hammer



Scaler



Riveting Hammer

Features:

- Highest Power to weight ratio in the market
- Speed governor - for maximum power at the right speed
- Vibration damped
- Auto balancer
- Matchless Productivity
- Ergonomics - Reducer operator strength
- Highly service friendly
- Longer life of consumables



Air Motors



Air Motor




Gear Air Motor



Turbine Air Motor



Piston Air Motor

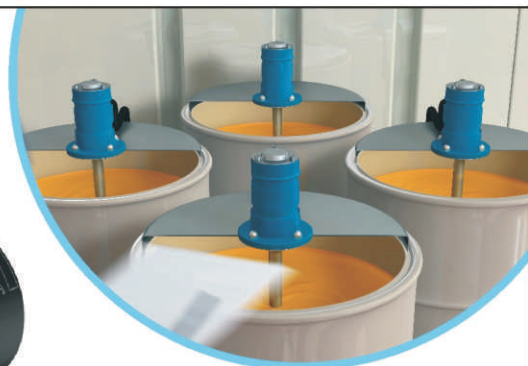

Air motor

- 3 different technologies – Vane, Piston and Turbine air motors
- An air motor weighs only 1/4 as much as an electric motor with the same output and occupies only 1/6 of the space.
- Air motors develop far more power in relation to their size and weight than most other motor types.
- The working point (torque and speed) for the air motor can be adjusted sleeplessly.
- Well suited for white room applications with lubrication free version of air motors
- Stainless steel, brake options available.
- Whole range of air motor is ATEX certified, suited for hazardous working environment.
- Customized designs are offered to suit various application needs.





Mechanical Wrenches

CWR 'click' wrench series



Click Wrench

- Wide range from 2Nm up to 300Nm
- Very small sizes ideal for tightening in limited space
- Repeatability of $\pm 4\%$
- Easy and safe adjusting and handling
- Standard drive (9x12 or 14x18) for a wide range of suitable end fittings



CWR with Microswitch Adaptor



Microswitch Adaptor

Upgrades CWR wrenches into signal transmitting devices (OK/NOK)

MTRw System



The Atlas Copco "Mechatronic" System

- Unique in the market
- Made for production line as well as for single work stations
- Four color LED Feedback of Tightening Status
- Wireless data transmission
- End fitting length / angle compensation (bending / torsion)
- Error proofing (programmable)
- Batch count & rehit detection

Torque Range:
5 to 200 Nm

Click Accuracy:
 $\pm 3\%$

Repeatability:
 $\pm 3\%$





Power up your tightening solutions



Features

- Connects a wide range of tool types
- Virtual Stations connecting several tools
- Web HMI
- Intelligent application module (IAM)
- On demand licensing
- Built-in Wi-Fi access point
- Available in standard, LV and HV versions
- Seamless integration with our eco-system

Benefits

- Can connect up to 20 tools at the same time
- One unit for battery, cable and fixture tools
- Access point and increased Wi-Fi range
- Easy remote programming, IAM storage
- Familiar and improved user interface






Software Solutions



Process Improvement ToolsNet8

- Personalized production data collection
- Simplified production analysis
- Enhanced processes for higher quality

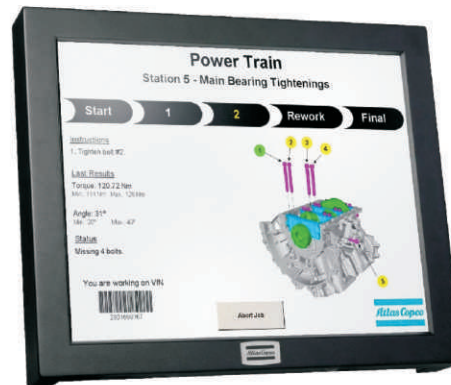

Assembly Quality Avantguard

- Full Control of the Assembly Process
- Reduces errors and improves quality
- Fast introduction of new products or variants

Industrial Location



Industrial Location SpotPoint ILS

Features:

- Vision technology with Infrared light
- All-in-One sensor - Vision & Computing power
- Part tracking- Positioning for moving lines
- Visual feedback - Operator Guidance
- Plug&Play – Atlas Copco ecosystem
- Provides assembly traceability
- Configurable reject management
- Detects tool orientation (P,Y,R)



Industrial Location Mapping ILM

Features:

- Provides tightening data based on location
- Provides assembly traceability
- Configurable reject management
- Configurable user interface
- Tightening positions with start and finish
- Visual indicators for status and feedback



Industrial Location Guidance ILG





QA Platform 4.0 : the next generation of Quality Assurance!

STbench



The STa6000



IRC-Connect



STR Advance wrench



STpad



QA Supervisor





Bolting Solutions

Torque or Tension ? We have got it covered



**Square Drive
Hydraulic Torque Wrenches**



**Low Profile
Hydraulic Torque Wrenches**



**Hydraulic
Bolt Tensioners**



**Hydraulic
Power Pack**

Repeatability:

± 1%

Output Accuracy:

± 3%

Torque Range:

75 Nm to 1,00,000 Nm

Features:

- High Power to weight ratio
- Hands free operation
- For low clearance application
- High strength steel alloy of housing for long tool life



Bolting Solutions



**Pneumatic
Nut Runner**



**Battery
Transducerized
Nut Runner**



**Electric
Transducerized
Nut Runner**

Features:

- Custom Engineering
- Simultaneous Tensioning
- Fast nut rundown with high accuracy
- Operator Friendly
- Traceability Possible
- Interchangeable reaction bar


Torque Range:

60 Nm to 16,000 Nm



XC Controller



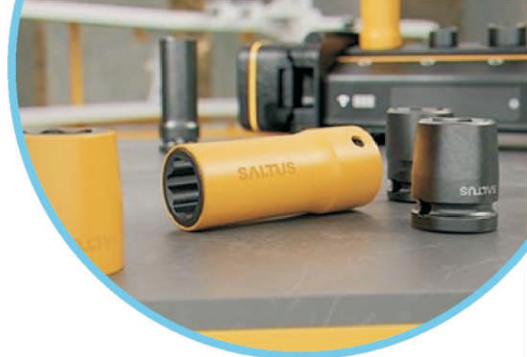

Competence Centre Sockets



Impact Sleeve Socket



Socket Accessories



Socket an effective tool

Rotation Socket



Isolated and Insulated sockets



Bits



Nut Setters



Bit Sockets



Stud Setters



Crowfoot Attachments



Adaptors & Extensions



Automatic Socket Changer



Hold & Drive




End Fittings





Assembly Solutions, Under One Roof

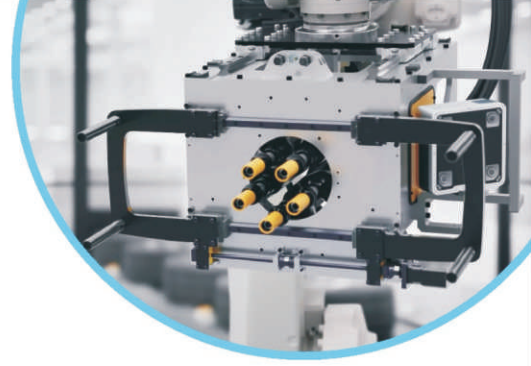

Fixtured Application Solution

With our vast experience, we are a supplier you can rely on



Single spindle
Fixture System



Single spindle
Table mounted Fixture System



AX2 Arm



4 spindle Fixture System



Multispindle Fixture System



Ax 1 Articulated Arm



Torque reaction
suspension - Hand Tool



Articulated
Arm



Tool Balancing Arm





Assembly Solutions, Under One Roof




SPM Machines




4 Spindle Automatic Bolt Tightening Machine:

- Customised for Variable PCD for Tightening Bolts
- Full Proof Interlocking with PLC
- Control Panel for easy access to machine Operator
- HMI Display for each tightening Torque with OK / NOK indication
- Data Traceability for complete Cycle
- Error proofing and Zero fault production

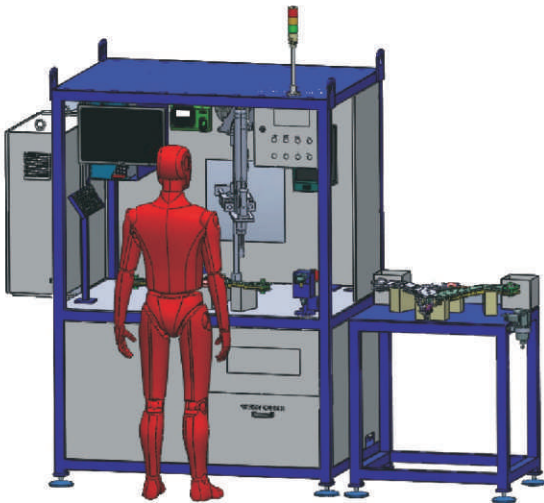

Single Spindle Work Station With Positioning Tightening System :

- Control the Sequence and the Position
- Full Proof Interlocking with Barcode / QR Code Scanner
- Controller Display for each tightening Torque with OK / NOK indication
- Data Traceability for complete Cycle
- Error proofing and Zero fault production
- Minimizes reaction force to prevent hand-arm-shoulder disorders
- Improves finished product quality with all torque absorbed in the joint and no movement of tool

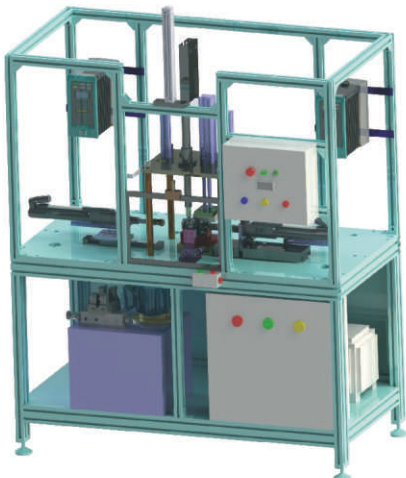

2 Spindle Automatic Valve Tightening Machine

- CW and CCW Tightening
- Full Proof Interlocking with PLC
- Control Panel for easy access to machine Operator
- HMI Display for each tightening Torque with OK / NOK indication
- Data Traceability for complete Cycle
- Error proofing and Zero fault production





Industrial Assembly Solutions

Your partner for innovative joining


Adhesive dispensing




Selected application types




Stitched bead
Hybrid joining



Triangular bead
Glazing



Swirl
Hem flange bonding



Flat stream
Sealing,
underbody protection

Enso 7000 Plus



CHALLENGE

Complexity, cost, and safety of barrel changes
Ensure quality of dispensing process

VALUE

Increased quality & safety
Up to 1 million material cost savings per year/per production line and up to 10% less barrel changes

SOLUTION

Half-automated barrel change and ventilation
Optimized Flat Follower Plate and vacuum pump

SUSTAINABILITY

Up to 700 t* less CO₂ emission
Up to 15% more material can be used

RTVisiton.t

High quality in-line based inspection for industrial dispensing applications



In-line monitoring immediately detects quality issues without additional cycle time


High image processing frequency allows high productivity levels with robot speeds up to 600mm/s

360° coverage of the application ensures 100% bead inspection




Enso 7000 Flat Follower Plate

Enormous material savings

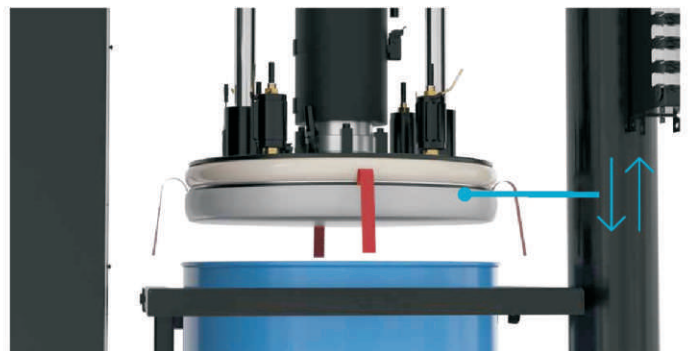

- Floated mounted Follower Plate
- Pump and Follower Plate mounted with sliding bushings
- Sensor-controlled alternating downward and upward process
- Filter fleece protects the vacuum pump and reduces cleaning effort of the Follower Plate

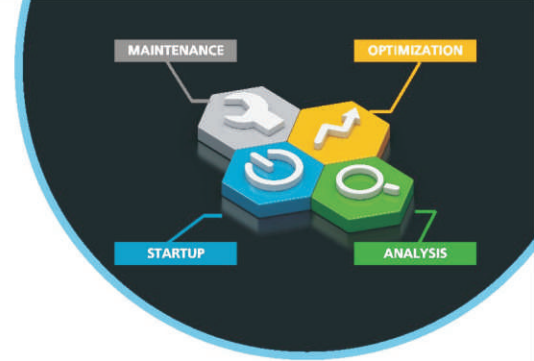


Atlas Copco service offerings for industrial tools & solutions

EasyStart	: Right first time – save time and money
Repairs	: Save time, costs and inconvenience
ToolCover maintenance solutions	: Optimize performance and efficiencies
Calibration	: Increase the quality, reduce rework and risk of liability costs
TechCover service level agreements	: Protect your investment
Training	: Reduce tool misuse and improve productivity
Tightening Services	: Improved quality on your existing line

Please see below our value proposition

BASED ON YOUR NEEDS, YOU CAN CHOOSE BETWEEN PROTECT, STABILITY, UPTIME.

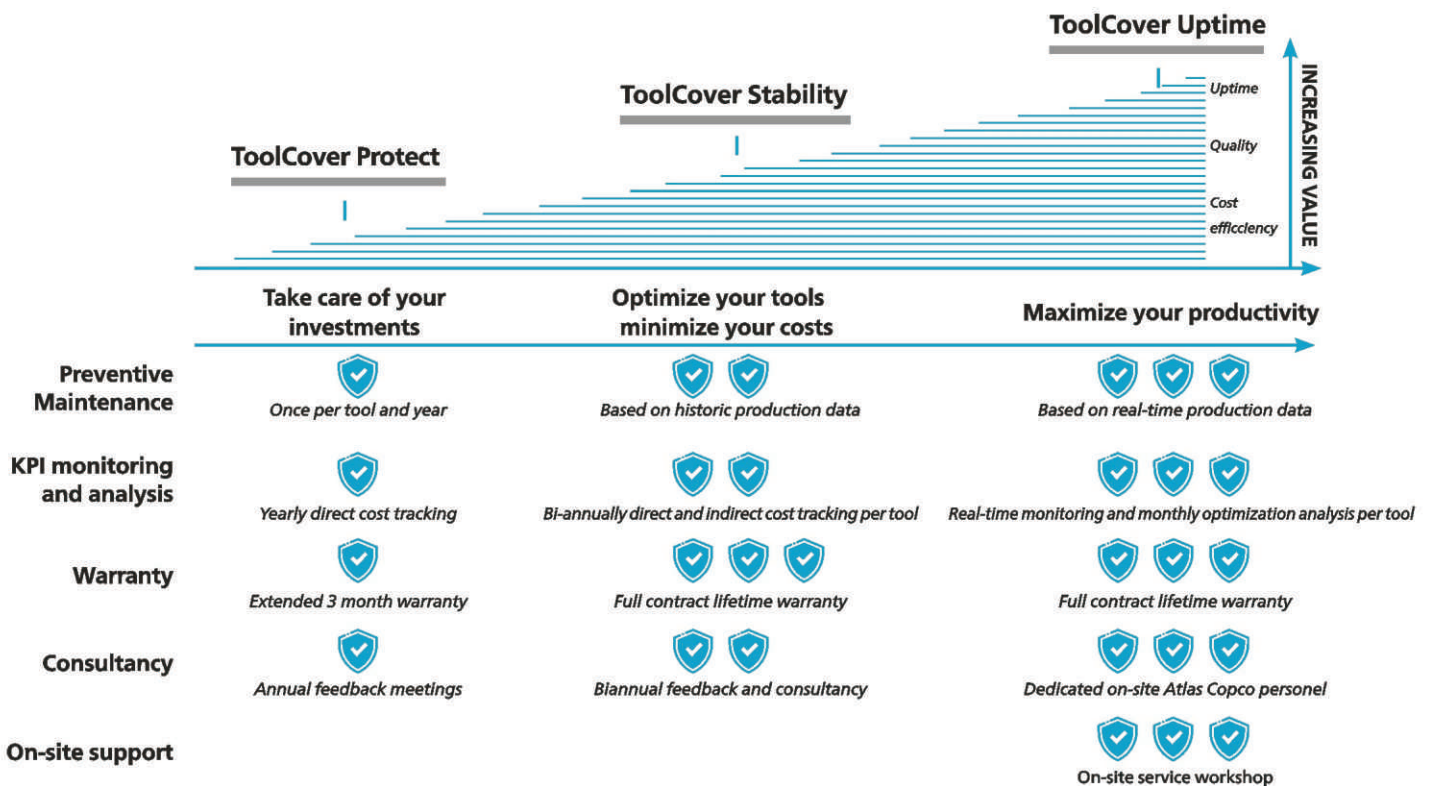

ALTURE : The smart and proactive production monitoring solution



Features:

- Real-time notifications
- Customizable thresholds
- Quality assurance
- Predictive analytics
- Comprehensive visibility





Assembly Solutions, Under One Roof



Quick Connect Solutions



eSafe quick couplings
Max Working Pressure :
10 to 16 bar



Quick couplings for ultra high pressure hydraulic hoses & fittings
Max Working Pressure :
70 to 400 MPa



Compressed Air Hoses
High Vis, Anti spark,
Antistatic, Braided, Non braided
Max Working Pressure :
10 to 16 bar



Multi-link Outlets
Vented Safety
Max Working Pressure :
12 to 16 bar



Compressed Air Reels Closed
Slow Retraction, Guiding
mechanism, easy to install &
maintain
Length : 5m to 17m



Compressed Air Pressure tester
Vented Safety
Max Working Pressure :
10 bar



Electrical Cable Reels
Slow Retraction,
Cable : 3x1.5mm, 240V,
Single phase
Length : 10m to 17m



**Multiflow Air
& Fluid Gun**
OSHA Compliant
Max Working
Pressure :
16 bar




Compressed Air Reels Open
Slow Retraction, Guiding
mechanism, easy to install &
maintain
Length : 15m to 23m



208 Air & Fluid Gun
OSHA Compliant
Max Working Pressure : 16bar



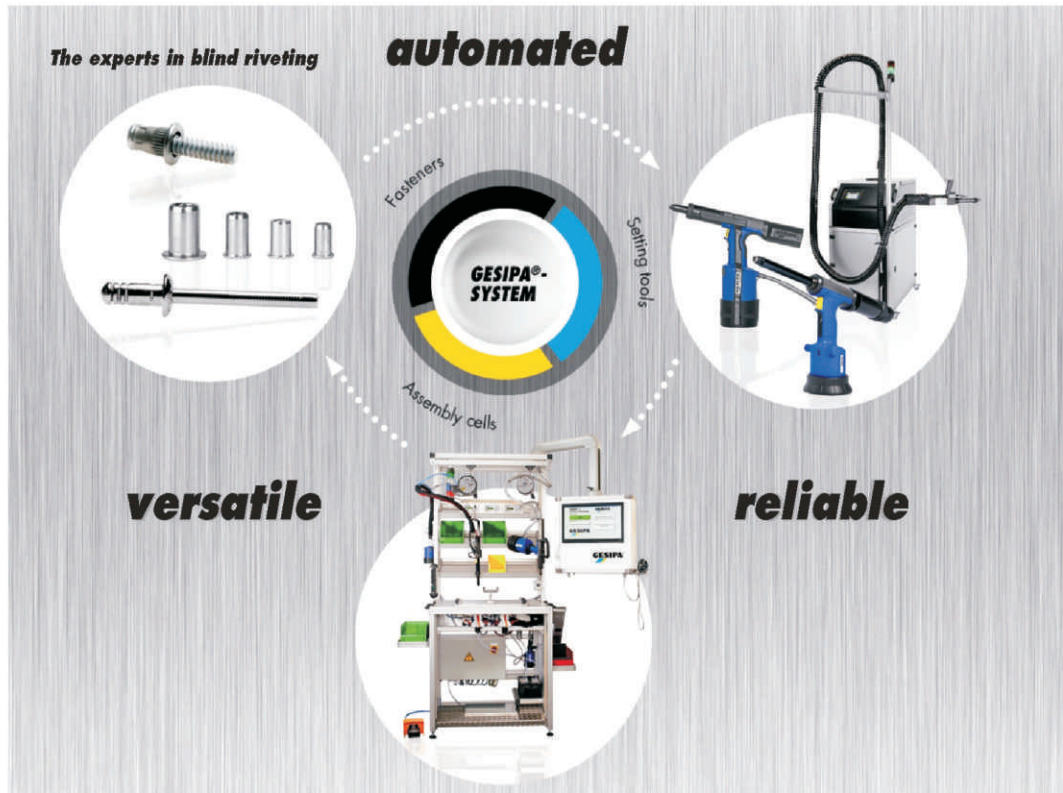

Blind Rivet, Blind Rivet Nut and Setting Tools



Manual Rivet Tool



Battery Operated Rivet Tool



Hydro Pneumatic Rivet Tool



Hydro Pneumatic Lock Bolt Tool



Automatic Riveting Machine



Speed Rivet Tool




Battery Operated Blind Rivet Nut Tool




Hydro Pneumatic Blind Rivet Nut Tool

The Experts In Blind Riveting



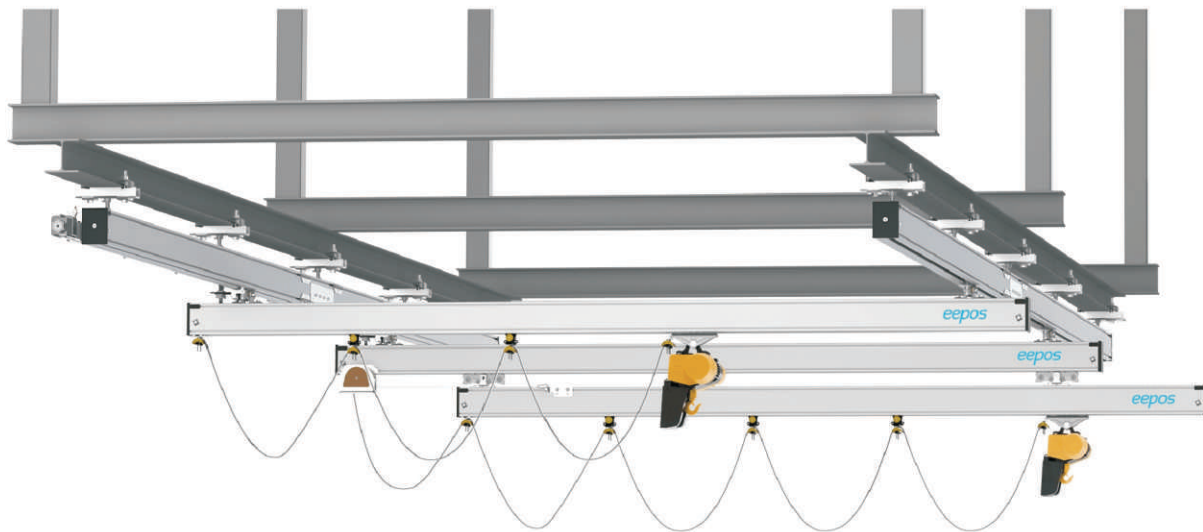

eepos one

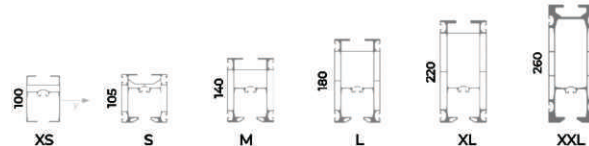

The light-weight modular system for transporting loads up to 2,000 kg



Single girder crane



Double girder crane



Telescopic crane



Closed Loop System



Nano Rail workstation

Features

Different profiles - One trolley
6 profile sizes for loads up to 2,000 kg with one trolley design

Rigid & lightweight construction
Low dead weight with high rigidity due to double walled profile design hollow chambers.


Advantages

Ergonomic
Ergonomic and fatigue-free working thanks to excellent, jam-free smooth running

Sturdy and reliable
High-quality, low-wear components guarantee maximum value retention and cost-effectiveness over the entire service life

100% Modular
Fast design, delivery and assembly through intelligent modular system


The max. permissible operating force for manually operated trolleys in accordance with DIN 13157.2:2004

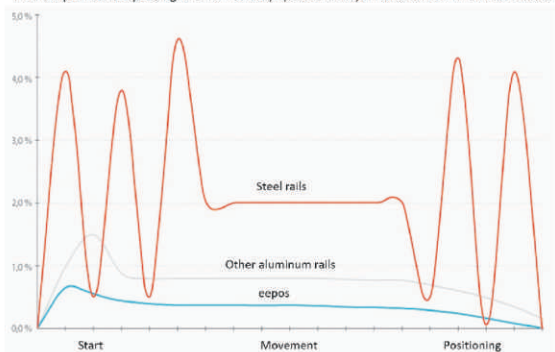


3 Layered safety systems



For long rail



For cross rail



For load

Last Load	Start	Bewegen Movement
100 kg	0,5 – 0,8 kg	0,2 – 0,4 kg
250 kg	1,3 – 1,9 kg	0,5 – 0,8 kg
500 kg	2,5 – 3,8 kg	1,0 – 1,9 kg
750 kg	3,8 – 5,6 kg	1,5 – 2,9 kg
1000 kg	5,0 – 7,5 kg	2,0 – 3,8 kg



eepos base

Safe and clean solution for your energy, data and more.

Features

Available in 6 different sizes

Modular Design - Floor mounted ,
Ceiling Mounted, Wall Mounted and
Portable

Compact and robust construction.

External grooves to mount equipment
like HMI/Tool racks/Swivel arm.

Flexibility to provide inputs
(Underground, upper side or through
side faces)

Easy Maintenance – Each module has a
dedicated slot and easily unscrew able.

Good Interchangeability – Easy addition
or replacement of modules

Multiple Configurations Available

Mounting arrangement: floor
ceiling, wall as well as with rails


Application: Machining lines,
Production lines, assembly
lines, workstations, etc.

Various Modules Available

Industrial sockets (3-phase, 1-
phase)

Compressed air coupling in
various sizes

Ethernet, Oil, Gas, Water,
Coolant, etc.

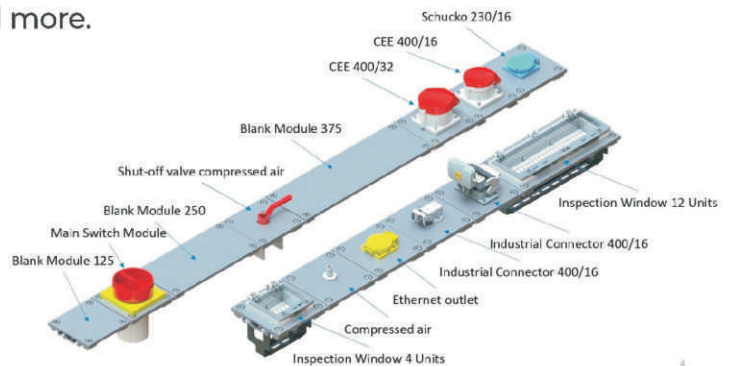

Line-side media equipment





Hot & Cold Water Plumbing Application



Pex Barrier Pipe



Equal Straight Connector



Reducing Straight Connector



Equal Elbow



Stem Elbow



Equal Tee



Reducing Tee



Female Coupler - Tap Connector



Bent Tap Connector



Stop End



Reducer



Plug




Superseal Pipe Insert



Pipe Clips & Spacers



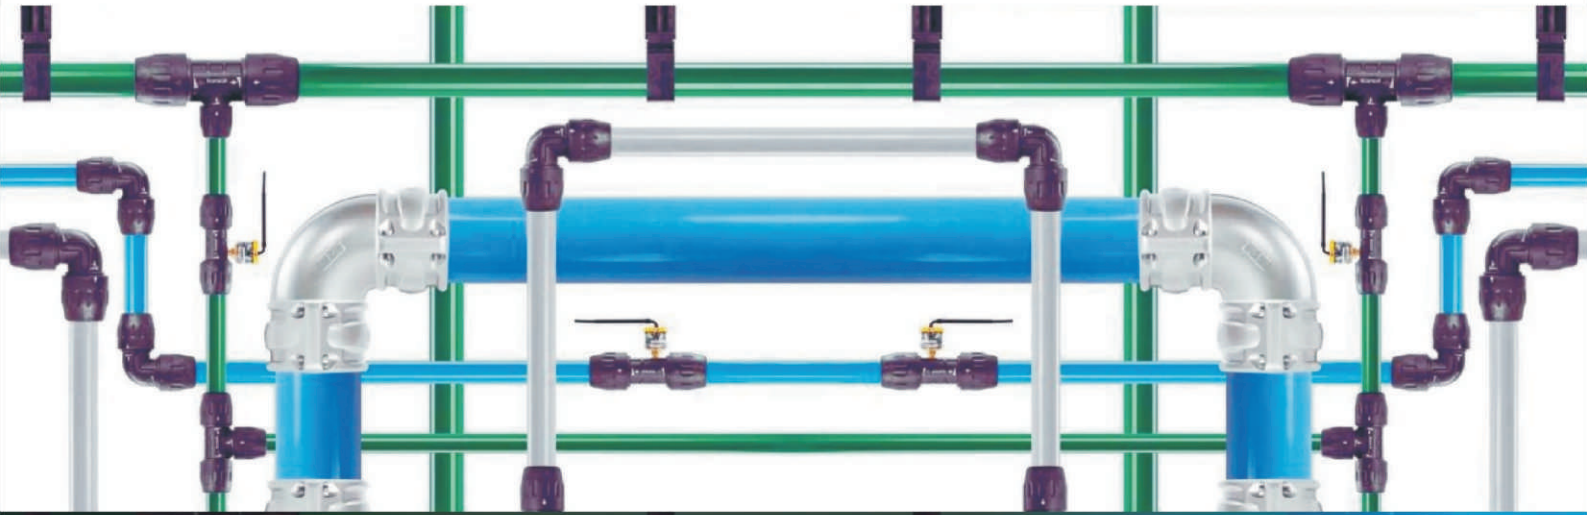


Fast, Efficient, Dependable

Parker's Transair aluminum compressed air piping has over 20 years of innovation. Our aluminum compressed air piping system installs fast and provides years of dependable compressed air conveyance.

Pipe Sizes: 16.5mm to 168mm


Low Pressure Piping

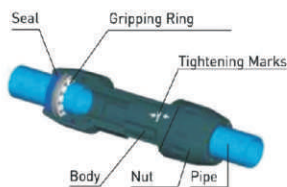

Ø16.5 - Ø25 - Ø40 mm
Simply push the pipe into the connector up to the connection mark. The gripping ring of each fitting is then automatically secured and the connection is safe.



Ø50 - Ø63 mm
Transair's SnapRing secures the connection between the nut and the pipe - tightening of the nuts secures the final assembly

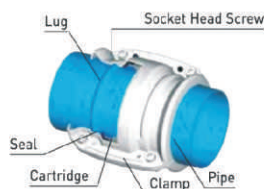


Ø76 - Ø100 - Ø168 mm
Position the pipes to be connected within the Transair® cartridge and close/tighten the Transair® clamp.


• **Maximum Working Pressure***
10 bar (-20°C to 60°C) for all diameters
7 bar (-20°C to 90°C) for all diameters

• **Working Temperature :**
-20°C to 90°C


S.S. Piping

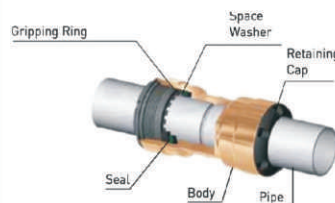

Ø22 - Ø28mm
Pipe-to-pipe and stud connectors in Ø22 and Ø28 can be immediately connected to Transair® stainless steel - pipe - simply push the pipe into the connector up to the connection mark. The gripping ring of each fitting is then automatically secured and the connection is safe.

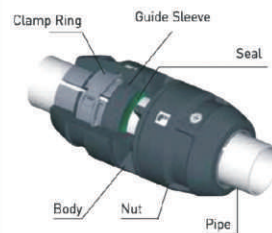

Ø42 - Ø60mm
Pipe-to-pipe and stud connectors in Ø42 and Ø60 can be quickly connected to Transair® stainless steel pipe by means of a double clamp ring. This secures the connection between the nut and the pipe - tightening of the nuts secures the final assembly.

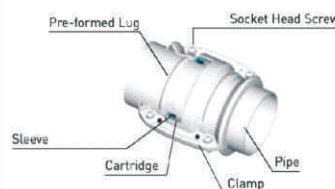

Ø76 - Ø100mm
Pipe-to-pipe and stud connectors in Ø76 and Ø100 can be quickly connected to Transair® stainless steel pipe. Position the pipes to be connected within the Transair® cartridge and close/tighten the Transair® clamp.

• **Maximum Working Pressure***
16 bar (-20°C to 45°C) up to 100 mm
13 bar (-20°C to 60°C) for all diameters
7 bar (-20°C to 85°C) for all diameters

• **Working Temperature :**
-20°C to 85°C



Low Pressure Connectors

Fittings, tubing, valves & couplers for pneumatic & low-pressure fluid systems



Recoiled Hose



FRL



Hydraulic Hose



Cylinder



Transair Installation Photos





Industrial Hand Tools, Tools Trolley & Torque Wrench.



Tools Trolley



Work Benches



Tool Boxes



Premium Hand Tools



Allen key set



Reversible ratchet head



Insulated Hand Tools



Tool Bag



Manual Adjustable Torque Wrench



Digital Torque Wrench



Electronic Torque Tester





**We are everywhere,
empowering every industry**



Assembly Solutions, Under One Roof

NEO AUTOMATION

- 📍 13, Jahnvi Industrial Estate, Opp. Madhav Avenue,
S.P. Ring Road, Odhav, Ahmedabad -382415, Gujarat, India.
- ✉ marketing@neoautomation.in
- 🌐 www.neoautomation.in

- 📞 Harsh (MVI) : +91 98987 97004
- ✉ harsh@neoautomation.in
- 📞 Sneh (Sales) : +91 70164 50911
- ✉ sneh@neoautomation.in

- 📞 Nikunj (GI) : +91 96625 01426
- ✉ nikunj@neoautomation.in
- 📞 Priyanka (Service) : +91 98799 49485
- ✉ priyanka@neoautomation.in

Scan for Location

