
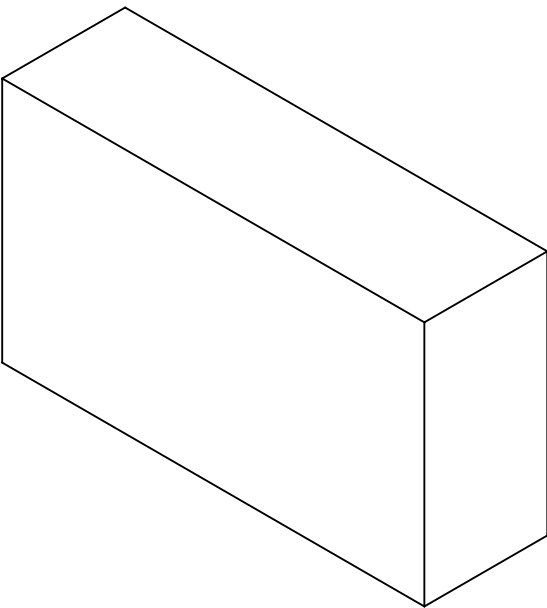
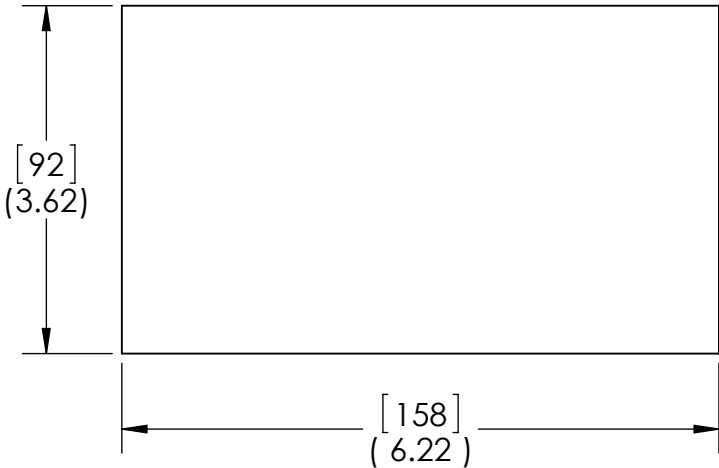


ENG. APPROVED SOURCE	SOURCE PART NO.

THIS PART TO BE USED IN THE PULP
MOLDED PACKAGING ASSEMBLY
FOR A 10X4 CEILING VENT (900-00011)

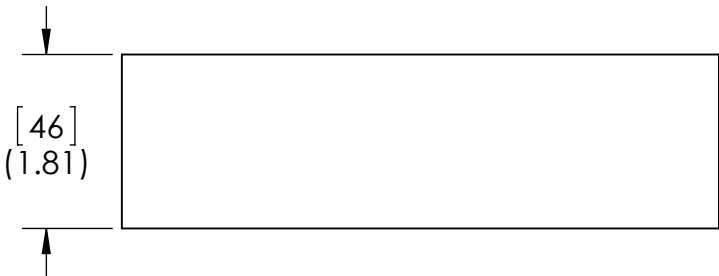

GENERAL NOTES

- 1. [♦] CALLOUTS ARE APPLIED TO TOLERANCES THAT MAY REQUIRE SPECIAL QUALITY CONTROL PROCESSES. QUALITY CONTROL INSTRUCTIONS ARE OUTSIDE THE SCOPE OF THIS DRAWING AND ARE DEFINED BY EXTERNAL DOCUMENTATION TO BE AGREED TO WITH THE MANUFACTURER.
- 2. ALL DIMENSIONS AND TOLERANCES MUST BE HELD REGARDLESS OF THE USE OF QUALITY CONTROL SYMBOLS [♦]
- 3. (X.XX) DIMENSIONS ARE USED AS REFERENCE ONLY AND ARE NOT SUBJECT TO TOLERANCES.
- 4. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE APPLICABLE AT 20 DEGREES CELCIUS (68 DEGREES FAHRENHEIT) IN ACCORDANCE WITH ANSI/ASME B89.6.2
- 5. ALL HOMOGENOUS MATERIALS AND PROCESSES IN THIS DRAWING SHALL BE COMPLIANT TO THE EU RoHS DIRECTIVE 2011/65/EC
- 6. REFER TO DETAILED WORK INSTRUCTIONS FOR ASSEMBLY SPECIFICATIONS SUCH AS SCREW TORQUE AND GLUE VOLUME.

REV	DESCRIPTION	ECO	DATE	BY	DO NOT SCALE DRAWING. WORK TO DIMENSION		
A	INITIAL	000060	2/1/16	CR	IF PLATING IS SPECIFIED, ALL DIMENSIONS TO BE MET AFTER PLATING UNLESS OTHERWISE SPECIFIED. 1. PERMISSIBLE TOLERANCES 2. ALL RIGHT ANGLES=90° 3. DIMENSIONS GIVEN IN INCHES		
MATERIAL:					NOTICE: CHANGES TO MATERIAL, DESIGN, CONFIGURATION OR PROCESS MAY NOT BE MADE WITHOUT NOTIFICATION TO ECOVENT. ALL MATERIALS AND PROCESSES MUST BE COMPLIANT WITH ENVIRONMENTAL LAWS AND REULATIONS AS REFERENCED IN XXXXX		
					DESIGN	CTQ	CLASSIFICATION OF CHARACTERISTICS
					★	★★	(CRITICAL)
					♦	♦♦	(MAJOR)
					REVIEW:	DATE:	
FINISH					TITLE:	VENT CEILING 10X4 FOAM INSERT	A3
					PART NO.	401-00064	SHEET 1 OF 1
					SCALE:1:1	THIS DOCUMENT IS THE PROPERTY OF ECOVENT. NEITHER THIS DOCUMENT NOR ANY INFORMATION CONTAINED HEREIN MAY BE USED, REPRODUCED OR DISCLOSED TO THIRD PARTIES WITHOUT ECOVENT WRITTEN CONSENT.	