
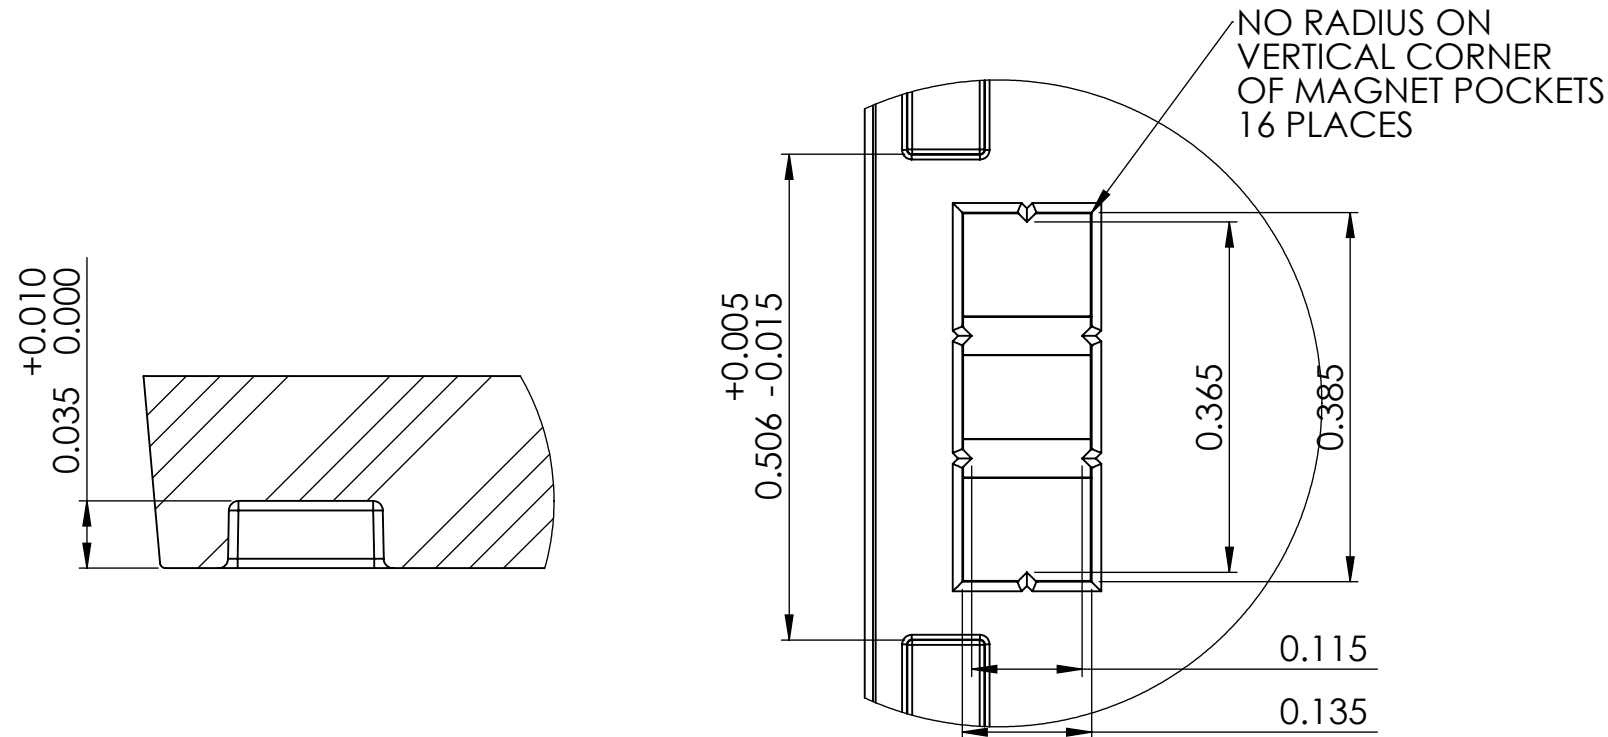
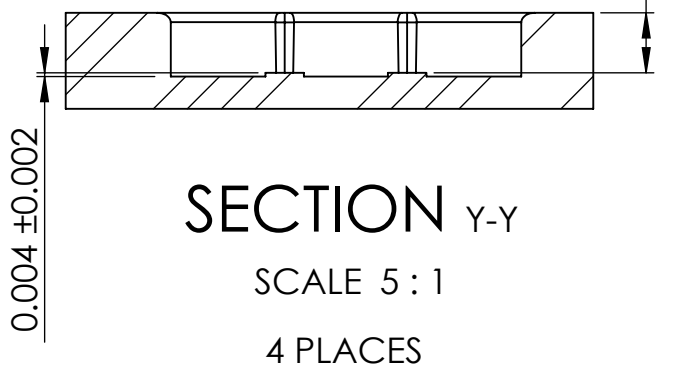
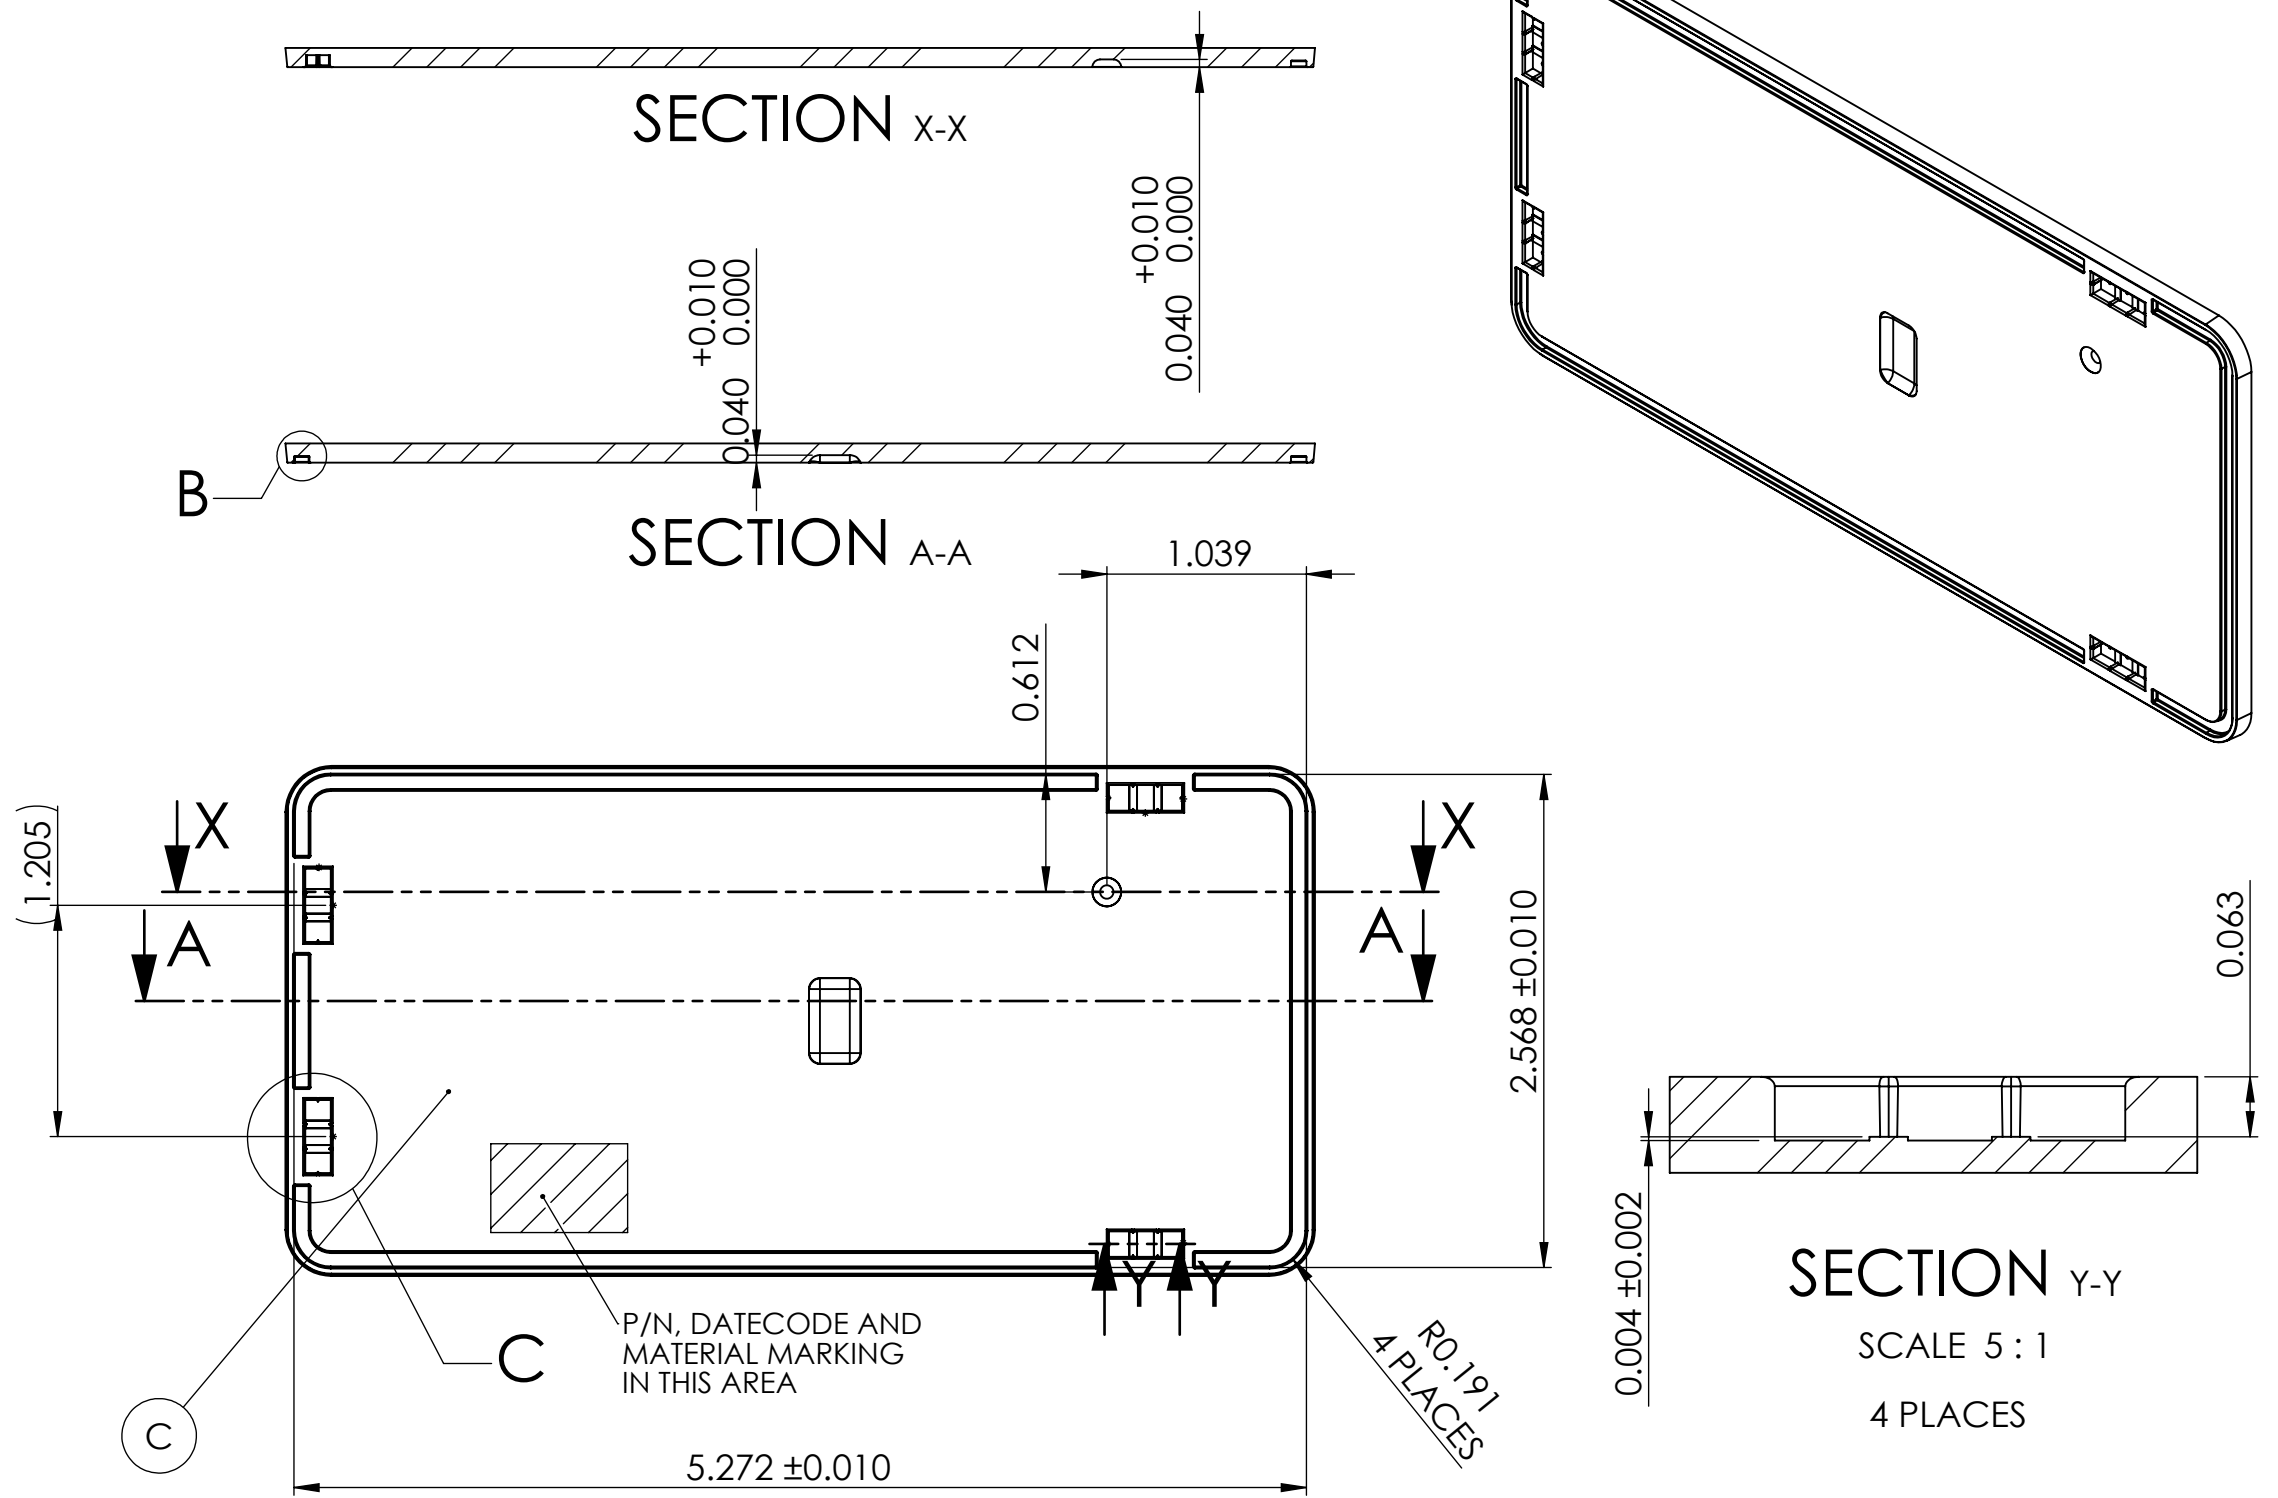


ENG. APPROVED SOURCE	SOURCE PART NO.

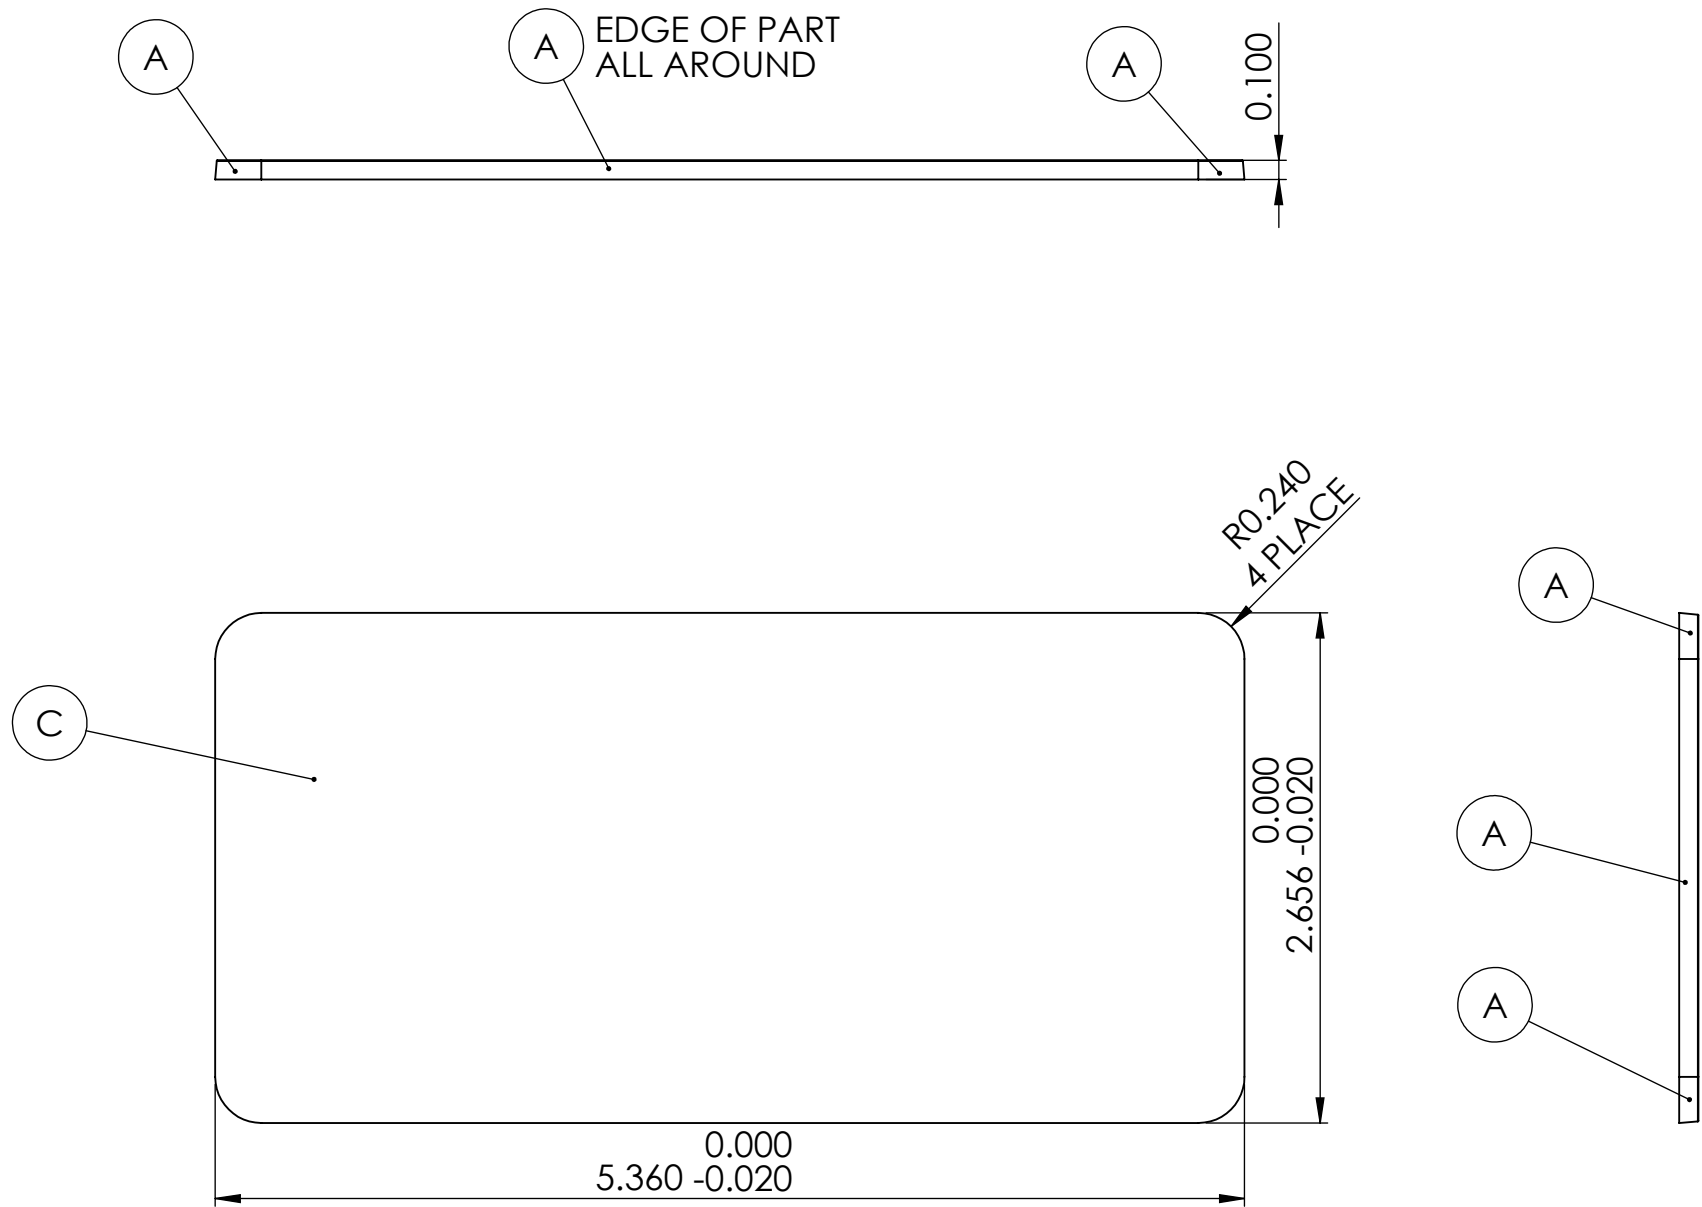

DETAIL B  
SCALE 10 : 1

DETAIL C  
SCALE 5 : 1  
4 PLACES

NOTE: FACES MARKED 'A' ARE VISIBLE TO CUSTOMER. CONSIDERATIONS REGARDING GATE AND EJECTOR PIN LOCATION SHOULD BE MADE

LETTER	FINISH	DESCRIPTION
A	SPI D-1	DULL FINISH
B	SPI A-3	HIGH POLISH FINISH
C	SPI D-2	VERY DULL FINISH

#### NOTES

- IF DIMENSION IS NOT SPECIFIED, ASSUME TOLERANCE:  $\pm 0.015"$
- 3D FILE DIMENSIONS SUPERSEDE DIMENSIONS IN THIS DOCUMENT.
- TOLERANCE FOR NOTED DIMENSIONS ARE AS FOLLOWS:  
 $X.XX = \pm 0.010"$   
 $X.XXX = \pm 0.005"$
- TOLERANCE FOR ALL ANGLES:  $\pm 0.5$  DEGREES
- TOLERANCE FOR ALL RADII:  $\pm 0.005$  OR 10%, WHICHEVER IS SMALLER.
- SURFACE IS CLEAN AND FREE OF BURRS AND ROUGH EDGES.
- REFER TO SOLID MODEL FOR DRAFT ANGLE ON SURFACES UNLESS OTHERWISE NOTED.
- REFER TO SOLID MODEL FOR CORNER AND FILLET RADII UNLESS OTHERWISE NOTED.
- UNLESS OTHERWISE NOTED, ALL SURFACES TO BE MINIMUM OF SPI C3 FINISH. ALL TOOL AND CUTTER MARKS TO BE REMOVED.
- GATE, PARTING LINE, EJECTOR PIN LOCATIONS, AND OTHER FEATURES FOR TOOLING CONSIDERATIONS SHALL BE APPROVED BY ECOVENT BEFORE TOOL CONSTRUCTION.
- PARTING LINE FLASH, GATES, RUNNER, AND RISER STUBS 0.005" MAXIMUM.
- EJECTOR PIN MARKS SHALL BE FLUSH TO .003 UNDERFLUSH WITH SURFACE.
- VISIBLE SINK MARKS TO BE .0005" DEEP MAX ON ALL COSMETIC SURFACES.
- [♦] CALLOUTS ARE APPLIED TO TOLERANCES THAT MAY REQUIRE SPECIAL QUALITY CONTROL PROCESSES. QUALITY CONTROL INSTRUCTIONS ARE OUTSIDE THE SCOPE OF THIS DRAWING AND ARE DEFINED BY EXTERNAL DOCUMENTATION TO BE AGREED TO WITH THE MANUFACTURER.
- NO REGRIND ACCEPTABLE.
- INTERIOR OF PART TO SHOW PART NUMBER, TOOL AND CAVITY NUMBER, TOOL REVISION (ON EJECTOR PIN), AND MATERIAL SYMBOL.
- UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE APPLICABLE AT 20 DEGREES CELCIUS (68 DEGREES FAHRENHEIT) IN ACCORDANCE WITH ANSI/ASME B89.6.2.
- ALL HOMOGENEOUS MATERIALS AND PROCESSES IN THIS DRAWING SHALL BE COMPLIANT TO THE EU ROHS DIRECTIVE 2011/65/EC.

REV	DESCRIPTION	ECO	DATE	BY
E	INITIAL TOOL RELEASE			
F	REDUCE MAGNET POCKET SIZE			
G	MATERIAL, FINISH, AND GEOMETRY CHANGE			
H	CHANGE CENTER CUTOUTS	ECO-000057	12/16/15	TF
J	MAGNET POCKET CRUSH RIBS, POKE YOKE	000078	02/24/16	TF

MATERIAL: L2849UV LTL COLOR COMPOUNDERS FRPA100X BROWN (BROWN ABS/PC)-UV RESISTANT OR ECOVENT APPROVED EQUIVALENT	
FINISH: SEE TABLE	DESCRIPTION

TITLE: FACEPLATE COVER FLOOR		A2
PART NO.: 602-00136	SHEET 1 OF 1	
SCALE: 1:1		ecovent

DO NOT SCALE DRAWING. WORK TO DIMENSION		
IF PLATING IS SPECIFIED, ALL DIMENSIONS TO BE MET AFTER PLATING UNLESS OTHERWISE SPECIFIED.		
1. PERMISSIBLE TOLERANCES	DIMENSIONS = $\pm 0.015$	
2. ALL RIGHT ANGLES = 90°	ANGLES = $\pm 0.5^\circ$	
3. DIMENSIONS GIVEN IN INCHES	CHAMFER ANGLES = $\pm 5^\circ$	
CONCENTRICITY = 0.010 T.I.R.		
DESIGN	CTQ	CLASSIFICATION OF CHARACTERISTICS
★	★★	(CRITICAL)
♦	♦♦	(MAJOR)
REVIEW:		DATE: