



ENG. APPROVED SOURCE	SOURCE PART NO.

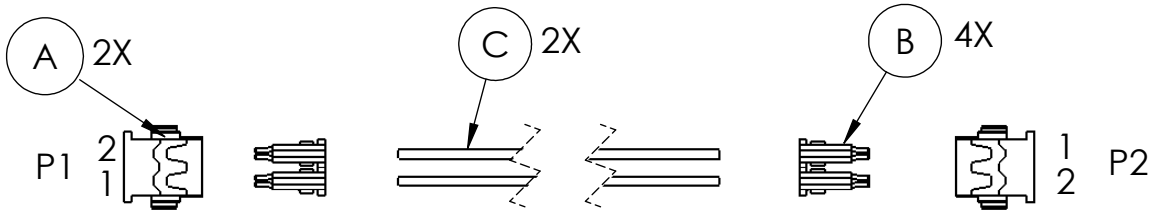

PIN ASSIGNMENTS

P1 2 1 P2 1 2

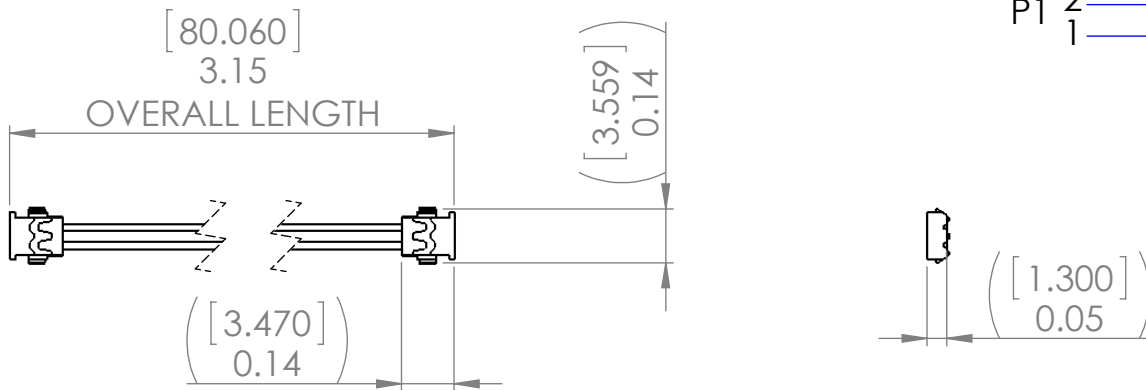

NOTES

1. SEE ARENA PLM FOR PART NUMBER REFERENCE DESIGNATORS AND CURRENT REVISIONS.
2. THIS ASSEMBLY IS CLASSIFIED AS A **CRITICAL COMPONENT**; ANY PROCESS OR PRODUCT CHANGES NEED TO BE APPROVED BY ECOVENT.
3. WIRE LENGTH TOLERANCE MUST BE $\pm 0.25"$ OR $\pm 10\%$ OF WIRE LENGTH, WHICHEVER IS SHORTER.
4. HARNESS ASSEMBLY SHALL BE IDENTIFIED WITH A LABEL PERMANENTLY ATTACHED ON CABLE, UNLESS OTHERWISE SPECIFIED. LABEL SHALL CONTAIN THE ASSEMBLY NUMBER, REVISION, AND TRACABILITY CODE. ANY ADDITIONAL DISCREET CONNECTOR LABELING SHALL BE EXPLICITLY DEFINED AND DETAILED WHEN REQUIRED.
5. [♦] CALLOUTS ARE APPLIED TO TOLERANCES THAT MAY REQUIRE SPECIAL QUALITY CONTROL PROCESSES. QUALITY CONTROL INSTRUCTIONS ARE OUTSIDE THE SCOPE OF THIS DRAWING AND ARE DEFINED BY EXTERNAL DOCUMENTATION TO BE AGREED TO WITH THE MANUFACTURER.
6. ALL DIMENSIONS AND TOLERANCES MUST BE HELD REGARDLESS OF THE USE OF QUALITY CONTROL SYMBOLS [♦].
7. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE APPLICABLE AT 20 DEGREES CELCIUS (68 F) IN ACCORDANCE WITH ANSI/ASME B89.6.2.
8. ALL HOMOGENOUS MATERIALS AND PROCESSES IN THIS DRAWING SHALL BE COMPLIANT TO THE EU RoHS DIRECTIVE 2011/65/EC.
9. RUN LIST VERIFIED BY 100% INSPECTION METHOD FOR CONTINUITY, INSULATION RESISTANCE AND CONTACT RETENTION.
10. COMPONENTS USED IN ASSEMBLY MUST BE RECOGNIZED/APPROVED COMPONENTS BY UL. [♦]
11. WIRE COLORS AT VENDOR DISCRETION WHEN NOT SPECIFIED.
12. FREE OF ALL BURRS AND ROUGH EDGES.

DRAWING NO. 201-00063

REV	DESCRIPTION	ECO	DATE	BY
A	INITIAL RELEASE (FROM 801-00033 DRAWING)	000084	3/1/16	AK
B	DRAWING AND PART NUMBER UPDATE	DCO-000043	3/25/16	AK
MATERIAL:				
FINISH	DESCRIPTION			

DO NOT SCALE DRAWING. WORK TO DIMENSION

IF PLATING IS SPECIFIED, ALL DIMENSIONS TO BE MET AFTER PLATING UNLESS OTHERWISE SPECIFIED.
 1. PERMISSIBLE TOLERANCES
 2. ALL RIGHT ANGLES=90°
 3. DIMENSIONS GIVEN IN INCHES

DIMENSIONS=±0.015
 ANGLES=±0.5°
 CHAMFER ANGLES=±5°
 CONCENTRICITY=0.010 T.I.R.

NOTICE: CHANGES TO MATERIAL, DESIGN, CONFIGURATION OR PROCESS MAY NOT BE MADE WITHOUT NOTIFICATION TO ECOVENT. ALL MATERIALS AND PROCESSES MUST BE COMPLIANT WITH ENVIRONMENTAL LAWS AND REGULATIONS AS REFERENCED IN XXXXX

DESIGN	CTQ	CLASSIFICATION OF CHARACTERISTICS
★	★★	(CRITICAL)
♦	♦♦	(MAJOR)

REVIEW: DATE:

TITLE: CABLE, VENT BATTERY POWER, 3 IN WIRE

A4

PART NO. 801-00033

SHEET 1 OF 1



SCALE:2:1

THIS DOCUMENT IS THE PROPERTY OF ECOVENT. NEITHER THIS DOCUMENT NOR ANY INFORMATION CONTAINED HEREIN MAY BE USED, REPRODUCED OR DISCLOSED TO THIRD PARTIES WITHOUT ECOVENT WRITTEN CONSENT.