



1.3.4 Renewable Insulation

Conner Glover, Angelo Hilario, and Ryan Frels




Process

We brought in various items from home to insulate a hotbox, we brought aluminum foil, project foam, insulation bags, and more. Our final design utilized a layer of foam, surrounded by aluminum foil and a heap of masking tape, and then, just to seal everything together, we put a t-shirt over it.

Pictures



More Pictures

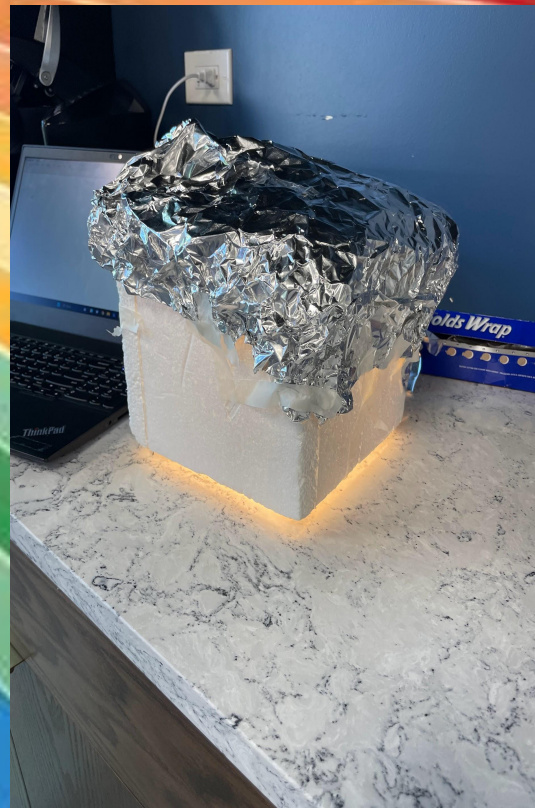

R/W/L/Conclusion

Right	Wrong	Learned
• Our insulation worked pretty well. • We had a compact, yet efficient design.	• Our Logger Pro stopped counting at around 190 seconds. • We don't know what the final temperature would have been.	• Next time we should monitor the computer so we can find the exact moment an error occurs.

The project went well except for the Logger Pro malfunction. When we found out our progress was no longer being tracked, we were at around 44.3 degrees Celsius over 180 seconds. This gave us a slope of $-0.087222...$ this means we would've gotten down to 21 degrees celsius in 332.484 seconds.