EMINENCE®

George Alessandro Signature

10"

GA10-SC69



Electrified guitar hit its peak in 1969 with many of the Rock Legends plugging in and turning up like nothing we have heard before. The British influence was not limited to just guitar "gods" but also the amplifiers and cabinets that defined the Rock sound. Rock n' Roll was being defined as Loud and Distorted. The new SC69 line offers that plug it in and turn it up sound, with a fine balance between clean headroom and clarity, and when push have, those beautiful harmonics and breakup. Larger magnets and British style cones, allow this American speaker to redefine a classic sound.

Specification

Nominal Basket Diameter	10", 254 mm
Nominal Impedance*	8 Ω
Power Rating*	
Program Power	N/A
Watts	40 W
Resonance	96.1 Hz
Usable Frequency Range	80 Hz - 3.7 kHz
Sensitivity*	100.4 dB
Magnet Weight	38 oz.
Gap Height	0.31", 7.9 mm
Voice Coil Diameter	1.75", 44.5 mm


Mounting Information

Recommended Enclosure Volume	
Sealed	Acceptable
Vented	Acceptable
Driver Volume Displaced	0.042 cu.ft. / 1.2 liters
Overall Diameter	10.11", 256.8 mm
Baffle Hole Diameter	9.13", 231.9 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	N/A
Mounting Holes Diameter	0.22", 5.6mm
Mounting Holes B.C.D.	9.6", 243.8mm
Depth	4.13", 104.9 mm
Net Weight	7.2 lbs, 3.27 kg
Shipping Weight	8.3 lbs, 3.76 kgs

Materials of Construction

Coil Construction	Copper voice coil
Coil Former	Paper former
Magnet Composition	Ferrite magnet
Core Details	Non-vented core
Basket Materials	Pressed steel basket
Cone Composition	Paper cone
Cone Edge Composition	Paper cone edge
Dust Cap Composition	Solid composition felt dust cap

FREQUENCY RESPONSE *

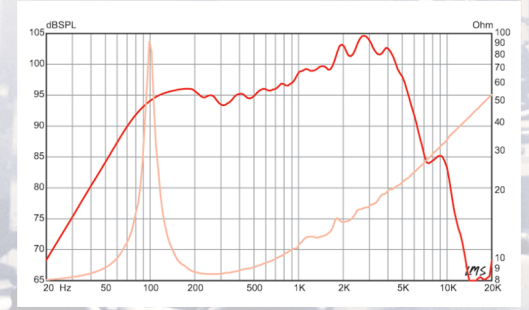





learn more at eminence.com

* See footnotes on page 2 for information regarding nominal impedance, power rating and sensitivity.

EMINENCE®

From design and manufacturing to the stage or studio. Once you've experienced the performance of Eminence, you'll never accept anything else.

mission statement

Eminence is dedicated to providing the best Quality, Value and Service to meet our customers' needs.

footnotes

* Please consult www.eminence.com for specifications of models with alternative impedances.

** Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment.

*** The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Carver PM-120 amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

**** BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.

***** Multiple units exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.

****** The average on axis output across the entire usable frequency range when applying 1W/1m into the nominal impedance, i.e. 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft x 2ft baffle is built into the wall with horn front mounted | Carver PM-120 amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

Prices, specifications and product cosmetics are subject to change without notice.

eminence speaker llc
838 Mulberry Pike, Eminence, KY 40019

DESIGNED AND ASSEMBLED IN THE USA

Follow us:
EMINENCE.COM