


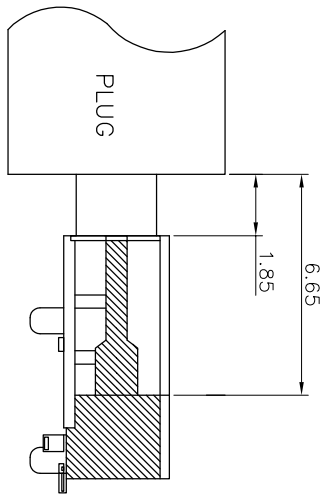
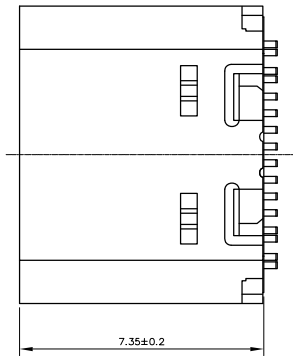


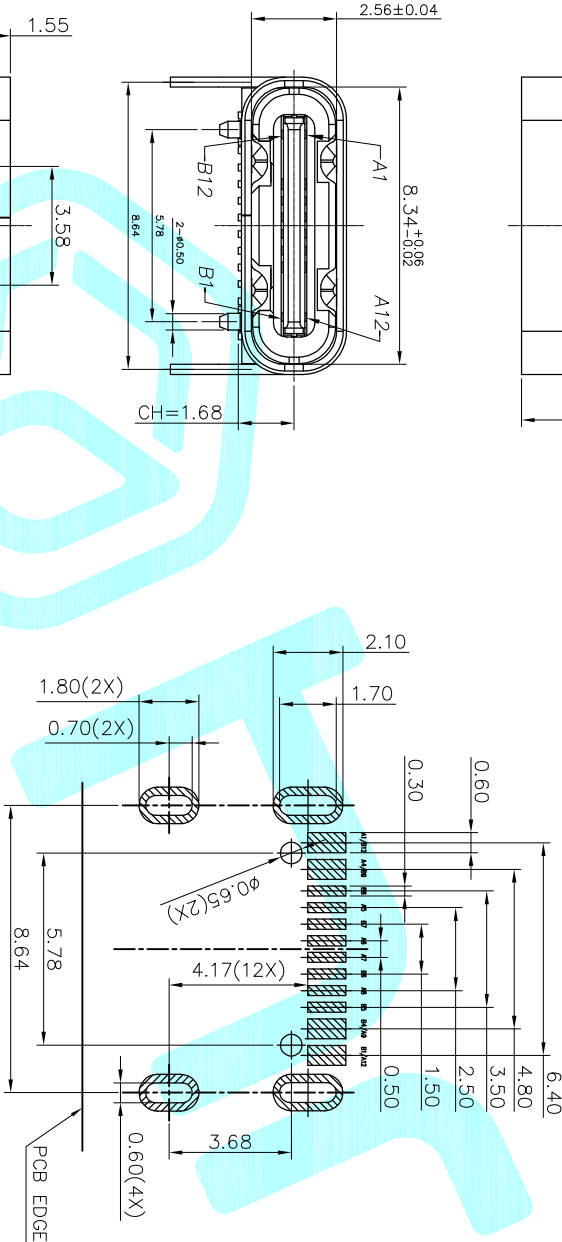

公母对插后尺寸

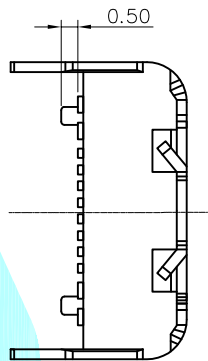

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

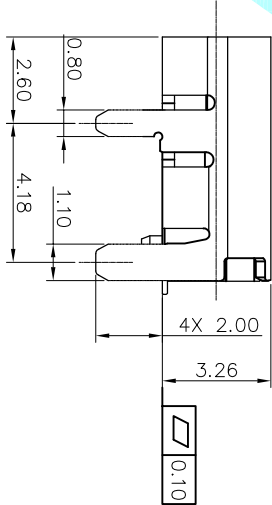

- NOTE:
- 1.Material and Plating: Refer to Appendix 1
 - 2.Electrical Performance:
 - 2.1 contact impedance: 30MΩ Max FDR INITIAL, 40MΩ Max AFTER TEST.
 - 2.2 Withstand Voltage:100V AC
 - 2.3 insulation:100mΩ Min
 - 2.4 rated current:
- COLLECTIVELY VBUS PIN (A4,A9,B4,B9),TOTAL 5A VCCON PIN (B5) THROUGH GND PIN (A1,A12,B1,B12),1.25A OTHERS PIN 0.25A
- 2.5 Operating Temperature: -40℃~80℃
- 3.mechanical properties
- 3.1 insertion force: 5~20N
 - 3.2 Pull out force: Initial value 8~20N, tested 6~20N
 - 3.3 lifespan:10,000 CYCLES



07	外壳	不锈钢	1	SUS 304 均, 10 30
06	二次Molding件	LCP	1	黑色 UL94 V-0
05	Molding件2	LCP	1	黑色 UL94 V-0
04	Molding件1	LCP	1	黑色 UL94 V-0
03	中夹片	SUS301-H T=0.15	1	不电镀
01	端子	C2680-H T=0.15	1 set	功能接触区镀金, 焊脚镀金
序号	品名	材质	用量	备注

APPROVALS		DATE		
DRAWN	LIANG	2026.03.09		
CHECKED				
APPROVALS			PART NO.	TYPE-C-31-M-12C
TOLERANCES ARE		30~90H ±0.30	ANGLE	UNIT: mm
		10~30 ±0.20	±2°	SCALE: 1:1
		5~10 ±0.15		DRAWING NO.
		~5 ±0.10		SHEET 1 OF 1



ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

NOTE:



- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
 - 2.CONTACTS: COPPER ALLOY
 - 3.MID PLATE: STAINLESS STEEL
 - 4.SHELL: STAINLESS STEEL
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
GOLD FLASH PLATING ON SOLDER AREA
 - 2-2.FRONT SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 0.5~2.0kgf.
 - 3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
 - 3-3.DURABILITY: 10000 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4-1. CURRENT RATING: 5A
VOLTAGE RATING: 20V
 - 4-2.INSULATION RESISTANCE: 100MΩ MIN
 - 4-3.DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
 - 4-4.LOW CONTACT RESISTANCE: INITIAL 40mΩ
AFTER 50mΩ
5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -30°C~+80°C.
- 6.IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

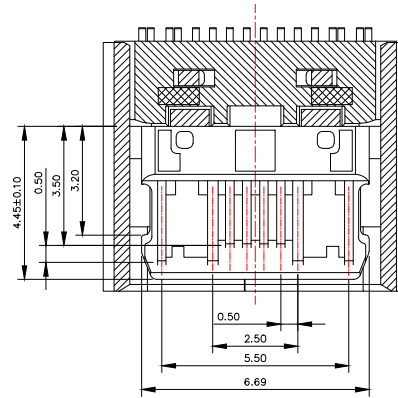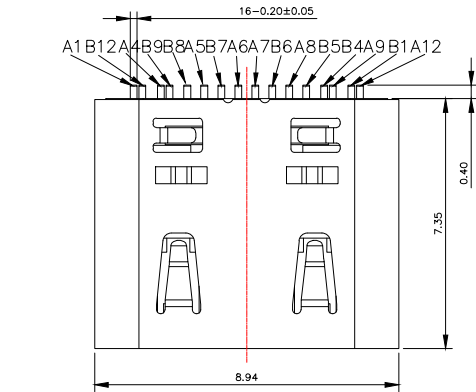

SECTION B-B
SCALE 1:1

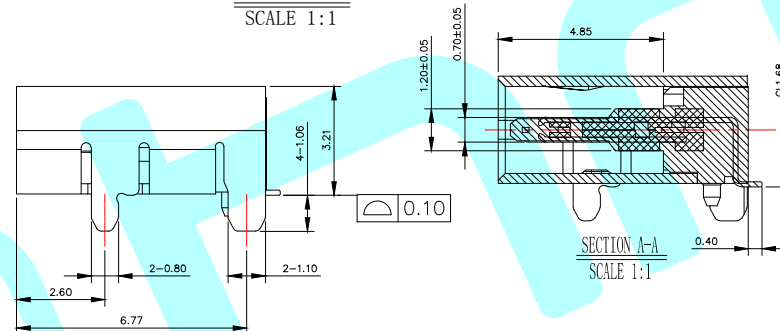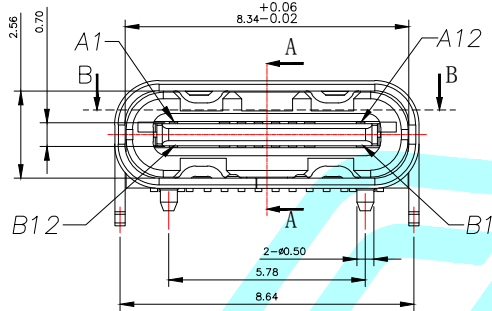

SECTION A-A
SCALE 1:1

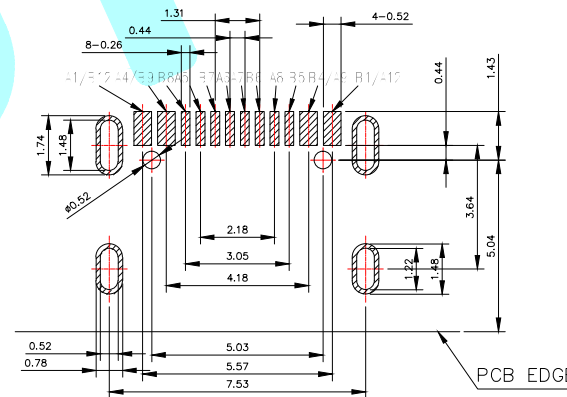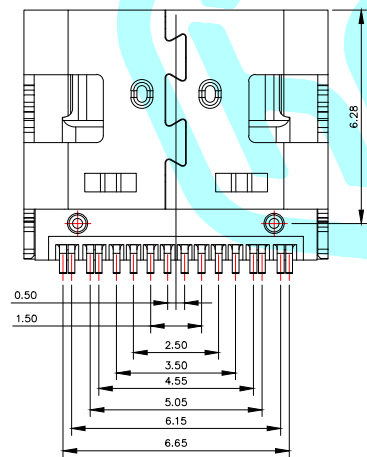


RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

APPROVALS			DATE				
DRAWN		LIUCAN	2025.12.22				
CHECKED				TITLE:		USB TUPE C 17PIN,L=7.35mm(一体式5A) 板上四脚点带弹规格	
APPROVALS				PART NO.		TYPE-C-31-M-12B	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
			±2°	DRAWING NO.	_____	SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

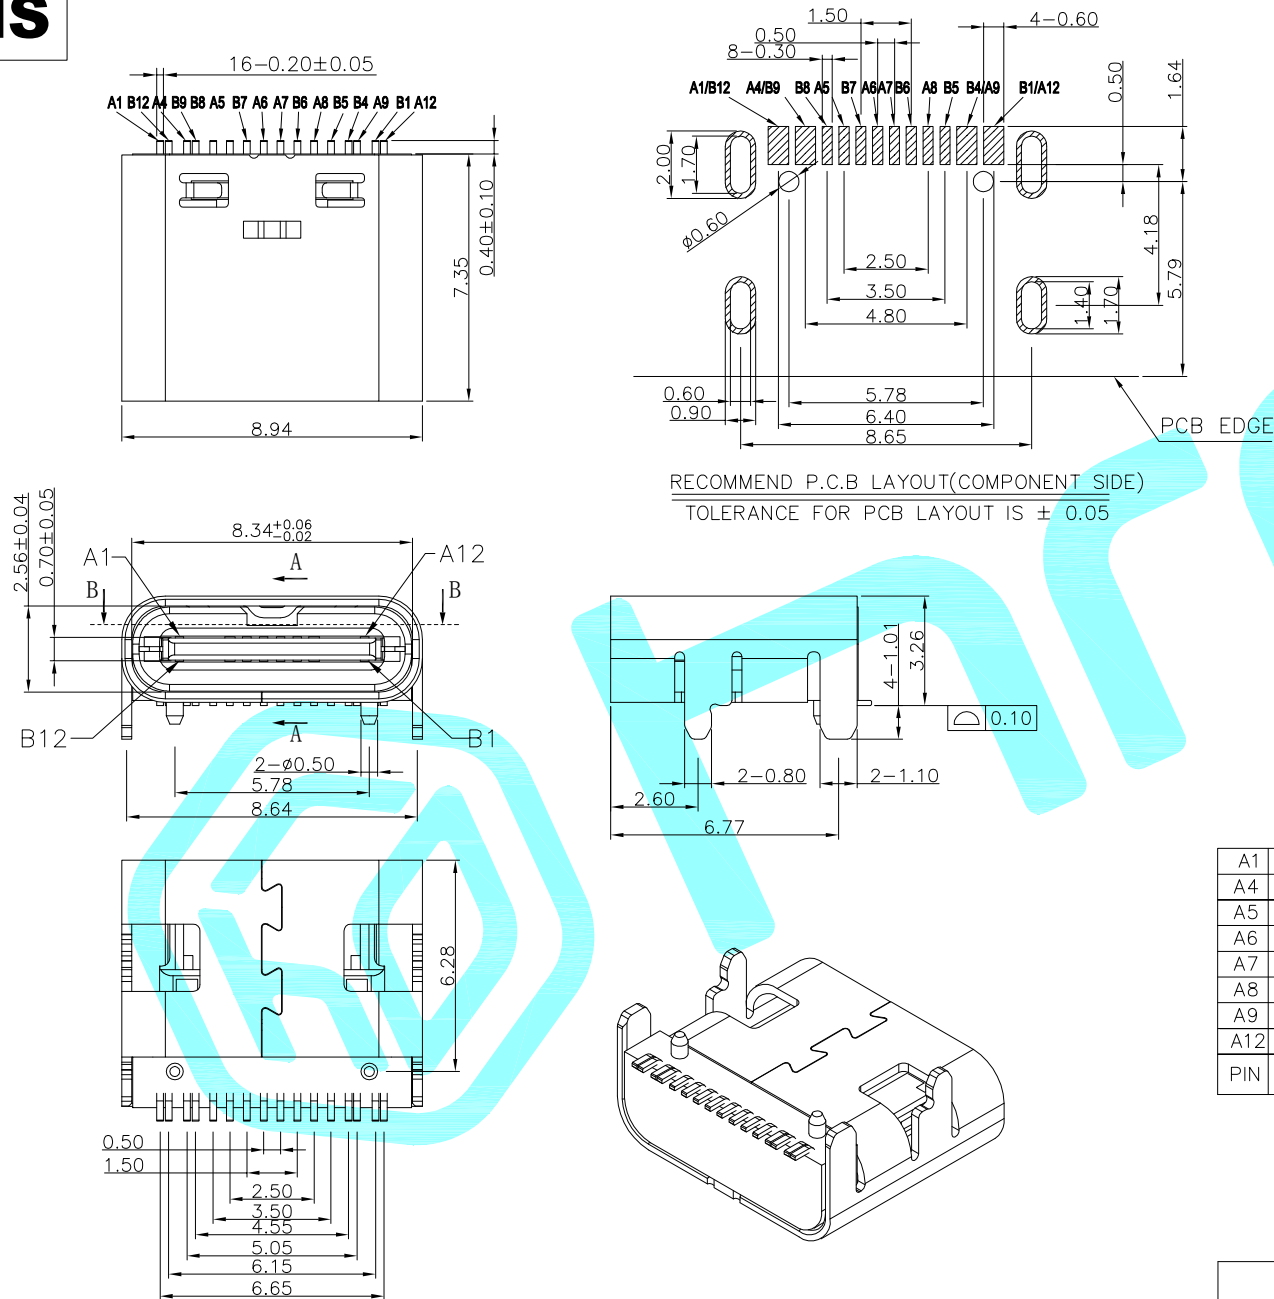


NOTE:

- MATERIAL SPECIFICATION:
 - HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
 - CONTACTS: COPPER ALLOY
 - MID PLATE: STAINLESS STEEL
 - SHELL: STAINLESS STEEL
- PLATING SPECIFICATION:
 - CONTACTS:
 - Ni 50u" MIN. UNDER PLATED OVER ALL.
 - Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
 - (GOLD PLATING THICKNESS FOLLOW THE P/N)
 - GOLD FLASH PLATING ON SOLDER AREA
 - FRONT SHELL:
 - Ni 30u" MIN. UNDER PLATED OVER ALL.
- MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 5~20N.
 - REMOVAL FORCE: 8~20N.
 - DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE,
 - CURRENT RATING: 6A
VOLTAGE RATING: 20V
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -30°C~+85°C.

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

APPROVALS			DATE				
DRAWN		LIUCAN	2022.10.26				
CHECKED					TITLE:	高导电, 过6A大电流款	
APPROVALS					PART NO.	TYPE-C-31-M-12A	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 	
	10~30	±0.20					
	5~10	±0.15					
	~ 5	±0.10					
			±2'	DRAWING NO.		SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

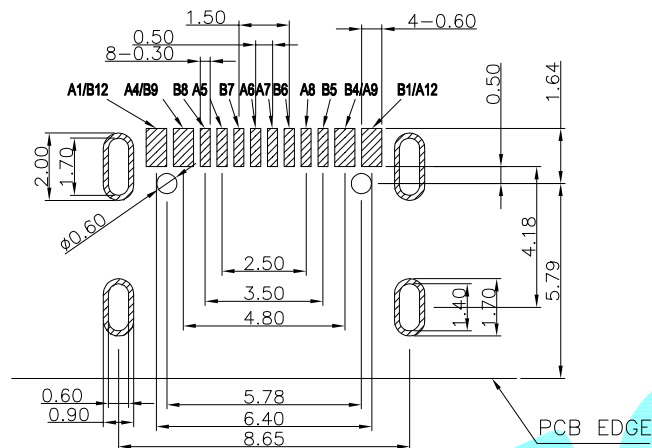

1.MATERIAL SPECIFICATION:
1.HOUSING:HIGH TEMPERATURE RESISTANT PLASTIC,UL94 V-0.
2.CONTACTS: COPPER ALLOY
3.MID PLATE: STAINLESS STEEL
4.SHELL: STAINLESS STEEL

2.PLATING SPECIFICATION:
2-1.CONTACTS:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
GOLD FLASH PLATING ON SOLDER AREA



2-2.FRONT SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.

3.MECHANICAL PERFORMANCE,
3-1.INSERTION FORCE: 5~20N.
3-2.REMOVAL FORCE: 8~20N.
3-3.DURABILITY: 10000 CYCLES.


4.ELECTRICAL PERFORMANCE,
4-1. CURRENT RATING: 5A
VOLTAGE RATING: 20V
4-2.INSULATION RESISTANCE: 100MΩ MIN
4-3.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.

5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -30°C~+85°C.

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

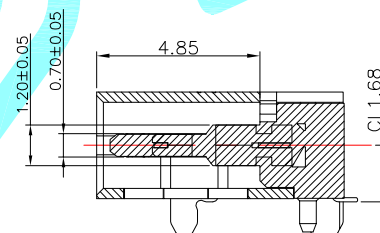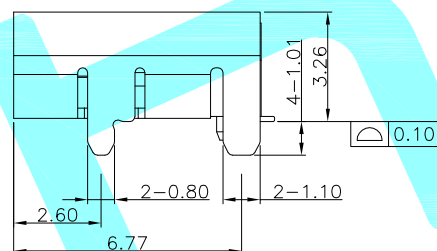

SECTION A-A
SCALE 1:1

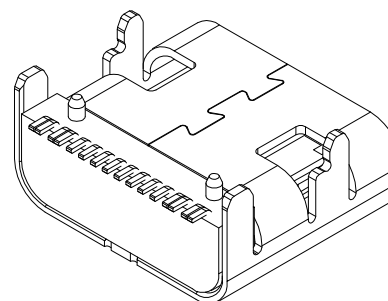

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

APPROVALS		DATE				
DRAWN	LIUCAN	2020.12.08				
CHECKED				TITLE:	DETECTOR SWITCHS	
APPROVALS				PART NO.	TYPE-C-31-M-12	
TOLERANCES ARE	30~以上	±0.30	ANGLE ±2'	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.20		DRAWING NO.	_____	SHEET 1 OF
	5~10	±0.15				
	~ 5	±0.10				

_____	A	_____	NEW	_____	_____	_____
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.