


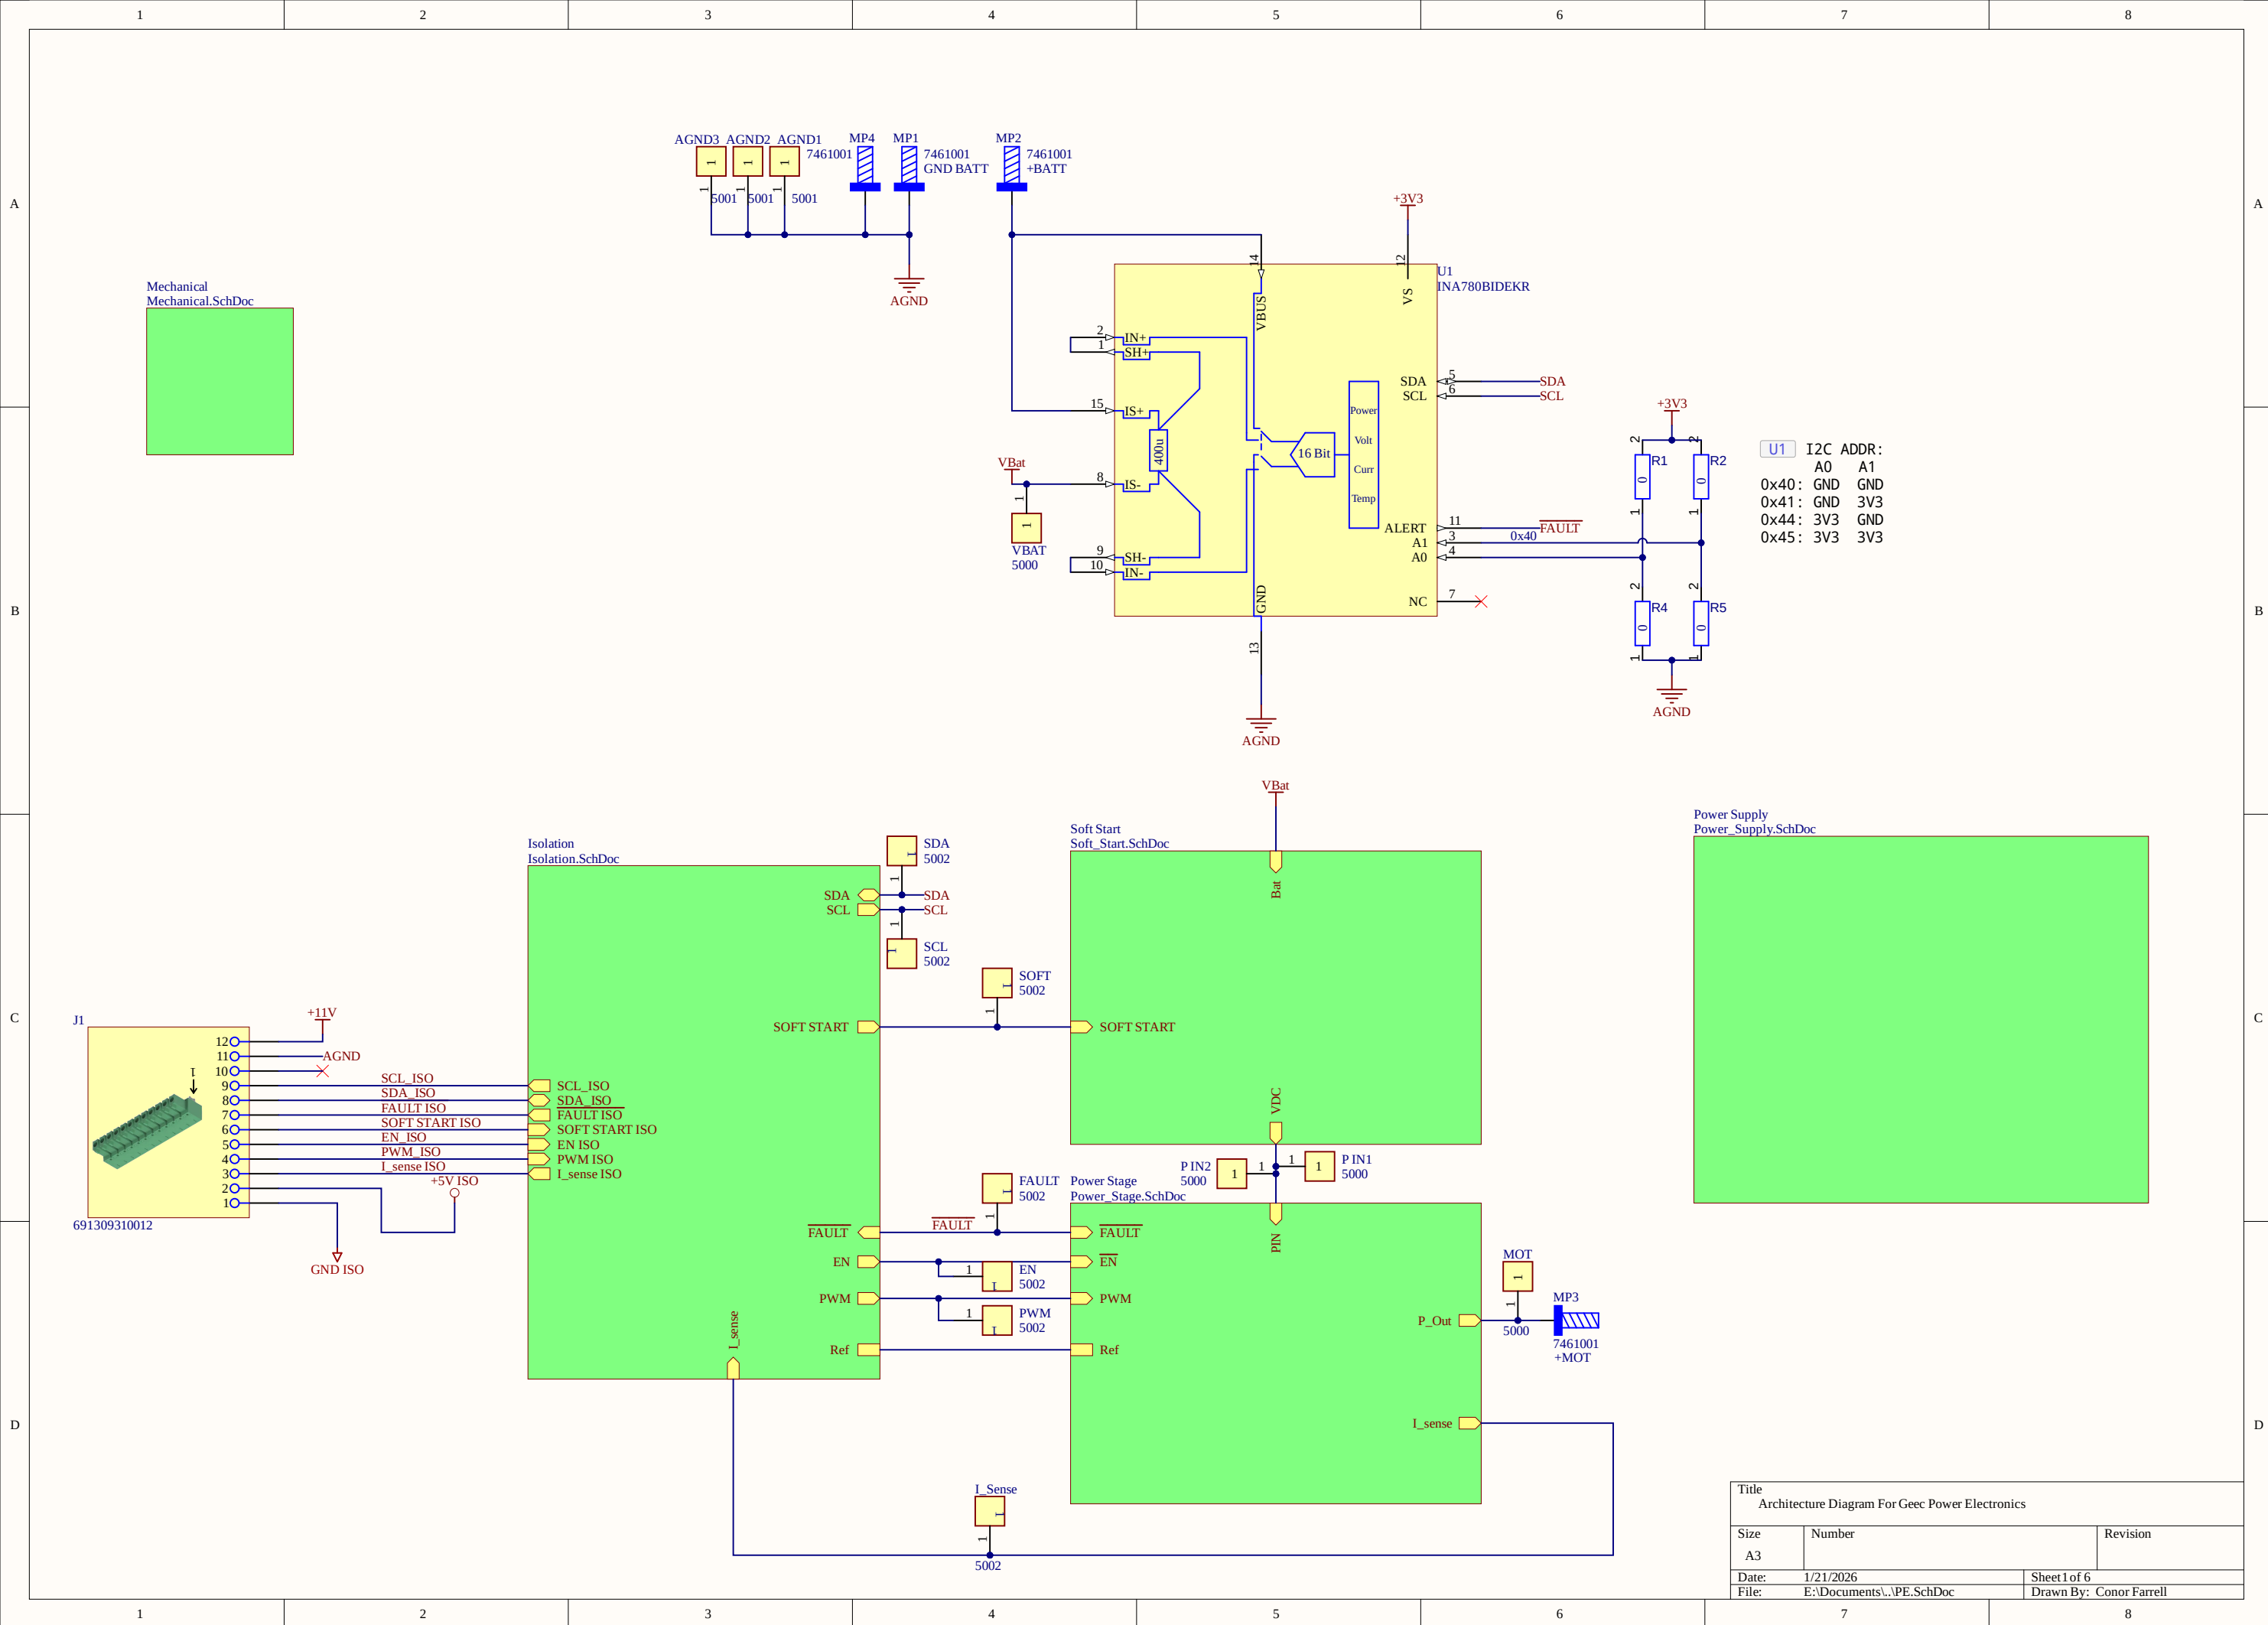


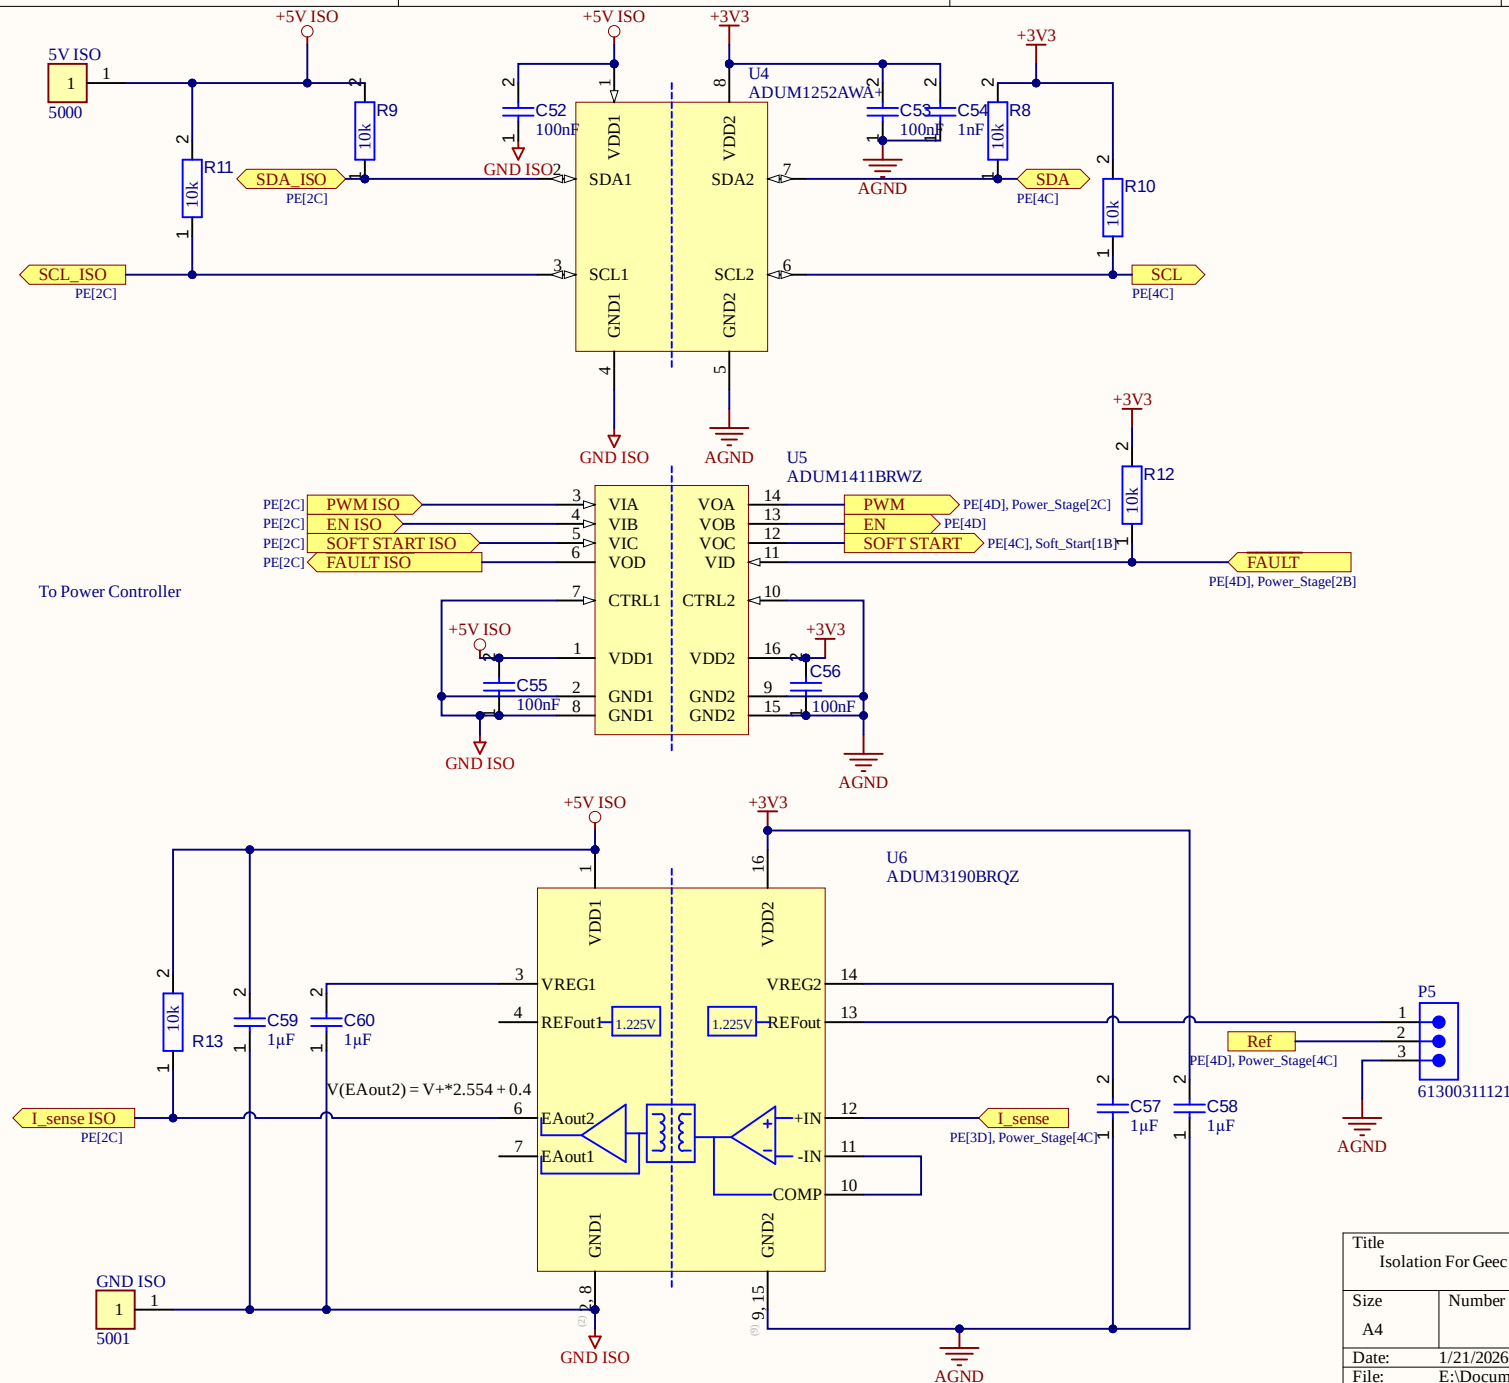


Alternate Parts:
 U4 ADuM1252: ADuM1254, ISO1540, ISO1640
 U5 ADuM1411: ADuM1410 will work but
 FAULT Won't work
 ISO6741 requires PIN 10 and 7 disconnected
 Other SOIC TI 3 forward 1 reverse will similarly work
 U6 ADuM3190B - ADuM3190T 400kHz version,
 ADuM3190A is 200kHz and could work

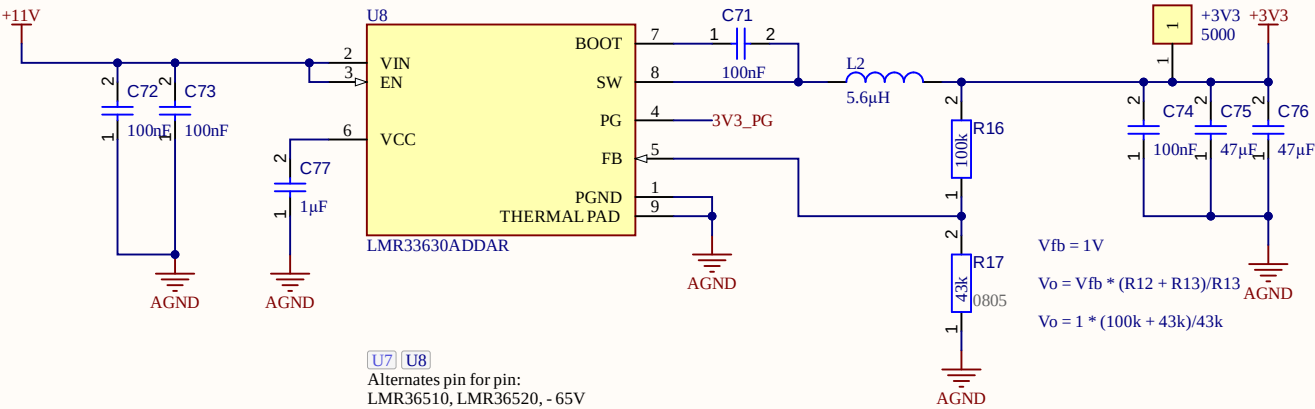



Title		
Isolation For Geec Power Electronics		
Size	Number	Revision
A4		
Date:	1/21/2026	Sheet 3 of 6
File:	E:\Documents\..Isolation.SchDoc	Drawn By: Conor Farrell

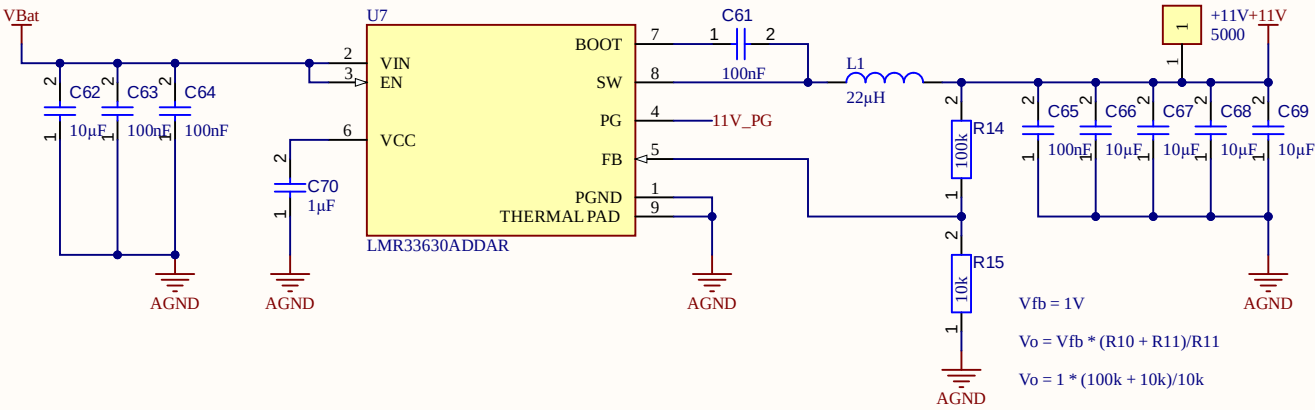

U7 U8
Alternates pin for pin:
LMR36510, LMR36520, - 65V
rated 1A and 2A
LMR33610, LMR33620,
LMR33640 - 36V rated 1A, 2A,
4A

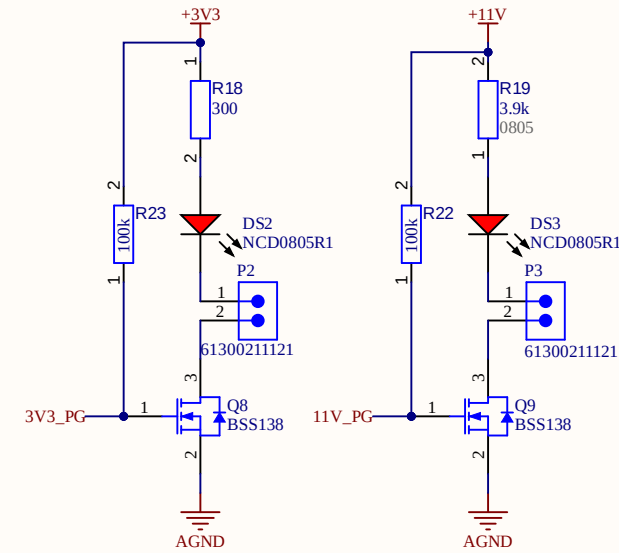

Title		
Half Bridge Schematic For Geec Power Electronics		
Size	Number	Revision
A4		
Date:	1/21/2026	Sheet 4 of 6
File:	E:\Documents\Power_Supply.SchDoc	Drawn By: Conor Farrell

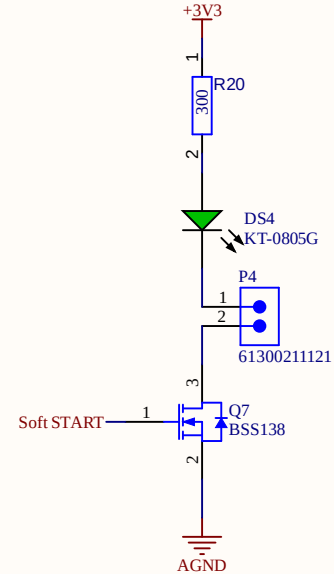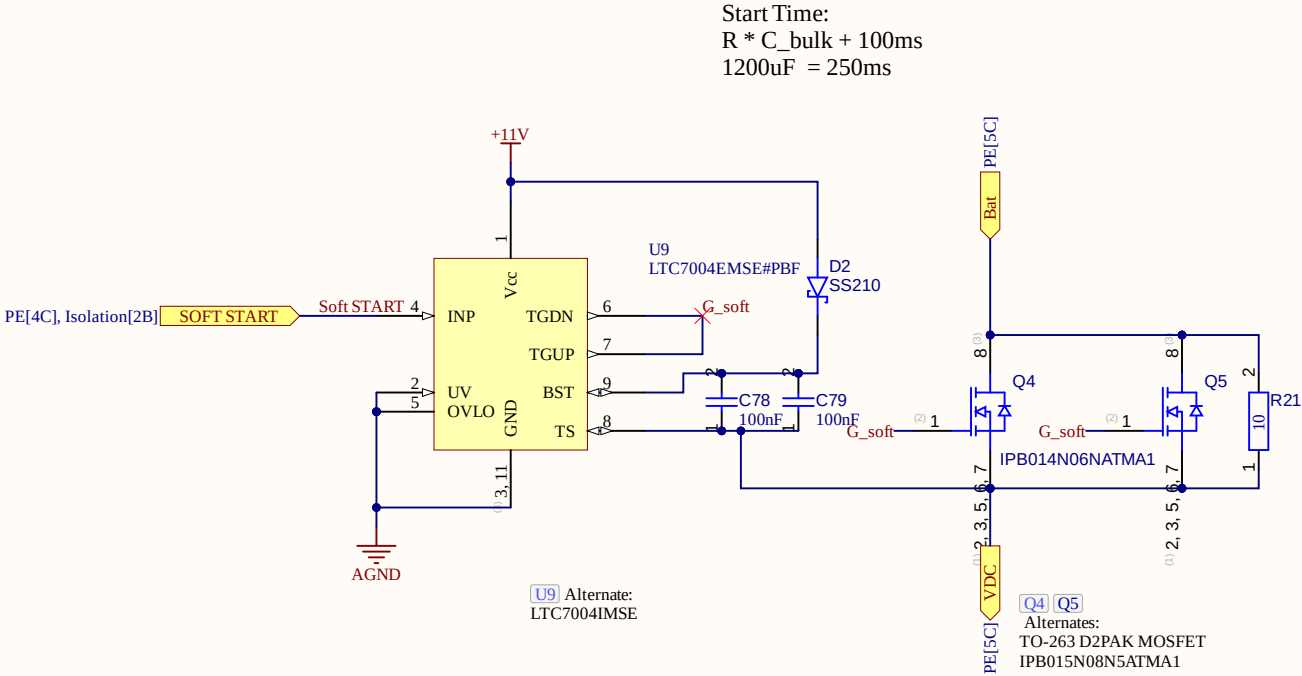

Title Soft Start For Geec Power Electronics		
Size A4	Number	Revision
Date: 1/21/2026	Sheet 5 of 6	
File: E:\Documents\...\Soft_Start.SchDoc	Drawn By: *	

