




ARDUINO
NANO
STORE.ARDUINO.CC/NANO

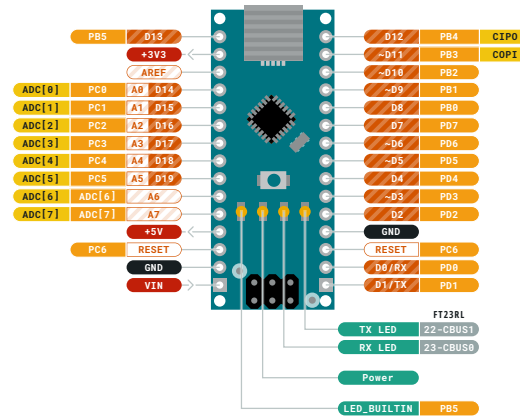

- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default


- MAXIMUM** current per I/O pin is 20mA
- MAXIMUM** current per +3.3V pin is 50mA
- VIN** 7-12 V input to the board.

NOTE: CIP0/C0PI have previously been referred to as MISO/MOSI

ARDUINO.CC
Last update: 30/06/2021



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1868, Mountain View, CA 94040, USA.

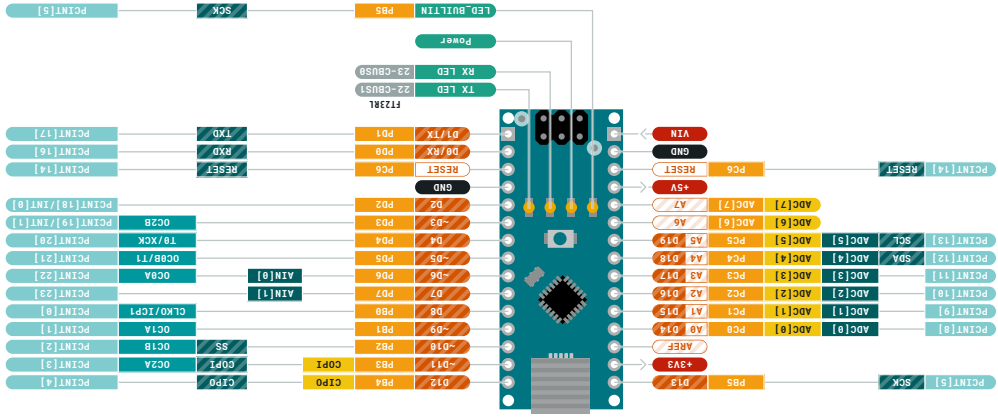

Ground
Power
LED
Internal Pin
SMD Pin

Digital Pin
Analog Pin
Other Pin
Microcontroller's Port
Default
Analog
Communication
Timer
Interrupt
Sercom

NOTE: CIP0/COP1 have previously been referred to as MIS0/MOS1

MAXIMUM current per I/O pin is 20mA

MAXIMUM current per +3.3V pin is 50mA

VIN 7-12 V input to the board.

