Chapter 1: introduction

our goal:

- get "feel" and terminology
- more depth, detail *later* in course
- approach:
  - use Internet as example

overview:

- what's the Internet?
- what's a protocol?
- network edge; hosts, access net, physical media
- network core: packet/circuit switching, Internet structure
- performance: loss, delay, throughput
- protocol layers, service models
- history

Chapter 1: roadmap

1.1 what *is* the Internet?
1.2 network edge
- end systems, access networks, links

1.3 network core
- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks
1.5 protocol layers, service models
1.6 networks under attack: security
1.7 history

What's the Internet: "nuts and bolts" view

- millions of connected computing devices:
  - *hosts = end systems*
  - running *network apps*



- *communication links*
  - fiber, copper, radio, satellite
  - transmission rate: *bandwidth*

- *Packet switches:* forward packets (chunks of data)
  - *routers* and *switches*



"Fun" internet appliances

IP picture frame
http://www.ceiva.com/

Web-enabled toaster + weather forecaster

Tweet-a-watt: monitor energy use

Internet refrigerator

Slingbox: watch, control cable TV remotely

Internet phones

What's the Internet: "nuts and bolts" view

- *Internet:* "network of networks"
  - Interconnected ISPs
- *protocols* control sending, receiving of msgs
  - e.g., TCP, IP, HTTP, Skype, 802.11
- *Internet standards*
  - RFC: Request for comments
  - IETF: Internet Engineering Task Force



What's the Internet: a service view

- *Infrastructure that provides services to applications:*
  - Web, VoIP, email, games, e-commerce, social nets, …
- *provides programming interface to apps*
  - hooks that allow sending and receiving app programs to "connect" to Internet
  - provides service options, analogous to postal service



What's a protocol?

human protocols:
- "what's the time?"
- "I have a question"
- introductions

… specific msgs sent
… specific actions taken when msgs received, or other events

network protocols:
- machines rather than humans
- all communication activity in Internet governed by protocols

protocols define format, order of msgs sent and received among network entities, and actions taken on msg transmission, receipt

What's a protocol?

a human protocol and a computer network protocol:

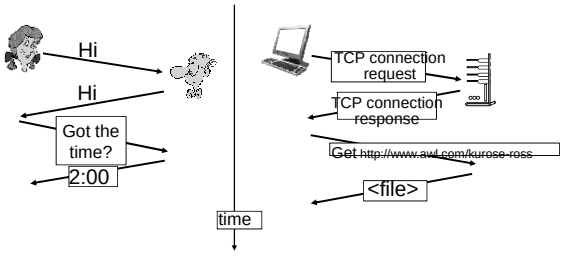

Q: other human protocols?

Chapter 1: roadmap

1.1 what *is* the Internet?
1.2 network edge
- end systems, access networks, links

1.3 network core
- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks
1.5 protocol layers, service models
1.6 networks under attack: security
1.7 history

A closer look at network structure:

- *network edge:*
  - hosts: clients and servers
  - servers often in data centers
- *access networks, physical media:* wired, wireless communication links
- *network core:*
  - interconnected routers
  - network of networks



Access networks and physical media

Q: How to connect end systems to edge router?
- residential access nets
- institutional access networks (school, company)
- mobile access networks

keep in mind:
- bandwidth (bits per second) of access network?
- shared or dedicated?



Access net: digital subscriber line (DSL)

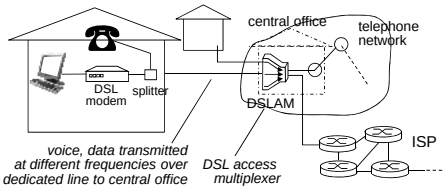

- use *existing* telephone line to central office DSLAM
  - data over DSL phone line goes to Internet
  - voice over DSL phone line goes to telephone net
- < 2.5 Mbps upstream transmission rate (typically < 1 Mbps)
- < 24 Mbps downstream transmission rate (typically < 10 Mbps)

Access net: cable network

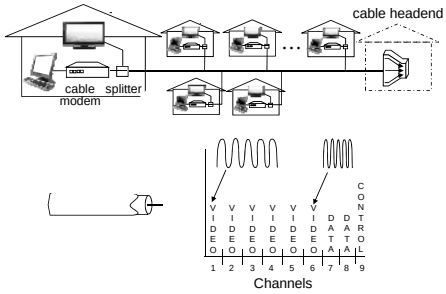

frequency division multiplexing: different channels transmitted in different frequency bands

Access net: cable network

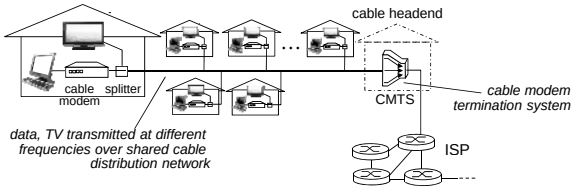

- HFC: hybrid fiber coax
  - asymmetric: up to 30Mbps downstream transmission rate, 2 Mbps upstream transmission rate
- network of cable, fiber attaches homes to ISP router
  - homes *share access network* to cable headend
  - unlike DSL, which has dedicated access to central office

Access net: home network

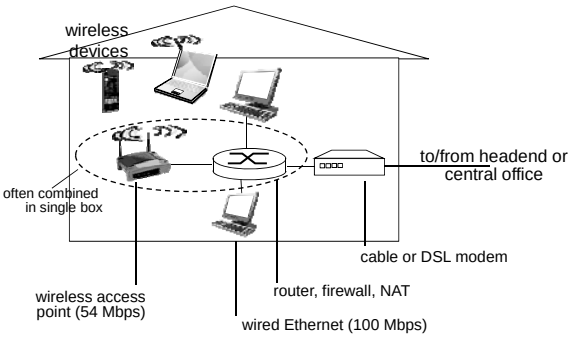

Enterprise access networks (Ethernet)

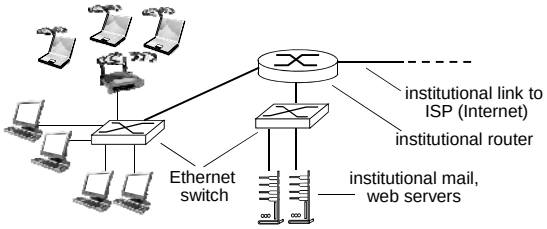

- typically used in companies, universities, etc
- 10 Mbps, 100Mbps, 1Gbps, 10Gbps transmission rates
- today, end systems typically connect into Ethernet switch

Wireless access networks

- shared *wireless* access network connects end system to router
  - via base station aka "access point"

wireless LANs:
- within building (100 ft)
- 802.11b/g (WiFi): 11, 54 Mbps transmission rate



wide-area wireless access
- provided by telco (cellular) operator, 10's km
- between 1 and 10 Mbps
- 3G, 4G: LTE



Host: sends *packets* of data

host sending function:
- takes application message
- breaks into smaller chunks, known as *packets*, of length *L* bits
- transmits packet into access network at *transmission rate R*
  - link transmission rate, aka link *capacity, aka link bandwidth*



$$\text{packet transmission delay} = \text{time needed to transmit } L\text{-bit packet into link} = \frac{L \text{ (bits)}}{R \text{ (bits/sec)}}$$

Physical media

- bit: propagates between transmitter/receiver pairs
- physical link: what lies between transmitter & receiver
- guided media:
  - signals propagate in solid media: copper, fiber, coax
- unguided media:
  - signals propagate freely, e.g., radio

twisted pair (TP)
- two insulated copper wires
  - Category 5: 100 Mbps, 1 Gpbs Ethernet
  - Category 6: 10Gbps

Physical media: coax, fiber

coaxial cable:
- two concentric copper conductors
- bidirectional
- broadband:
  - multiple channels on cable
  - HFC

fiber optic cable:
- glass fiber carrying light pulses, each pulse a bit
- high-speed operation:
  - high-speed point-to-point transmission (e.g., 10's-100's Gpbs transmission rate)
- low error rate:
  - repeaters spaced far apart
  - immune to electromagnetic noise

Physical media: radio

- signal carried in electromagnetic spectrum
- no physical "wire"
- bidirectional
- propagation environment effects:
  - reflection
  - obstruction by objects
  - interference

radio link types:

- terrestrial microwave
  - e.g. up to 45 Mbps channels
- LAN (e.g., WiFi)
  - 11Mbps, 54 Mbps
- wide-area (e.g., cellular)
  - 3G cellular: ~ few Mbps
- satellite
  - Kbps to 45Mbps channel (or multiple smaller channels)
  - 270 msec end-end delay
  - geosynchronous versus low altitude

Chapter 1: roadmap

1.1 what *is* the Internet?

1.2 network edge

- end systems, access networks, links

1.3 network core

- packet switching, circuit switching, network structure

1.4 delay, loss, throughput in networks

1.5 protocol layers, service models

1.6 networks under attack: security

1.7 history

The network core

- mesh of interconnected routers
- packet-switching: hosts break application-layer messages into *packets*
  - forward packets from one router to the next, across links on path from source to destination
  - each packet transmitted at full link capacity



Packet-switching: store-and-forward

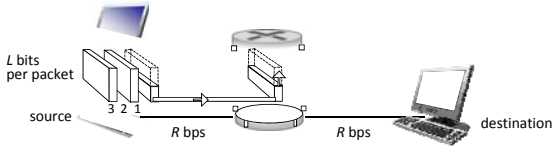

- takes *L*/*R* seconds to transmit (push out) *L*-bit packet into link at *R* bps
- *store and forward:* entire packet must arrive at router before it can be transmitted on next link
- end-end delay = 2*L*/*R* (assuming zero propagation delay)

one-hop numerical example:

- *L* = 7.5 Mbits
- *R* = 1.5 Mbps
- one-hop transmission delay = 5 sec

more on delay shortly …

Packet Switching: queueing delay, loss



queuing and loss:

- If arrival rate (in bits) to link exceeds transmission rate of link for a period of time:
  - packets will queue, wait to be transmitted on link
  - packets can be dropped (lost) if memory (buffer) fills up

Two key network-core functions

routing: determines source-destination route taken by packets

- *routing algorithms*

forwarding: move packets from router's input to appropriate router output

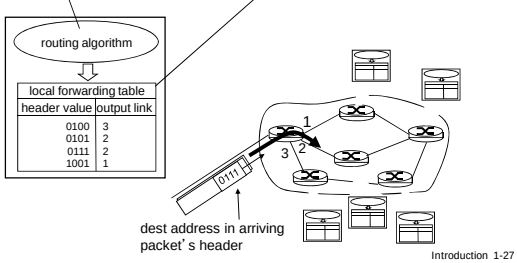

Alternative core: circuit switching

end-end resources allocated to, reserved for "call" between source & dest:

- In diagram, each link has four circuits.
  - call gets 2nd circuit in top link and 1st circuit in right link.
- dedicated resources: no sharing
  - circuit-like (guaranteed) performance
- circuit segment idle if not used by call *(no sharing)*
- Commonly used in traditional telephone networks



Circuit switching: FDM versus TDM

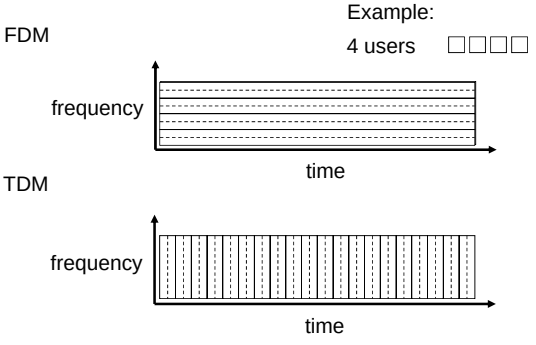

Packet switching versus circuit switching

packet switching allows more users to use network!

example:
- 1 Mb/s link
- each user:
  - 100 kb/s when "active"
  - active 10% of time



- *circuit-switching:*
  - 10 users
- *packet switching:*
  - with 35 users, probability > 10 active at same time is less than .0004 *

Q: how did we get value 0.0004?

Q: what happens if > 35 users ?

* Check out the online interactive exercises for more examples

Packet switching versus circuit switching

is packet switching a "slam dunk winner?"

- great for bursty data
  - resource sharing
  - simpler, no call setup
- excessive congestion possible: packet delay and loss
  - protocols needed for reliable data transfer, congestion control
- *Q:* How to provide circuit-like behavior?
  - bandwidth guarantees needed for audio/video apps
  - still an unsolved problem (chapter 7)

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet-switching)?

Internet structure: network of networks

- End systems connect to Internet via access ISPs (Internet Service Providers)
  - Residential, company and university ISPs
- Access ISPs in turn must be interconnected.
  - So that any two hosts can send packets to each other
- Resulting network of networks is very complex
  - Evolution was driven by economics and national policies
- Let's take a stepwise approach to describe current Internet structure

Internet structure: network of networks

Question: given *millions* of access ISPs, how to connect them together?

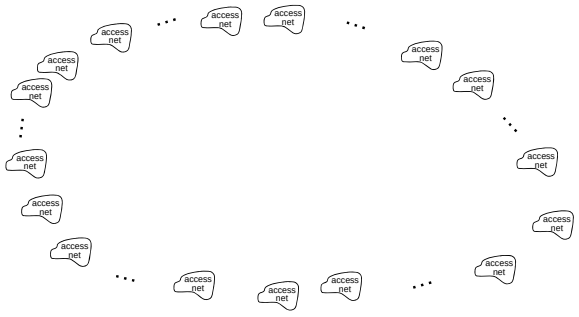

Internet structure: network of networks

Option: connect each access ISP to every other access ISP?

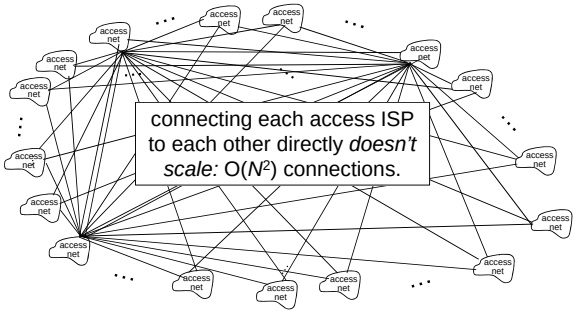

Internet structure: network of networks

Option: connect each access ISP to a global transit ISP? Customer and provider ISPs have economic agreement.

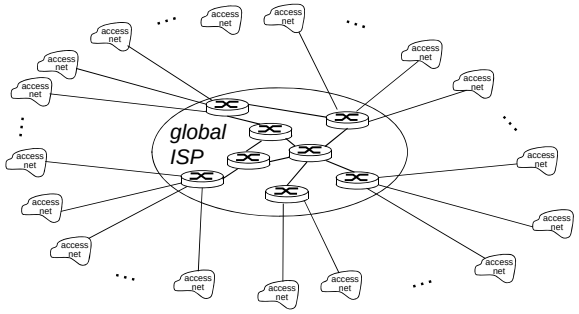

Internet structure: network of networks

But if one global ISP is viable business, there will be competitors ….

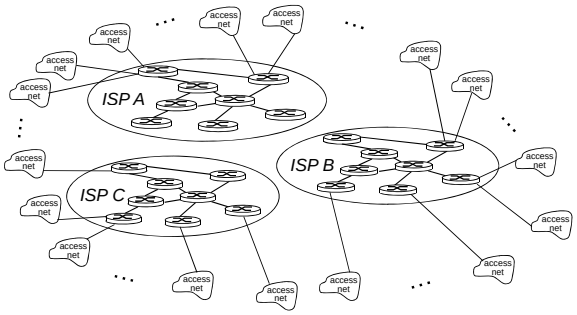

Internet structure: network of networks

But if one global ISP is viable business, there will be competitors …. which must be interconnected

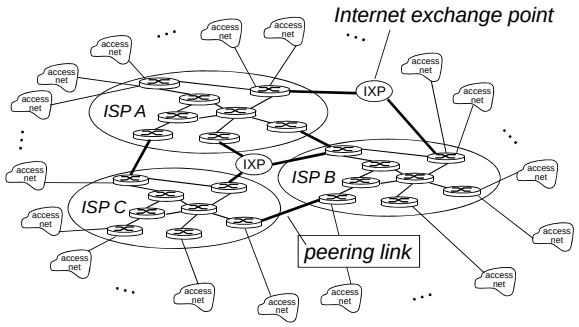

Internet structure: network of networks

… and regional networks may arise to connect access nets to ISPS

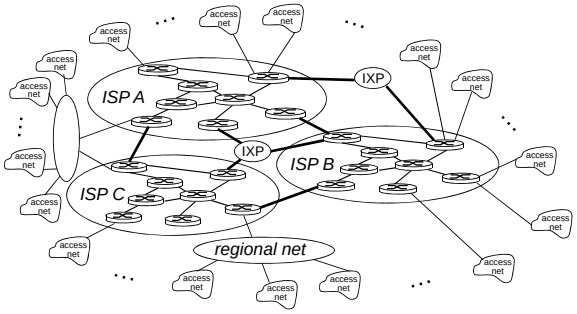

Internet structure: network of networks

… and content provider networks (e.g., Google, Microsoft, Akamai) may run their own network, to bring services, content close to end users

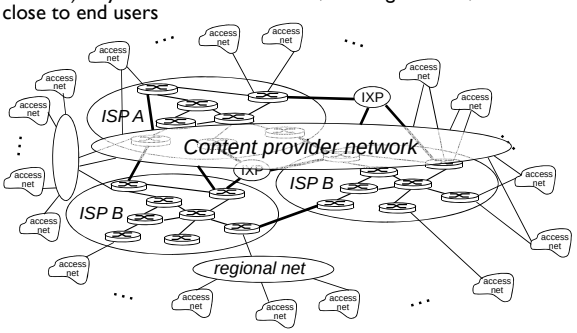

Internet structure: network of networks

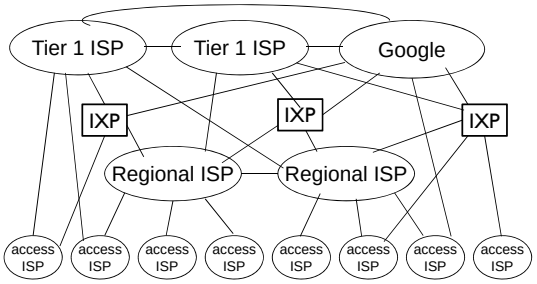

- at center: small # of well-connected large networks
  - "tier-1" commercial ISPs (e.g., Level 3, Sprint, AT&T, NTT), national & international coverage
  - content provider network (e.g, Google): private network that connects it data centers to Internet, often bypassing tier-1, regional ISPs

Tier-1 ISP: e.g., Sprint