


YH-55-05

REV.

ECN NO.

DATE

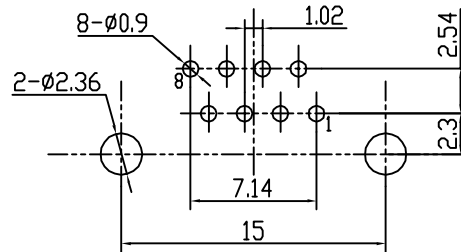

PCB LAYOUT




NOTES:

1. ELECTRICAL:

- 1.1 VOLTAGE RATING: 125 VAC RMS;
- 1.2 CURRENT RATING: 1.5 AMP;
- 1.3 CONTACT RESISTANCE: 20 MILLIOHMS Max;
- 1.4 INSULATION RESISTANCE: 1000 MEGOHMS
Min @500 VDC;
- 1.5 DIELECTRIC STRENGTH: 1000 VAC RMS 50
or 60Hz 1 Minute;

2. MECHANICAL:

- 2.1 HOUSING: PBT, UL94V-0, GRAY;
 - 2.2 TERMINALS: DIA 0.46 PHOSPHOR BRONZE
PLATED 3u" Au;
 - 2.3 DURABILITY: 750 CYCLES Min.
3. ★ Critical Dimension.

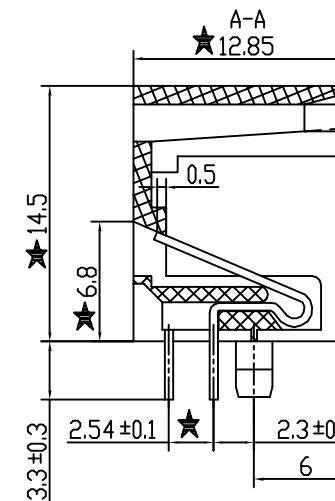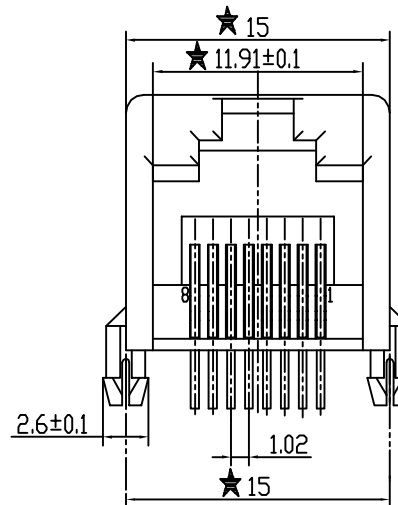

RoHS Compliant

CZT® 意华通讯连接器有限公司 YIHUA COMMUNICATED CONNECTOR CO.,LTD.					TOLERANCES 0~15±0.15, 15~30±0.2, 30~±0.25 ANGLE±1°.	MATERIAL: SEE NOTE	Designed:	NAME: 5521 8P8C	
		SCALE	UNIT	CUSTOMER:		FINISH: SEE NOTE	Checked:	DWG NO.: Q07081704	REV
		SIZE 2.5:1	mm	MODEL NO.:		SHEET 1 OF 1	Approved:	PART NO.: B551N-8803-M012	00