PLAN (lid removed)

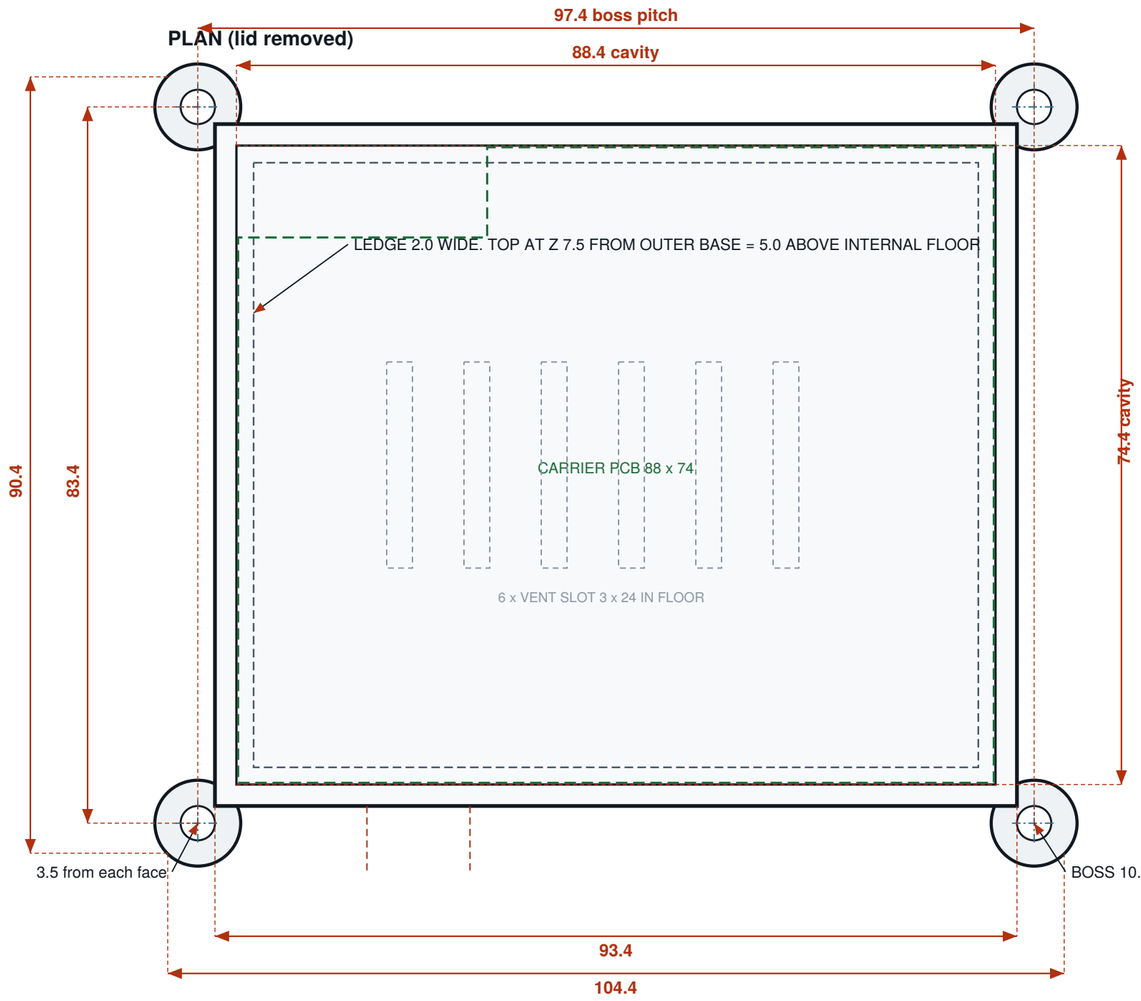

HEIGHT DATUMS Z=0 IS THE OUTER UNDERSIDE OF THE BASE

Z	FEATURE
2.5	floor, top face (internal floor)
7.5	carrier underside, ledge top = 5.0 above floor
9.1	carrier top face
11.6	daughterboard underside (2.5 header seat)
13.2	daughterboard top face
16.4	DevKitC USB connector top
23.2	SK Pang DC-DC top
25.7	DB9 top - the governing height
30.5	cavity ceiling / lid underside
33.0	overall top

NOTES

1. Lid screw bosses are OUTSIDE the cavity by design. Anything inside it fouls the carrier, which fills the cavity.
2. Lid carries a hold-down rib on the carrier's free left edge plus four pads, all stopping 1.5 above the board. Fit 1.5 EVA foam to each - that foam IS the clamp.
3. Lid: 3.4 clearance with 6.2 counterbore, over 4.0 inserts in the base.
4. LED window 18 x 12 in lid, thinned to 0.6, over the DevKitC RGB LED.
5. Gland replaces the 13 x 10 slot of the earlier model. M12 thread, 12.5 clearance hole, locknut supplied. Cable range 3.0 - 6.5.
6. Headroom above the DB9 is 4.8. Removing the DB9 buys only 2.5, because the DC-DC is next at 23.2.
7. No lid seal and no breather vent this iteration. Sealing without a vent is worse than leaving it unsealed.

FRONT ELEVATION (port face)

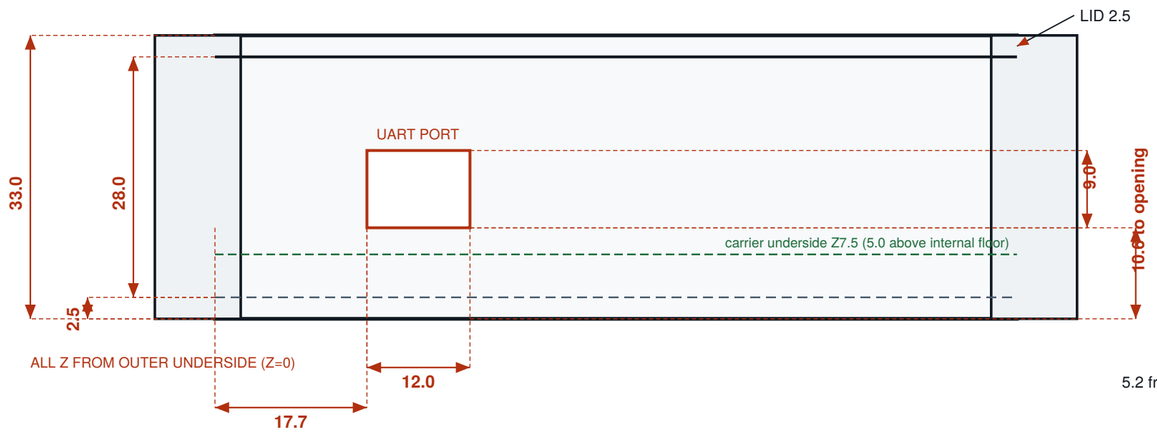

END ELEVATION (connector face, viewed from the right)

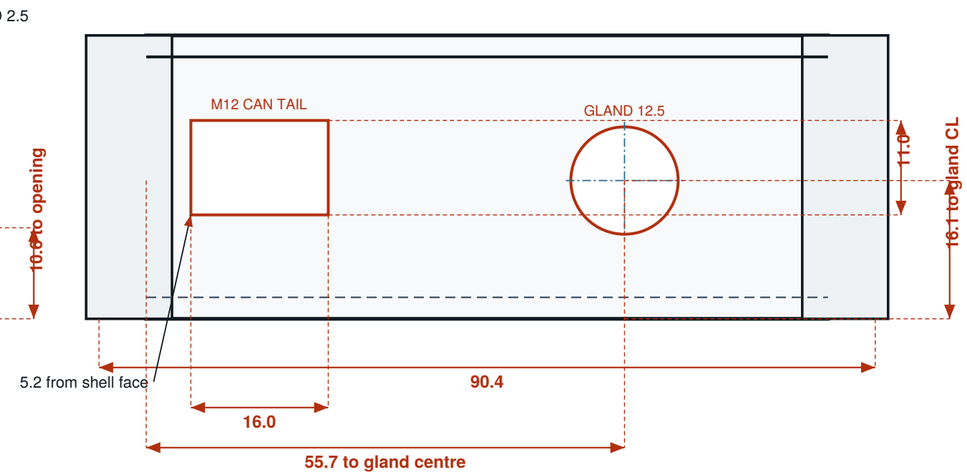

EC4 SNIFFER - ENCLOSURE rev B

DWG EC4-200 rev B NTS UNITS mm

MATERIAL 3D printed ASA
END VIEW from the connector face
DATUM lower-left-front corner
WALL / FLOOR / LID 2.5
FIXINGS 4 off M3 heat-set insert
SEALING none this iteration