

BLACK LABEL LIPO DOCIER

GENERAL SPECIFICATION

- 30C CONTINUOUS DISCHAGRE
 - 80C PULSE
 - 3.0C CHARGE RATE*

— www.revolectrix.com —



REVOLECTRIX BLACK LABEL 30C

FRESH LIPO


The REVOLECTRIX range of BLACK label battery packs have been carefully selected and cells matched for your application. Every battery pack is assembled on the same day as your shipment thus ensuring you receive the freshest LiPO battery packs. Look out for the date code on the battery label.

Extreme Performance

At REVOLECTRIX we have hand selected the highest performing batteries for your application. Since we co-developed LiPO in 1999, REVOLECTRIX has been the true to specification supplier of LiPO that you can trust and respect.


This data sheet for BLACK label batteries will show you the truest data on all the packs available for your selection.

Fast Charge: 6C charging applicable at 30-35degC using REVOLECTRIX charger

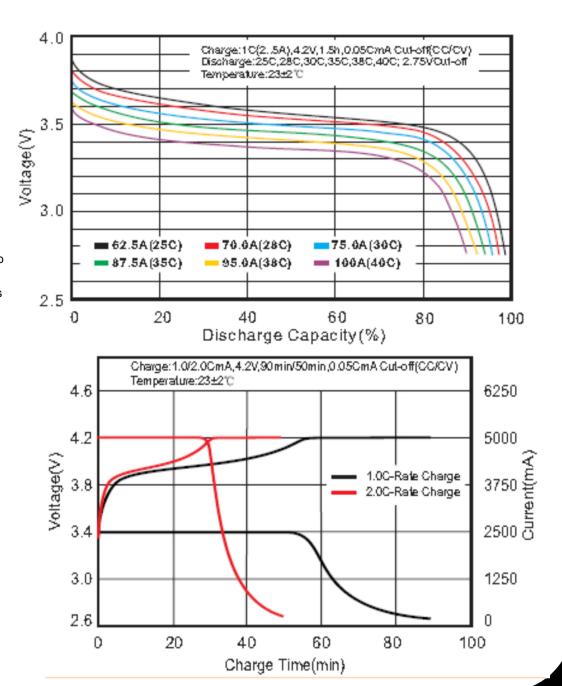




BLACK 2250MAHR 30C



BLACK 2250 2S 7.4V

Size: 15 * 34 * 96 mm Weight: 120 grams


Discharge Continuous: 30C Discharge Pulse: 80C Max Charge: 6C



BLACK 2250 3S 11.1V

Size: 25 * 34 * 96 mm Weight: 175 grams

Discharge Continuous: 30C Discharge Pulse: 80C Max Charge: 6C



BLACK 2250 4S 14.8V

Size: 28 * 34 * 96 mm Weight: 235 grams

Discharge Continuous: 30C Discharge Pulse: 80C Max Charge: 6C



BLACK 2700 2S 7.4V

Size: 14 * 38 * 100 mm Weight: 140 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C



Size: 21 * 38 * 100 mm Weight: 215 grams

Discharge Continuous: 30C

Discharge Pulse: 80C

Max Charge: 6C


BLACK 2700 4S 14.8V

Size: 29 * 38 * 100 mm Weight: 285 grams

grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C







BLACK 2700MAHR 30C


BLACK 2700 5S 18.5V

Size: 36 * 38 * 100 mm Weight: 360 grams

Discharge Continuous: 30C

Discharge Pulse: 80C


Max Charge: 6C



BLACK 2700 6S 22.2V

Size: 42 * 38 * 100 mm Weight: 410 grams

Discharge Continuous: 30C





BLACK 3400 2S 7.4V

Size: 14 * 38 * 130 mm Weight: 170 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C



Size: 21 * 38 * 130 mm Weight: 255 grams

Discharge Continuous: 30C

Discharge Pulse: 80C


Max Charge: 6C

BLACK 3400 4S 14.8V

Size: 28 * 38 * 130 mm Weight: 335 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C







BLACK 3400MAHR 30C

BLACK 3400 5S 18.5V

Size: 34 * 38 * 110 mm Weight: 420 grams


Discharge Continuous: 30C Discharge Pulse: 80C Max Charge: 6C




Size: 42 * 38 * 110 mm Weight: 498 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C







BLACK 3900MAHR 30C

BLACK 3900 2S 7.4V

Size: 15 * 43 * 130 mm Weight: 198 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C



Size: 23 * 439* 130 mm Weight: 280 grams

Discharge Continuous: 30C

Discharge Pulse: 80C


Max Charge: 6C


BLACK 3900 4S 14.8V

Size: 29 * 43 * 130 mm Weight: 395 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C








BLACK 3900 5S 18.5V

Size: 36 * 43 * 130 mm Weight: 485 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C




BLACK 3900 6S 22.2V

Size: 45 * 43 * 130 mm Weight: 580 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C





BLACK 4500MAHR 30C

BLACK 4500 2S 7.4V

Size: 15 * 44 * 152 mm Weight: 240 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C



Size: 23 * 44 * 152 mm Weight: 360 grams

Discharge Continuous: 30C

Discharge Pulse: 80C


Max Charge: 6C


BLACK 4500 4S 14.8V

Size: 31 * 44 * 152 mm Weight: 470 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C







BLACK 4500 5S 18.5V


Size: 40 * 44 * 152 mm Weight: 570 grams


Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C

BLACK 4500 6S 22.2V Size: 46 * 44 * 152 mm Weight: 695 grams

Discharge Continuous: 30C







BLACK 5200MAHR 30C

BLACK 5200 2S 7.4V

Size: 18 * 44 * 152 mm Weight: 260 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C



Size: 27 * 44 * 152 mm Weight: 390 grams

Discharge Continuous: 30C


Discharge Pulse: 80C Max Charge: 6C

BLACK 5200 4S 14.8V

Size: 36 * 44 * 152 mm Weight: 510 grams

Discharge Continuous: 30C

Discharge Pulse: 80C Max Charge: 6C



BLACK 5200 5S 18.5V

Size: 45 * 44 * 152 mm Weight: 650 grams

Discharge Continuous: 30C


Discharge Pulse: 80C Max Charge: 6C




BLACK 5200 6S 22.2V

Size: 56 * 44 * 152 mm Weight: 775 grams

Discharge Continuous: 30C







BLACK LABEL 6250 30C

BLACK 6250 30C 2S 7.4V

Size: 17 x 46 x 148 mm Weight: 270 grams

Discharge Continuous: 30C Discharge Pulse: 60C Max Charge: 2C

BLACK 6250 30C 3S 11.1V

Size: 17 x 46 x 148 mm Weight: 400 grams

Discharge Continuous: 30C Discharge Pulse: 60C Max Charge: 2C

BLACK 6250 30C 4S 14.8V

Size: 17 x 46 x 148 mm Weight: 540 grams

Discharge Continuous: 30C Discharge Pulse: 60C Max Charge: 2C

BLACK 6250 30C 5S 18.5V

Size: 17 x 46 x 148 mm Weight: 670 grams

Discharge Continuous: 30C Discharge Pulse: 60C Max Charge: 2C

BLACK 6250 30C 6S 22.2V


Size: 17 x 46 x 148 mm Weight: 800 grams

Discharge Continuous: 30C Discharge Pulse: 60C Max Charge: 2C

BLACK 6250 30C 7S 25.9V

Size: 17 x 46 x 148 mm Weight: 930 grams

Discharge Continuous: 30C Discharge Pulse: 60C Max Charge: 2C

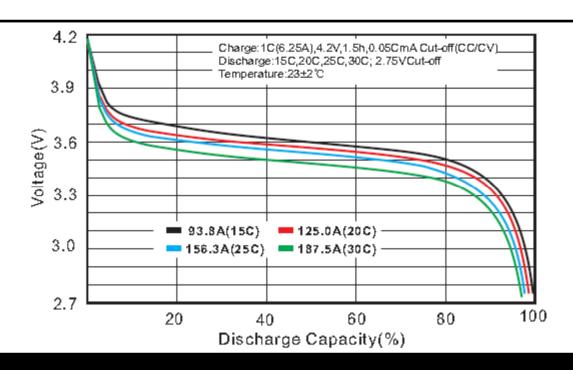



BLACK 6800 2S 7.4V

Size: 13 * 38 * 130 mm Weight: 165 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C



Size: 19 * 38 * 130 mm Weight: 245 grams

Discharge Continuous: 30C

Discharge Pulse: 80C


Max Charge: 6C

BLACK 6800 4S 14.8V

Size: 26 * 38 * 130 mm Weight: 330 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C







BLACK 6800MAHR 30C

BLACK 6800 5S 18.5V

Size: 34 * 38 * 110 mm Weight: 420 grams

Discharge Continuous: 30C


Discharge Pulse: 80C


Max Charge: 6C

BLACK 6800 6S 22.2V

Size: 41 * 38 * 110 mm Weight: 495 grams

Discharge Continuous: 30C







BLACK 7800MAHR 30C

BLACK 7800 2S 7.4V

Size: 31 * 43 * 130 mm Weight: 380 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C



Size: 46 * 43 * 130 mm Weight: 575 grams

Discharge Continuous: 30C

Discharge Pulse: 80C

Max Charge: 6C


BLACK 7800 4S 14.8V

Size: 62 * 43 * 130 mm Weight: 770 grams

Discharge Continuous: 30C

Discharge Pulse: 80C

Max Charge: 6C



BLACK 7800 5S 18.5V

Size: 76 * 43 * 130 mm Weight: 960 grams

Discharge Continuous: 30C

Discharge Pulse: 80C Max Charge: 6C




BLACK 7800 6S 22.2V

Size: 91 * 43 * 130 mm Weight: 1175 grams

Discharge Continuous: 30C

Discharge Pulse: 80C

Max Charge: 6C









BLACK 9000MAHR 30C

BLACK 9000 2S 7.4V

Size: 31 * 44 * 152 mm Weight: 470 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C



Size: 45 * 44 * 152 mm Weight: 700 grams

Discharge Continuous: 30C


Discharge Pulse: 80C Max Charge: 6C

BLACK 9000 4S 14.8V

Size: 61 * 44 * 152 mm Weight: 940 grams

Discharge Continuous: 30C

Discharge Pulse: 80C Max Charge: 6C




BLACK 9000 5S 18.5V

Size: 76 * 44 * 152 mm Weight: 1200 grams

Discharge Continuous: 30C


Discharge Pulse: 80C Max Charge: 6C



BLACK 9000 6S 22.2V

Size: 91 * 44 * 152 mm Weight: 1410 grams

Discharge Continuous: 30C











BLACK LABEL 9000 25C

BLACK 9000 25C 2S 7.4V

Dimensions (mm): 12 x 67 x 220 Weight: 425 grams

Discharge Continuous: 25C Discharge Pulse: 50C Max Charge: 2C

BLACK 9000 25C 3S 11.1V

Dimensions (mm): 18 x 67 x 220 Weight: 640 grams

Discharge Continuous: 25C Discharge Pulse: 50C Max Charge: 2C

BLACK 9000 25C 4S 14.8V

Dimensions (mm): 25 x 67 x 220 Weight: 850 grams

Discharge Continuous: 25C Discharge Pulse: 50C Max Charge: 2C

BLACK 9000 25C 5S 18.5V

Dimensions (mm): 31 x 67 x 220 Weight: 1060 grams

Discharge Continuous: 25C Discharge Pulse: 50C Max Charge: 2C

BLACK 9000 25C 6S 22.2V


Dimensions (mm): 37 x 67 x 220 Weight: 1270 grams

Discharge Continuous: 25C Discharge Pulse: 50C Max Charge: 2C

BLACK 9000 25C 7S 25.9V

Dimensions (mm): 44 x 67 x 220 Weight: 1300 grams

Discharge Continuous: 25C Discharge Pulse: 50C Max Charge: 2C

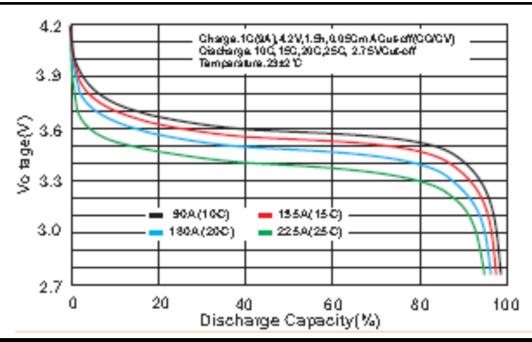











BLACK 10400MAHR 30C

BLACK 10400 2S 7.4V

Size: 35 * 44 * 152 mm Weight: 625 grams

Discharge Continuous: 30C

Discharge Pulse: 80C Max Charge: 6C



Size: 51 * 44 * 152 mm Weight: 765 grams

Discharge Continuous: 30C


Discharge Pulse: 80C Max Charge: 6C

BLACK 10400 4S 14.8V

Size: 69 * 44 * 152 mm Weight: 1050 grams

Discharge Continuous: 30C Discharge Pulse: 80C

Max Charge: 6C



BLACK 10400 5S 18.5V

Size: 86 * 44 * 152 mm Weight: 1310 grams

Discharge Continuous: 30C


Max Charge: 6C



BLACK 10400 6S 22.2V

Size: 103 * 44 * 152 mm Weight: 1580 grams

Discharge Continuous: 30C











Singapore • 1090 Lower Delta Rd • Singapore• Ph (65) 6272 1818 • energy@leoindustries.com
USA • 3520 Sugarloaf Parkway, Suite F-03-121 • Urbana, Maryland 21704 • Ph (301) 798 2770 • sales@revolectrix.com

— www.revolectrix.com —