
ANA V1 right temple — ESP32 main board

Board: 4-layer 0.8 mm FR-4, JLCPCB rules (0.1/0.1 mm, vias 0.4/0.2 mm). All SMT parts on F (top) side.
Frame link (8 wires, same order on both temples): 1 VSYS 2 LED_K 3 GND 4 EN 5 IO0 6 CHRG_N 7 U0RXD 8 U0TXD_R
ESP32 GPIO map: OLED CLK=4 MOSI=23 CS=15 DC=26 RST=27 | I2C SDA=21 SCL=22 | MAX_INT=5 | TOUCH=14 | BAT_ADC=33 | CHRG=13 | UART0 TX=1 RX=3 | 3V3 routed, 3V3 pour on In2


ESP32-U4WDH core



RF

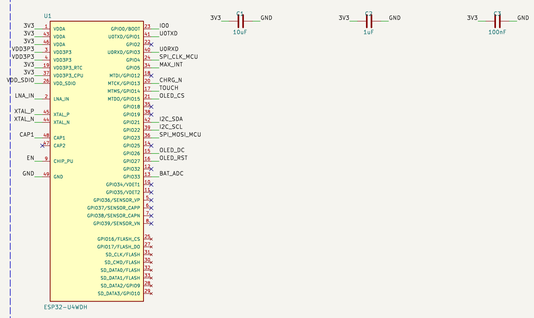


Power

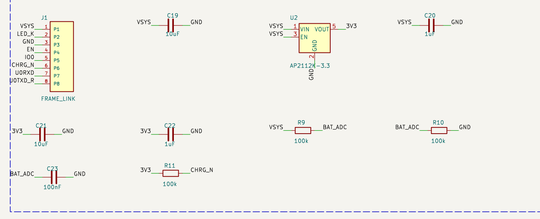


Debug



Sensors

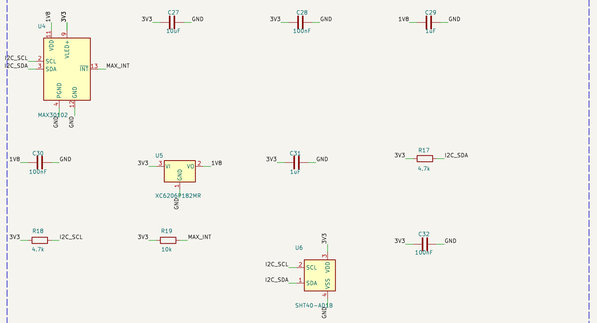

Touch + LED + display

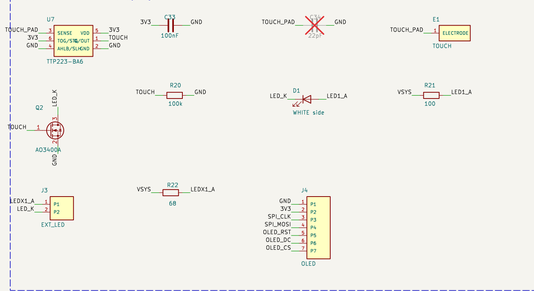

Power flags (tell ERC these nets are supplied from off-sheet: battery, link wires, USB)



Net-label style schematic: pins with the same label are connected
Generated by hardware/scripts/build.py — edit circuits.py, not this file

Project Spectra — ANA smart glasses

Sheet: /
File: ana-main.kicad_sch

Title: ANA V1 right temple — ESP32 main board

Size: A1	Date: 2026-11-07	**Rev: 1.0**
KiCad E.D.A. 9.0.9		Id: 1/1