

ANA V2 rear pod — harness hub, ESP32-S3, EEG

Board: 4-layer 0.8 mm FR-4, JLCPCB rules (0.1/0.1 mm, vias 0.4/0.2 mm). All SMT parts on F (top) side.
Temple harness (two rows of 8 wires, same order on temple and pod): A = 5V GND SDA SCL IMU_INT PPG_INT TOUCH IR_PWM | B = 5V GND I2S_BCLK I2S_LRCLK MIC_SD SPK_SD GND LED_PWM
Pi GPIO: SDA 2, SCL 3, IMU_INT 4, PPG_INT 5, PI_SHDN 6, IR_PWM 12, LED_PWM 13, HUB_RX 14 (Pi TXD), HUB_TX 15 (Pi RXD), TOUCH 17, I2S BCLK 18, LRCLK 19, MIC_SD 20, SPK_SD 21


Harness

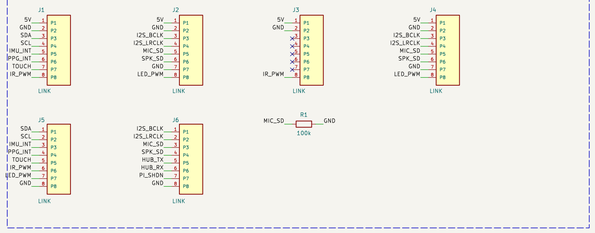


Power

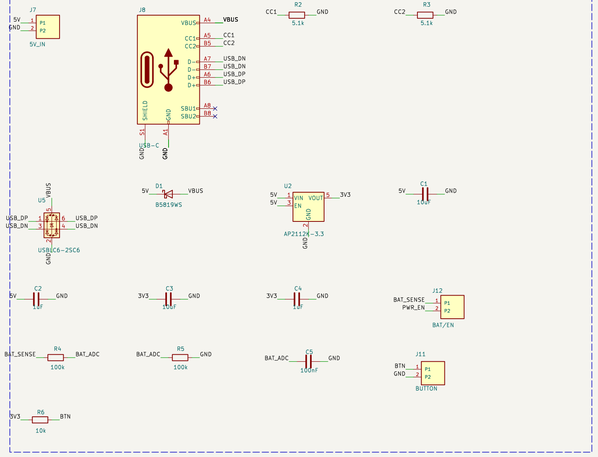

Hub MCU

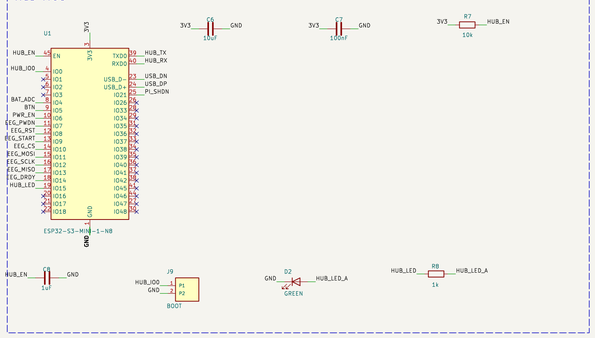

EEG

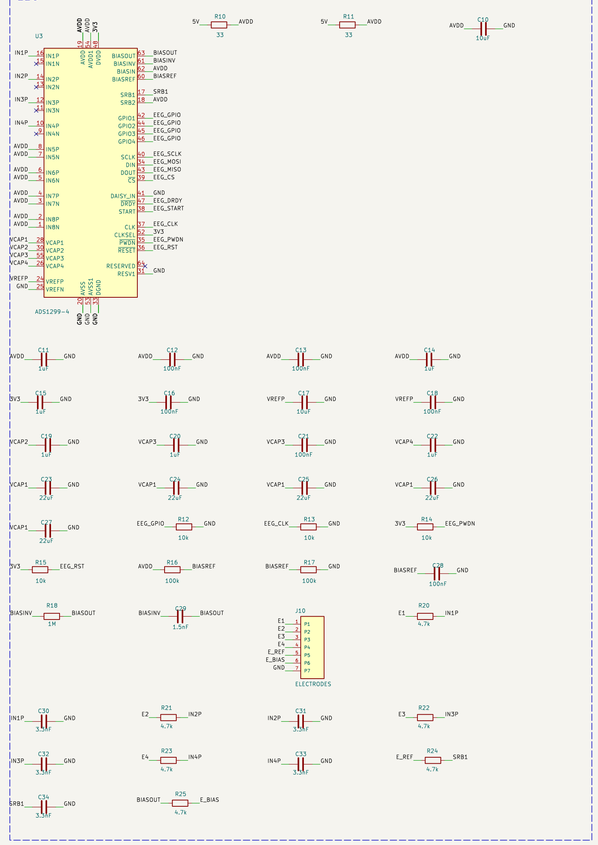

Power flags (tell ERC these nets are supplied from off-sheet: battery, link wires, USB)



Net-label style schematic: pins with the same label are connected
Generated by hardware/scripts/build.py — edit circuits.py, not this file

Project Spectra — ANA smart glasses

Sheet: /
File: ana2-pod.kicad_sch

Title: ANA V2 rear pod — harness hub, ESP32-S3, EEG

Size: A1	Date: 2026-11-07
KiCad E.D.A. 9.0.9	**Rev: 2.0**
	Id: 1/1