



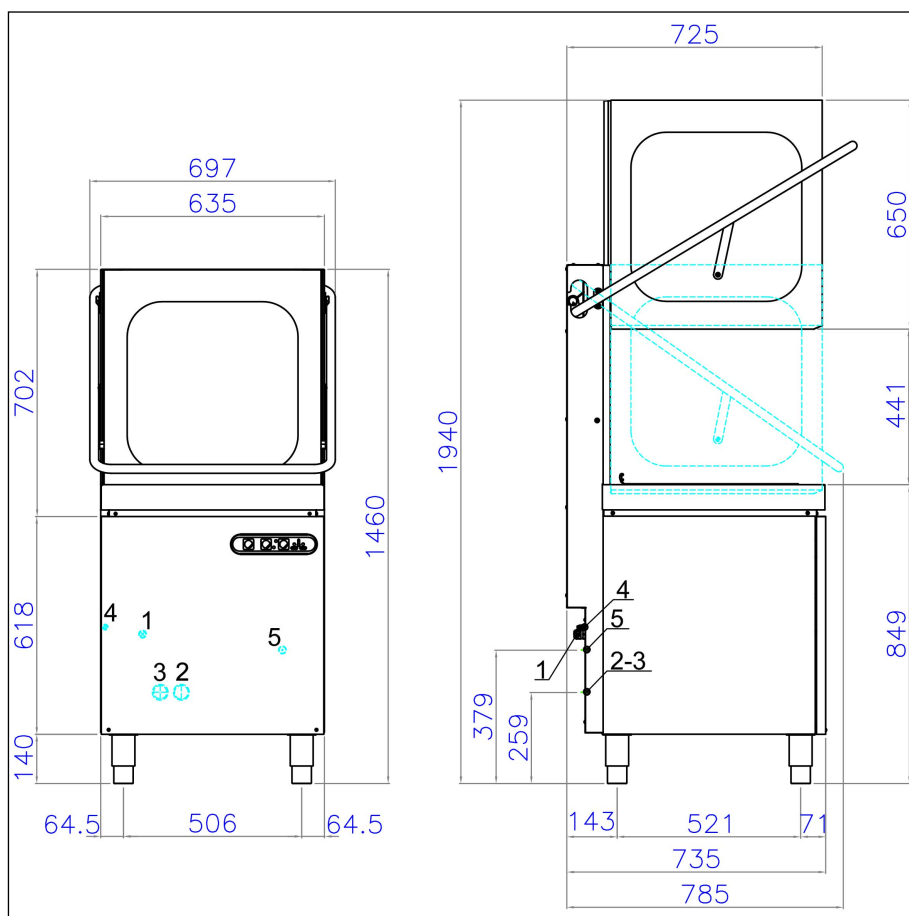

- | | |
|--|------------------------------|
| 1. Power cable entry 5x2,5 (400Vx3N/230Vx3N/230Vx1-50Hz) | 3. Water loading pipe Ø3/4"G |
| 2. Water drain pipe Ø30 Hmax=45cm | 4. Equipotential |
| | 5. Dosing pumps entry |



- Moulded wash tank with rounded corners and double wall (insulated hood upon request).
- Full-width wash tank filters (on request).
- Fully automatic operation with electromechanical controls.
- Magnetic microswitch to cut out operation of the appliance when door is opened.
- Useful washing height 40 cm, dish Ø44 cm.
- Square basket 50x50 cm (supplied with 1 plate basket, 1 flat basket, 1 cutlery holders).
- Independent lower/upper washing and rinsing arms.
- Washing cycle time 75-180 seconds (capacity 960-400 pz/h).

- Standard built-in rinse-aid pump.
- Self-draining wash pump.
- Built-in insulated boiler made in AISI 304L stainless steel.
- Boiler and tank heating through thermostatically protected armoured heating elements (in exchange).
- Tank capacity lt. 18 and boiler capacity lt. 8.
- Water consumption per cycle lt. 3,5 - Water pressure input ATE 2,0-3,0 - Max temperature of inlet water 50°C.
- Tank heating element kW 2,5 - Boiler heating element kW 6,0 (Cold water input kW 9,0).
- Washing pump power Hp 1.
- Noise level at 1 mt. < 70 dbA.
- Total power kW 6,74.

Note

Can be used in straight-line and corner installations in combination with prewash inlet tables and outlet tables.

On request: Automatic start on hood closing.