

RW3RD Refrigerated Waste Box - 3 containers

TECHNICAL FEATURES:

- Sandwich panels made entirely of AISI 304 stainless steel, polished inside, Scotch Brite outside.
- 60mm insulation in CFC and HCFC free polyurethane, high density, very high insulating capacity.
- Versions from 1 to 3 modules suitable for containing 1, 2 or 3 wheeled containers (not supplied) of 120 or 240 liters.
- Optional floor.

DOORS AND LIDS:

- Doors built entirely in AISI 304 stainless steel.
- Three-sided magnetic gaskets and bottom gasket at floor level.
- AISI 304 stainless steel doors hinged laterally with perimeter gasket.
- Locks on doors and lids on request.

SETUP:

- Traverse for stopping and positioning of trolleys.
- Easily removable centering funnels (A).

COOLING SYSTEM:

- Condensing unit positioned on the right side, inserted in a full-height AISI 304 stainless steel casing.
- Foamed evaporator in the back panel
- Automatic evaporation of defrost water.
- Automatic defrosting when the compressor stops.
- Compressor heating for use in cold climates with automatic activation.

CONTROL BOARD:


- Electronic thermostat.



TECNICAL FEATURES:



STAINLESS STEEL
AISI304



THICKNESS 60 mm



3




ELECTRONIC
CONTROL



GAS R290 (GWP3)



CLIMATE CLASS 4



AUTOMATIC
CONDENSATE
EVAPORATION



AUTOMATIC
DEFROSTING

PRIMAX Srl

Via Gemona, 14/16 - 33078 San Vito al Tagliamento (PN)
Tel: +39 0434 630779 Fax: +39 0434 630956
<https://www.primaxsrl.com> Email: info@primaxsrl.com



RW3RD Refrigerated Waste Box - 3 containers

TECHNICAL SHEET	RW3RD
Measure pan mm	3 containers 120/240 Lt. (not supplied)
Net dimensions (LxWxH) mm	2400x875x1280
Net internal dimensions (LxWxH) mm	1950x660x1080
Internal volume l	1370
Net weight kg	198
Packing	Pallet + carton
Packaging dimensions (WxDxH) mm	2440x940x1370
Packing volume m3	3.14
Gross weight kg	213
Max power consumption KW	0.515
Max absorbed current A	2.4
Power supply V~/Hz	230/1/50
Electric cable n° x mm²	3x1,5mm²
Temperature range °C	+2/+10°C
Refrigerant gas	R290
Refrigerant gas quantity, water cooling g	108
Cooling power EN12900 W	696 @ TE -10°C/TC +45°C
Climatic class	4


PRIMAX Srl

Via Gemona, 14/16 - 33078 San Vito al Tagliamento (PN)
Tel: +39 0434 630779 Fax: +39 0434 630956
<https://www.primaxsrl.com> Email: info@primaxsrl.com



RW3RD Refrigerated Waste Box - 3 containers

RW3R(P)D

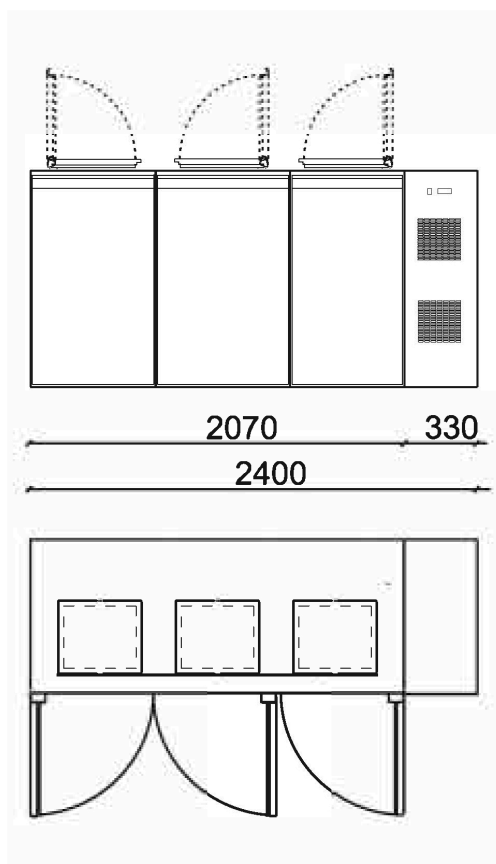

Remote version
Versione grp remoto

-150mm

