

Потапчук Александр ИС222

Настроил ip на 2 интерфейсах роутера

Router3

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/0

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0006.2A70.CE01

IP Configuration

IPv4 Address 192.168.0.254

Subnet Mask 255.255.255.0

Tx Ring Limit 10

Equivalent IOS Commands

Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#

☐ Top

Router3

Physical Config CLI Attributes

GLOBAL

Settings

Algorithm Settings

ROUTING

Static

RIP

SWITCHING

VLAN Database

INTERFACE

FastEthernet0/0

FastEthernet0/1

FastEthernet0/1

Port Status ☒ On

Bandwidth ☒ 100 Mbps ☐ 10 Mbps ☒ Auto

Duplex ☐ Half Duplex ☒ Full Duplex ☒ Auto

MAC Address 0006.2A70.CE02

IP Configuration

IPv4 Address 192.168.1.254

Subnet Mask 255.255.255.0


Tx Ring Limit 10

Equivalent IOS Commands

Router(config)#interface FastEthernet0/0
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/1
Router(config-if)#

☐ Top

Проверил пинг

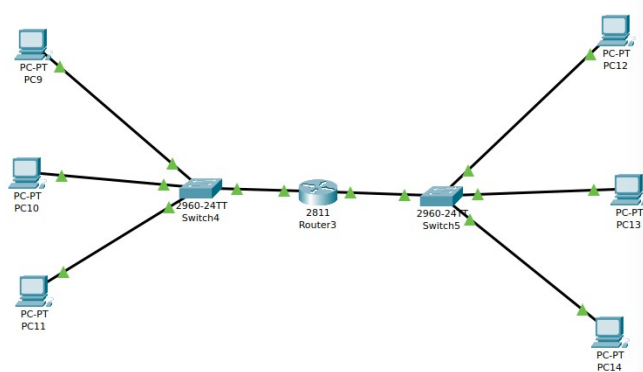

```
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.1

Pinging 192.168.0.1 with 32 bytes of data:

Reply from 192.168.0.1: bytes=32 time=33ms TTL=128
Reply from 192.168.0.1: bytes=32 time=8ms TTL=128

Ping statistics for 192.168.0.1:
    Packets: Sent = 2, Received = 2, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 8ms, Maximum = 33ms, Average = 20ms

Control-C
^C
C:\>ping 192.168.0.1

Pinging 192.168.0.1 with 32 bytes of data:

Reply from 192.168.0.1: bytes=32 time=33ms TTL=128
Reply from 192.168.0.1: bytes=32 time=17ms TTL=128
Reply from 192.168.0.1: bytes=32 time=17ms TTL=128

Ping statistics for 192.168.0.1:
    Packets: Sent = 3, Received = 3, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 17ms, Maximum = 33ms, Average = 22ms

Control-C
^C
C:\>
```