


本圖完工後請速歸還

[illegible]

ERECTION MATERIALS				
PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
FLANGES				
1	FLANGE BLIND 150# RF A182-F304 ASME B16.5	1	S1P1/FBR-1"	1
GASKETS				
2	GASKET 150# RF 4.5 MM THICK 304SS SPIRAL WOUND W/GRAPHITE FILLER W/SS304 OUTER RING ASME B16.20/B16.5	1	S1P1/GR-1"	2
BOLTS				
3	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	1/2	S1P1/BS4-1/2"X65L	8
VALVES / IN-LINE ITEMS				
4	BALL 150# RF A351-CF8/304SS+PTFE FULL PORT FIRE SAFE WRENCH OPER. ASME B16.34 (VOC<100 vppm)	1	S1P1/VA-1"-4144-E	1
SUPPORTS				
5	FLANGE GROUNDING CONDUCTOR (C-401)	1	MISC/C-401	2

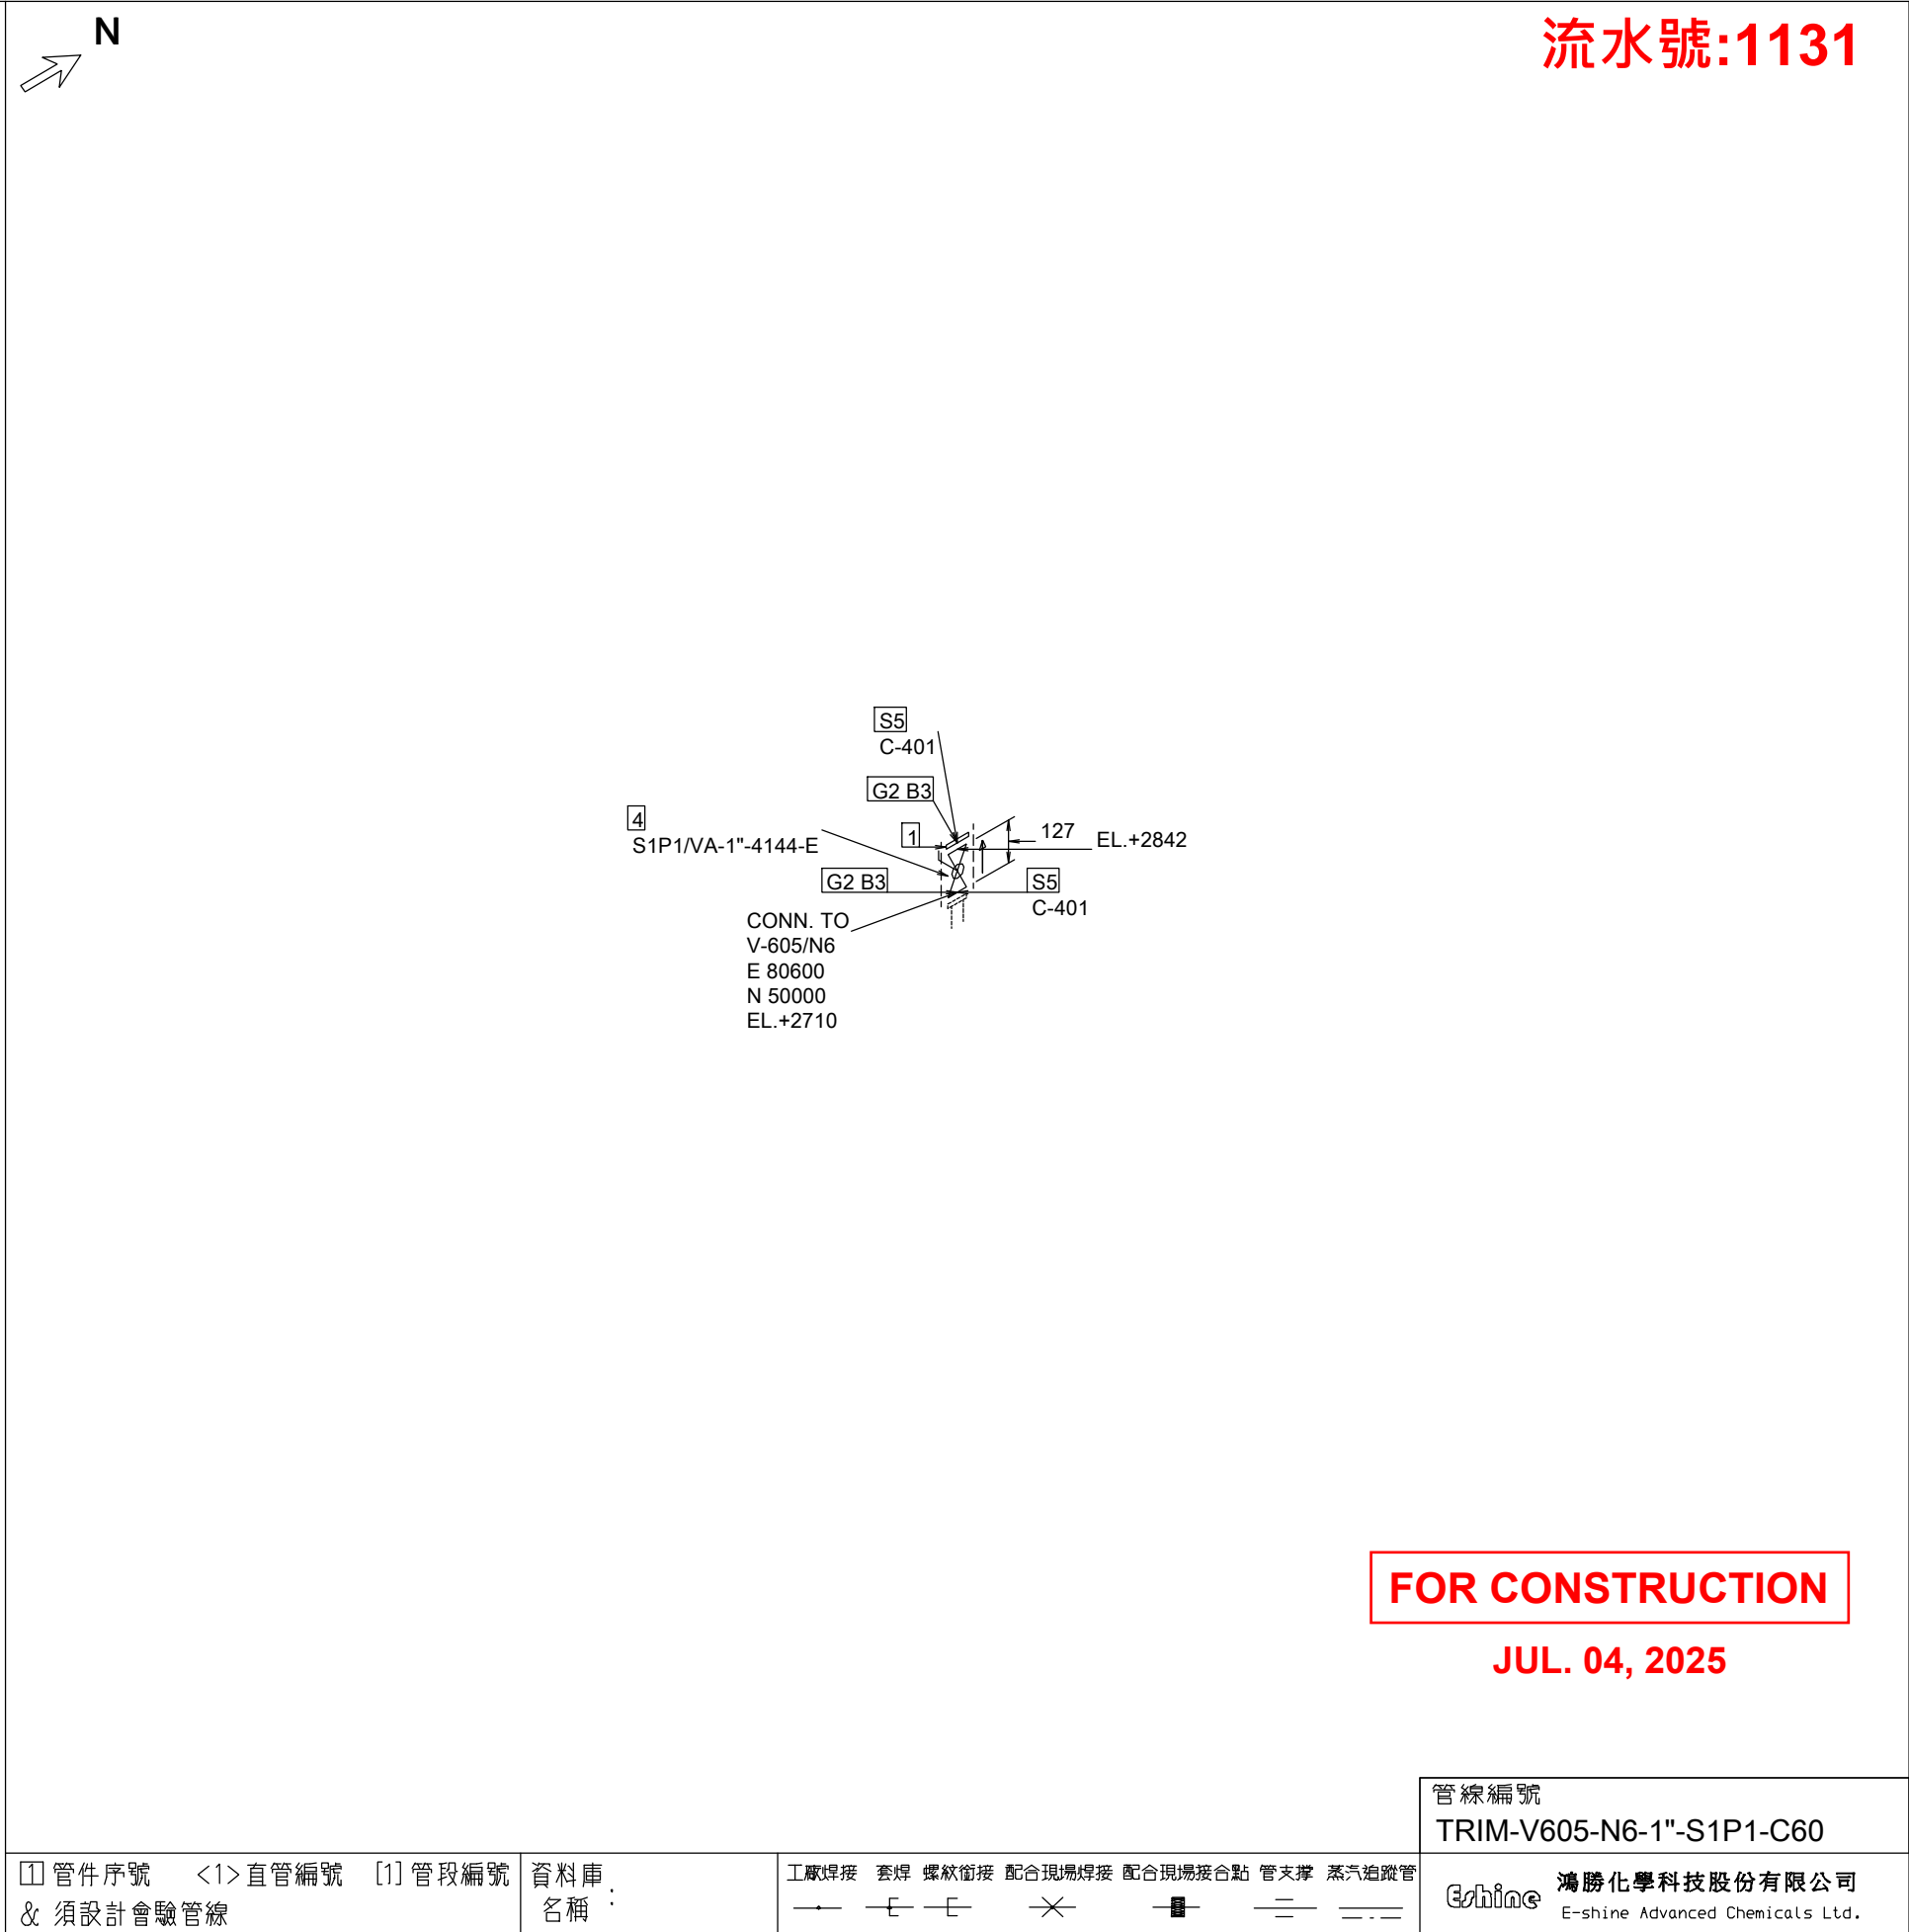

□ 管件序號 <1> 直管編號 [1] 管段編號 & 須設計會驗管線			資料庫 名稱：		工廠焊接 套焊 螺紋銜接 配合現場焊接 配合現場接合點 管支撐 蒸汽追蹤管 — — — — — — — — — —				Eshine 鴻勝化學科技股份有限公司 E-shine Advanced Chemicals Ltd.	
操作壓力: 0.05 $\frac{KG}{CM^2} G$ 操作溫度: -16~38 °C			管線等級: S1P1		製 圖 陳怡如 2025.04.21		會 策			 富台工程股份有限公司 FU-TAI ENGINEERING CO., LTD.
設計壓力: 0.14 $\frac{KG}{CM^2} G$ 設計溫度: -26~80 °C			保溫(冷)等級: C60		設 計 黃炳富 2025.04.21					
試驗基準: Air 0.18 $\frac{KG}{CM^2} G \times 60$ 分			熱追蹤等級:		審 核 陳安誠 2025.04.21					
管路塗裝:		管支撐	管 材 塗 裝 碳鋼及不銹: 鋼保溫(冷): 不銹鋼		認 可 陳逢明 2025.04.21					
焊道: 塗裝:			NDE 抽驗: 10 %		依據圖號: C2418-4-509		圖號:		檔號: TRIM-V605-N6-S1P1- 1	
									審尾一期 管線工程 1 建廠工程 立體配管圖 1	