本圖完工後請速歸還

流水號:1111

ERECTION MATERIALS

PT NO	COMPONENT DESCRIPTION	N.S. (INS)	ITEM CODE	QTY
	FLANGES			
1	FLANGE BLIND 150# RF A182-F304 ASME B16.5	3	S1P4/FBR-3"	1
	GASKETS			
2	GASKET 150# RF 3.0 MM THICK VIRGIN PTFE ZW#7500 ASME B16.21/B16.5	3	S1P4/GR-3"-ZW#7500	2
	BOLTS			
3	STUD BOLT A193 GR.B8 W/ TWO HEX. HEAD HEAVY NUT A194 GR.8 ASME B1.1 B18.2.2	5/8	S1P4/BS4-5/8"X95L	8
	VALVES / IN-LINE ITEMS			
4	BALL 150# RF A351-CF8/304SS+PTFE FULL PORT FIRE SAFE WRENCH OPER. ASME B16.34 (VOC<100 vppm)	3	S1P4/VA-3"-4144-E	1
	SUPPORTS			
5	FLANGE GROUNDING CONDUCTOR (C-501)	3	MISC/C-501	2

N

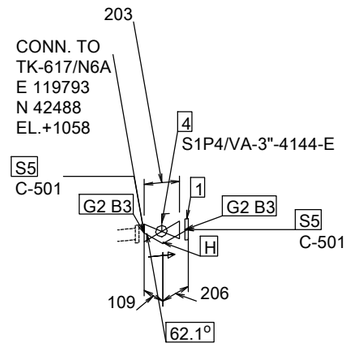

FOR CONSTRUCTION

JUL. 04, 2025

△					
△					
0	2025.07.03	FOR CONSTRUCTION	黃炳富	陳逢明	
A	2025.04.21	FOR APPROVAL	黃炳富	陳逢明	
序次	日期	修改說明	修改	認可	

△ 會簽

分配 △ △

[1] 管件序號 <1> 直管編號 [1] 管段編號 & 須設計會驗管線

操作壓力: 0.05 KG/CM²G 操作溫度: 38 ℃

設計壓力: 0.14 KG/CM²G 設計溫度: 80 ℃

試驗基準: Air 0.18 KG/CM²G X 60 分

管路塗裝:

焊道:
塗裝:

管支撐

管材塗裝
碳鋼及不銹鋼:
保溫(冷):
不銹鋼:

資料庫名稱:

管線等級: S1P4

保溫(冷)等級:

熱迫縱等級:

焊接基準:

NDE 抽驗: 10 %

工廠焊接 套焊 螺紋銜接 配合現場焊接 配合現場接合點 管支撐 蒸汽迫蹤管

會簽			
製圖	陳怡如	2025.04.21	
設計	黃炳富	2025.04.21	
審核	陳安誠	2025.04.21	
認可	陳逢明	2025.04.21	

依據圖號: C2418-4-512

圖號:

管線編號
TRIM-TK617-N6A-3"-S1P4

Eshine 鴻勝化學科技股份有限公司
E-shine Advanced Chemicals Ltd.

富台工程股份有限公司
FU-TAI ENGINEERING CO., LTD.

崙尾一期建廠工程

管線工程
立體配管圖

1/1

檔號: TRIM-TK617-N6A-S1P4- 1