



RV Educational Institutions ®
RV College of Engineering ®

Autonomous
Institution Affiliated
to Visvesvaraya
Technological
University, Belagavi

Approved by AICTE,
New Delhi

Go, change the world

DEPARTMENT OF ELECTRONICS AND COMMUNICATION ENGINEERING

Academic Year: 2023-24

**Microwave and Radiating Systems
18EC72**

**UG Laboratory Manual and Observation Book
(Autonomous scheme 2018)**

RV COLLEGE OF ENGINEERING®, Bengaluru-59

(Autonomous Institution affiliated to VTU, Belagavi)

Department of Electronics and Communication Engineering

SCHEME OF CONDUCT AND EVALUATION

| | |
|----------------------------|----------------------------|
| CLASS: VII SEMESTER | CIE MARKS (Max): 50 |
| YEAR: 2023-24 | SEE MARKS (Max): 50 |
| | SEE: 03 Hrs |

| Expt No | Title | Page No | Duration in Hrs | Max Marks | Marks obtained | Staff signature |
|---|--|---------|-----------------|------------|----------------|-----------------|
| Hardware (X-Band and C-Band) Experiments | | | | | | |
| 1 | Study of Mode Curves of Reflex Klystron Source(X-band) | 1 | 2.5 | 10 | | |
| 2 | Radiation Characteristics of Pyramidal Horn Antenna and Microstrip Patch (X-band) | 6 | 2.5 | 10 | | |
| 3 | Characterization of Microwave Directional Coupler, Power divider, Hybrid coupler and Ring resonator (Strip line type, C-band) | 13 | 2.5 | 10 | | |
| 4 | Characterization of Microwave Magic Tee, Directional Coupler, Circulator, Tunable Attenuator and Isolator (Waveguide type, X-band) | 22 | 2.5 | 10 | | |
| Design & Simulation Experiments in HFSS and Matlab | | | | | | |
| 5 | Design simulation of micro strip line and and Hybrid Ring using HFSS | 29 | 2.5 | 10 | | |
| 6 | Design and Simulation of Rectangular Waveguide and Waveguide Magic-Tee and using HFSS | 55 | 2.5 | 10 | | |
| 7 | Design and Simulation of Patch Antenna and Optimetrics using HFSS | 88 | 2.5 | 10 | | |
| 8 | Performance Analysis of Rayleigh and Rician Fading Channel Models | 125 | 2.5 | 10 | | |
| 9 | Simulation of Alamouti Space Time Block Code (STBC) in Rayleigh Fading Channel | 135 | 2.5 | 10 | | |
| 10 | Simulation of OFDM Transmission and Reception | 142 | 2.5 | 10 | | |
| | Total Record Marks Obtained | | | 100 | | |
| Demonstration | | | | | | |
| 11 | Characterization of Lowpass, bandpass and band stop filters (C-Band) | | | | | |
| 12 | Illustration of RADAR Range / Target Detection | | | | | |
| | Record Marks | | | 40 | | |
| | Lab Test | | | 10 | | |
| | Final Assessment | | | 50 | | |

RV COLLEGE OF ENGINEERING[®], Bengaluru-59

(Autonomous Institution affiliated to VTU, Belagavi)

Department of Electronics and Communication Engineering



Laboratory Certificate

This is to certify that Mr. / Ms _____
_____ has satisfactorily completed the course of Experiments
in Microwave and Radiating systems lab (16EC71) course prescribed by the Department
during the year _____

USN No.: _____ Semester: _____

| Marks | |
|---------|----------|
| Maximum | Obtained |
| 50 | |

| Marks in words |
|----------------|
| |

Signature of the staff in-charge

Head of the Department

Date:

Course Outcomes:

On completion of the course the student will be able to:

- CO1. Explain and summarize the working of transmission line, Waveguides, Microwave Passive Devices and Antennas.
- CO2. Analyze wave propagation in transmission line, Waveguides and characterize the passive microwave components and Antennas.
- CO3. Design the transmission lines, passive microwave components and Antennas for given specification and also match the impedance.
- CO4. Evaluate S-Parameter, VSWR for transmission lines, Microwave components and radiation pattern for Antennas.

CO-PO Mapping

| | PO1 | PO2 | PO3 | PO4 | PO5 | PO6 | PO7 | PO8 | PO9 | PO10 | PO11 | PO12 |
|-----|------------|------------|------------|------------|------------|------------|------------|------------|------------|-------------|-------------|-------------|
| CO1 | H | M | H | M | L | M | M | - | L | L | - | M |
| CO2 | M | M | H | M | L | M | M | - | L | L | - | M |
| CO3 | H | M | H | M | L | M | M | - | L | L | - | M |
| CO4 | M | M | H | M | L | M | M | - | L | L | - | M |

Rubrics for Evaluation

| Sl.No | Criteria | Excellent | Good | Average | Max Score |
|-------------------------------|--|------------------|-------------|----------------|------------------|
| Data sheet | | | | | |
| A | Problem statement | 9-10 | 6-8 | 1-5 | 10 |
| B | Design & specifications | 9-10 | 6-8 | 1-5 | 10 |
| C | Expected output | 9-10 | 6-8 | 1-5 | 10 |
| Record | | | | | |
| D | Simulation/ Conduction of the experiment | 14-15 | 11-13 | 1-10 | 15 |
| E | Analysis of the result. | 14-15 | 11-13 | 1-10 | 15 |
| Viva | | | | | |
| Total | | | | | |
| Scale down to 10 marks | | | | | |

EXPERIMENT 1

Study of Mode Curves of Reflex Klystron Source

Topic Learning Objectives:

The student must be able to:

1. Demonstrate the working of Reflex Klystron operating in X band.
 2. Plot the modes of Reflex Klystron; determine parameters such as Transit time, Electronic tuning range, Sensitivity, Peak output power for different modes, and Frequency variation for any one mode.
 3. Use reflex klystron as source for microwave devices such as antennas, waveguide Tee's, couplers etc.
- 1. AIM:** To conduct a suitable experiment on Reflex klystron to plot its mode curves and determine its Transit time, Electronic tuning range, Sensitivity, Peak output power for different modes and frequency variation for any one mode.
- 2. EQUIPMENT REQUIRED:** Klystron power supply, Isolator, Frequency meter, Variable attenuator, X-band detector, Waveguide-to-BNC adaptor and CRO/ VSWR meter.
- 3. THEORY:** Reflex klystron is a single cavity klystron that can operate in the frequency range of 1 to 25GHz and with an output power of up to 500mW. It is widely used in a local oscillator, in a microwave receiver of Doppler radars and missile systems. The principle behind a reflex klystron is that a fraction of the output power is feedback to the input cavity and if the loop gain has a magnitude of unity with a phase shift of multiple of 2π , then the klystron will oscillate.

The Repeller electrode is at a negative potential. It stops the movement of the electrons, turn them around, and send them back through the resonator gap. As the repelled electrons re-enter the resonator, they give up their kinetic energy. The field excited in the resonator adds in phase with the initial modulating field such that it reinforces the next wave of electron bunching. As a result, this energy serves as a regenerative feedback to sustain the oscillation at the resonant frequency of the resonator. This is the case only if the Repeller voltage is set such that the travel time, t_o , for the electrons to complete their travel through the gap, turn around, and back through the gap, satisfy the following condition:

$$t_o = \left[n + \frac{3}{4} \right] T \quad n = 1, 2, 3, \quad (1.1)$$

Where T is the period of the RF waveform

If the voltage between the resonator and the Repeller is V_r , and the distance is d , the deceleration or retardation experienced by the electron may be expressed as

$$a = \frac{e V_r / d}{m} \quad (1.2)$$

Where ‘e’ is charge of electron and ‘m’ mass of electron. If an electron leaves the resonator with velocity v_o , the displacement of the electron from the resonator, at any time t , is

$$x = v_o t - \frac{1}{2} a t^2 \quad (1.3)$$

4. BLOCK DIAGRAM:

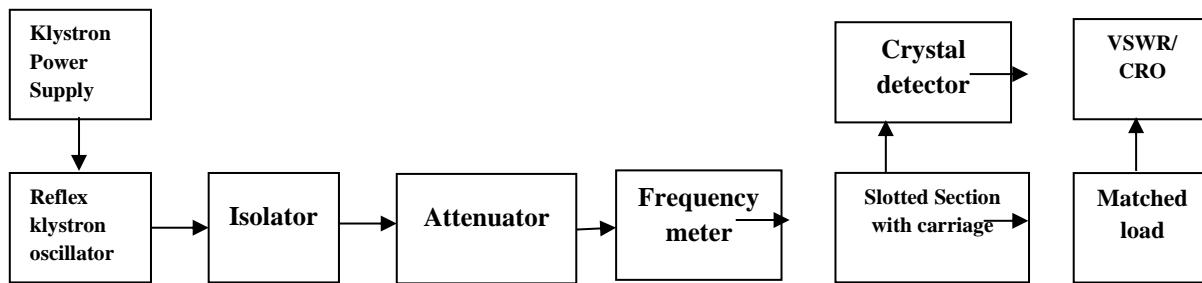


Figure1.1: Experimental setup of a reflex klystron oscillator

5. PROCEDURE:

1. Equipment's are connected as shown in the Fig. 1.1.
2. Keep the repeller voltage knob at maximum (more negative), beam voltage knob at minimum before switching on power supply and switch on the fan.
3. Switch on klystron power supply and increase the beam voltage to 250V. Note down beam current.
4. Adjust the repeller voltage and detector knob to get maximum output on CRO/SWR meter keeping frequency meter detuned.
5. Repeller voltage is slowly reduced in steps of 5V and at each step note down the output voltage on CRO or output power on SWR meter along with frequency in frequency meter.
6. To measure operating frequency, the frequency meter is tuned to get the dip on the CRO and frequency is read directly from the frequency meter.
7. To find the guided wave length, move the carriage on the slotted line to get the maximum output and note down the reading on the scale on slotted line and Vernier scale, say d_1 in cm. Move the carriage to the right or to the left to get the next maximum output position, say d_2 in cm.

The guide wave length

$$\lambda_g = 2(d_1 - d_2) \quad \text{cm}$$

8. Repeat step 6-7 note down the repeller voltage, power and frequency for different modes. Tabulate the readings.
9. Calculate the mode number, transit time of each mode, electronic tuning range and electronic tuning sensitivity. Sample calculation is shown in Appendix 1.
10. Plot the output power vs repeller voltage to get mode curves. Also plot the frequency vs repeller voltage. Expected graphs are shown in fig 1.2.

11. For dominant TE₁₀ mode in rectangular waveguide λ_0 , λ_g and λ_c are related as below

$$\frac{1}{\lambda^2_0} = \frac{1}{\lambda^2_g} + \frac{1}{\lambda^2_c} \quad \text{-----} \quad \text{Eq 1}$$

Where

λ_0 , wavelength in free space in m

λ_g , guided wavelength in waveguide in m

λ_c , cut-off wavelength in waveguide in m

Measure the cut-off wavelength of TE₁₀ mode by $\lambda_c=2a$ where a is broad dimension of waveguide

12. The guide wave length is $\lambda_g = 2(d_1 - d_2)$ in m, From eqn 1, the λ_0 is calculated.

The operating frequency inside waveguide is $f_0 = c/\lambda_0$ which can be verified by measured frequency in frequency meter.

6. TABULAR COLUMN:

| | | | | |
|--|--|--|--|--|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

CAUTION

Even though there should be little danger from microwave radiation hazards in the lab, the following work habits are recommended whenever working with RF or microwave equipment:

- i. *Never look into the open end of a waveguide or transmission line that is connected to other equipment.*
- ii. *Do not place any part of your body against the open end of a waveguide or transmission line.*
- iii. *Turn off the microwave power source when assembling or disassembling components.*

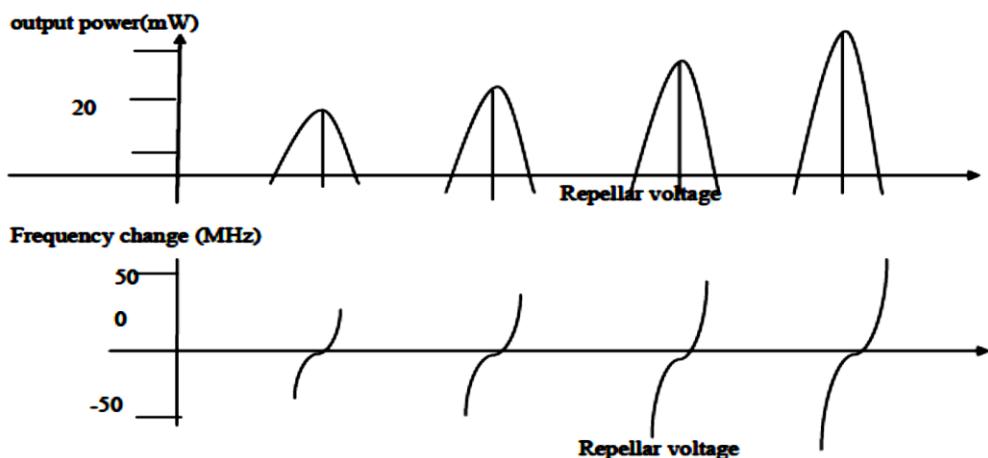


Figure 1.2: Expected Mode curves of a klystron

7. RESULT

| Mode No. | Case(1) | Case(2) |
|-------------------------------|---------|---------|
| Transit time | | |
| Electronic tuning Range | | |
| Electronic tuning sensitivity | | |

Observations:

| Sl.No | Criteria | Max Marks | Marks obtained |
|-------------------------------|--|-----------|----------------|
| Data sheet | | | |
| 1 | Problem statement | 10 | |
| 2 | Design & specifications | 10 | |
| 3 | Expected output | 10 | |
| Record | | | |
| 4 | Simulation/ Conduction of the experiment | 15 | |
| 5 | Analysis of the result | 15 | |
| 6 | Viva | 40 | |
| 7 | Total | 100 | |
| Scale down to 10 marks | | | |
| Staff Signature: | | | |

EXPERIMENT 2

Radiation Characteristics of Pyramidal Horn Antenna and Microstrip Patch (X-band)

Topic Learning Objectives:

The student must be able to:

1. Measure the radiation pattern of horn antenna in both principal planes
2. Determine the various parameters like Beamwidth, directivity
3. Apply Friss transmission formula to determine Gain of horn antenna
4. Compare theoretical values of Beamwidth, directivity and Gain with practical values

1. **AIM:** To measure the antenna parameters, Radiation pattern, determine half power beamwidth and directivity of Horn Antenna and carry out Gain measurements using method of comparison.

2. **EQUIPMENTS REQUIRED:** Klystron power supply, Isolator, Frequency meter, Variable attenuator, X-band detector, Horn antenna (2no's), Waveguide-to-BNC adaptor and Oscilloscope, Power meter.

3. **THEORY:** Horn antenna is flared out or opened out waveguide whose main function is to produce a uniform phase wavefront with larger aperture compared to waveguide.

Horn antennas were constructed as early as 1897 by J C Bose.

The rectangular horn flares out of a rectangular or square waveguide with flat metal walls. Figure 3.1 shows the horn geometry; the pyramidal horn antenna is fed from a rectangular waveguide of interior dimensions ' a ' and ' b '. The aperture is of width ' A ' in the H-plane and height ' B ' in the E-plane.

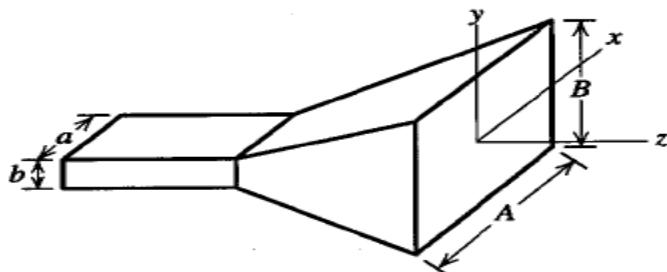


Figure 2.1: Overall geometry of Pyramidal horn antenna

The figure 3.2 (a, b) shows the Cross section through the xz-plane (H-plane), Cross section through the yz-plane (E-plane) respectively for Horn antenna. Where R_1, R_2 are axial length of horn antenna from throat to aperture in H-plane and E-plane respectively and l_h and l_e are axial lengths in H-plane and E-plane respectively.

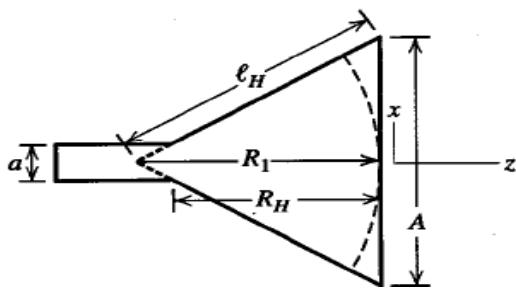


Figure 2.2(a)
Cross section through the xz-plane (H-plane).

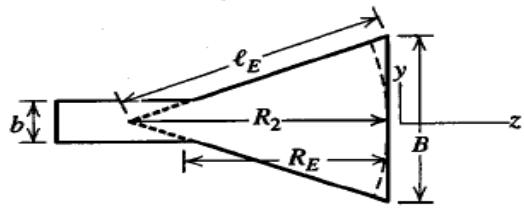


Figure 2.3(b)
Cross section through the yz-plane (E-plane).

The normalized radiation pattern of Horn antenna

For H-Plane, $\phi = 0$

$$F_H(\theta) = \frac{1 + \cos(\theta)}{2} f_H(\theta) \quad \text{Where } f_H(\theta) \propto \int_{-\frac{A}{2}}^{\frac{A}{2}} \cos\left(\frac{\pi x^1}{A}\right) e^{-j\beta\sqrt{(R_1)^2 + (x^1)^2}} e^{j\beta \sin \theta x^1} dx^1 \quad (3.1)$$

For E-Plane $\phi = 90^\circ$

$$F_E(\theta) = \frac{1 + \cos(\theta)}{2} f_E(\theta) \quad \text{Where } f_E(\theta) \propto \int_{-\frac{B}{2}}^{\frac{B}{2}} e^{-j\beta\sqrt{(R_2)^2 + (y^1)^2}} e^{j\beta \sin \theta y^1} dy^1 \quad (3.2)$$

The half-power beamwidth relationship for the optimum horn is as follows

$$\theta_E = 54 \frac{\lambda}{B} \quad (\text{for E-plane}) \quad \theta_H = 78 \frac{\lambda}{A} \quad (\text{for H-plane}) \quad (3.3)$$

The gain of an optimum gain pyramidal horn is

$$G = 0.51 \left(\frac{4\pi}{\lambda^2} \right) AB \quad (3.4)$$


The Directivity of an optimum gain pyramidal horn is

$$D = \frac{41253}{\theta_E \theta_H} \quad (3.5)$$

MICROSTRIP PATCH ANTENNA:

Microstrip patch antennas are low profile, conformable to planar and nonplanar surfaces, simple and inexpensive to manufacture using modern printed-circuit technology, mechanically robust when mounted on rigid surfaces, compatible with MMIC designs, and when the particular patch shape and mode are selected. They are very versatile in terms of resonant frequency, polarization, pattern, and impedance.

Microstrip patch antennas are analyzed using the transmission-line and cavity models. In the cavity model, a rectangular microstrip antenna can be represented as an array of two radiating narrow apertures (slots), each of width W and height h , separated by a distance L . The transmission-line model shown in Figure 8.1(a) represents the microstrip antenna by two slots, separated by a low-impedance Z_c , transmission line of length L . The dimensions of the patch are finite along the length and width; the fields at the edges of the patch undergo fringing. This is illustrated along the length in Figure 5.1(b) for the two radiating slots of the microstrip antenna, same applies along the width. The amount of fringing is a function of the dimensions of the patch and the height of the substrate. For the principal E-plane (xy-plane) fringing is a function of the ratio of the length of the patch L to the height h of the substrate (L/h) and the dielectric constant ϵ_r of the substrate.

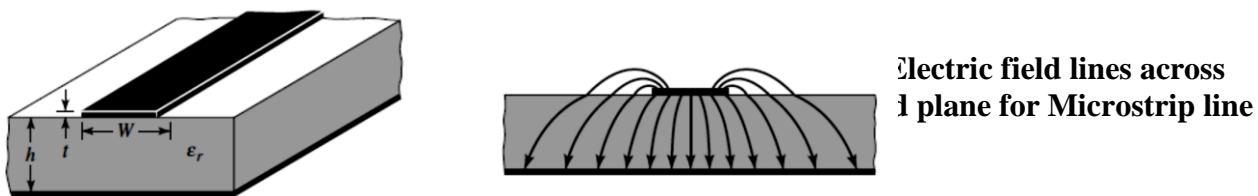

The normalized radiation pattern of Microstrip patch antenna is

For E-Plane, $-90 \leq \phi \leq 90; \theta = 90$

$$E(\phi) = \frac{\sin\left(\frac{k_o h}{2} \cos \phi\right)}{\frac{k_o h}{2} \cos \phi} \sin \phi$$

For H-Plane, $0 \leq \theta \leq 180; \phi = 0$

$$E(\theta) = \sin \theta \frac{\sin\left(\frac{k_o h}{2} \sin \theta\right)}{\frac{k_o h}{2} \sin \theta} \frac{\sin\left(\frac{k_o W}{2} \sin \theta\right)}{\frac{k_o W}{2} \sin \theta}$$

4. BLOCK DIAGRAM:

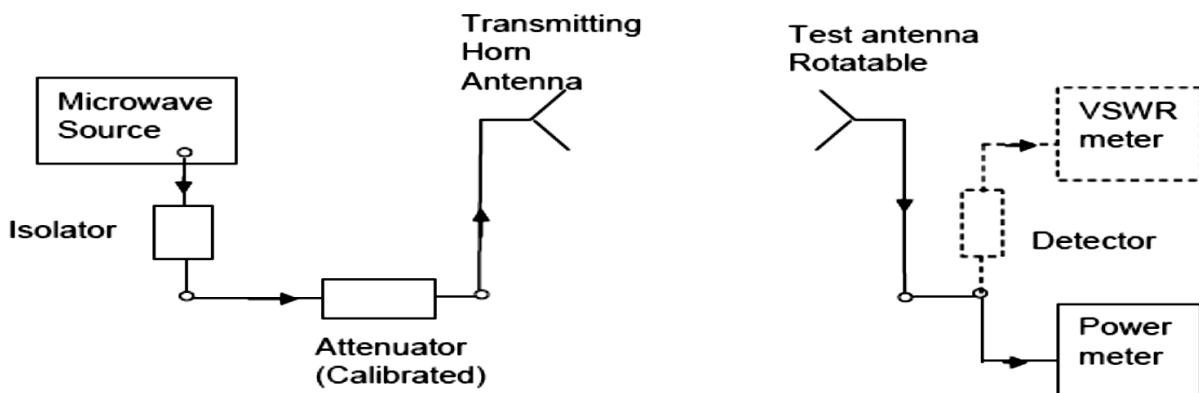


Figure 2.5: Experimental setup for radiation pattern measurement

5. PROCEDURE:

1. Experimental setup is shown in Fig3.3. Switch on the Klystron power supply and adjust the beam voltage to 250V and keep the Repeller voltage knob to maximum position (More negative).
2. Connect the detector output to CRO and observe the square wave. Adjust the Repeller voltage, AM knob and slotted carriage to get maximum output on the CRO.
3. Note down the voltage on CRO and calculate corresponding power(P_t), or Connect the detector to power meter and measure the power in dBm
4. To find the operating frequency (f_0) of horn antenna, tune the frequency meter till a dip in the square wave is observed. Read the corresponding frequency from the frequency meter; Also calculate operating wavelength(λ_0)
5. Remove the detector and connect the transmitting horn antenna as shown in figure 3.3. Set transmitting and receiving horn antennas in zero degree alignment separated by distance $\geq \frac{2D^2}{\lambda}$ (far field), where 'D' is the maximum dimension of Horn antenna.
6. Align both transmitting and receiving antennas in H-plane (co-polarization).
7. Rotate the receiving antenna in steps of 5^0 on both sides (clockwise and anticlockwise) and note down the corresponding power received (P_r) and tabulate the readings.
8. Using 90 deg – twister waveguide section, change the transmitting and receiving antenna to E-plane co-polarization.
9. Repeat step 7.
10. Plot the horn antenna radiation pattern for both E-plane and H-plane.
11. Determine half power Beamwidth using the plot of step 10; calculate Directivity using equation (3.5).
12. Calculate the theoretical values of half power Beamwidth using equation (3.3); calculate Gain, Directivity using equation (3.4), (3.5) respectively.
13. Mount the microstrip patch antenna (receiving antenna) on a rotatable stand.
14. Keep the distance between the two antennas sufficiently large such that they are in the far-field zone. Set the antennas for measurement in the E-plane.
15. Set the source to the frequency at antennas resonant frequency at which the radiation pattern is to be measured. Align the two antennas for maximum reading on the power meter. This is the peak position of the main beam. Note this power as the reference level say P_r at 0^0 position.
16. The E-plane and H-plane orientations of microstrip patch and printed dipole antenna (Receiving antennas) with respect to transmitting horn antenna are shown in fig 3.5.
17. Rotate the test (receiving) antenna clockwise in small steps (5^0 or 10^0) to 90^0 and note the readings on the power meter at every step (in tabular column).
18. Return to the 0^0 position. The power meter should read the reference level power. Repeat the measurements by rotating the antenna anti-clockwise in small steps till -90^0 and record the readings at every step. Plot the E-plane radiation pattern.

19. Repeat the measurements for the H-plane and plot the radiation pattern. Determine HPBW in both planes.
20. Calculate gain of an antenna from Friis transmission formula $G = \frac{4\pi R}{\lambda_0} \sqrt{\frac{P_r}{P_t}}$ where P_t, λ_0 , and P_r are measured in step 3, 4, 7 respectively and R is separating distance between transmitter and receiver.
21. Expected radiation pattern of a pyramidal horn antenna is shown in figure 3.4.

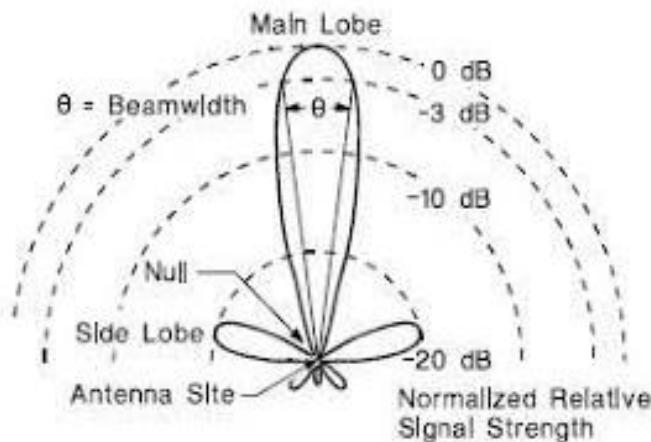


Figure 2.6. Principal Plane patterns for optimum pyramidal horn / Patch antenna

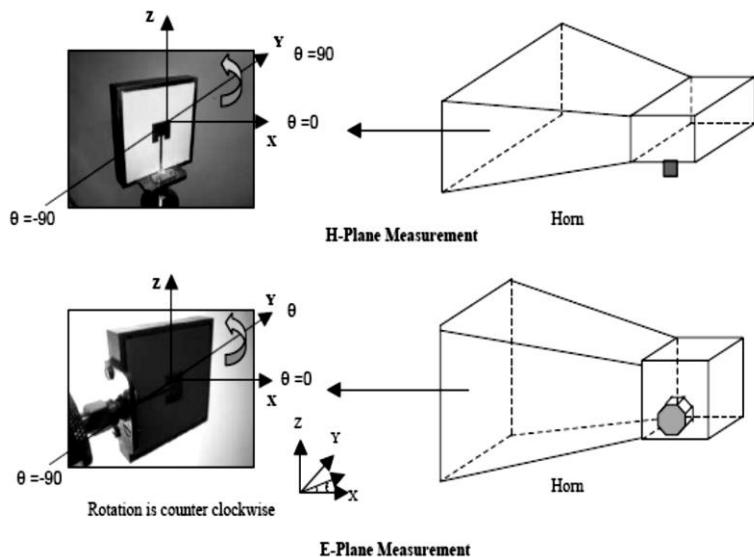


Figure 2.7. Orientation for E- and H-plane of rectangular microstrip patch antenna and Horn antenna

6. Tabular column :

| | HORN antenna | | | | PATCH Antenna | | | |
|-----------------|------------------|-------|------------------|-------|------------------|-------|------------------|-------|
| | Power in E plane | | Power in H plane | | Power in E plane | | Power in H plane | |
| Angle (degrees) | Left | Right | Left | Right | Left | Right | Left | Right |
| 0 | | | | | | | | |
| 5 | | | | | | | | |
| 10 | | | | | | | | |
| 15 | | | | | | | | |
| 20 | | | | | | | | |
| 25 | | | | | | | | |
| 30 | | | | | | | | |
| 35 | | | | | | | | |

RESULT

| Parameters | HORN Antenna | PATCH Antenna |
|--|--------------|---------------|
| The transmitted power (Pt) | | |
| The Operating frequency | | |
| The Operating wavelength | | |
| The separating distance between transmitter and receiver (R) | | |
| The received power (Pr) | | |
| Antenna Parameters | Theoretical | Practical |
| Half power Beamwidth(θ_E) | | |
| Half power Beamwidth(θ_H) | | |
| Gain | | |
| Directivity | | |

Basic precautions to be taken:

1. Power flowing out of horn antenna may damage the retina of the eye, **do not see directly inside the horn antenna.**
2. Materials present in the vicinity of the experimental setup may be absorbing ones. Keep reflecting objects away from the experimental setup.

Observations:

| Sl.No | Criteria | Max Marks | Marks obtained |
|-------------------------------|--|-----------|----------------|
| Data sheet | | | |
| 1 | Problem statement | 10 | |
| 2 | Design & specifications | 10 | |
| 3 | Expected output | 10 | |
| Record | | | |
| 4 | Simulation/ Conduction of the experiment | 15 | |
| 5 | Analysis of the result | 15 | |
| 6 | Viva | 40 | |
| 7 | Total | 100 | |
| Scale down to 10 marks | | | |
| Staff Signature: | | | |

EXPERIMENT 3

Characterization of Ring Resonator, Power Divider, Directional Coupler and Hybrid Ring (Strip line type, C-band)

Topic Learning Objectives:

The student must be able to:

1. Characterize microwave devices (strip-line type) such as ring resonator, power divider, directional coupler and hybrid coupler.

2. Determine the various parameters like power division, isolation and insertion loss etc.

1.AIM: To characterize the microwave passive components at C-band range of frequencies.

2.EQUIPMENTS REQUIRED: RF Signal source, power meter/VSWR meter, ring resonator, power divider, directional coupler and hybrid coupler.

3.THEORY:

Ring resonator

The ring resonator is known as a simple printed resonator that is useful for making approximate measurement of dielectric constant. Additionally, it is used in filters, and to an extent in antennas. In principle it is a simple structure, but accurate analysis of a ring resonator is difficult because of the input and output coupling to straight microstrip printed lines. Two structures shown in Figure 3.1 are reported in the literature.

Looking at a ring resonator in isolation, it may appear that the field would be in the form of a wave circulating around in either direction, but in reality, the coupling structure plays a very important role. It may be noticed that both the structures are symmetrical. It follows that whatever voltage wave is excited in the clockwise direction, an identical voltage wave will be excited in the anti-clockwise direction as well. This gives rise to the standing wave pattern, common to resonators. The voltage maxima in both cases are located at the center of the coupled section. Looking at this behavior, it may be more accurate to look upon the ring resonator as two half-wave transmission line resonators (open ended) connected in parallel. The coupling structures disturb these open ends and shift the resonant frequency slightly.

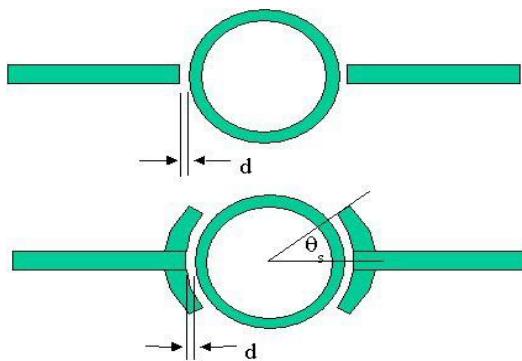


Fig 3.1. Ring resonator coupled with (a) open-ended lines and (b) with coupling arcs

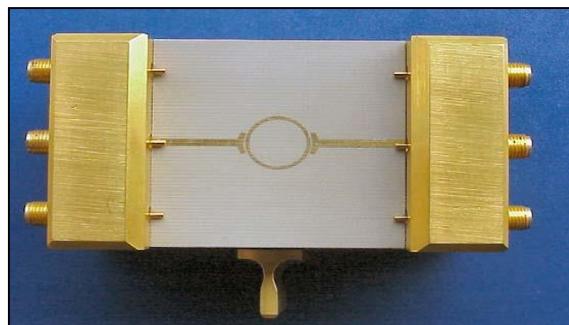


Fig. 3.2 Microstrip Ring Resonator Circuit mounted in the test jig

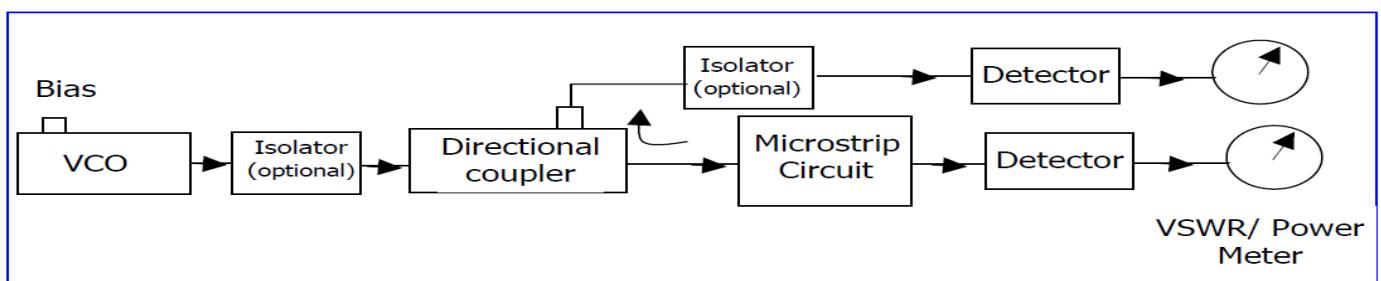


Fig. 3.3 Measurement setup based on Voltage Controlled Oscillator (VCO)

PROCEDURE:


To measure return and insertion loss characteristics of the microstrip ring resonator and determine the resonant frequency and insertion loss at the resonant frequency. Pick up the Microstrip Ring Resonator circuit board from the AMTK and mount the substrate in the test jig as shown in Figure 3.2. Here we use only the center pair of input/output SMA connectors. The circuit is now ready for testing.

1. Set up the system as shown in Figure 3.3.
2. Measure the input power fed to the Microstrip ring resonator circuit at a selected VCO frequency.
3. Measure the reflected power by noting the reading of the detector connected to the directional coupler and the forward power by noting the reading of the detector connected to the Microstrip ring resonator circuit (DUT) at the same frequency settings of the VCO.
4. Repeat the above two steps at 5-10 different frequencies by tuning the VCO.
5. Plot the transmission loss of the microstrip ring resonator.
6. From the plot, determine the resonant frequency of the microstrip ring resonator. From this, knowing that ring length= λg , calculate the effective dielectric constant and the permittivity of the substrate used. This should be 3.2.

Tabular column:

| Sl No | Frequency (GHz) | Received power (dB) |
|-------|-----------------|---------------------|
| | | |
| | | |
| | | |
| | | |
| | | |

| | | |
|--|--|--|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

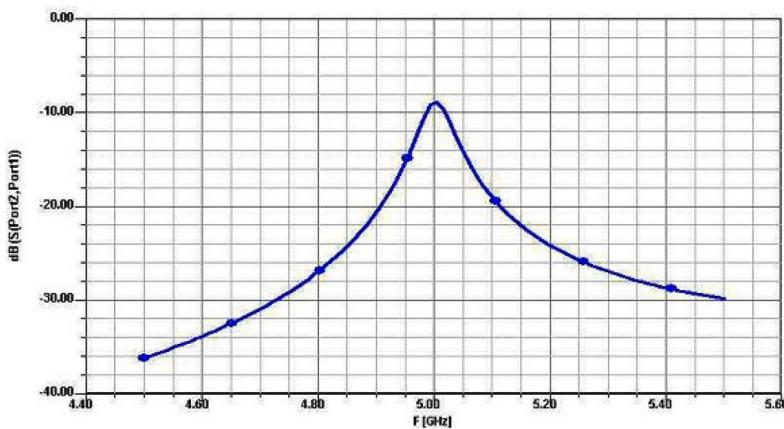Expected result:

Power divider:

The layout of a conventional T-junction power divider in microstrip configuration with input port matched is shown in Figure 3.4.

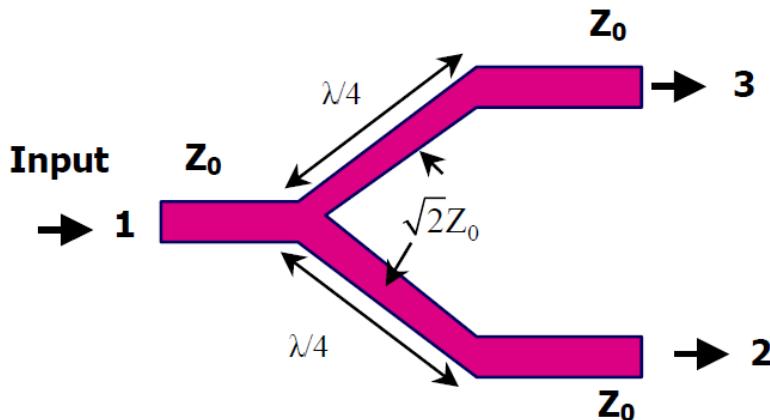


Fig. 3.4 Layout of a conventional T-junction Power Divider

The scattering parameters of this type of T-junction power divider is given by:

$$[s] = \begin{bmatrix} 0 & \frac{1}{\sqrt{2}} & \frac{1}{\sqrt{2}} \\ \frac{1}{\sqrt{2}} & s_{22} & s_{23} \\ \frac{1}{\sqrt{2}} & s_{32} & s_{33} \end{bmatrix}; s_{23} = s_{32}$$

Applying unitary conditions, we get

$$s_{22} = -s_{23}$$

$$|s_{22}| = |s_{33}| = -|s_{23}| = \frac{1}{2}$$

This clearly shows that it is impossible to match all the three ports of this type of power divider. The layout of the modified power divider (Known as the Wilkinson power divider) in which all the three ports are perfectly matched at the centre frequency is shown in Figure 3.5. An isolation resistance of $2Z_0$ is added between ports 2 and 3.

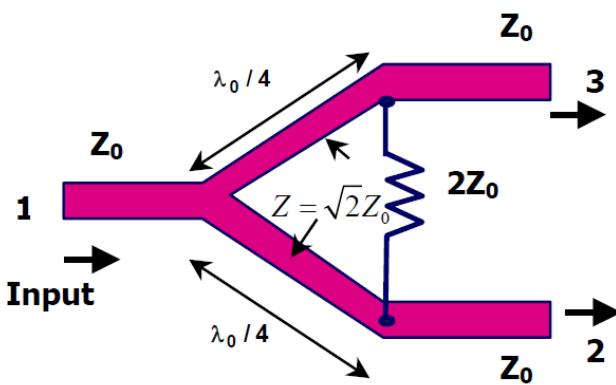


Fig. 3.5 Layout of the modified T-junction Power Divider

The scattering parameters of the modified power divider at center frequency are given by

$$[s] = \frac{1}{\sqrt{2}} \begin{bmatrix} 0 & 1 & 1 \\ 1 & 0 & 0 \\ 1 & 0 & 0 \end{bmatrix}$$

It is interesting to note that all the ports are simultaneously matched. Ports 2 and 3 are also perfectly isolated. This type of power divider can be used as power combiner as well. Power fed to ports 2 and 3 simultaneously gives entire power at port 1.

Procedure:

For input power fed to port 1 of the power divider, measure power coupled to ports 2 and 3 with and without the isolation resistor. Determine return loss, power split and isolation at the centre frequency for the two cases. Also, determine 20-dB isolation bandwidth for the Wilkinson power divider

1. Pick up the Microstrip power divider circuit board (without the resistor) from the **AMTK** and mount the substrate in the test jig as shown in Figure 3.6. Here, we use the middle SMA connector for connecting the input and outer two SMA connectors for connecting the two output ports. The circuit is now ready for testing.
2. Set up the system as shown in Figure 3.3. Terminate port 3 in 50-ohm matched load. Measure the input power fed to port 1 of the Microstrip power divider circuit at a selected VCO frequency.

Measure the reflected power by noting the reading of the detector connected to the directional coupler and the forward power by noting the reading of the detector connected to port 2 of the microstrip power divider circuit (DUT) shown in Figure 3.6 at the same frequency settings of the VCO.

3. Repeat the above two steps at 5-10 different frequencies by tuning the VCO.
4. Plot the power coupled to port 2 of the microstrip power divider circuit.
5. Using the same procedure, plot power coupled to port 3 (Match terminate port 2).
6. Terminate port 1 and feed power to port 2 and measure power available at port 3.
7. Now terminate port 1 with matched load and measure isolation between ports 2 and 3.
8. Determine the power split and isolation at the centre frequency.


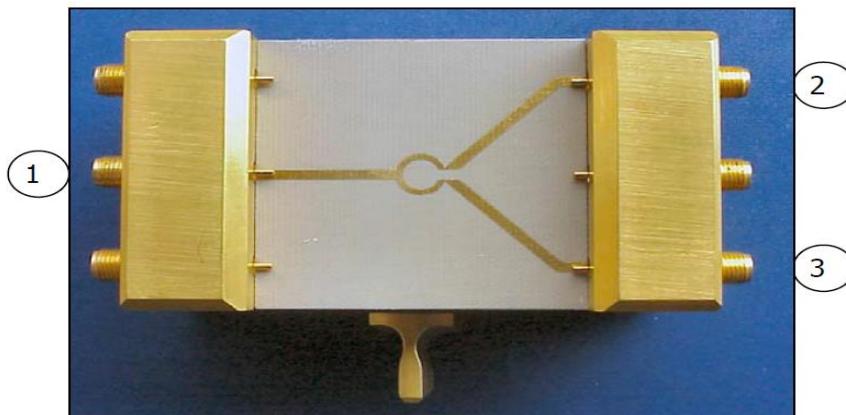


Fig. 3.6 Microstrip power divider circuit without resistor in the test jig

Tabular column:

| Sl No | Frequency (GHz) | Received power (dB) in P2, Match P3, P1=input | Received power (dB) in P3, Match P2, P1=input | Received power (dB) in P3, Match P1, P2=input |
|-------|-----------------|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Expected result:

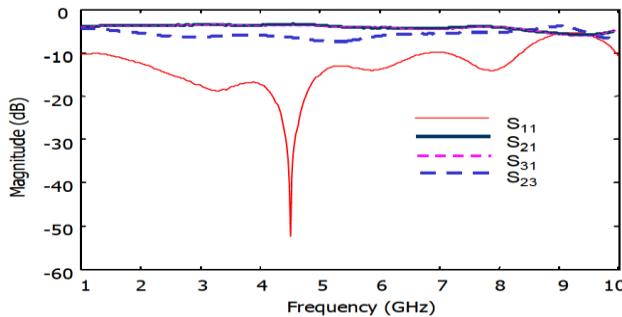

Parallel Coupled Directional Coupler

The layout of a parallel-coupled directional coupler in microstrip configuration is shown in Figure 3.7.

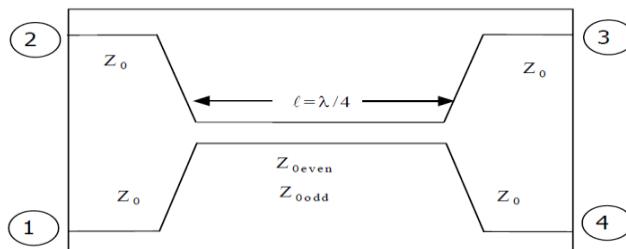


Fig. 3.7 Layout of a parallel-coupled directional coupler

The mean length ‘ l ’ of the coupled line section is quarter wavelength $\lambda_0/4$ in the transmission medium at the center frequency f_0 . All input and output lines have the same characteristic impedance $Z_0 (=1/Y_0)$. With port 1 as the input port, port 2 is the coupled port, port 4 is the direct-coupled port and port 3 is the isolated port.

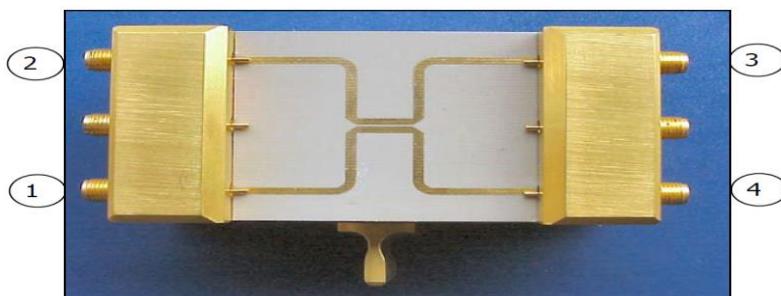


Fig. 3.8 Microstrip parallel-coupled directional Coupler mounted in the test jig

Procedure:

For input power fed to port 1 of the parallel-coupled directional coupler, measure power coupled to ports 2, 3 and 4. Determine return loss, coupling, isolation and directivity at the centre frequency. Also determine bandwidth over which coupling is 15 ± 1 dB.

1. Pick up the Microstrip parallel-coupled directional coupler circuit board from the **AMTK** and mount the substrate in the test jig as shown in Figure 3.8. Here we use the outer two pairs of input/output SMA connectors. The circuit is now ready for testing.
2. Set up the system as shown in Figure 3.3.
3. Terminate ports 3 and 4 in 50-ohm matched loads.

4. Measure the input power fed to port 1 of the Microstrip parallel-coupled directional coupler circuit at a selected VCO frequency.
5. Measure the reflected power by noting the reading of the detector connected to the directional coupler and the forward power by noting the reading of the detector connected to port 2 of the microstrip parallel-coupled directional coupler circuit (DUT) at the same frequency settings of the VCO.
6. Find the power coupled to port 2 of the microstrip parallel-coupled directional coupler circuit.
7. Using the same procedure, find power coupled to port 3 (Matched terminate ports 2 and 4) and port 4 (matched terminate ports 2 and 3)
8. Determine insertion loss, coupling and isolation at the centre frequency.

Various parameters of the coupling are given by:

$$\text{Return loss} = -20 \log_{10} |S_{11}|, \text{ Insertion Loss} = -20 \log_{10} |S_{41}|,$$

$$\text{coupling} = -20 \log |S_{21}|, \text{ Isolation} = -20 \log |S_{31}|$$

and Directivity=Isolation-Coupling.

Result:

| Sl No | Parameter(dB) |
|-------|------------------|
| 1 | Insertion loss = |
| 2 | Coupling = |
| 3 | Isolation = |
| 4 | Directivity = |

Hybrid Coupler:

Theory: The layout of a rat race hybrid coupler in microstrip configuration is shown in Figure 3.9.

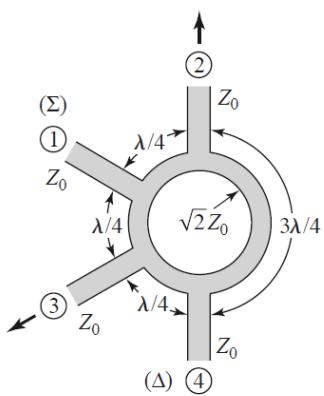


Fig. 3.9: Layout of a rat race hybrid coupler

The mean length ‘l’ of three branches is quarter wavelength $\lambda_0/4$ in the transmission medium at the center frequency f_0 , whereas, one of the branches is $3\lambda_0/4$ long. $Z_a(=1/Y_a)$ and $Z_b(=1/Y_b)$ denote the characteristic impedances of the branches as shown in the layout. All input and output lines have the same characteristic impedance $Z_0(=1/Y_0)$. The rat-race hybrid coupler can be used as power divider as well as a power combiner. With port 2 as the input port, equal phase and amplitude signals emerge from ports 1 and 4 and port 3 is isolated. With port 1 as the input port, equal amplitude signals emerge from ports 2 and 3 and port 4 is isolated. These signals have 180^0 phase shift. When used as a power combiner, signals are fed to ports 2 and 3. Difference signal is available at port 4 (Δ -port) and the sum signal is available at port 1 (Σ -port).

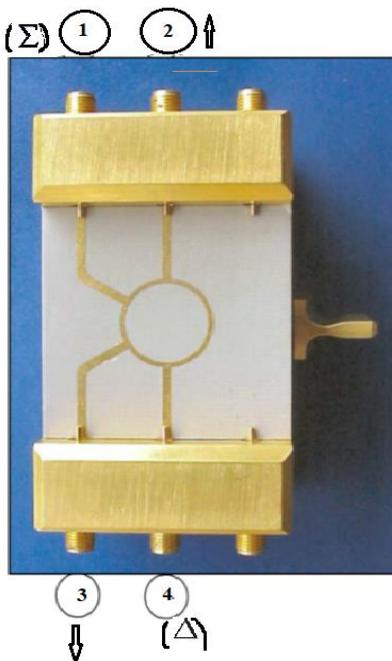


Fig. 3.10 Microstrip Rat Race Hybrid Coupler Circuit mounted in the test jig

Procedure:

Pick up the Microstrip Rat Race Hybrid Coupler circuit board from the AMTK and mount the substrate in the test jig as shown in Figure 3.10. Here we use top two pairs of input/output SMA connectors. The circuit is now ready for testing.

1. Set up the system as shown in Figure 3.3.
2. Terminate ports 3 and 4 in 50-ohm matched loads.
3. Measure the input power fed to port 1 of the Microstrip rat race hybrid coupler circuit at a selected VCO frequency.
4. Measure the reflected power by noting the reading of the detector connected to the directional coupler and the forward power by noting the reading of the detector connected to port 2 of the Microstrip rat race hybrid coupler circuit (DUT) at the same frequency settings of the VCO.
5. Determine the power coupled to port 2 of the microstrip rat race hybrid coupler circuit.
6. Using the same procedure, find the power coupled to port 3 (Match terminate ports 2 and 4) and port 4 (match terminate ports 2 and 3).

Result:

| Sl No | Parameter(dB) |
|-------|------------------|
| 1 | Insertion loss = |
| 2 | Coupling = |
| 3 | Isolation = |

Observations:

| Sl.No | Criteria | Max Marks | Marks obtained |
|-------------------------------|--|-----------|----------------|
| Data sheet | | | |
| 1 | Problem statement | 10 | |
| 2 | Design & specifications | 10 | |
| 3 | Expected output | 10 | |
| Record | | | |
| 4 | Simulation/ Conduction of the experiment | 15 | |
| 5 | Analysis of the result | 15 | |
| 6 | Viva | 40 | |
| 7 | Total | 100 | |
| Scale down to 10 marks | | | |
| Staff Signature: | | | |

EXPERIMENT 4

Characterization of Microwave Magic Tee, Directional Coupler, Circulator, Tunable Attenuator and Isolator (Waveguide type, X-band)

Topic Learning Objectives:

The student must be able to:

1. Demonstrate the working of microwave devices such as waveguide Magic Tee, Circulator, Directional Coupler, Attenuator and Isolator.
2. Determine the S parameters and losses such as isolation, insertion loss and directivity of microwave devices such as waveguide Magic Tee, Circulator, Directional Coupler, Attenuator and Isolator.
1. **AIM:** To determine S-parameters and plot S- matrix for passive microwave devices such as waveguide E-plane Tee, H-plane Tee, Magic Tee, Circulator, Directional Coupler and Isolator.
2. **EQUIPMENTS REQUIRED:** Klystron power supply, klystron oscillator, Isolator, Attenuator, Frequency meter, E-plane Tee, H-plane Tee, Magic tee, Circulator, Directional Coupler, Isolator, crystal detector, VSWR/Power meter/CRO and Matched load.

3. THEORY:

Magic Tee

A magic tee is a combination of E-plane and H-plane tee and is shown in fig 4.1.

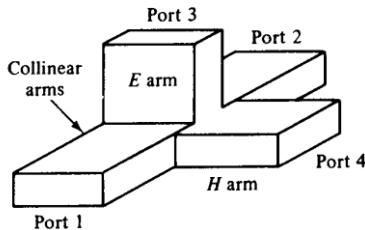


Fig 4.1: Structure of a Magic Tee

The characteristics of magic tee are:

1. If two waves of equal magnitude and same phase are fed into port 1 and port 2 the output will be zero at port 3 and additive at port 4.
2. If a wave is fed into port 4 it will be divided equally between port 1 and port 2 of the collinear arms and will not appear at port 3.
3. If a wave is fed into port 3 , it will produce an output of equal magnitude and opposite phase at port 1 and port 2. the output at port 4 is zero.
4. If a wave is fed into one of the collinear arms at port 1 and port 2, it will not appear in the other collinear arm at port 2 or 1 because the E-arm causes a phase delay while H arm causes a phase advance.

S-matrix of a Magic tee is given by

$$\mathbf{S} = \begin{bmatrix} 0 & 0 & S_{13} & S_{14} \\ 0 & 0 & S_{23} & S_{24} \\ S_{31} & S_{32} & 0 & 0 \\ S_{41} & S_{42} & 0 & 0 \end{bmatrix}$$

Applications of E-H Plane Tee

Some of the most common applications of E-H Plane Tee are as follows:

1. E-H Plane junction is used to measure the impedance – A null detector is connected to E-Arm port while the Microwave source is connected to H-Arm port. The collinear ports together with these ports make a bridge and the impedance measurement is done by balancing the bridge.
2. E-H Plane Tee is used as a duplexer – A duplexer is a circuit which works as both the transmitter and the receiver, using a single antenna for both purposes. Port 1 and 2 are used as receiver and transmitter where they are isolated and hence will not interfere. Antenna is connected to E-Arm port. A matched load is connected to H-Arm port, which provides no reflections. Now, there exists transmission or reception without any problem.
3. E-H Plane Tee is used as a mixer – E-Arm port is connected with antenna and the H-Arm port is connected with local oscillator. Port 2 has a matched load which has no reflections and port 1 has the mixer circuit, which gets half of the signal power and half of the oscillator power to produce IF frequency.

Directional coupler

Directional coupler shown in figure 4.2. Directional coupler is a device that samples a small amount of Microwave power for measurement purposes. The power measurements include incident power, reflected power, VSWR values, etc. Directional Coupler is a 4-port waveguide junction consisting of a primary main waveguide and a secondary auxiliary waveguide. The following figure shows the image of a directional coupler.


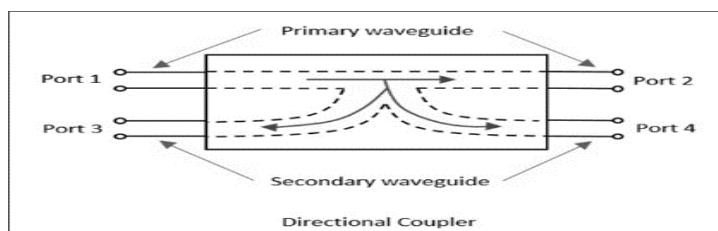


Fig4.2: Directional coupler

The properties of an ideal directional coupler are as follows.

1. All the terminations are matched to the ports.
2. When the power travels from Port 1 to Port 2, some portion of it gets coupled to Port 4 but not to Port 3. As it is also a bi-directional coupler, when the power travels from Port 2 to Port 1, some portion of it gets coupled to Port 3 but not to Port 4.
3. If the power is incident through Port 3, a portion of it is coupled to Port 2, but not to Port 1.
4. If the power is incident through Port 4, a portion of it is coupled to Port 1, but not to Port 2.
5. Port 1 and 3 are decoupled as are Port 2 and Port 4.

Ideally, the output of Port 3 should be zero. However, practically, a small amount of power called back power is observed at Port 3. The following figure indicates the power flow in a directional coupler.

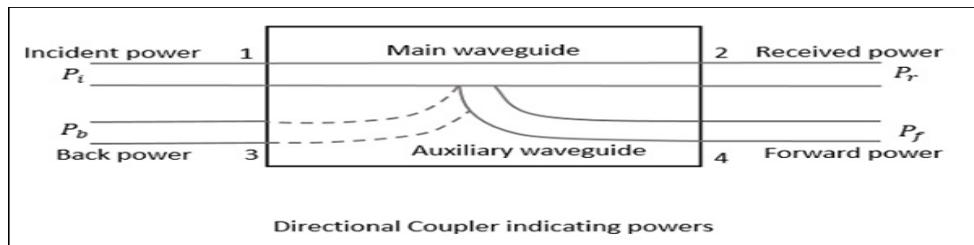

Where

P_i = Incident power at Port 1

P_r = Received power at Port 2

P_f = Forward coupled power at Port 4

P_b = Back power at Port 3

Following are the parameters used to define the performance of a directional coupler.

Coupling Factor (C)

The Coupling factor of a directional coupler is the ratio of incident power to the forward power, measured in dB.

$$C = 10 \log_{10}(P_i/P_f) \quad \text{dB}$$

Directivity (D)

The Directivity of a directional coupler is the ratio of forward power to the back power, measured in dB.

$$D = 10 \log_{10}(P_f/P_b) \quad \text{dB}$$

Isolation

It defines the directive properties of a directional coupler. It is the ratio of incident power to the back power, measured in dB.

$$I = 10 \log_{10}(P_i/P_b) \quad \text{dB}$$

Isolation in dB = Coupling factor + Directivity

BLOCK DIAGRAM:

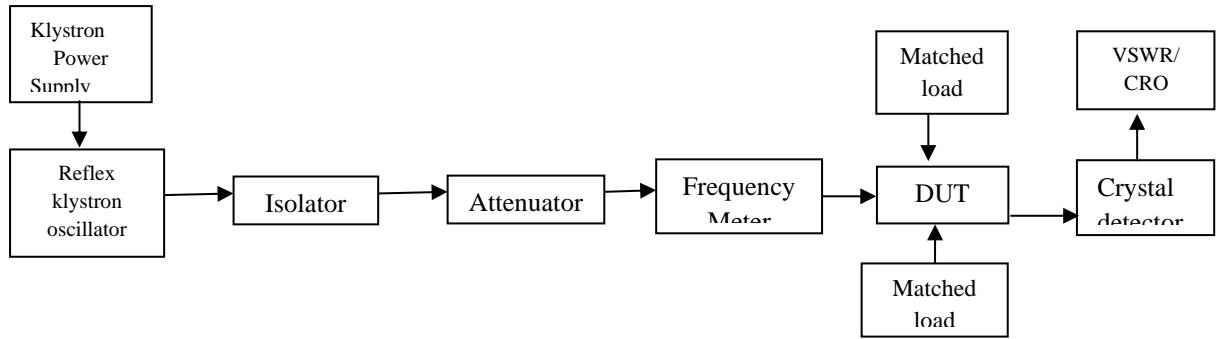


Figure 4.3: Experimental setup for determining S-matrix for passive devices.

4. Procedure:

Magic Tee

1. Equipment's are connected as shown in the Figure 4.3.
2. Keep the repeller voltage at maximum, beam voltage at minimum before switching on power supply and also switch on the fan.
3. Switch on klystron power supply and increase the beam voltage to 250V. Note down beam current.
4. Adjust the repeller voltage and detector knob to get maximum output (P_i) on CRO/SWR meter keeping frequency meter detuned.
5. Feed the microwave power at the given port and measure the output power at the required port using the CRO while terminating the other ports with matched loads.
6. The readings are noted and the parameters like insertion loss, isolation and power division are calculated using necessary equations.
7. The input power to any given can be measured by removing the magic tee and connecting the crystal detector and CRO.

Directional Coupler

1. The experimental set up is as shown in Figure 4.3.
2. Energize the microwave source for particular frequency of operation.
3. Set any reference level of power on CRO/SWR meter, and note the reading (reference level let P_1).
4. Measure the power in different ports and calculate coupling, directivity and isolation.

Results:

S-matrix of a magic tee:

| Sl No | Parameter | Value (dB) |
|-------|-----------------|------------|
| 1 | $S_{31}=S_{32}$ | |
| 2 | $S_{41}=S_{42}$ | |
| 3 | $S_{34}=S_{43}$ | |


S-matrix of a Directional Coupler

| Sl No | Parameter | Value (dB) |
|-------|-----------|------------|
| 1 | S_{12} | |
| 2 | S_{21} | |
| 3 | S_{32} | |

CIRCULATOR AND ISOLATOR

THEORY: A circulator is a ferrite device (ferrite is a class of materials with strange magnetic properties) with usually three ports circulators are non-reciprocal devices, that is, energy into port 1 predominantly exits port 2, energy into port 2 exits port 3, and energy into port 3 exits port 1. In a reciprocal device the same fraction of energy that flows from port 1 to port 2 would occur to energy flowing in the opposite direction, from port 2 to port 1. The scattering matrix for an ideal three-port circulator is

$$[S] = \begin{bmatrix} 0 & 0 & 1 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix}$$




S-Matrix of Circulator

Figure 4.4: Circulator

An isolator is a two-port device that transmits microwave or radio frequency power in one direction only. It is used to shield equipment on its input side, from the effects of conditions on its output side; for example, to prevent a microwave source being detuned by a mismatched load. An isolator is a non-reciprocal device, with a non-symmetric scattering matrix. An ideal isolator transmits all the power entering port 1 to port 2, while absorbing all the power entering port 2, its S-matrix is

$$[S] = \begin{bmatrix} 0 & 0 \\ 1 & 0 \end{bmatrix}$$



S-Matrix

Figure 4.5: Isolator

PROCEDURE:

1. Connect the components as shown in experimental set up Figure 4.3.
2. Structure of a circulator and isolator are shown in the Figure 4.4 and Figure 4.5 respectively.
3. Energize the microwave source for particular frequency of operation.
4. With the help of variable attenuator and gain control knob of VSWR meter set any power level in the CRO/SWR meter.
5. Verify the s-matrix for both circulator, isolator and attenuator.

RESULT

S-matrix of a Circulator:

| Sl No | Parameter | Value (dB) |
|-------|-----------|------------|
| 1 | S13 | |
| 2 | S21 | |
| 3 | S32 | |

$S_{12}=S_{23}=S_{31}=0$ (To verify)

S-matrix of a Isolator:

| Sl No | Parameter | Value (dB) |
|-------|-----------|------------|
| 1 | S12 | |
| 2 | S21 | |

S-matrix of a Attenuator:

| Sl No | Parameter | Value (dB) |
|-------|-----------|------------|
| 1 | S12 | |
| 2 | S21 | |

Observations:

| Sl.No | Criteria | Max Marks | Marks obtained |
|-------------------------------|--|-----------|----------------|
| Data sheet | | | |
| 1 | Problem statement | 10 | |
| 2 | Design & specifications | 10 | |
| 3 | Expected output | 10 | |
| Record | | | |
| 4 | Simulation/ Conduction of the experiment | 15 | |
| 5 | Analysis of the result | 15 | |
| 6 | Viva | 40 | |
| 7 | Total | 100 | |
| Scale down to 10 marks | | | |
| Staff Signature: | | | |

EXPERIMENT 5

Design Simulation of Micro Strip Line and Hybrid Ring Using HFSS

Topic Learning Objectives:

The student must be able to:

1. Design and simulate 50Ω microstrip line using HFSS
2. Design and simulate printed hybrid ring at a given operating frequency band using HFSS
3. Analyze the S parameters of Hybrid Ring

1. AIM: To design, simulate and analyse the S parameters of 50Ω microstrip line and Printed Hybrid Ring at a given frequency band.


2. EQUIPMENT REQUIRED: 64-bit Personal computer/Laptop, Ansys HFSS design Kit

3. THEORY:

Microstrip lines were developed at ITT laboratories and were competitors of stripline. The first microstrip lines used a relatively thick dielectric substrate, which accentuated the non-TEM mode behavior and frequency dispersion of the line. Microstrip line is one of the most popular types of planar transmission lines primarily because it can be fabricated by photolithographic processes and is easily miniaturized and integrated with both passive and active microwave devices. Then the phase velocity and propagation constant can be expressed as

$$v_p = \frac{c}{\sqrt{\epsilon_e}},$$

$$\beta = k_0 \sqrt{\epsilon_e},$$

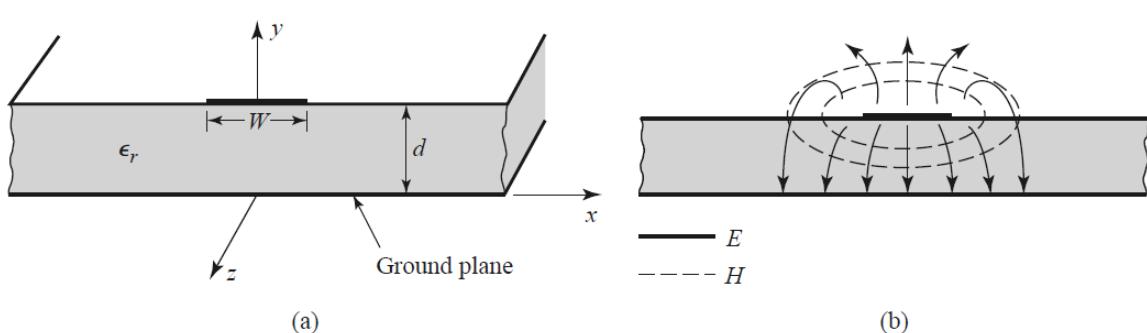

Microstrip transmission line. (a) Geometry. (b) Electric and magnetic field lines.

The effective dielectric constant of a microstrip line is given approximately by

$$\epsilon_e = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \frac{1}{\sqrt{1 + 12d/W}} \quad \dots \quad (5.1)$$

For a given characteristic impedance Z_0 and dielectric constant ϵ_r , the W/d ratio can be found as

$$\frac{W}{d} = \begin{cases} \frac{8e^A}{e^{2A} - 2} & \text{for } W/d < 2 \\ \frac{2}{\pi} \left[B - 1 - \ln(2B - 1) + \frac{\epsilon_r - 1}{2\epsilon_r} \left\{ \ln(B - 1) + 0.39 - \frac{0.61}{\epsilon_r} \right\} \right] & \text{for } W/d > 2, \end{cases} \quad \dots(5.2)$$

$$A = \frac{Z_0}{60} \sqrt{\frac{\epsilon_r + 1}{2}} + \frac{\epsilon_r - 1}{\epsilon_r + 1} \left(0.23 + \frac{0.11}{\epsilon_r} \right)$$

$$B = \frac{377\pi}{2Z_0\sqrt{\epsilon_r}}. \quad \dots(5.3)$$

The 180° hybrid junction is a four-port network with a 180° phase shift between the two output ports 2 and 3. In the 180° hybrid junction shown in Figure 9.1, a signal applied to port 1 will be evenly split into two in-phase components at ports 2 and 3, and port 4 will be isolated. If the input is applied to port 4, it will be equally split into two components with a 180° phase difference at ports 2 and 3, and port 1 will be isolated. When operated as a combiner, with input signals applied at ports 2 and 3, the sum of the inputs will be formed at port 1, while the difference will be formed at port 4. Hence, ports 1 and 4 are referred to as the sum and difference ports, respectively. The scattering matrix for the ideal 3 dB 180 hybrid thus has the following form

$$[S] = \frac{-j}{\sqrt{2}} \begin{bmatrix} 0 & 1 & 1 & 0 \\ 1 & 0 & 0 & -1 \\ 1 & 0 & 0 & 1 \\ 0 & -1 & 1 & 0 \end{bmatrix}$$

S-matrix of 180° phase shift Hybrid Ring junction

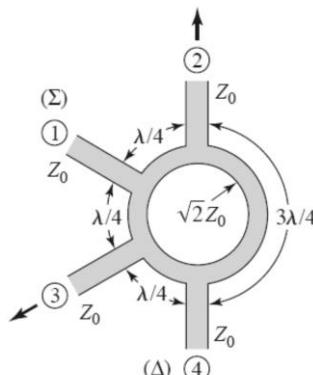


Fig. 5.1 Hybrid Ring (rat race)

4. PROCEDURE:

Design and simulation of 50 Ω microstrip line using HFSS

5. The design and simulation flow for a 180-degree hybrid ring structure with Ansys HFSS software is as follows.


Design of 50 Ω Microstrip line using HFSS

Design of microstrip line parameters

The microstrip calculator determines the width and length of a microstrip line for a given characteristic impedance (Z_0) and electrical length. The substrate parameters (ϵ_r and h) and the frequency of interest are required.


(SOURCE: <https://www.emtalk.com/mscalc.php>)

Microstrip Line Calculator

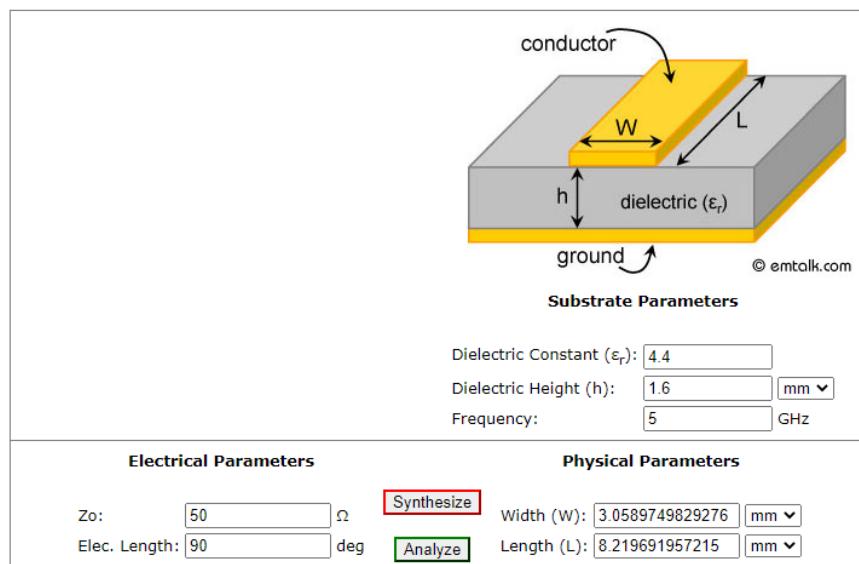


In ANSYS Electronics Desktop

1. Insert HFSS Design
 - a. Project--> Insert HFSS Design
2. Creating ground plane for microstrip line
3. Draw--> Rectangle--> Mouse Pointer in the origin (0,0,0) (Ref Screenshot)

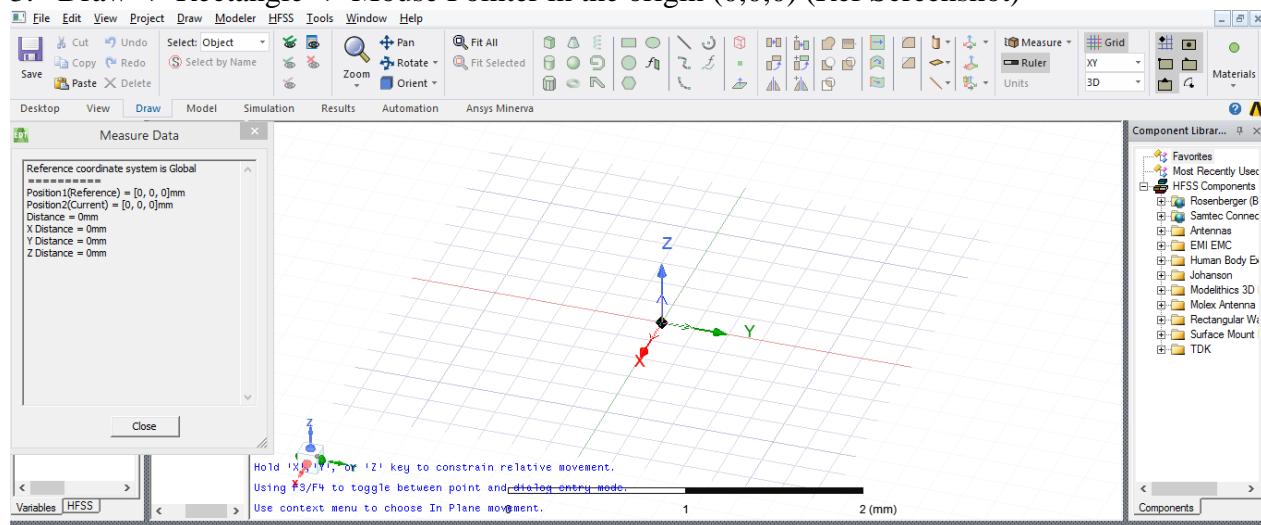


Draw rectangle with arbitrary X & Y Distances,
 Rename the ground plane with name “ground”
 Go to Model windows--> Rectangle1-->Attribute-->Name--> “ground”
 Color--> Orange --> Enter OK

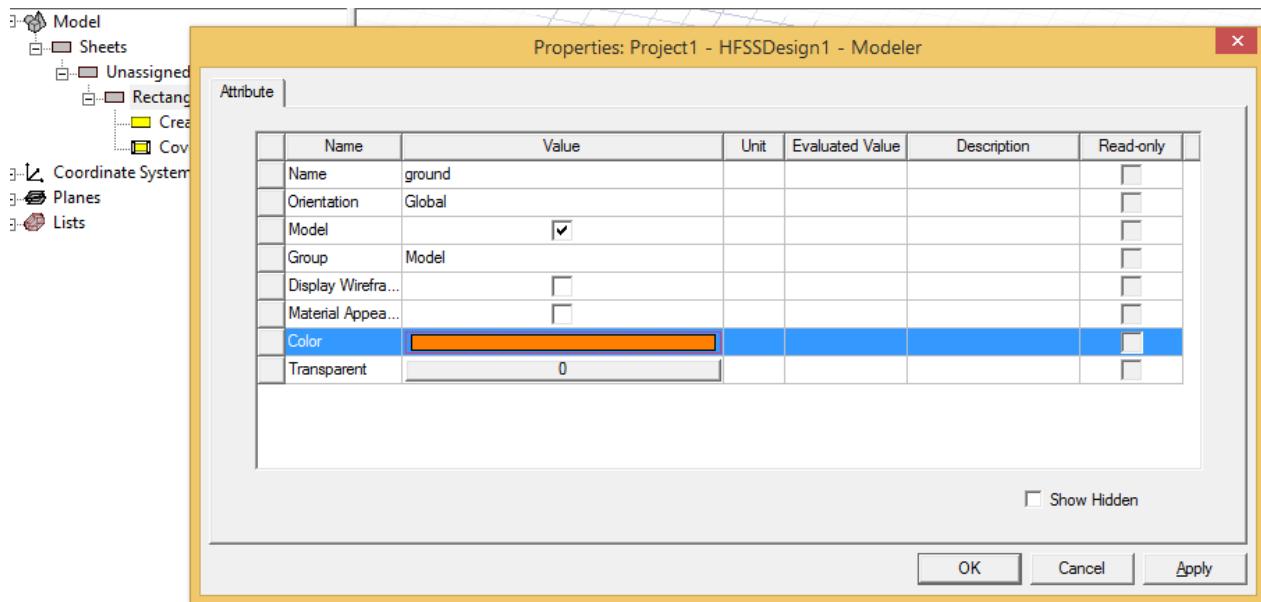

Select the ground plane dimension


Model--> ground--> CreateRectangle-->XSize--> 20mm, YSize-->40mm --> Enter OK

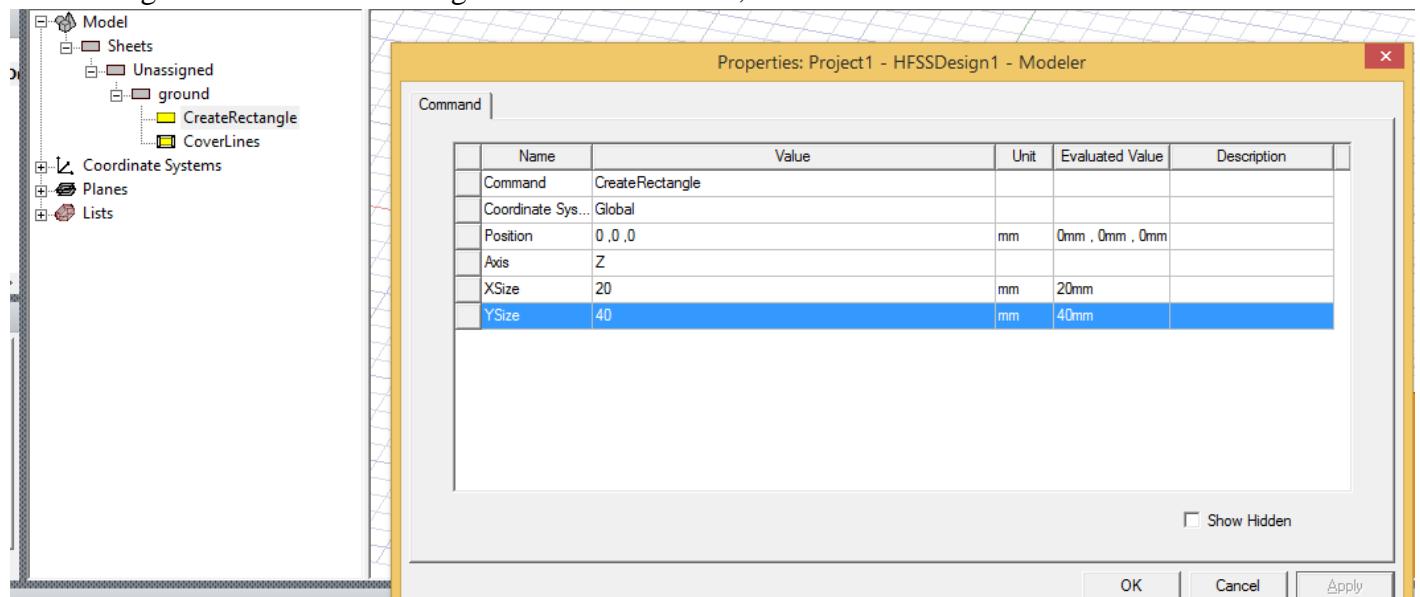

Note: To Fit all models in window, View--> Fit all (or Ctrl + D)

Design substrate box

Draw--> Box-->Position--> Using mouse-->Origin(0,0,0)-->XSize-->20mm, YSize-->40mm --> Enter OK

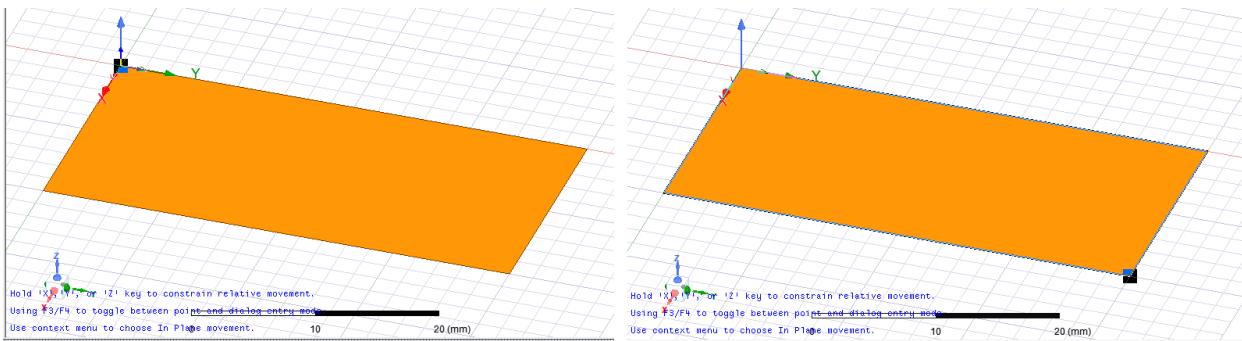


Rename the box with substrate & choose the substrate material

Solids-->vacuum-->Name-->" substrate" --> Material--> Edit...-->Search by Name--> "fr4" -->Select--> "FR4_epoxy" --> Enter OK


Change the thickness of the substrate

Model--> Solids--> FR4_epoxy-->substrate-->CreateBox-->ZSize-->1.6-->Enter OK

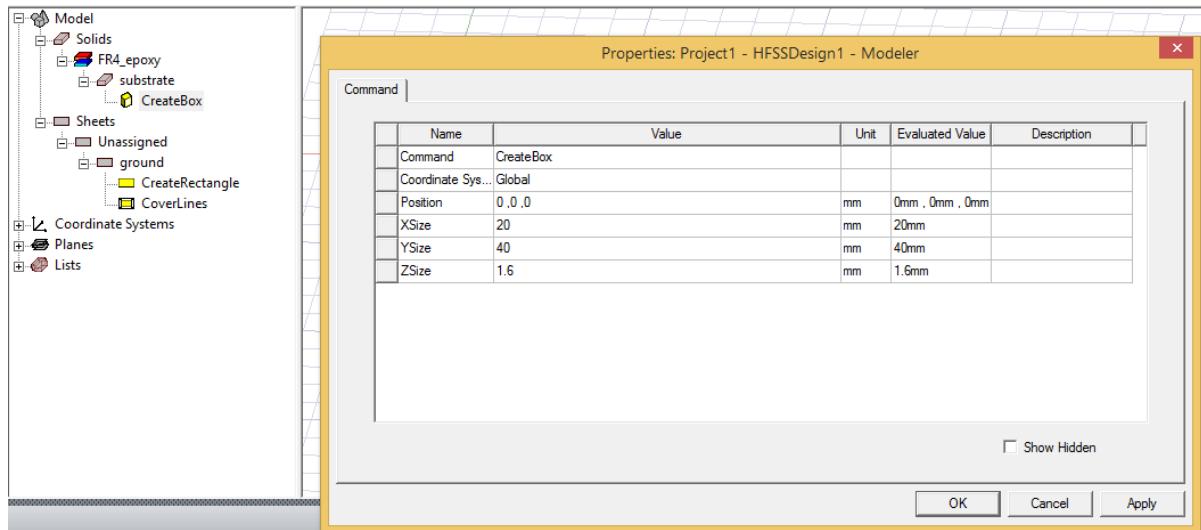


Design microstrip line at the top of the substrate

Draw Rectangle-->Using mouse pointer above substrate & change its attributes,

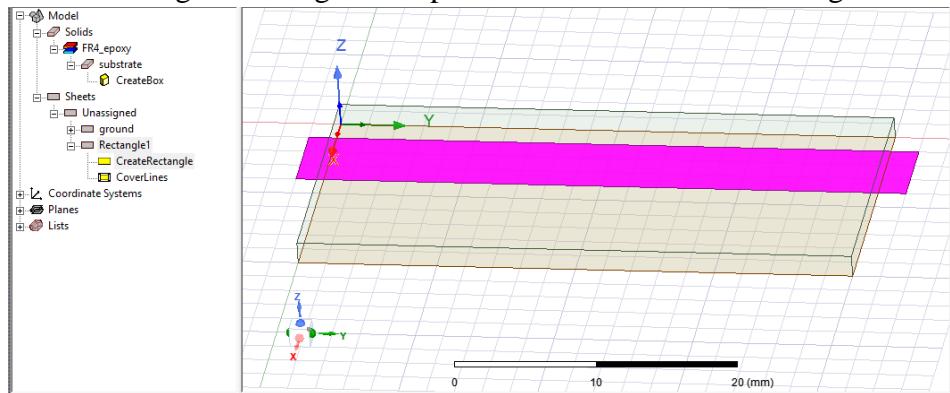

Sheets-->Unassigned-->Rectangle1-->Double click

Name--> "line", Color--> Orange --> Enter OK

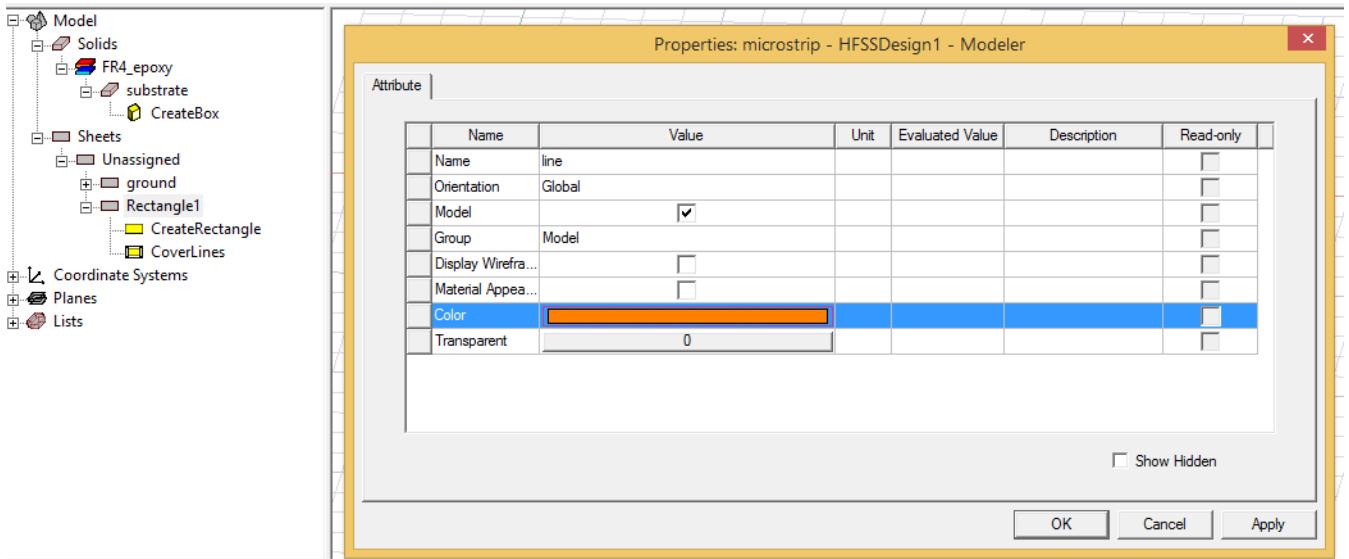

Change the dimension & position of micro strip line


Sheets-->line-->CreateRectangle

The microstrip line is positioned at top & center of the substrate.

Position--> 10-1.5, 0, 1.6


XSize-->3 (width of strip line)

YSize--> 40 (length of strip line)

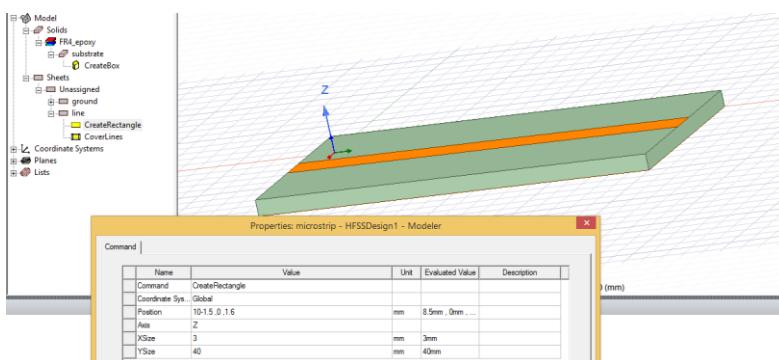


Assign field boundary to ground plane & micro strip line

Using Ctrl Command select both ground & line--> Right mouse click--> Assign Boundary--> Perfect E, Name-->PerfE1-->Enter OK

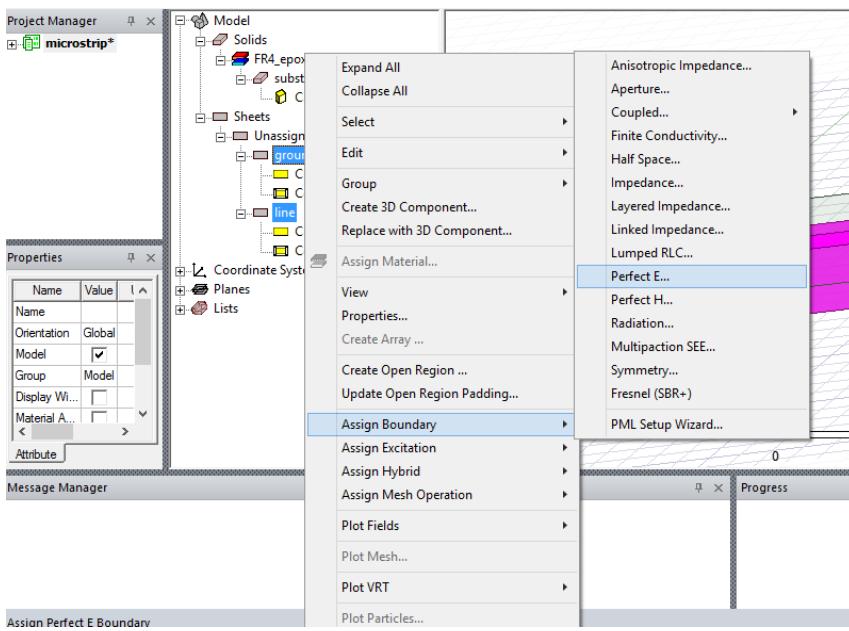

Assign excitation for port 1(input) & port 2(output)

In Draw panel, select X-Z plane

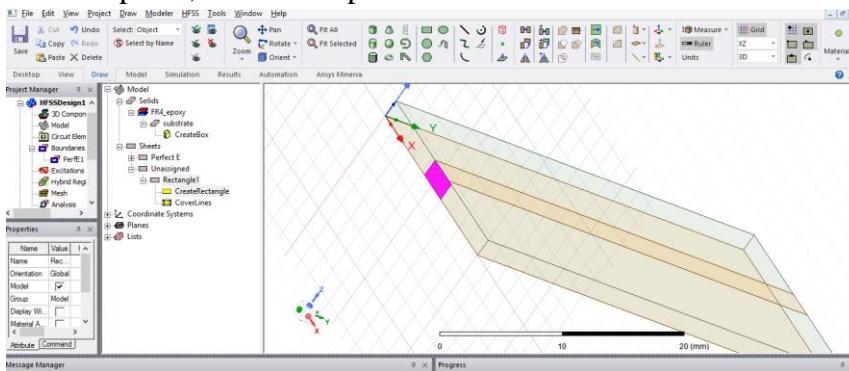

Draw--> Rectangle-->With mouse pointer select face of microstrip line

Change the attributes Model-->Sheets-->Unassigned--> Rectangle1-->Name--> "port1"-->Enter OK

Adjust the port1 dimension to accurate

Model-->Sheets-->Unassigned--> port1-->CreateRectangle


Position-->8.5,0,1.6

XSize-->3 (width of the strip)

Enter OK

Assign Excitation to port 1



Model-->Sheets-->port1--> Right Click on Mouse, Assign Excitation--> Lumped port-->Name-->1, Next-->Integration Line-->New Line--> Select on face of port 1 from up to down as shown below,

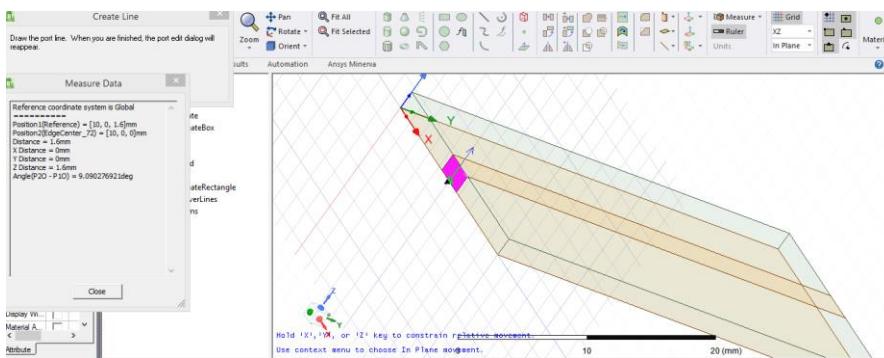


Next--> Enter Finish

Similarly assign port2

In View panel-->Rotate around current axis

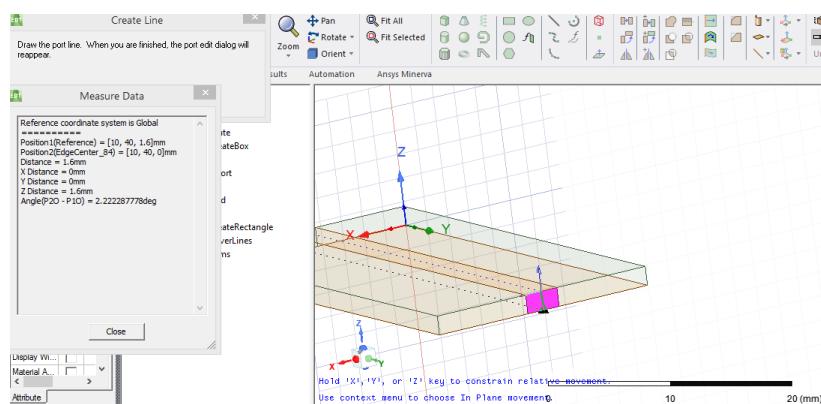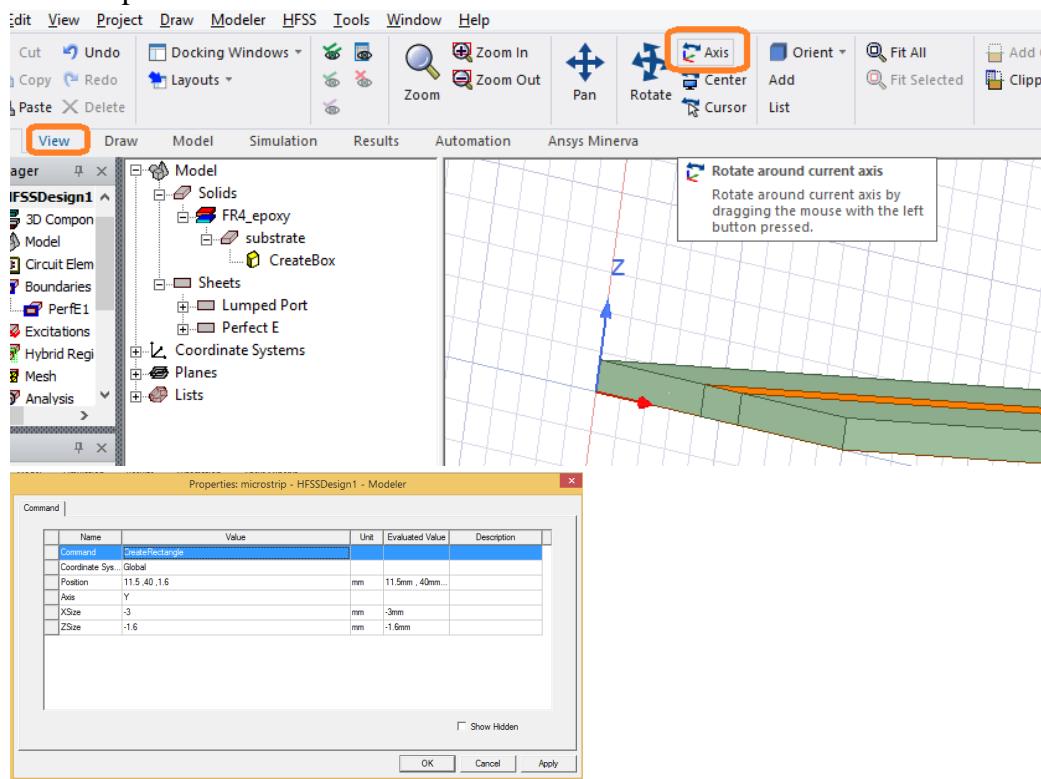


Verify the excitation in the Project manager explorer

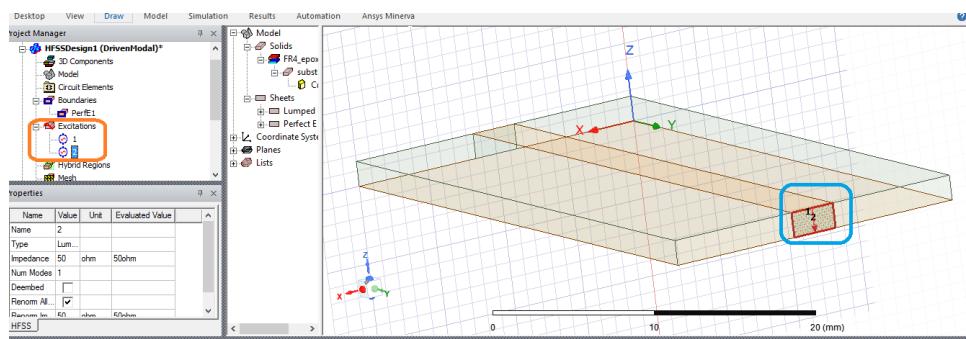

Create Radiation Box bigger than design structure

Draw-->Box

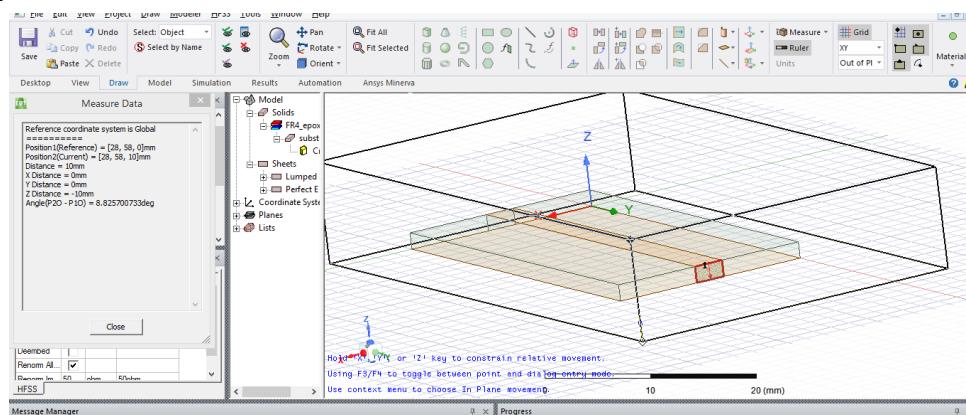

Change the attribute of the Box

Model-->Solids-->vacuum-->Box1-->Name--> “radiation”, material--> Search by name-->air-->Enter OK

Transparency--> 1 (To make design structure inside box visible)-->Enter OK

Fine tune the Radiation box position & dimensions


Model--> Solids-->air-->radiation-->CreateBox

Position: -10, -10, -20

XSize: 40


YSize: 60

ZSize: 40

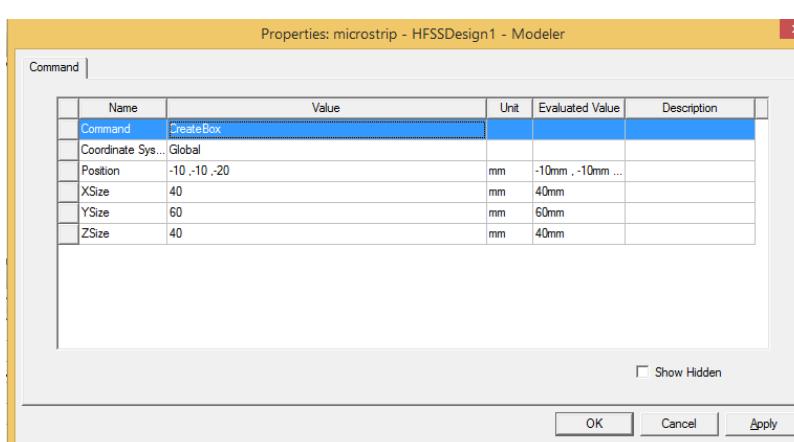

To fit all structure

Ctrl +D or View-->Fit all

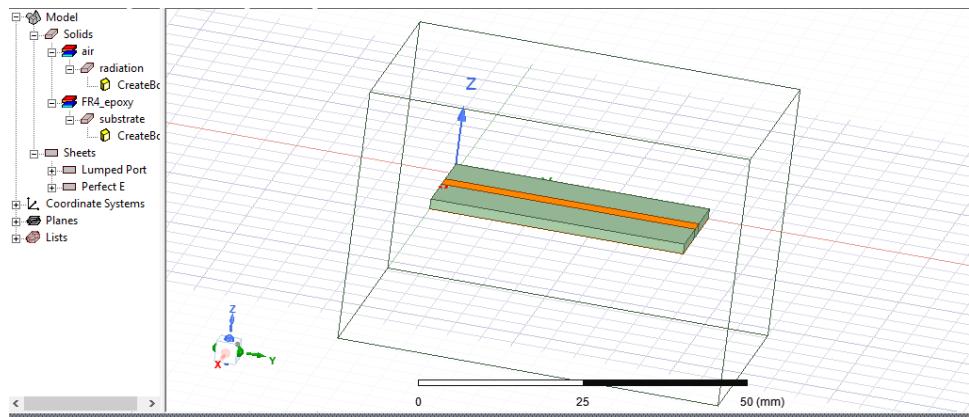

Assign radiation boundary to box

Model--> Solids-->air-->radiation, Right click on Mouse--> Assign Boundary--> Radiation--> Enter OK

Now micro strip line structure is designed and boundary & excitation are defined.


To analyze the results,

In project manager explorer

HFSS Design-->Analysis--> Right Click--> Add Solution Setup--> Advanced-->Solution Frequency 5 GHz--> Enter OK

Under Edit Sweep frequency

Distribution--> Linear Step--> 1 GHz (Start) 20 GHz (End), Step Size--> 0.1 GHz, Sweep Type--> FastClick on “Preview” to check the number of iterations execution

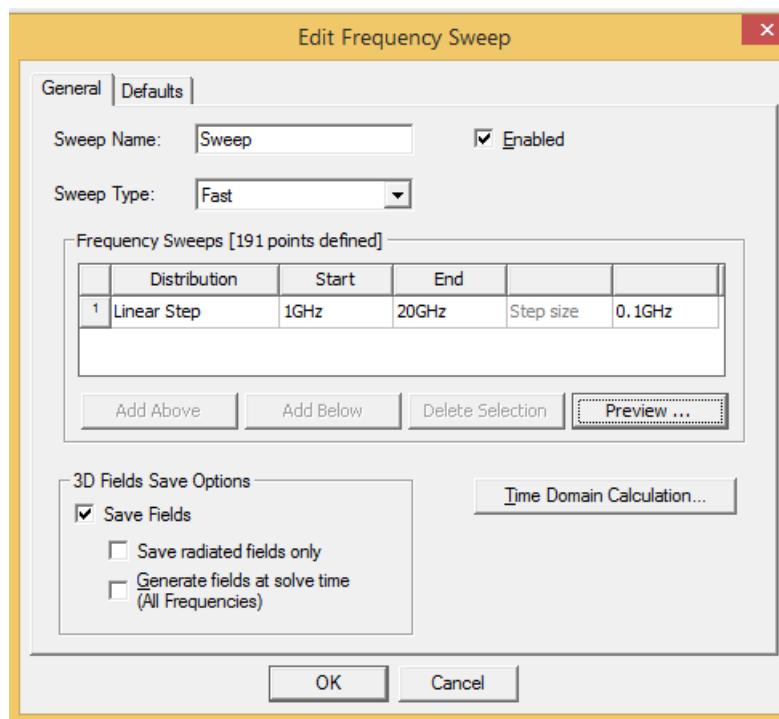


(Note: User can also use “interpolation” sweep type)

Enter OK

To run the program

HFSS--> Validate check (if error is displayed than check the boundary, dimensions and excitations)

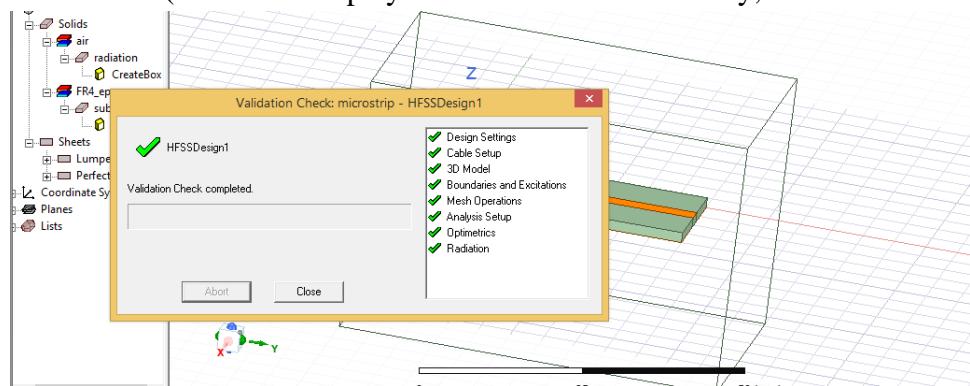


After validate--> Execute Analyze all

To see the result,

Choose the “Results” in Project Manager, (Right Click on Mouse)

Create Model Solution Data Report--> Rectangular port--> Choose S Parameter--> Quantity--> S(1,1), S(2,1), S(1,2), S(2,2)


Click on “New Report”

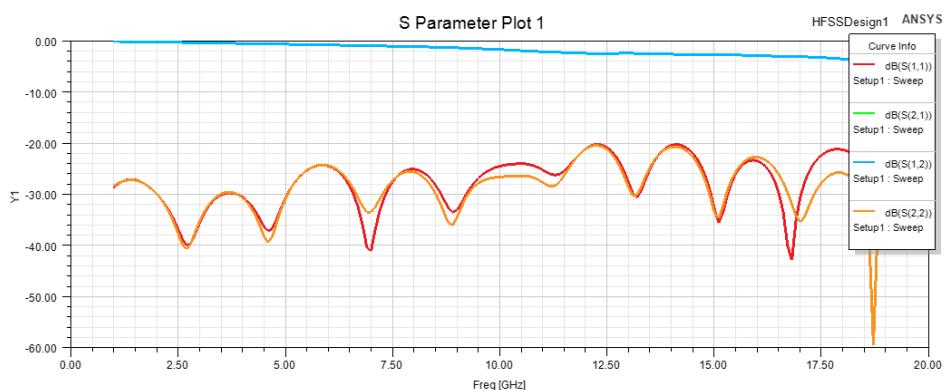

The results show that S11 & S22(Reflection coefficient) are less than –20 dB which suggest there is not much reflection on designed frequency. Hence microstrip line is typically can operate or can be used between 1 to 20 GHz.

The S12 or S21 (Transmission coefficient) is typically around 0 to –3dB which suggest the transmission is happens around 1 to 20 GHz. S12 or S21 gradually decreases with increase in the frequency which suggest the loss is gradually increases to higher frequency.

HFSS Procedure for hybrid ring

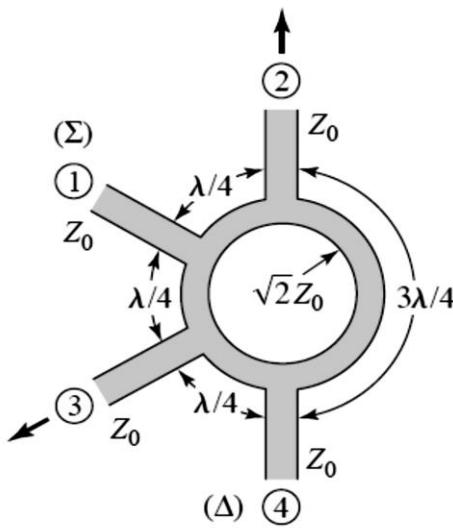

The average circumference of inner circle

$$C = \left(\frac{3\lambda}{4}\right) + 3 * \left(\frac{\lambda}{4}\right) = \frac{3\lambda}{2} = 540^\circ \text{ or } 6\pi$$

Hence total electrical length of the circle is $l = \frac{3\lambda}{2}$. Here the characteristic impedance of the ring transmission line is $\sqrt{2}Z_0$. For other ports, the characteristics impedance is Z_0 . The width of the $\sqrt{2}Z_0$ ($= 70.71\Omega$) inner ring and width of the Z_0 ($= 50\Omega$) ports are selected by microstrip calculator.

Design of microstrip line parameters

The microstrip calculator determines the width and length of a microstrip line for a given characteristic impedance (Z_0) and electrical length. The substrate parameters (ϵ_r and h) and the frequency of interest are required.

(SOURCE: <https://www.emtalk.com/mscalc.php>)

For port-line width,

For e.g., Operating frequency $f = 2.4\text{GHz}$, Dielectric Constant (ϵ_r) = 4.4, Dielectric Height = 1.6 mm, $Z_0 = 50\Omega$ and Electrical length= 90 deg(Can be any value since an electrical length is not fixed for the port) → Synthesize.

Calculated port width = 3 mm


For inner radius width,

For e.g., Operating frequency $f = 2.4\text{GHz}$, Dielectric Constant (ϵ_r) = 4.4, Dielectric Height = 1.6 mm, $Z_0 = 70.7\Omega$ and Electrical length= 540 deg (Since electrical length of the circle is $l = \frac{3\lambda}{2} = 540^\circ$) → Synthesize.

Calculated radius width = 1.62 mm

Length = 105 mm

Design Parameters
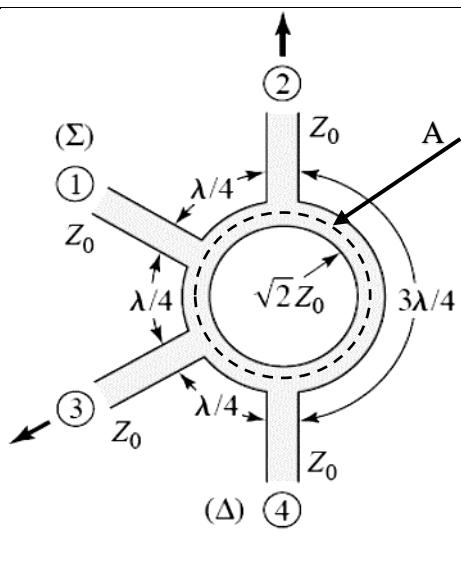
| | |
|---|---|
|  | Width (70.7Ω) = 1.62 mm Length (70.7Ω) = 105 mm Radius of the circle (A) = $C/2\pi$ (Since $C = 2\pi r$) $= 105/2\pi = 16.71$ mm Radius of inner circle = $16.71 - (1.62/2) = 15.9$ mm Radius of outer circle = $16.71 + (1.62/2) = 17.52$ mm |
|---|---|


In HFSS,

Draw Circle,

Change the attributes & position of circle as below,

Centre position: 0, 0, 0 mm


Radius= 17.52 mm (Outer Circle) → Enter OK

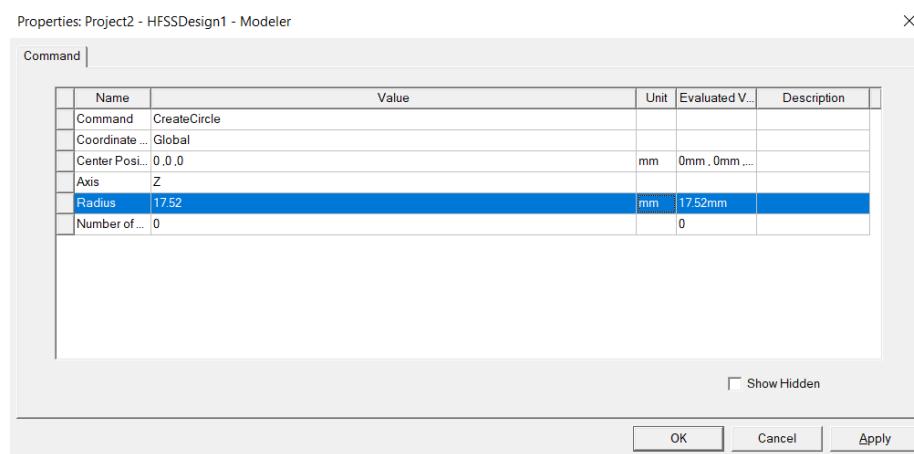


Fit View → Ctrl+D or View → Fit all

Duplicate the same circle

Under Model → Sheets → Unassigned, Right Click on Mouse Circle1, Edit → Copy and Paste in the Same directory

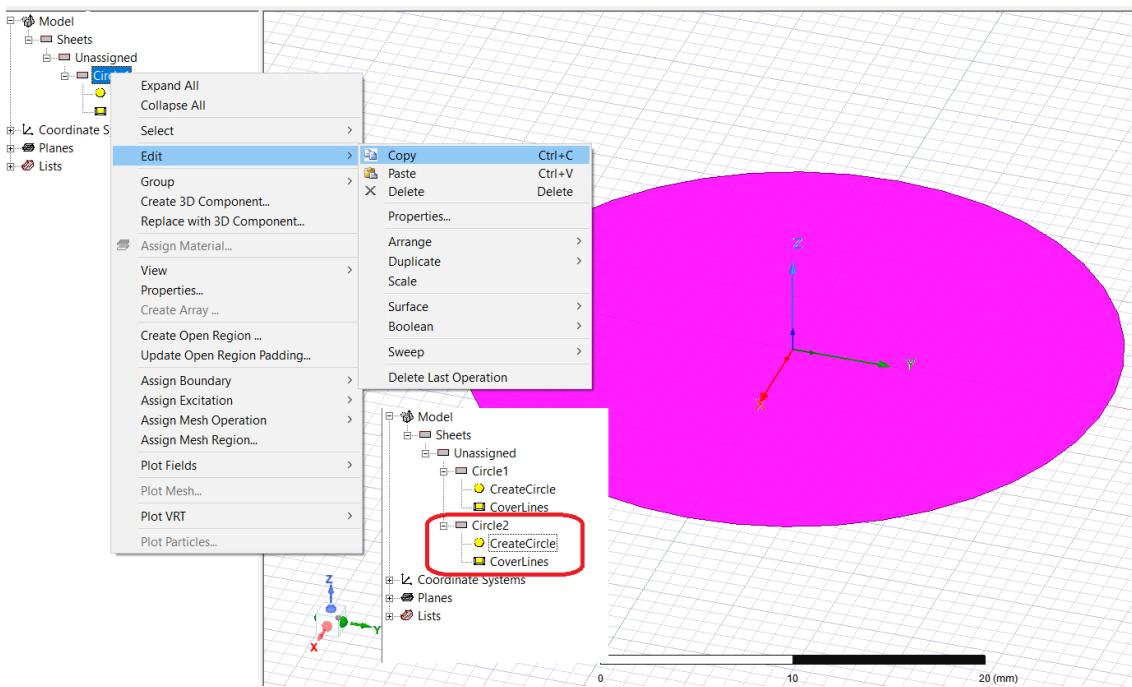


Change the radius of Circle2 as 15.9 mm as mentioned step above.

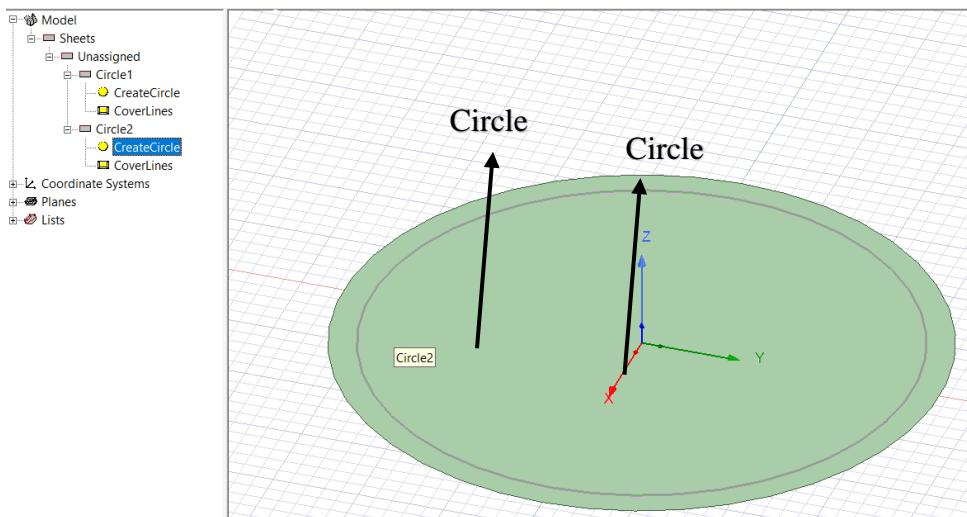


Subtract Circle1-Circle2

Using Mouse pointer, Select Circle1 and Circle 2

Modeler → Boolean → Substrate or in Draw panel → Subtract

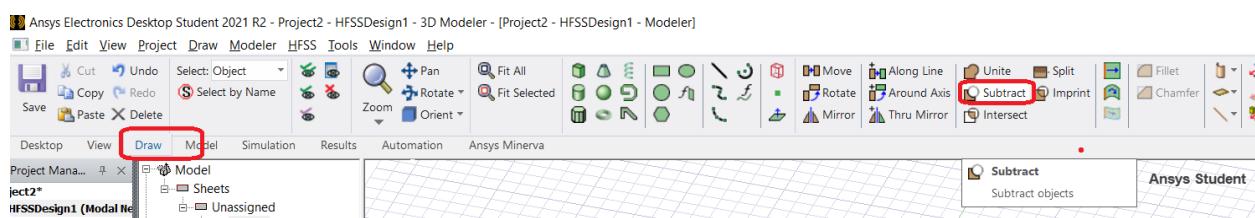

In Subtract pane → Enter OK

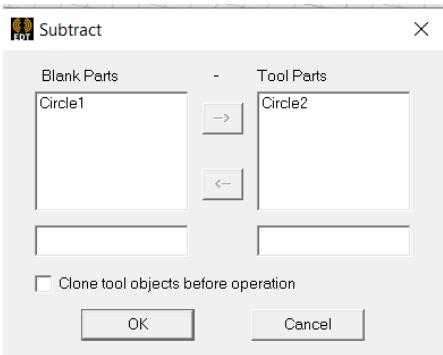

Drawing the first port

Change the TOP view orientation by

View → Modify attribute → Orientation → Orientation List → top → Apply to View → Close

Draw rectangle with the port line width

Draw → Rectangle


Model → Sheet → Rectangle1 → CreateRectangle

Position: -1.5, -40, 0 (since width is measure along X-axis along origin, the X range is (-1.5 to 1.5 mm, total 3mm and Y-axis position -40 + YSize of 24 =-16 position which overlap on ring)

XSize → 3 mm

YSize → 24 mm

Enter OK

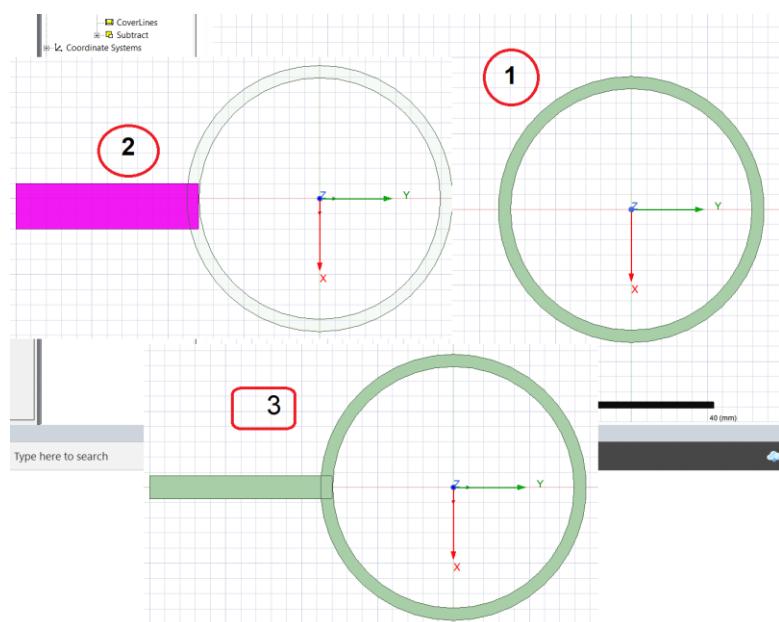

Note: The port line length can be shortened by changing the position & size of rectangle. For e.g,

In Model → Sheet → Rectangle1 → CreateRectangle

Position: -1.5, -30, 0

XSize: 3


YSize: 14

Draw other ports

From the design, duplicate and create other ports

Rotate the port(B) along Z-

axis of -90 deg

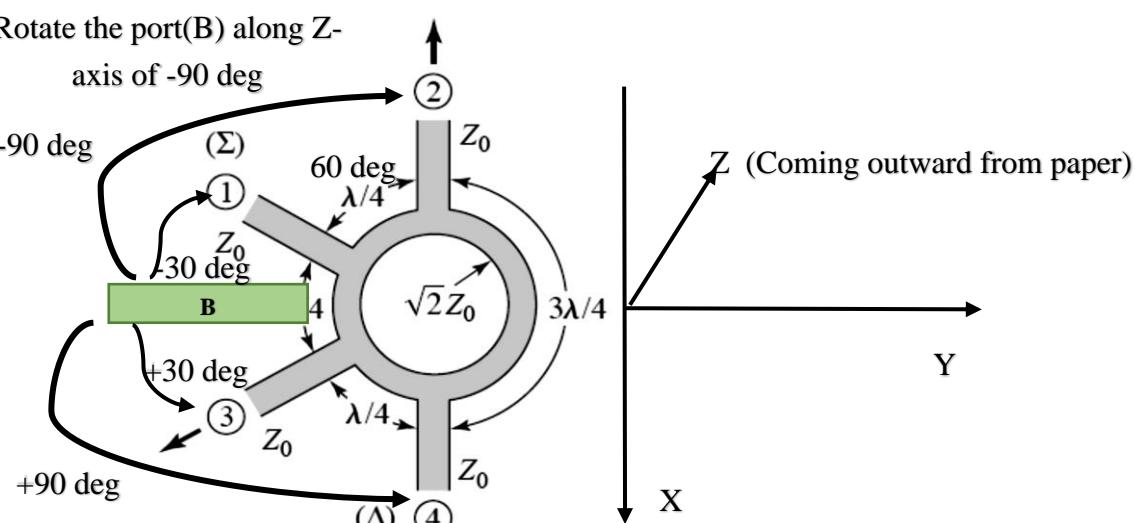


Z (Coming outward from paper)

Y

X

Rotate the port (B) along Z-
axis of +90 deg

Select the port and in draw panel, Duplicate around Axis → Axis → Z, Angle → -90 deg, Total number → 2 (port 2)

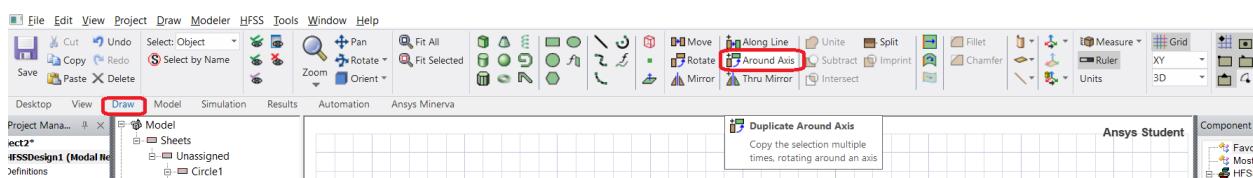



Similarly,

Select the port and in draw panel, Around Axis → Axis → Z, Angle → 90 deg, Total number → 2 (port 4)

Select the port and in draw panel, Around Axis → Axis → Z, Angle → -30 deg, Total number → 2 (port 1)

Move the remaining port to +30° degree

Select the port and in draw panel, Rotate→ Axis→Z, Angle→30 deg (port 2)

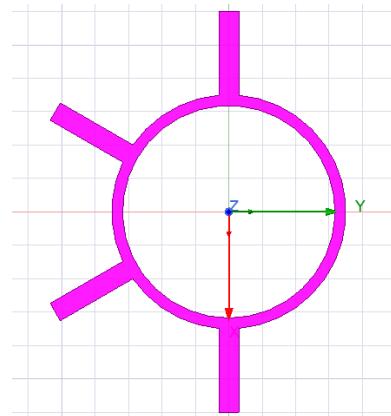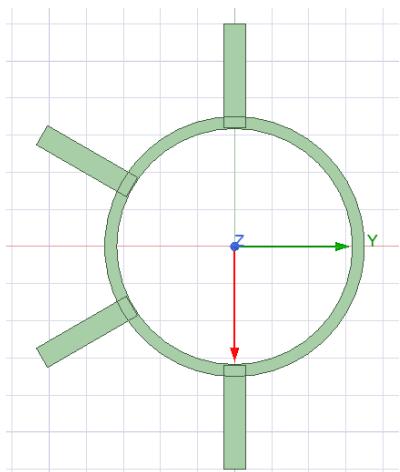

Select ALL objects and unite

In Draw panel→ Unite (or) Modeler→ Boolean→ Unite

Change the properties of ALL objects as “ring” by changing it attribute Name as “ring”


Draw the substrate & ground plane beneath hybrid ring

Select ALL Object→Edit→ Select All,


In Draw panel, Rotate→Axis→Z, Angle→30 deg→ Enter OK

Creating ground plane:

Draw regular polyhedron

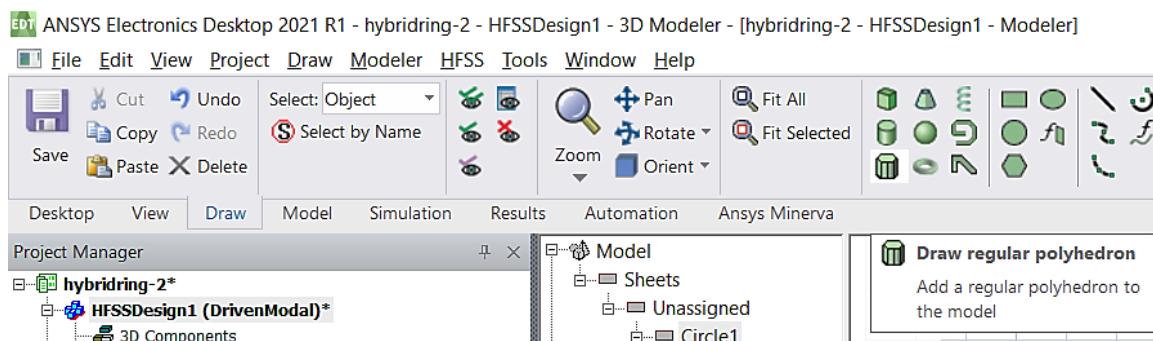

Use mouse pointer, select origin and draw the circle and choose Number of segments: 6

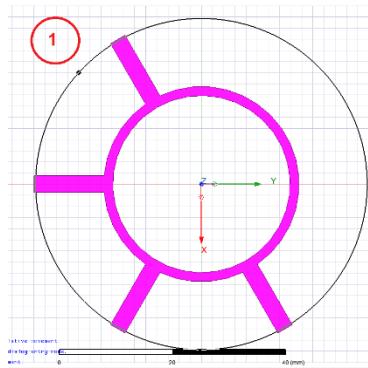

Choose the properties of polyhedron (ground plane),

Model → Sheets → Unassigned → RegularPolyhedron1 → CreateRegularPolyhedron


Select properties as,

Centre position: 0, 0, 0

Start position: 30mm/cos(30*pi/180) ,0mm ,0mm (**Note:** radius of polygon is port line length/cos(30*pi/180). Pythagoras theorem)


Axis: Z

Height: 0 mm

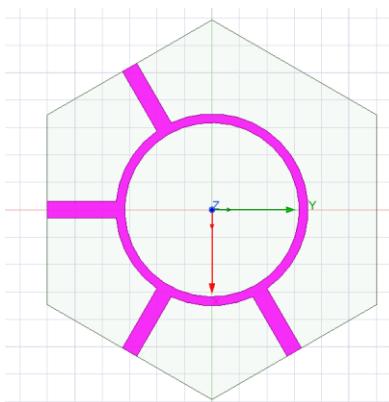

Duplicate polyhedron for substrate:

Select the ground plane, Model → Sheets → Unassigned → RegularPolyhedron1, Right Mouse Click → Edit → Copy & Paste in same location (RegularPolyhedron2 will be created)

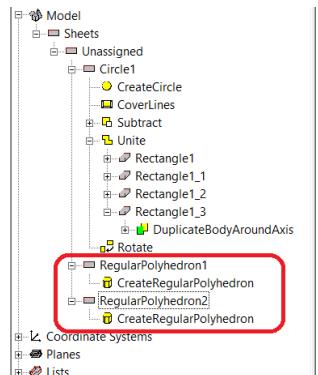

Choose the properties of polyhedron (substrate),

Model → Sheets → Unassigned → RegularPolyhedron2 → CreateRegularPolyhedron

Select properties as,

Centre position: 0, 0, 0

Start position: $30\text{mm}/\cos(30*\pi/180)$, 0mm, 0mm (**Note:** radius of polygon is port line length/ $\cos(30*\pi/180)$. Pythagoras theorem)

Axis: Z

Height: -1.6 mm

Assign substrate material,

Solid → Vacuum → RegularPolyhedron2 → Material → Edit → Search by Name → FR4_epoxy

Move the ground-plane polyhedron beneath substrate

Draw panel → Orient → Trimetric


Select Face of RegularPolyhedron1,


In Draw panel, Select → Select by Name → RegularPolyhedron1

Move in Z-Axis

Draw panel → Move

Select the corner of RegularPolyhedron1 and move down in Z-axis by -1.6mm

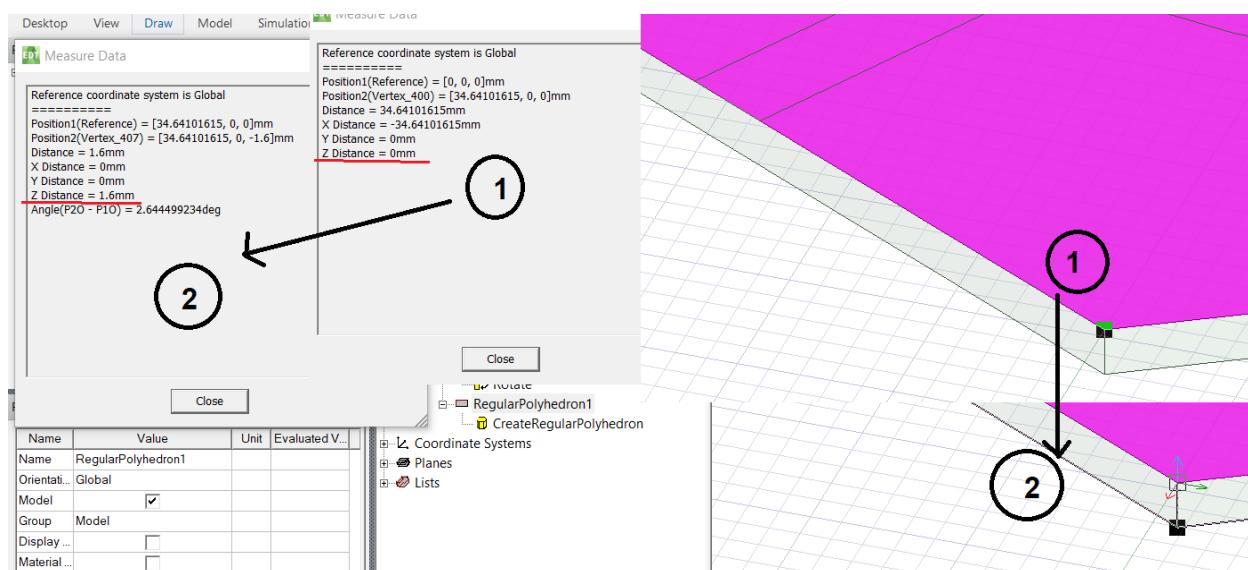

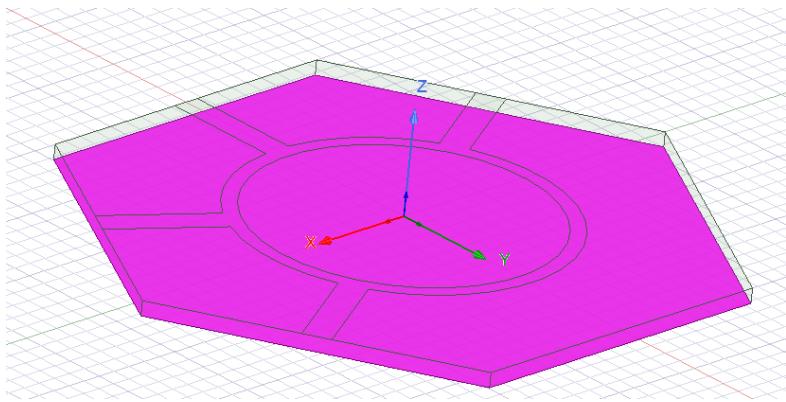

Place the rectangle sheet in all port as a lumped port

Note: Every time rotate 30/60° degree and draw rectangular sheet for each port

Select ALL Object, Edit→ Select All


Draw panel→ Rotate→ Axis: Z, Angle→ 30 deg

Drawing rectangle on each port:


In Draw panel→

Change the drawing plane choose the plane accordingly (YZ)

Draw→ Rectangle on every port

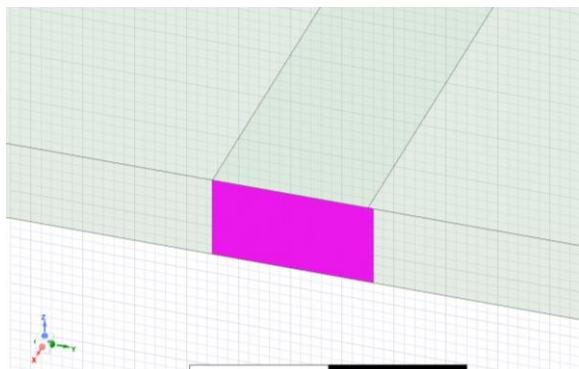


For e.g port 3 (Note: In view panel, Use Pan & Zoom in to draw)

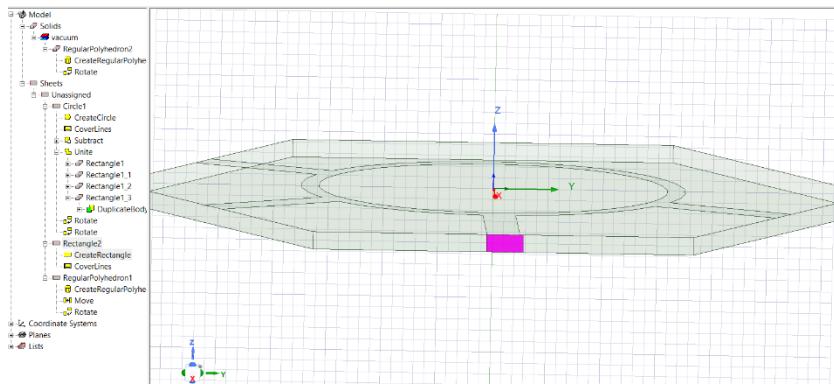

Adjust the dimension of rectangle to match with width of strip line.

(Rectangle2 → CreateRectangle → YSize → 3 mm)

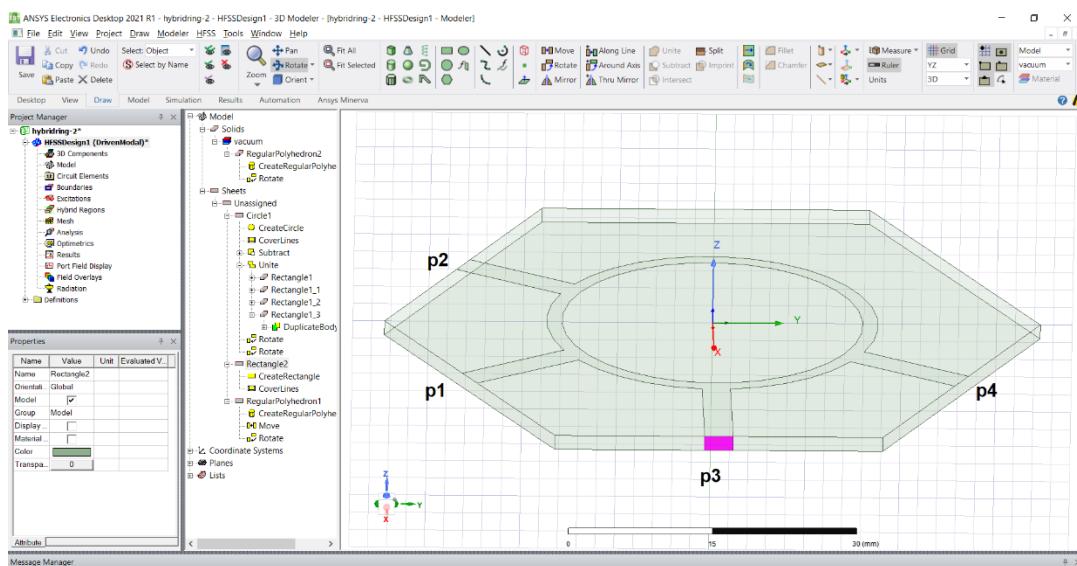

Before rotating the object,

Change the orientation: Draw → Orient->Top(-Z)


Select ALL Object, Edit → Select All

Draw panel → Rotate → Axis: Z, Angle → 60 deg (for port 1 & 2) 180 deg (for port 4)


Draw → Rectangle on every other port (Hint: Use view → Fit all, Rotate around axis to choose other ports for drawing).

Assign Port excitation

1. Select the port face object individually → Right mouse click → Assign excitation → Port → Lumped port → Name → 1 or 2 or 3 or 4 (Provide the name according to hybrid ring design) → Integration line → New line → Select on face of port from bottom to up at middle (Ref microstrip line)

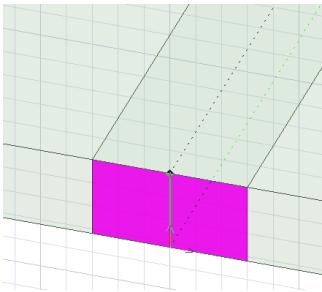

2. Assign excitation for remaining ports. (Note: While selecting integrating line on face of port object, keep relevant plane of reference either XY or YZ or XZ)
3. Excitation port can be verified in project manager under excitation numbered 1 to 4.

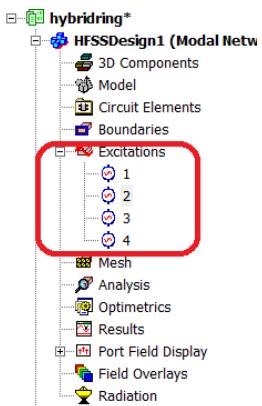


4. Assign Boundary to ring and ground plane
 - a. Select the ring, Model → Sheet → Unassigned → ring than
 - b. Right mouse click → Assign the Boundary → Perfect E → Enter OK
 - c. Select the ground plane, Sheets → Unassigned → RegularPolyhedron1 than
 - d. Right mouse click → Assign the Boundary → Perfect E → Enter OK
 - e. Create Radiation bigger enough to accommodate hybrid ring
5. Draw Box, In Attribute → Position → (-50, -50, -50)
 - a. XSize:100
 - b. YSize:100
 - c. ZSize:100
6. Assign material as “Air” to Box, Solids → vacuum → Box2 → Right Mouse click → Assign material → Search by Name → air.
7. Increase the transparency of Box to view the device structure inside the box
 - a. Solids → air → Box2 → Right Mouse click → properties → transparency → 0.7 to 1
8. Assign Boundary as Radiation to Air Box
 - a. Solids → air → Box2 → Right Mouse click → Assign the Boundary → Radiation → Enter OK


Analysis setup & Results

1. In project manager,

2. Analysis → Right Mouse Click → Add Solution Setup → Advanced → Solution Frequency → 2.4 GHz → Enter OK
3. Sweep Type → Interpolating → Start → 1GHz → End → 5GHz, Points → 100
4. HFSS → Design setting → Material Override → Checked
5. After validate → Execute Analyze all
6. To see the result,
 - a. Choose the “Results” in Project Manager, (Right Click on Mouse)
7. Create Model Solution Data Report → Rectangular port → Choose S Parameter → Quantity → S(1,1), S(2,1), S(1,2), S(2,2)
8. Click on “New Report”

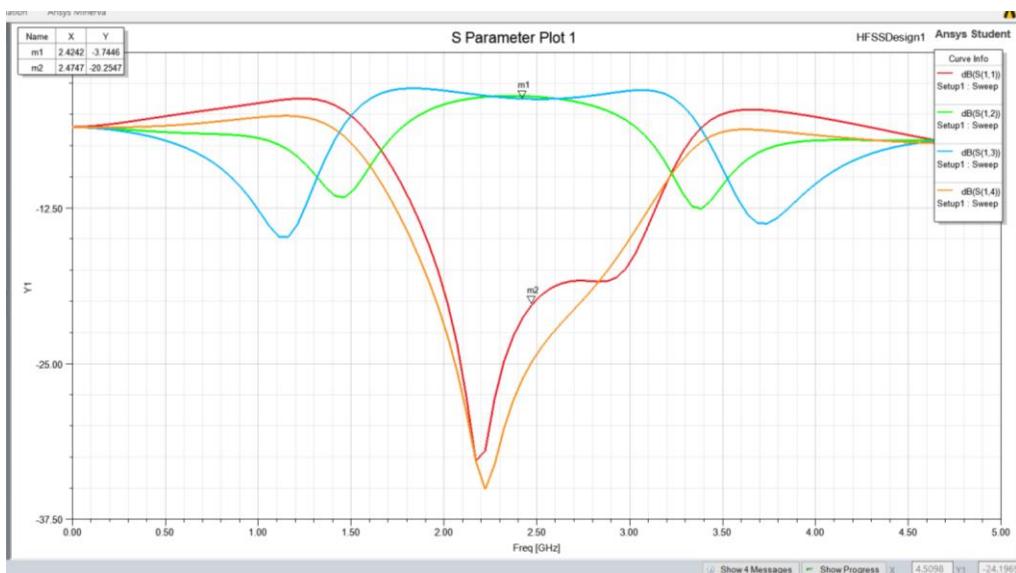


9. If you are getting warning message as “Adaptive Passes did not converge based on specified criteria”
10. Go to analysis setup in project manager and increase the Maximum number passes from 6.
11. [S] matrix of hybrid can be found in HFSS → Results → Solution Data → Freq → Operating Frequency (Here 2.4 GHz)

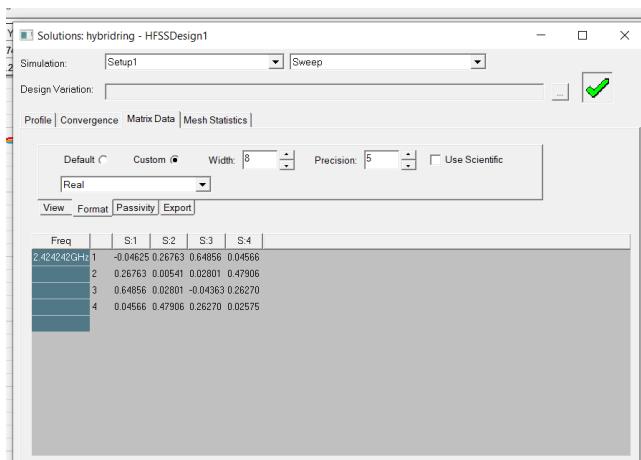

12. To view electric field propagation inside the ring
13. View → Select by Name → Select ring & Rectangle2 (Using Ctrl Key) → Enter OK → Right Mouse Click → Plot Fields → E → Mag_E → Enter Done

14. In project Explorer → Field Overlay → E Field → Mag_E1 → Right Mouse Click → Animate → Enter OK

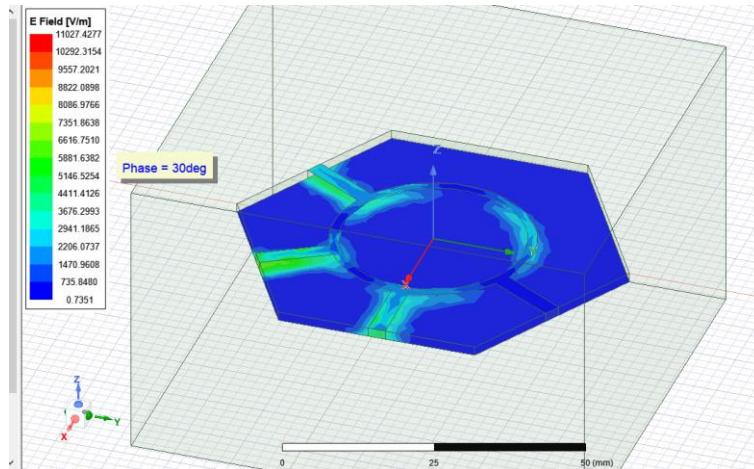

The excitation source can be edited to give two input sources in port 2 and 3. The sum of the port will be appear in the port 1 and difference appear in port 4

15. In project manager,

- Excitation → Edit source. On the source table
- Source 2:1, Magnitude=1 W, Phase 0 deg
- Source 3:1, Magnitude=1 W, Phase 0 deg
- Enter Ok and animate (Repeat the Step 14)
- Now user can observe the sum and difference of input source. Try also source 2:1, Magnitude=1 W, Phase 0 deg and Source 3:1, Magnitude=1 W, Phase 180 deg

Edit post process sources

| | Source | Type | Magnitude | Unit | Phase | Unit |
|---|--------|------|-----------|------|-------|------|
| 1 | 4:1 | Port | 0 W | | 0 deg | |
| 2 | 2:1 | Port | 1 W | | 0 deg | |
| 3 | 1:1 | Port | 0 W | | 0 deg | |
| 4 | 3:1 | Port | 1 W | | 0 deg | |

6. RESULTS/OUTCOMES

Construct a table of S-parameters for microstrip line and plot s-parameter matrix

| PARAMETERS | (dB) |
|------------|------|
| S11 | |
| S12 | |
| S21 | |
| S22 | |

Write S matrix in dB for simulated hybrid ring and plot the S-parameters

$$[S] = \frac{-j}{\sqrt{2}} \begin{bmatrix} 0 & 1 & 1 & 0 \\ 1 & 0 & 0 & -1 \\ 1 & 0 & 0 & 1 \\ 0 & -1 & 1 & 0 \end{bmatrix}$$

Observations

| Sl.No | Criteria | Max Marks | Marks obtained |
|-------------------------------|--|-----------|----------------|
| Data sheet | | | |
| 1 | Problem statement | 10 | |
| 2 | Design & specifications | 10 | |
| 3 | Expected output | 10 | |
| Record | | | |
| 4 | Simulation/ Conduction of the experiment | 15 | |
| 5 | Analysis of the result | 15 | |
| 6 | Viva | 40 | |
| 7 | Total | 100 | |
| Scale down to 10 marks | | | |

EXPERIMENT 6

Design and Simulation of Rectangular Waveguide and Magic-Tee using HFSS

Topic Learning Objectives:

The student must be able to:

1. Design and simulation of a WR-90 Rectangle waveguide and plotting & analysis of propagation constant, VSWR and S-Parameters
 2. Design and Create a Magic Tee structure at a given operating frequency using HFSS Design environment
 3. Simulate and analyze the S parameters of Magic Tee
- 1.** **AIM:** To design, simulate and analyze the S parameters of Magic Tee at a given frequency band
- 2.** **EQUIPMENT REQUIRED:** 64 bit Personal computer/Laptop and HFSS

3. THEORY:

Rectangular Waveguide:

Rectangular waveguides were one of the earliest types of transmission lines used to transport microwave signals, and they are still used for many applications. A large variety of components such as couplers, detectors, isolators, attenuators, and slotted lines are commercially available for various standard waveguide bands from 1 to 220 GHz. The high-power systems, millimeter wave applications, satellite systems, and some precision test applications are need rectangular waveguides. The hollow rectangular waveguide can propagate TM and TE modes but not TEM waves since only one conductor is present.

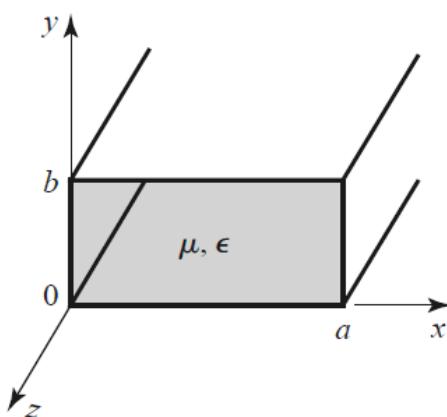


Fig 4.1 Geometry of a rectangular waveguide

The transverse field components of the TE_{mn} mode can be written as

$$E_x = \frac{j\omega\mu n\pi}{k_c^2 b} A_{mn} \cos \frac{m\pi x}{a} \sin \frac{n\pi y}{b} e^{-j\beta z}, \quad (6.1a)$$

$$E_y = \frac{-j\omega\mu m\pi}{k_c^2 a} A_{mn} \sin \frac{m\pi x}{a} \cos \frac{n\pi y}{b} e^{-j\beta z}, \quad (6.1b)$$

$$H_x = \frac{j\beta m\pi}{k_c^2 a} A_{mn} \sin \frac{m\pi x}{a} \cos \frac{n\pi y}{b} e^{-j\beta z}, \quad (6.1c)$$

$$H_y = \frac{j\beta n\pi}{k_c^2 b} A_{mn} \cos \frac{m\pi x}{a} \sin \frac{n\pi y}{b} e^{-j\beta z}. \quad (6.1d)$$

The propagation constant is

$$\beta = \sqrt{k^2 - k_c^2} = \sqrt{k^2 - \left(\frac{m\pi}{a}\right)^2 - \left(\frac{n\pi}{b}\right)^2} \quad (6.2)$$

Each mode (each combination of m and n) has a cutoff frequency f_{cmn} given by

$$f_{cmn} = \frac{k_c}{2\pi\sqrt{\mu\epsilon}} = \frac{1}{2\pi\sqrt{\mu\epsilon}} \sqrt{\left(\frac{m\pi}{a}\right)^2 + \left(\frac{n\pi}{b}\right)^2}. \quad (6.3)$$

The lowest cutoff frequency occurs for the TE₁₀ (m = 1, n = 0) mode:

$$f_{c10} = \frac{1}{2a\sqrt{\mu\epsilon}} \quad (6.4)$$

Magic Tee

A combination of E-plane and H-plane tees form a hybrid Tee (Magic tee) having four ports is shown in figure 5.1. Magic tee has the following characteristics: If two in-phase waves of equal magnitude are fed into ports 1 & 2, the output at port 3 is subtracted so the output is zero. The total output power additively appears at port 4. Hence port 3 is called difference or E-plane arm and port 4 is called sum arm or H-arm. A wave incident at port 4 divides equally in phase between ports 1 and 2. A wave incident at port 3 divides equally with out of phase difference between ports 1 and 2. Thus the S-parameters of a magic tee are expressed as:

$$s_{13} = s_{31} = \frac{1}{\sqrt{2}} = -s_{23} = -s_{32} \text{ and } s_{34} = s_{43} = 0 \quad (1)$$


$$s_{14} = s_{41} = \frac{1}{\sqrt{2}} = s_{24} = s_{42} \text{ and } s_{34} = s_{43} = 0 \quad (2)$$

A wave incident to port 1 or port 2 will not appear in the other port

$$s_{12} = s_{21} = 0. \quad (3)$$

Thus the S-matrix is of magic tee is

$$[S] = \frac{1}{\sqrt{2}} \begin{bmatrix} 0 & 0 & 1 & 1 \\ 0 & 0 & -1 & 1 \\ 1 & -1 & 0 & 0 \\ 1 & 1 & 0 & 0 \end{bmatrix}$$

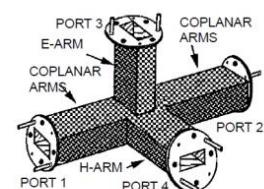

PROCEDURE: The design and simulation flow for a rectangular waveguide and Magic-Tee structure with Ansys HFSS software is as follows.

Fig 4.2: Magic Tee

HFSS: Getting Started

Launching ANSYS Electronics Desktop

- To access ANSYS Electronics Desktop, click the Microsoft Start button,
- Select Programs > ANSYS Electromagnetics > ANSYS Electromagnetics Suite. Select ANSYS Electronics Desktop

Setting Tool Options

- Note: In order to follow the steps outlined in this example, verify that the following tool options are set :



- Select the menu item Tools > Options > General Options...

- Expand the HFSS Branch

Left Mouse Click Boundary Assignment

- Use Wizards for data input when creating new boundaries: Checked
- Duplicate boundaries/mesh operations with geometry: Checked

Options

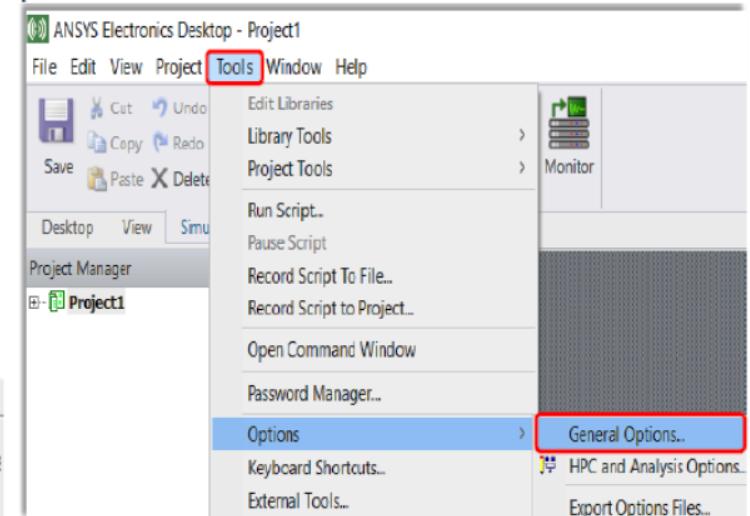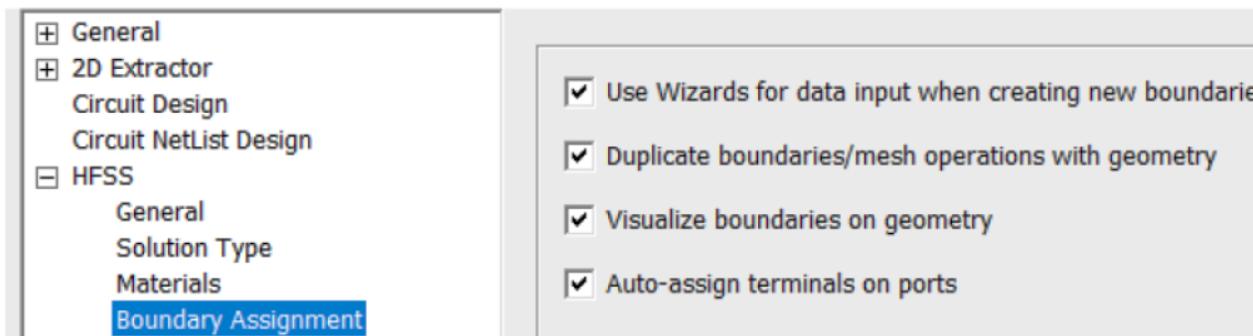

HFSS: Getting Started

Setting Tool Options (Continued)

- Expand the 3D Modeler Branch



Drawing: Edit properties of new primitives: Checked

- Expand the Display Branch

Rendering Set Default Transparency to 0.7

History Tree: Select last command on object/submodel select: Check

Options

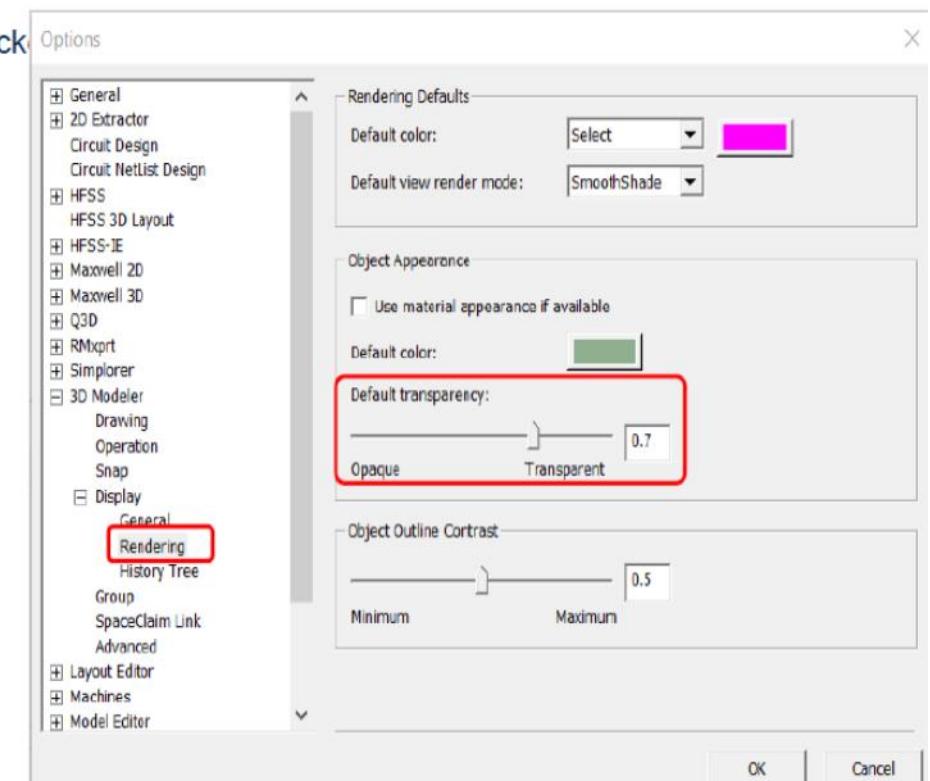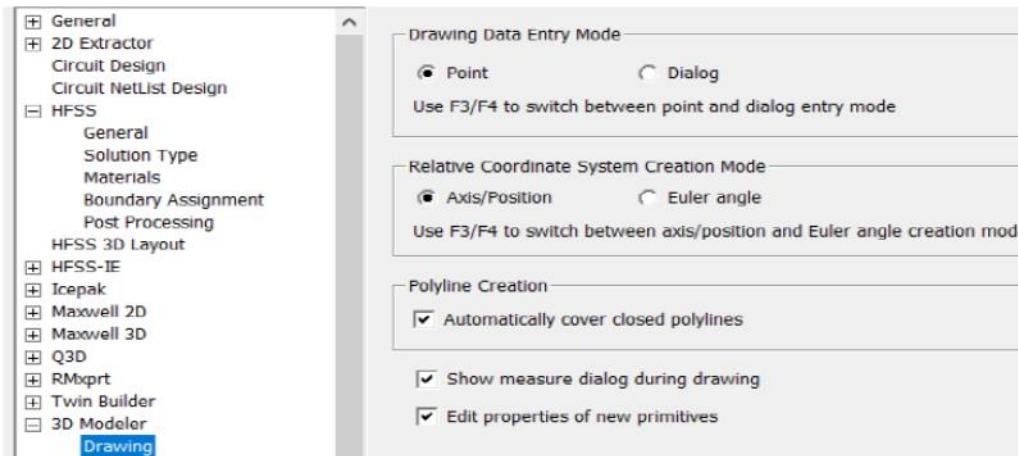

- Click the **OK** button

HFSS: Getting Started: Enable Material Override


Sometimes it is inconvenient to manually subtract partially overlapping solids (ex: via in PCB).

Enable Material Override adds additional rules to help the 3D Model Editor resolves partial overlaps

- 1.If the overlap exists between a good conductor and a dielectric the good conductor takes precedence
- 2.Overlaps between solids of the same material are reduced to warnings messages

Enable Material Override eliminates the need to subtract the vias from the substrates. HFSS automatically performs the subtraction because the metal vias override the dielectric substrate in the region of overlap.

From HFSS's menu bar HFSS > Design Settings: Enable material override: Checked

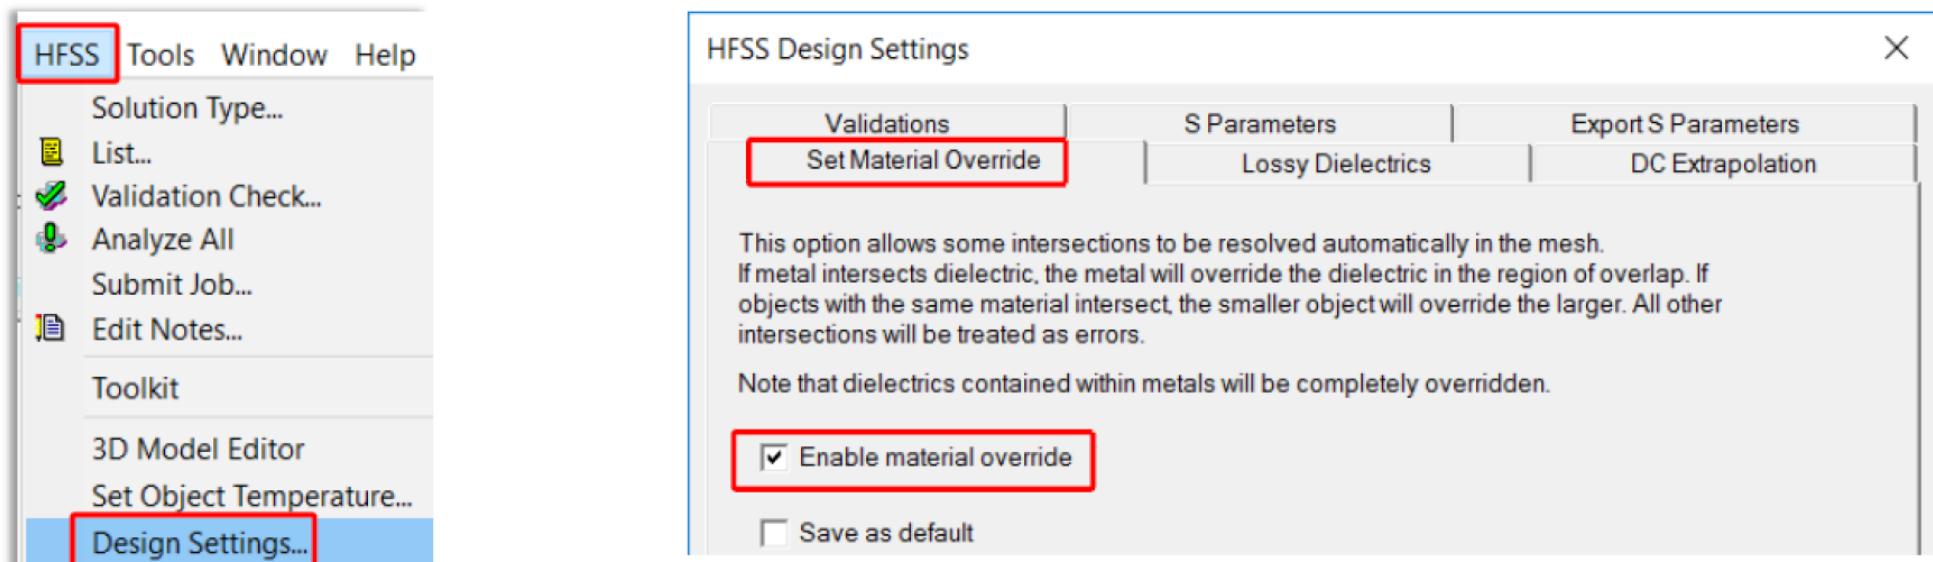

- Click the OK button

Simulation of a WR-90 Rectangular waveguide

1. Start HFSS and define geometry

Define Inner wall of waveguide

Define outer wall of waveguide

Boolean subtraction to obtain hollow waveguide

Inside of waveguide as vaccum

Radiation boundry

2. Define Excitation (Wave port)

3. Add solution setup (Freq Sweep)

4. Valiodate and simulate

5. View results

Design parameters

WR-90 Operating Frequency is X band (8.4 GHz to 12.4 GHz)



Standard dimentions (a X b) = 22.86 mm X 10.16 mm
(0.2 mm thickness of waveguide wall, length of 60 mm)

TE10 cutoff Freq = 6.56 GHz

TE20 cutoff Freq = 13.12 GHz

TE01 cutoff Freq = 14.76 GHz

TE11 cutoff Freq = 16.16 GHz

$$f_{c_{mn}} = \frac{1}{2\pi\sqrt{\mu\epsilon}} \sqrt{\left(\frac{m\pi}{a}\right)^2 + \left(\frac{n\pi}{b}\right)^2} \quad m,n=0,1,\dots$$

For TE₁₀ dominant mode,

f_{c_{10}} = \frac{1}{2\pi\sqrt{\mu\epsilon}} \sqrt{\left(\frac{1\pi}{a}\right)^2} = \frac{1}{2\sqrt{\mu\epsilon}} \frac{1}{a} = \frac{c}{2a} = \frac{3 \times 10^8}{2 \times 22.86 \times 10^{-3}} = 6.56 \text{ GHz}

Define Inner wall of waveguide

Select > HFSS > Solution Type > Model

Select > Modeler > Units > mm

Define Geometry: Draw Box > click three times in the main area

In Box properties tab > define position as

Position: $-a/2, -b/2, 0$

In automatically opened ass variable windows, we can define the parameters we have used:

Unit Type = Length

Unit: mm

Value for $a = 22.86$

Value for $b = 10.16$


Now we can use those variables throughout the rest of the exercise

Xsize: a

Ysize: b

Zsize: L

Click ok

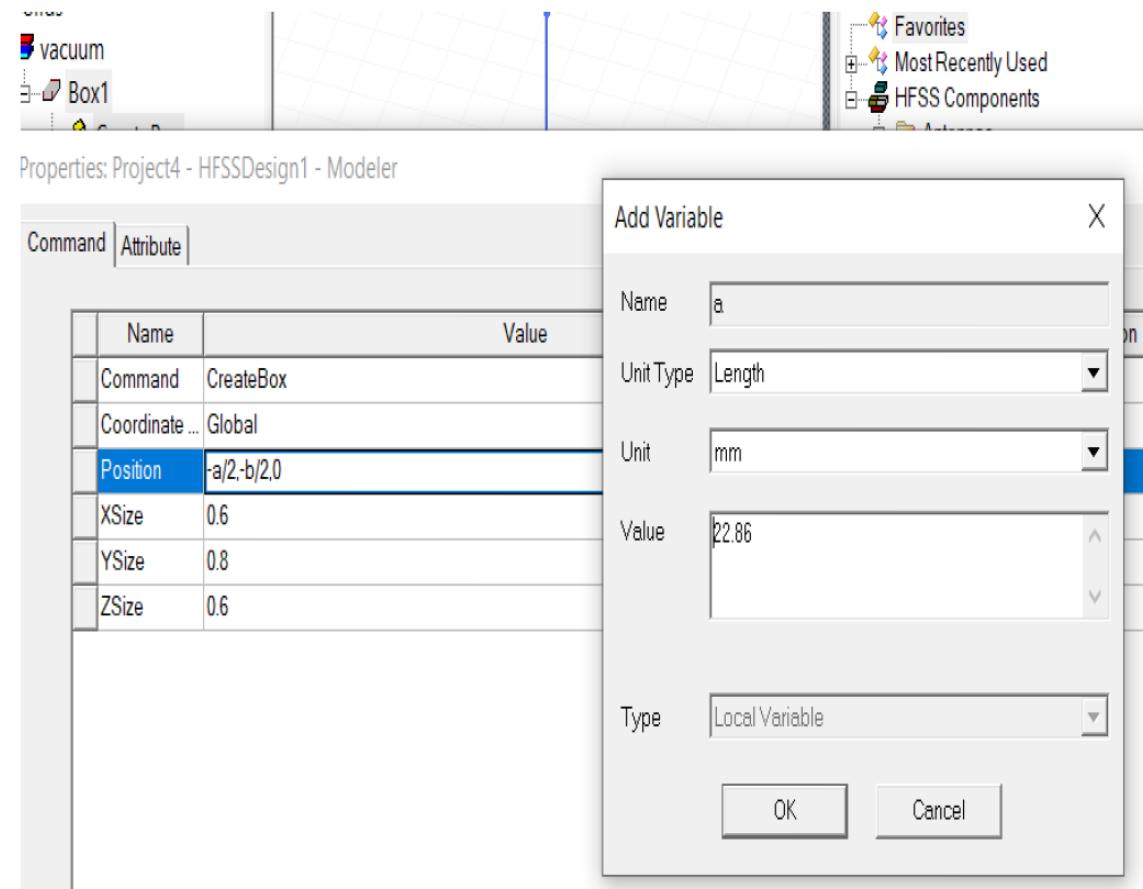

Define Inner wall of waveguide

Again we define the parameter 'L', representing the length of the waveguide along the Z-direction

Unit Type = Length

Unit: mm

Value for L = 60, ok

Press 'Ctrl' and 'D' to fit view

Properties: Project4 - HFSSDesign1 - Modeler

| | Name | Value | Unit | Evaluated Value | Description |
|--|----------------|--------------------|------|--------------------------|-------------|
| | Command | CreateBox | | | |
| | Coordinate ... | Global | | | |
| | Position | $-a/2, -b/2, 0$ mm | | -11.43mm, -5.08mm, 0m... | |
| | XSize | a | | 22.86mm | |
| | YSize | b | | 10.16mm | |
| | ZSize | L | | 60mm | |

Define Outer Wall of Waveguide

We will copy the inner wall definition and then modify it to give the waveguide a thickness.

In the model tree, under solids, vacuum, click on the box object Box 1 and copy (ctrl+c) and paste (ctrl+v) it in the same place, notice Box 2 is now created

Double click on box2 to open the attribute tab:

Name: Metal

Material: Copper

Note that this box is now defined in the modeler tree as a solid copper object.

Open up the command tab for this airbox by double create box under the copper solid now called metal and change the properties as follows:

Positon: $-a/2-th, -b/2-th, 0$

Define Outer Wall of Waveguide

In the automatically opened Add variable window, we define the parameter 'th' we have used to denote the thickness of the waveguide wall:

Unit Type = Length

Unit: mm

Value for th = 0.2

Xsize: $a+2*th$

Ysize: $b+2*th$


Click ok

Properties: Project4 - HFSSDesign1 - Modeler

| Command | | Value | Unit | Evaluated V... | Description |
|----------------|-------------------------|-------|------|-----------------|-------------|
| Command | CreateBox | | | | |
| Coordinate ... | Global | | | | |
| Position | $-a/2-th, -b/2-th, 0mm$ | | | -11.63mm , -... | |
| XSize | $a+2*th$ | | | 23.26mm | |
| YSize | $b+2*th$ | | | 10.56mm | |
| ZSize | L | | | 60mm | |

Boolean Subtraction to obtain Hollow waveguide

In the modeler tree, click on Box 1 and hold down ctrl and select Metal, then use the menu modeler>Boolean>subtract
Ensure blank parts has metal and tool parts has air and click ok (Can give different colour)

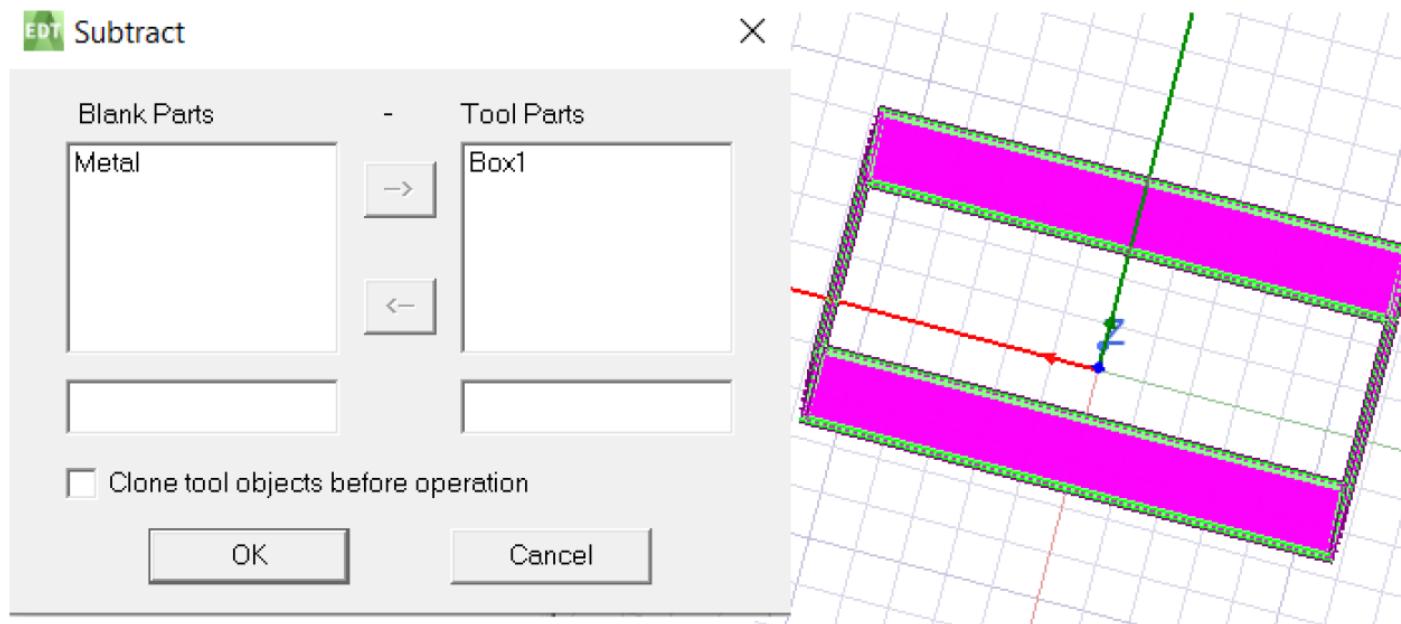

Define inside of waveguide as air



We will create another box to define the inside of the hollow waveguide as vacuum

In the modeler tree, select Box 1 and copy and paste

With the Not assigned solid, we will apply the following properties:

Name: Air

Material: air

Transparent:1

Define outside of waveguide + Rad Boundary

In the modeler tree, select air and copy and paste it

With the new air1 solid, we will apply the following properties

Name: Radiation

Material: air

Transparent: 1


Position: $-a/2-5\text{mm}$, $-b/2-5\text{mm}$, 0

Xsize: $a+10\text{mm}$

Ysize: $b+10\text{mm}$

Zsize: L




| | Name | Value | Unit | Evaluated V... |
|--|----------------|---|------|----------------|
| | Command | CreateBox | | |
| | Coordinate ... | Global | | |
| | Position | $-a/2-5\text{mm}$, $-b/2-5\text{mm}$, 0mm | | -16.43mm, -... |
| | XSize | $a+10\text{mm}$ | | 32.86mm |
| | YSize | $b+10\text{mm}$ | | 20.16mm |
| | ZSize | L | | 60mm |

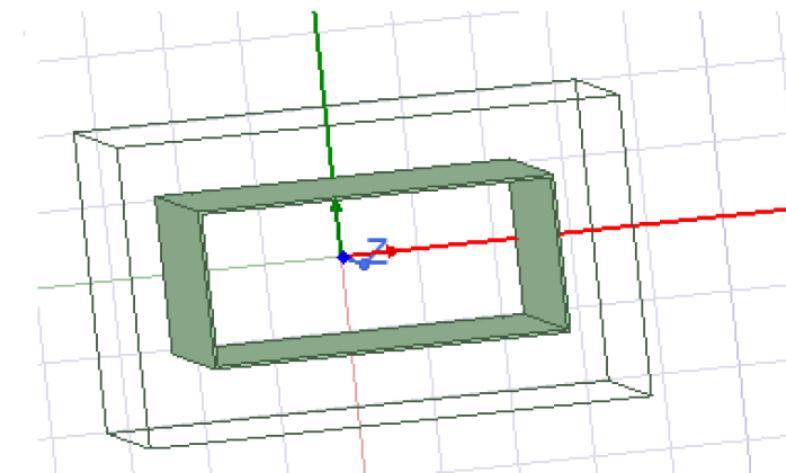

Define outside of waveguide + Rad Boundary

New assign this box as a radiation boundary

In the Modeler tree, RC on radiation solid>Assign Boundary>radiation>ok

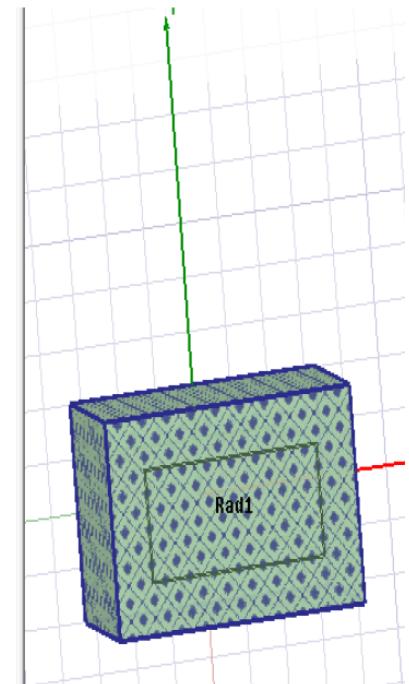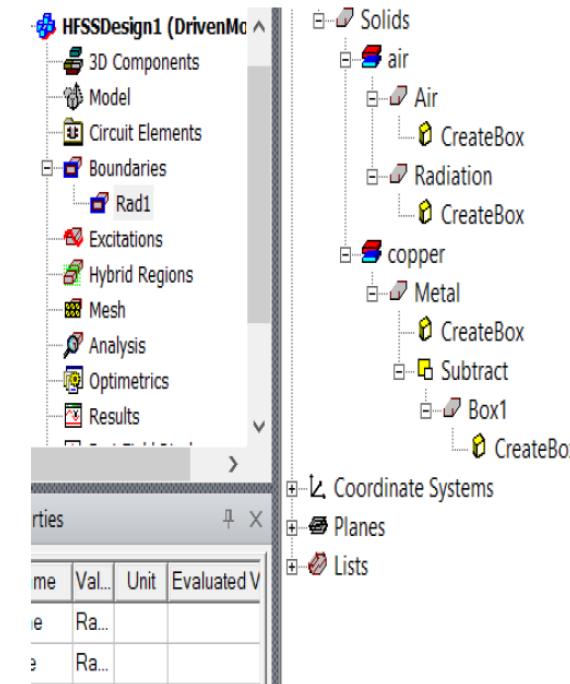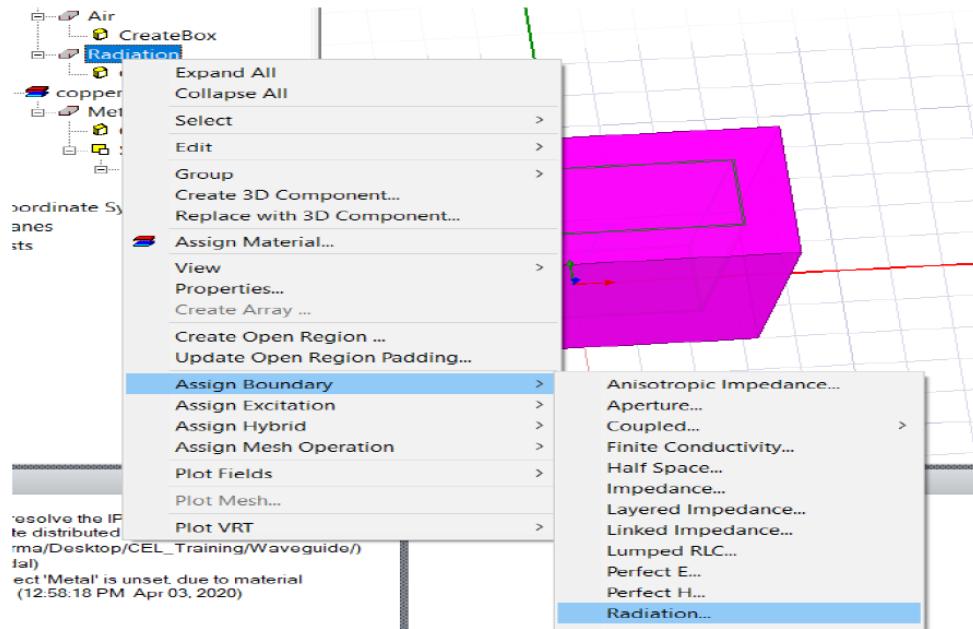


Define Wave Ports

In the main window, click outside the waveguide, On your keyboard, press F to enter face selection mode

Select face on the x-y plane at the entrance of the waveguide

(By left clicking on it as shown below) and R click on face>Assign Excitation>Wave port (as shown below)


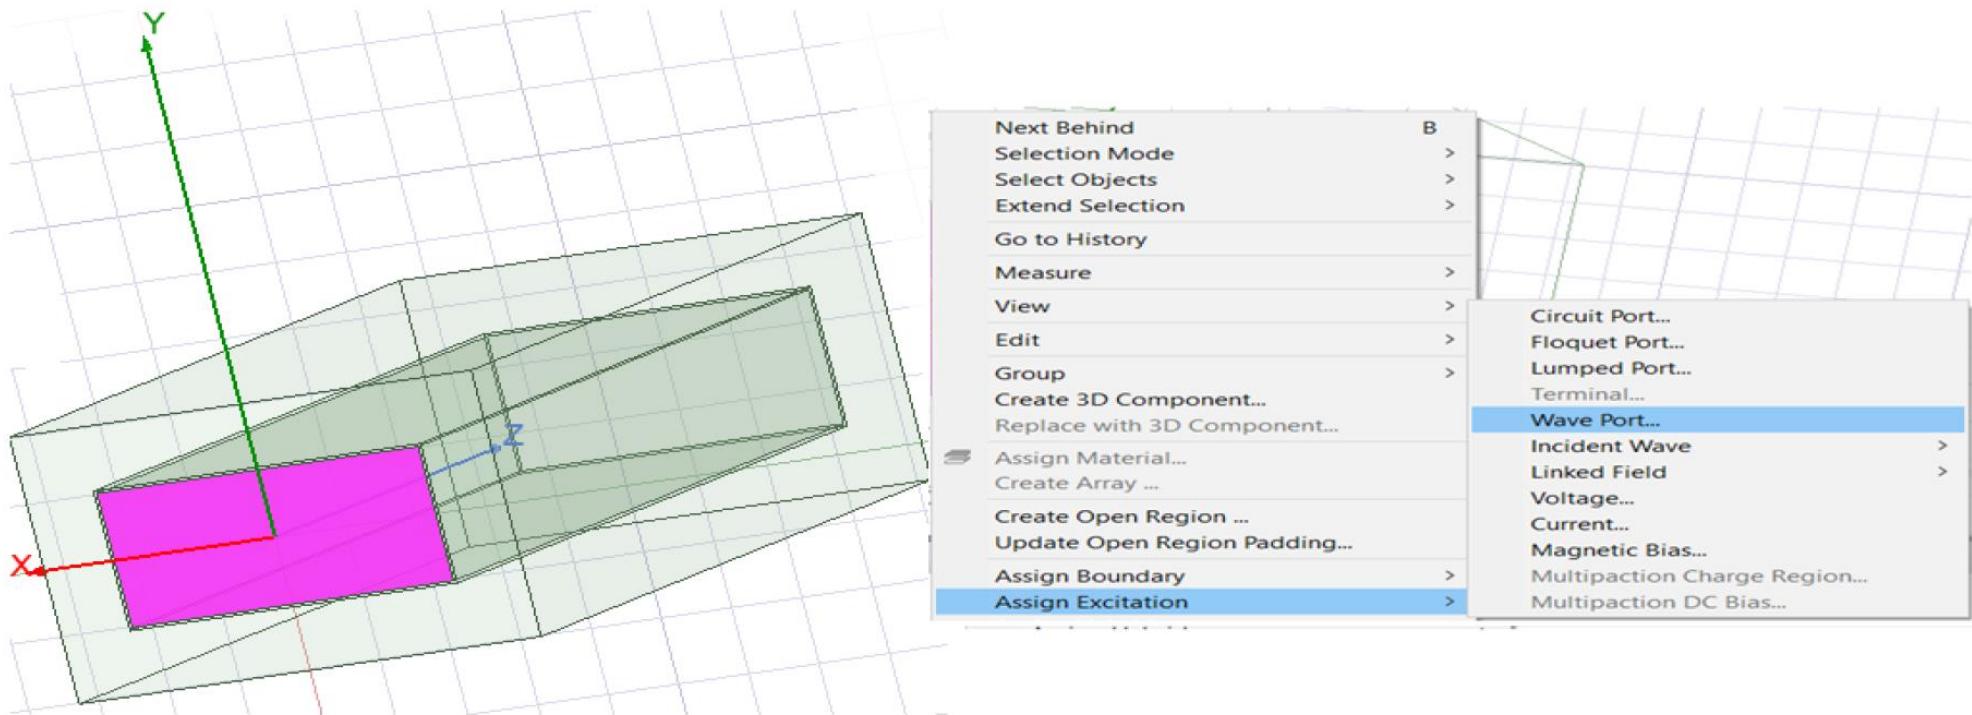


(Note: Wave port is used to solve the fields for the 2D port scenario and excite the 2D structure with it)

Define Wave Ports

In the Wave port window, click on Integration line > new line > in the 3d model editor, click on the Centre bottom and top of the selected face to define the line as shown below:

Wave Port

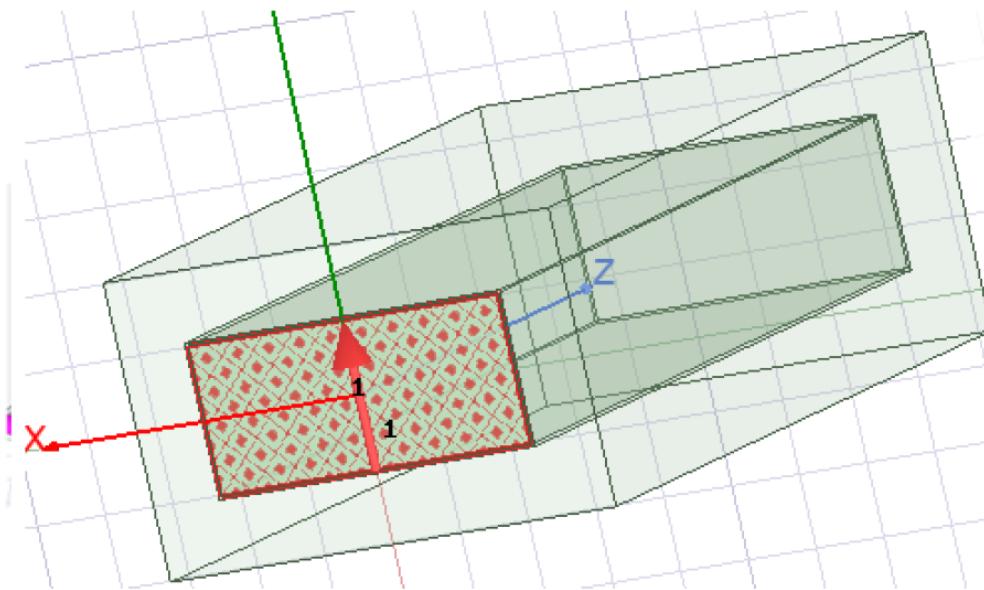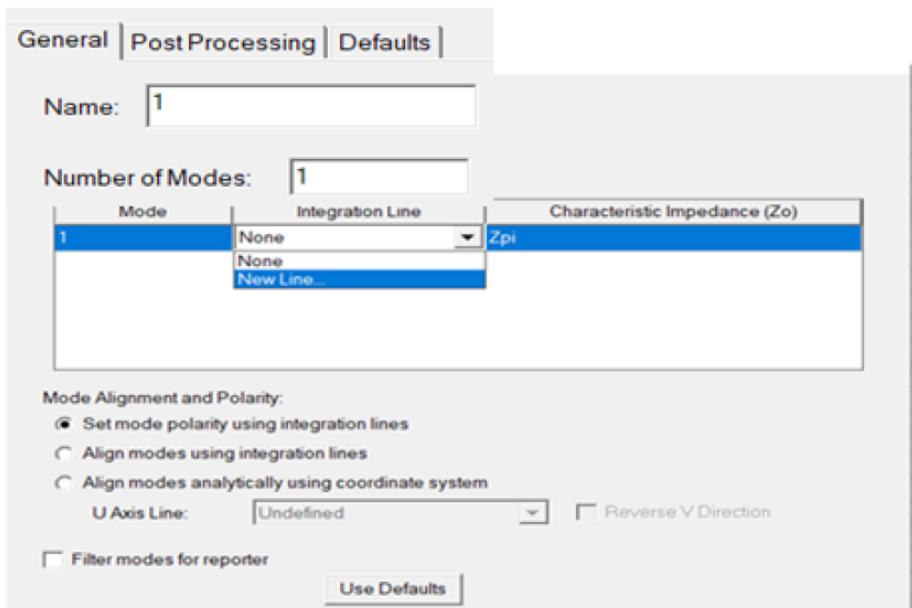


Click Next and then Finish (We do not want to renormalize to 50 OHM)

Repeat the same process for opposite face

Define Wave Ports

Set number of modes 4 to simulate 4 modes.

In project manager, open Excitation and click on 1 and set number of modes to 4 as shown below (We do not need to redefine integration line)

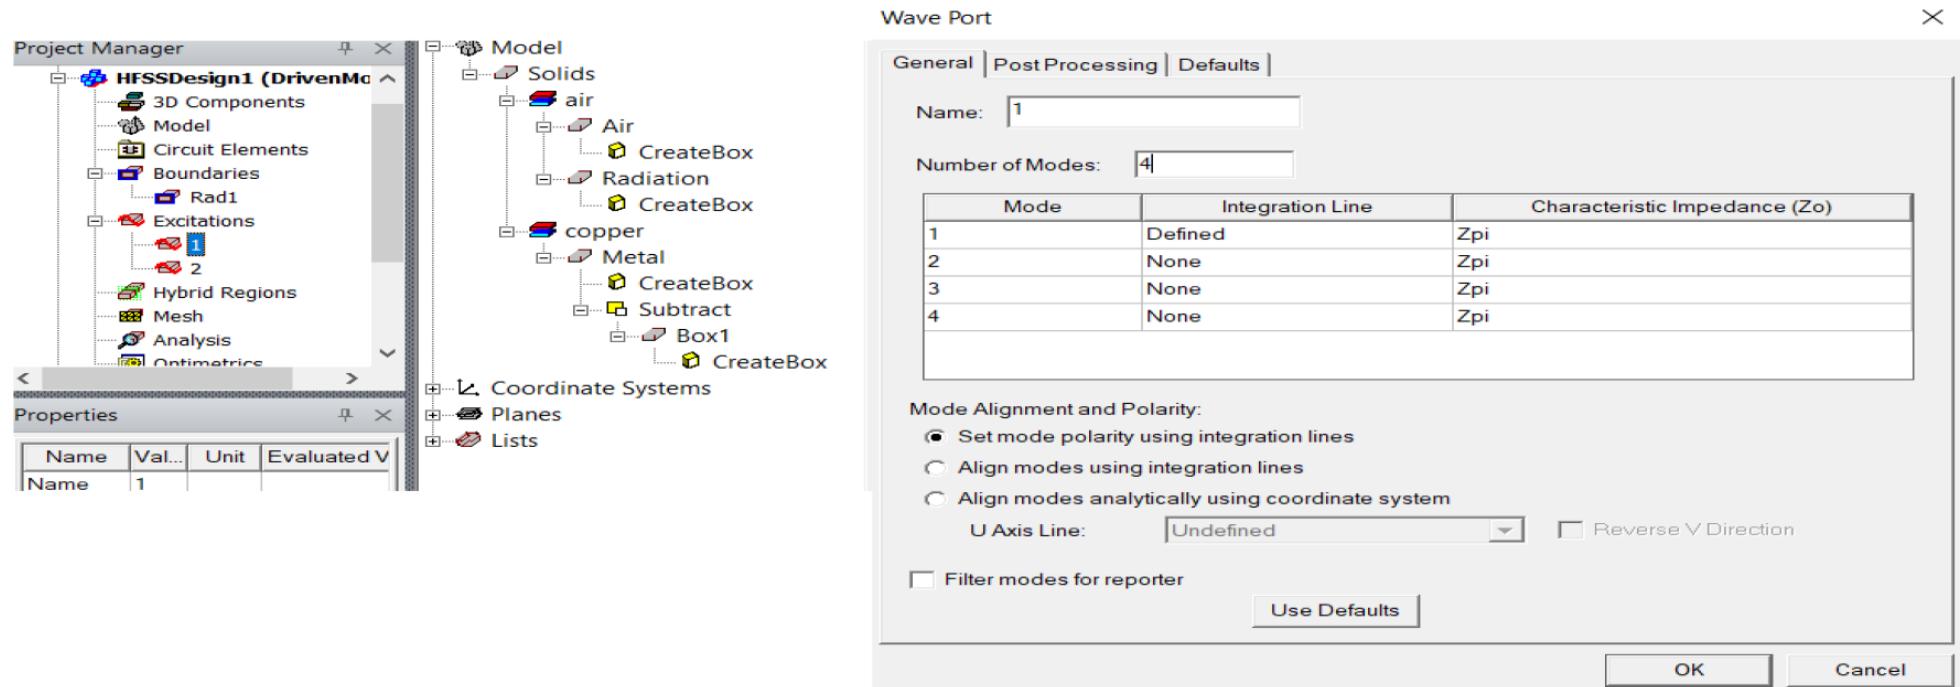


Repeat the same process for Wave port 2 and set Modes to 4.

Add Solution Setup

In project manager window click on analysis> Add solution Setup> Advance and use below settings:

Freq: 10 GHz

Num of Pass: 12 > ok

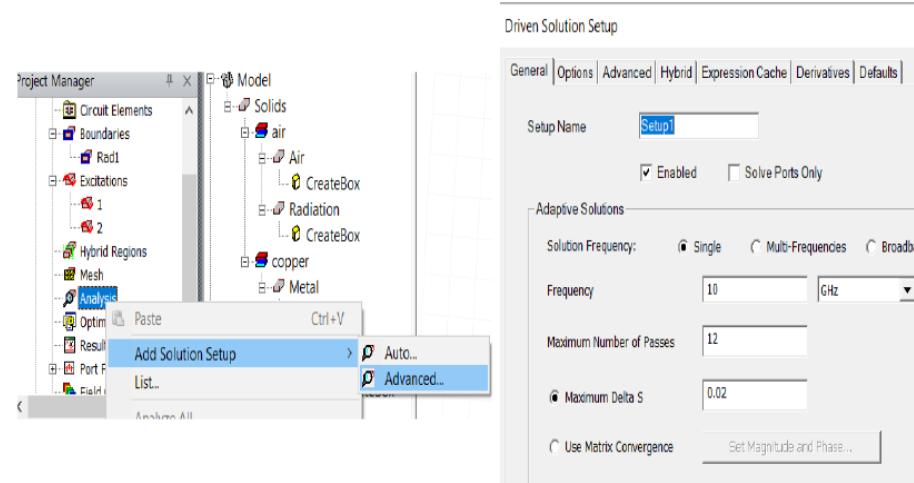

In project manager window, open up analysis, RClick on setup1> Add freq Sweep and use below settings:

Sweep Type: Discrete


Distribution: Linear step

Start: 5 GHz

End: 17 GHz

Step: 0.1 GHz

Save Field: All frequencies Checked

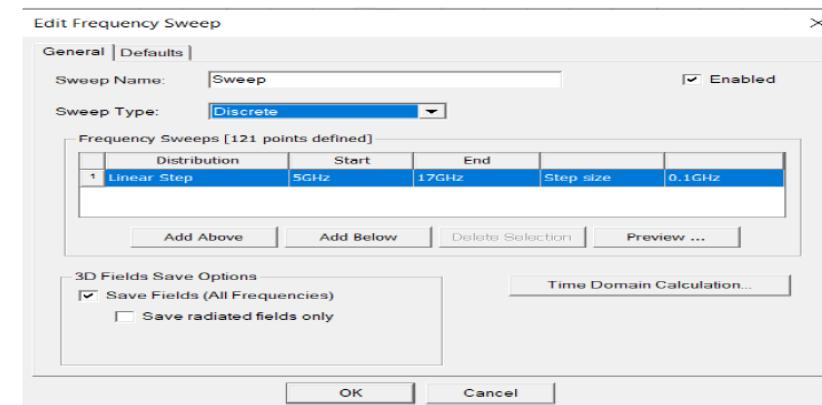


Validate and Simulate

HFSS> Validation Check


HFSS> Analyze all

Save

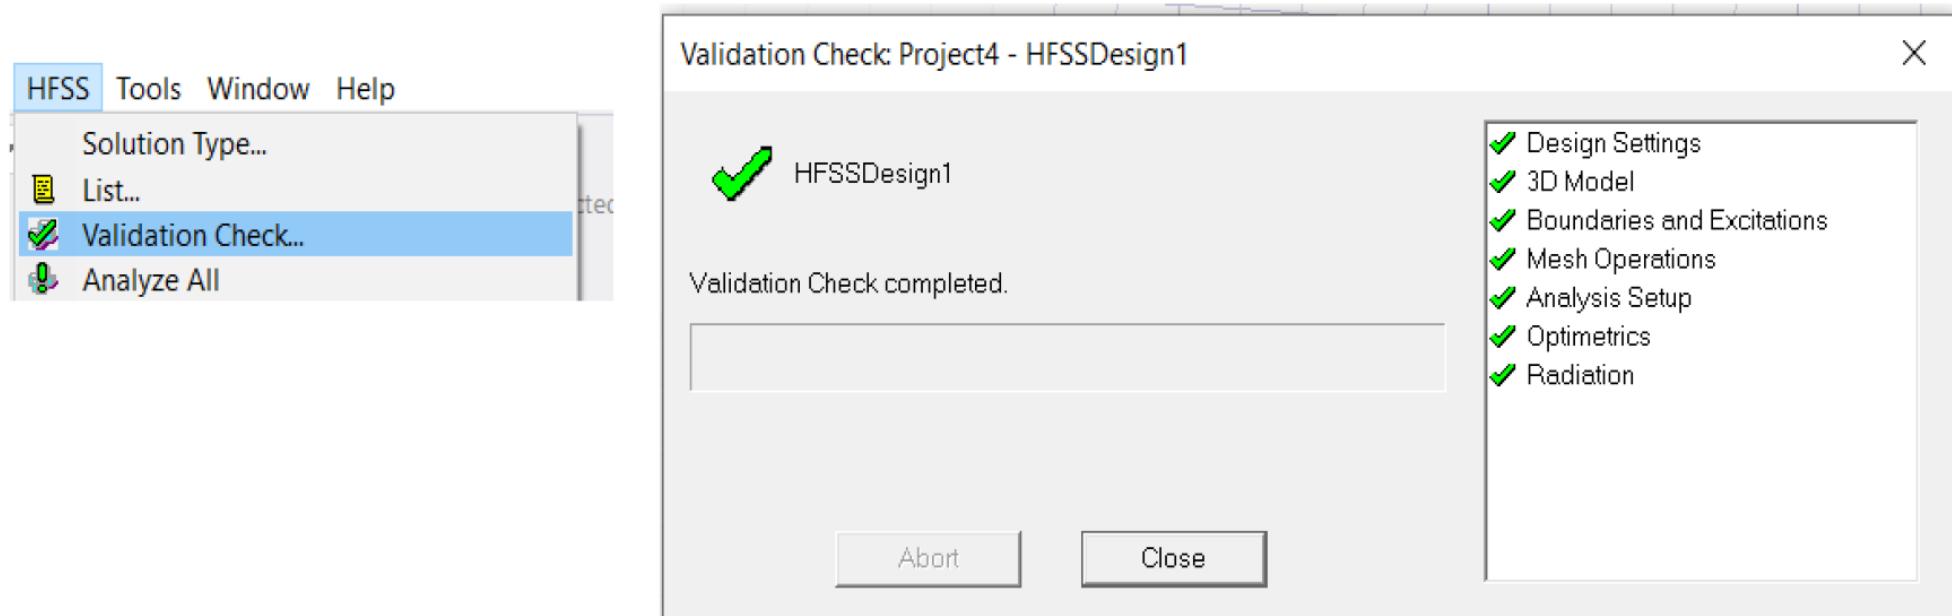

Post Processing: Port Field Display



In the Project manager Window, open 'port field display' and for either port, click on mode 1 to view the electric field vectors

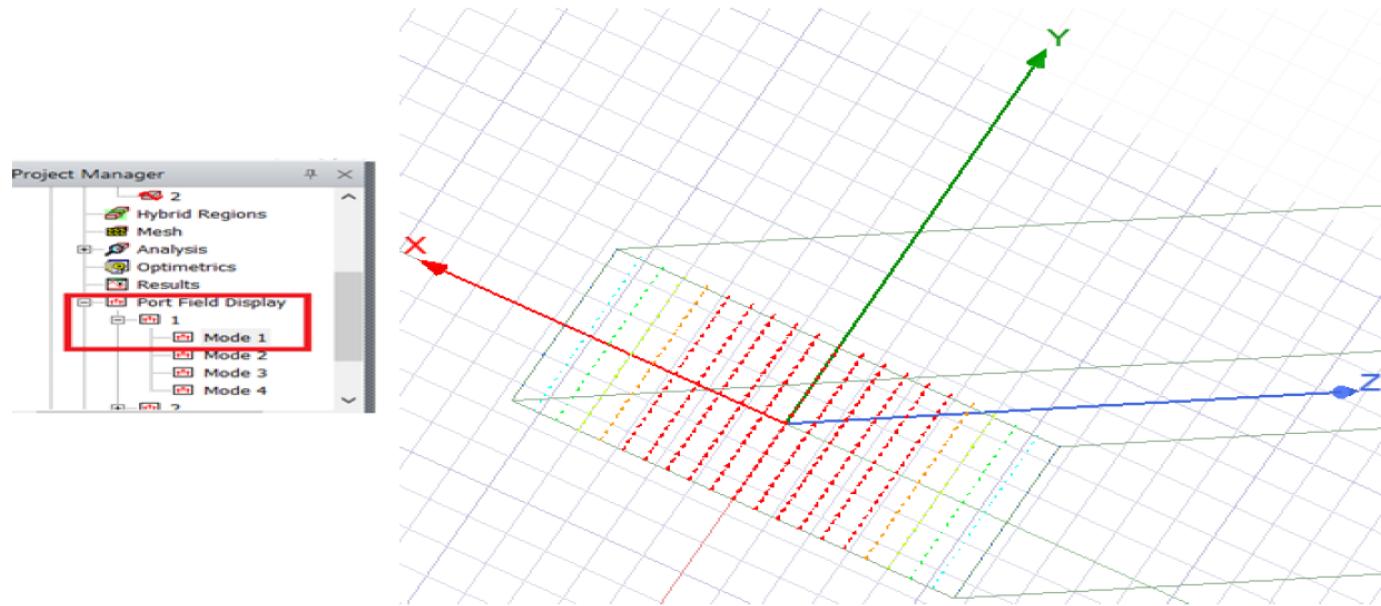


For mode 1, we obtained the plot of dominant mode TE10. The magnitude of E field intensity is greatest at the Centre, check the other modes as well

Post Processing: MAG E

View the Magnitude of the electric field vector not only at the ports, but along the length of the wave guide
 In the Model Tree, R click on Air Solid: Plot Field> E> Mag E

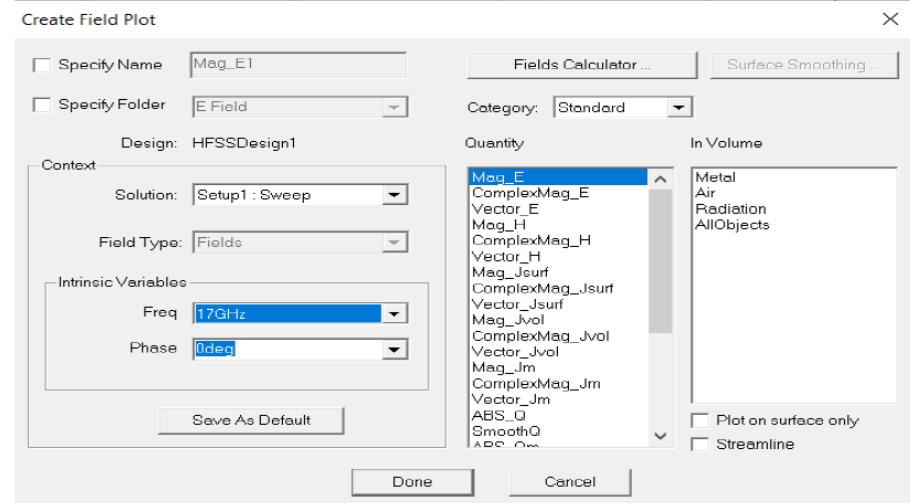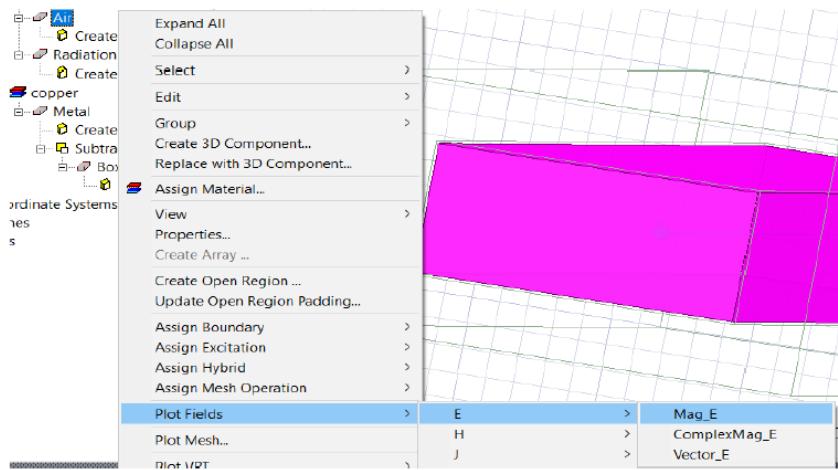


Hide Metal to make better View:

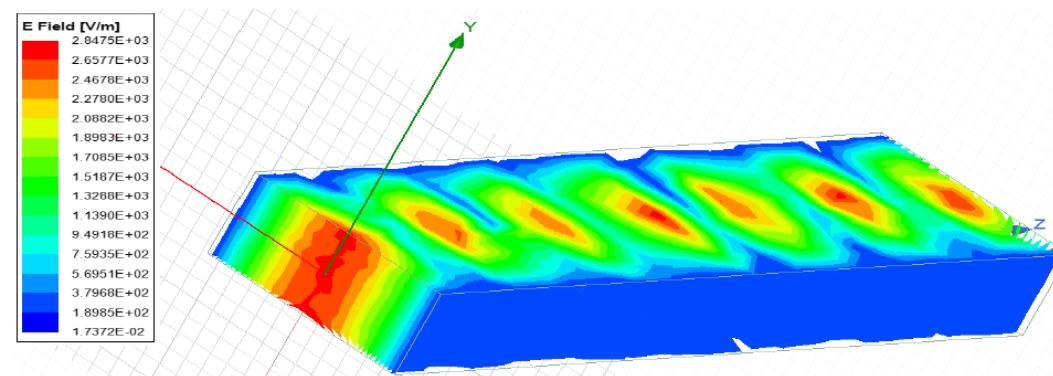


Post Processing: Specify View

To get other Modes, rather than TE10 Modes, We need to choose different excitation, HFSS>Field> Edit Sources, here you can which port and mode is excited, make selection, select mode 2 and view result and observe the changes in E field

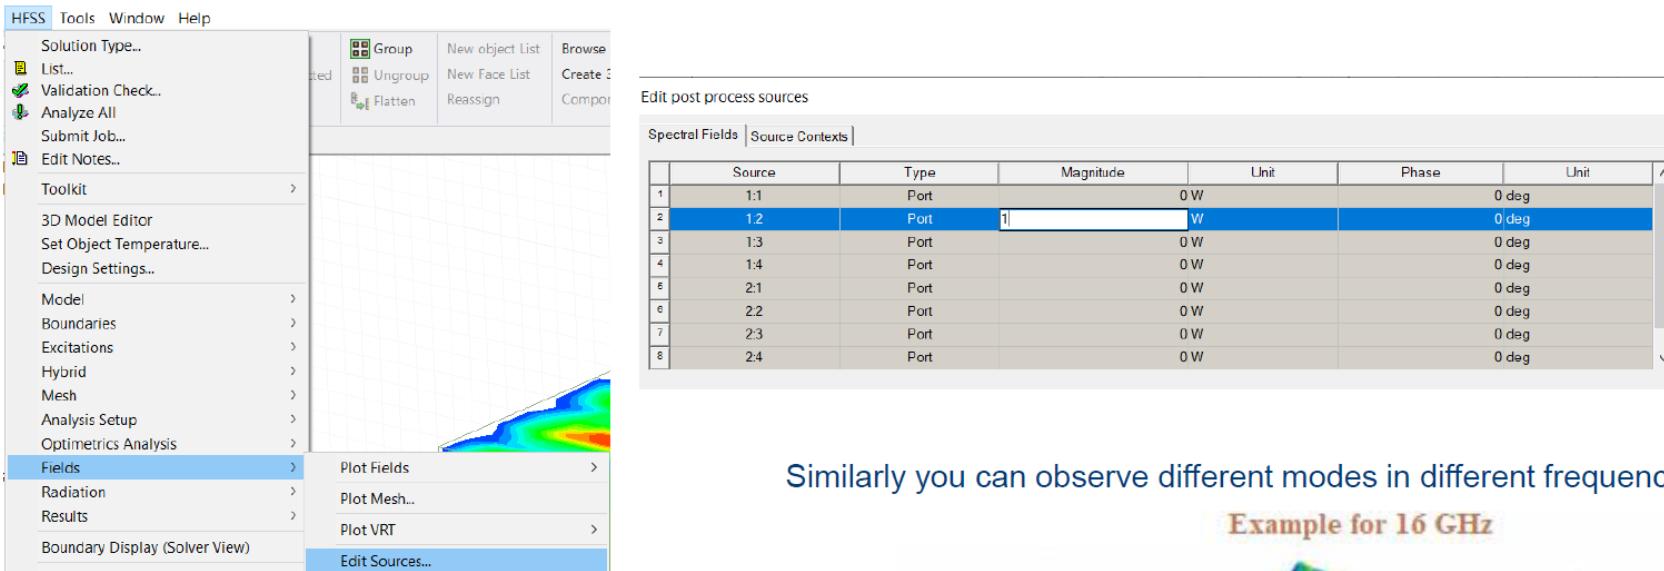


Similarly you can observe different modes in different frequencies as shown below

Example for 16 GHz


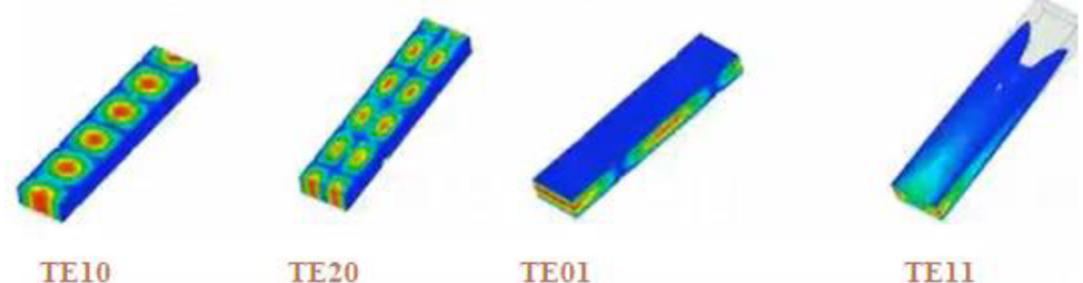


Post Processing: Vector E

Remove plot visibility for Mag_E

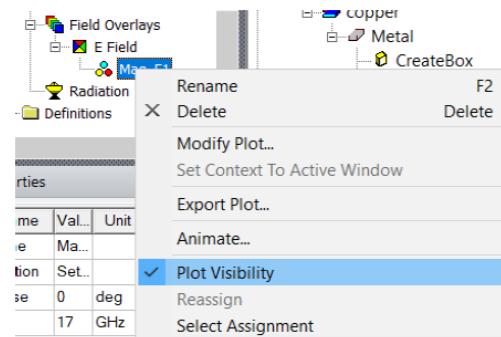


In the Model Tree, R click on Air Solid: Plot Field> E> Vector_E

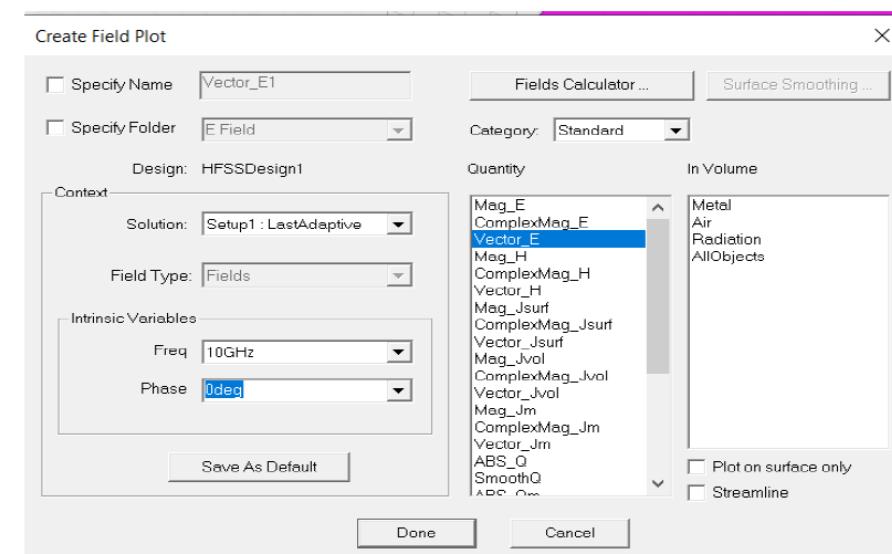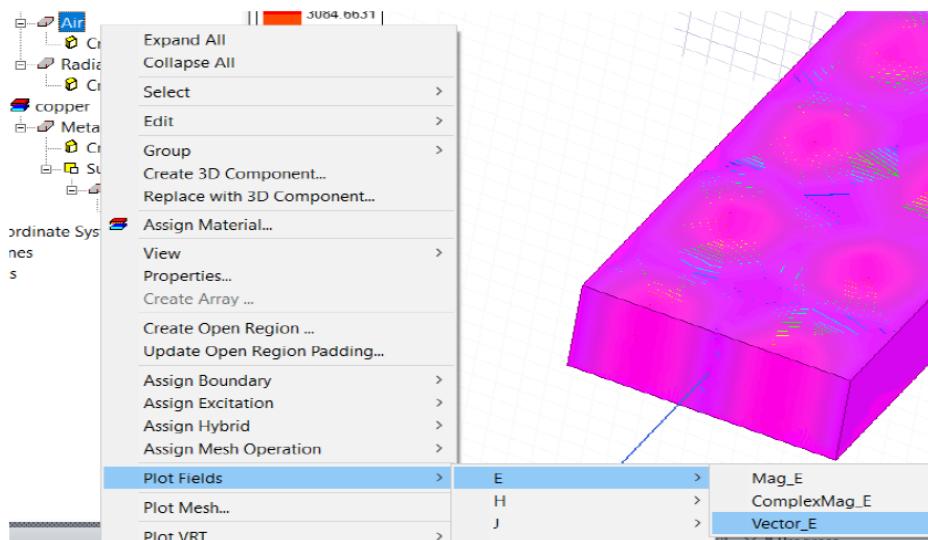


Post Processing: Vector E

Since we picked 10 GHz, lower then cutoff freq for mode 2, we don't see string number of fields here

Make Metal object visibility On and set transparency to 1

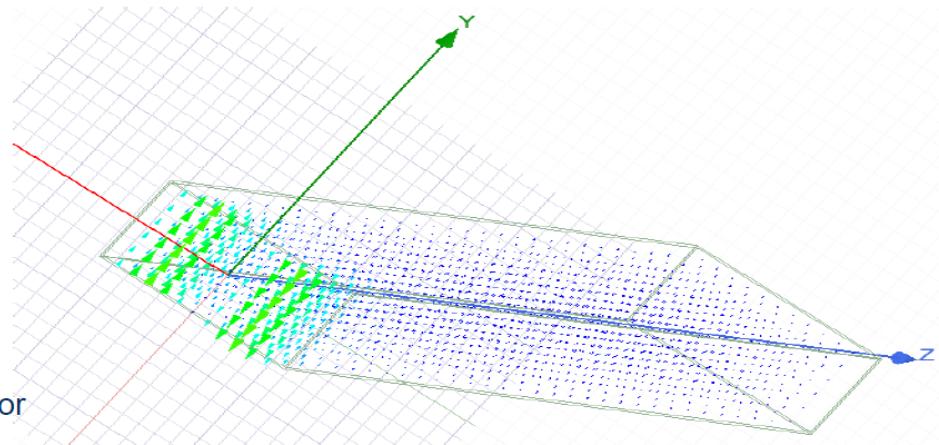

Field > Edit Sources> activate first mode and observe E-vector

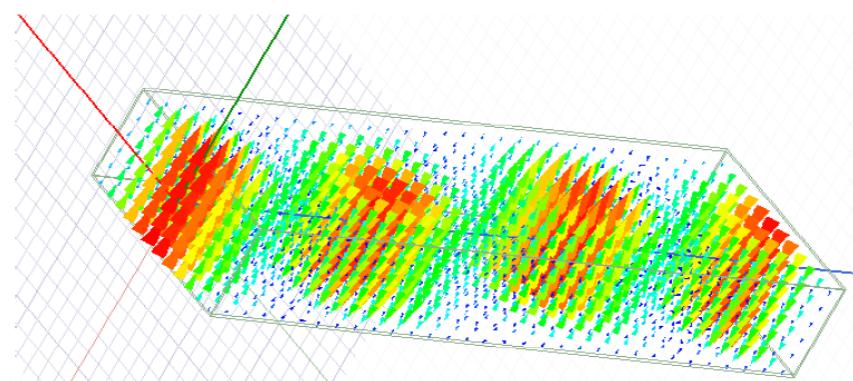


R click Vector E> Animate

Rectangular Plots: Propagation Constant, VSWR, S-parameters

$$y = \alpha + j\beta$$

y = propagation constant
 α = attenuation constant
 β = phase constant

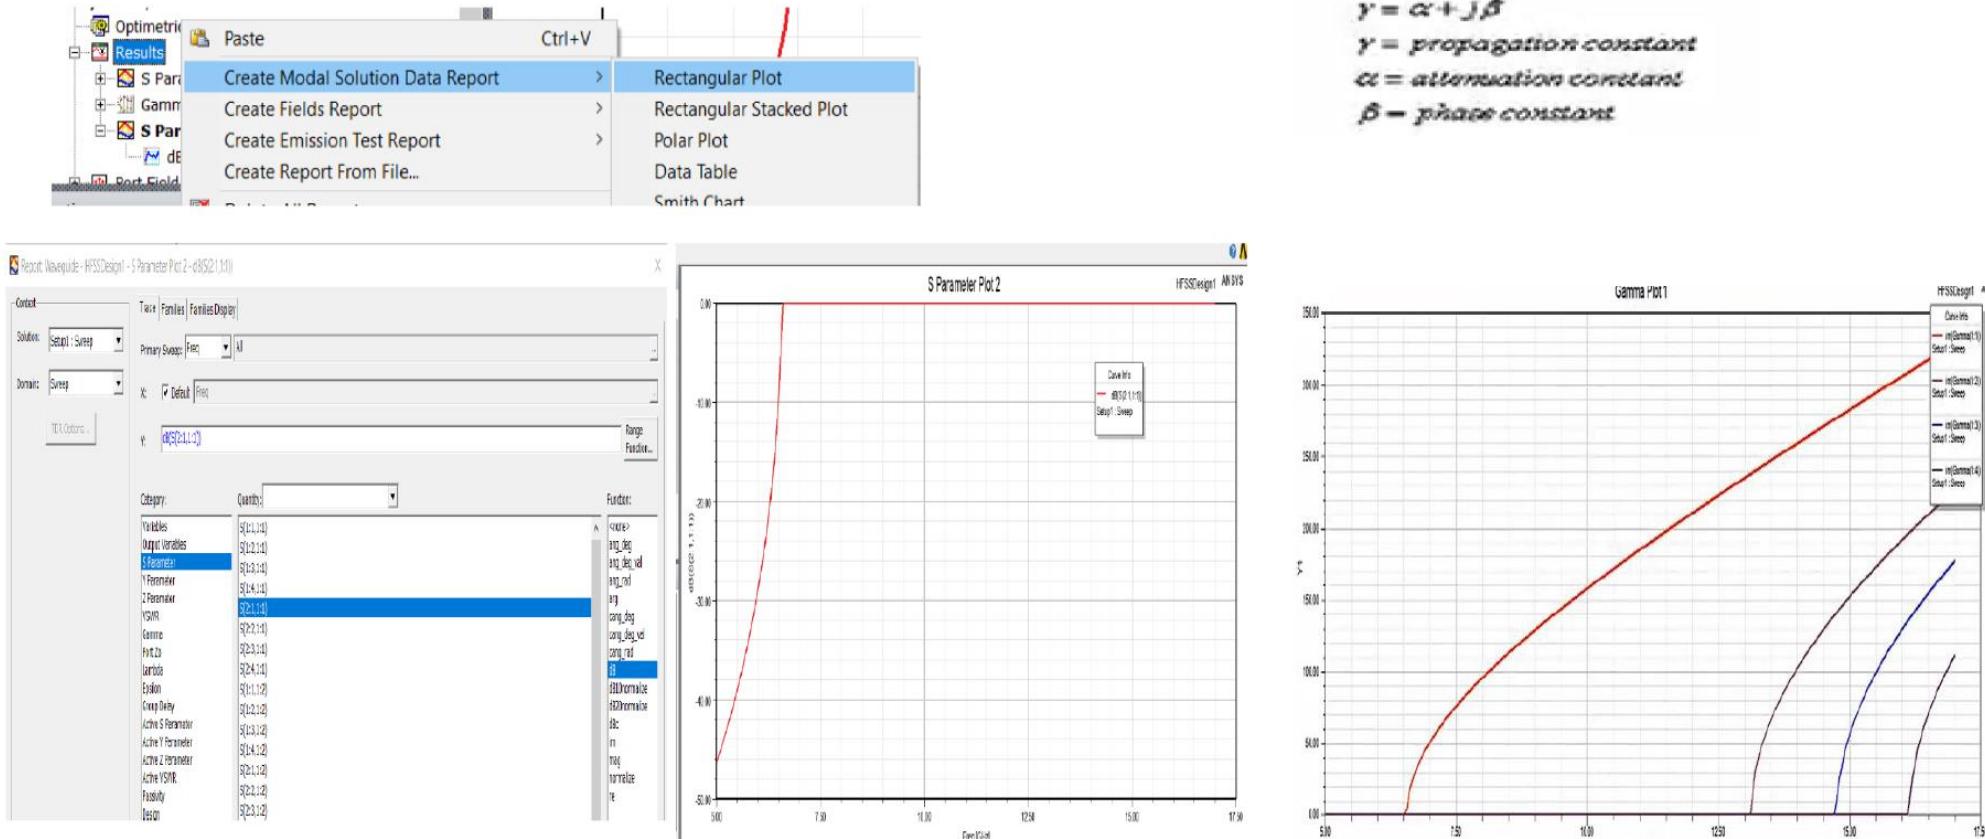

Magic Tee HFSS Procedure

Setting Tool Options

- Note: In order to follow the steps outlined in this example, verify that the following tool options are set :

- Select the menu item Tools > Options > General Options...

- Expand the HFSS Branch

Left Mouse Click Boundary Assignment

- Use Wizards for data input when creating new boundaries:

Checked

- Duplicate boundaries/mesh operations with geometry:

Checked

- Expand the 3D Modeler Branch

Drawing: Edit properties of new primitives:

Checked

Expand the Display Branch


Rendering Set Default Transparency to 0.7

History Tree: Select last command on object/submodel select:

Checked

a) Draw the Box and its dimension

Draw → Box → Use Mouse Pointer → Select the Origin (0,0,0) as position and draw (Ref Fig below)

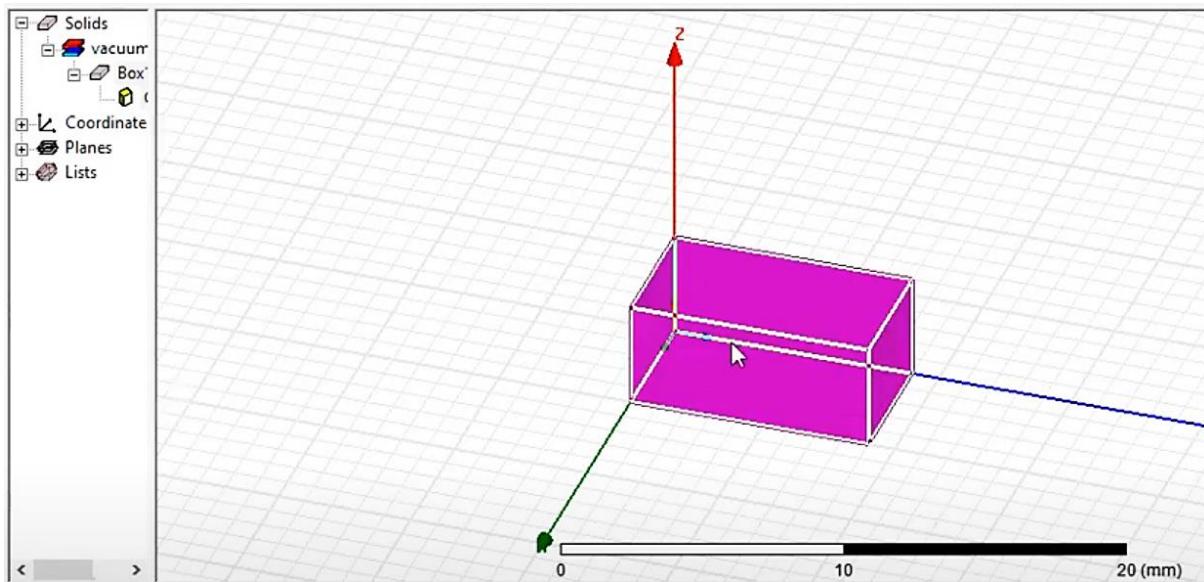

b) Changing the dimensions

Model → vacuum → Box → CreateBox

Position → (-11.43, 0, -5.08) (Note: To keep the waveguide positioning at centre of XZ plane axis)


XSize → 22.86

YSize → 100

ZSize → 10.16

c) Fit View Ctrl +D or View → Fit all & duplicate the box for all 4 arms

Select Box → Edit → Duplicate → Around Axis (Ref Fig below)

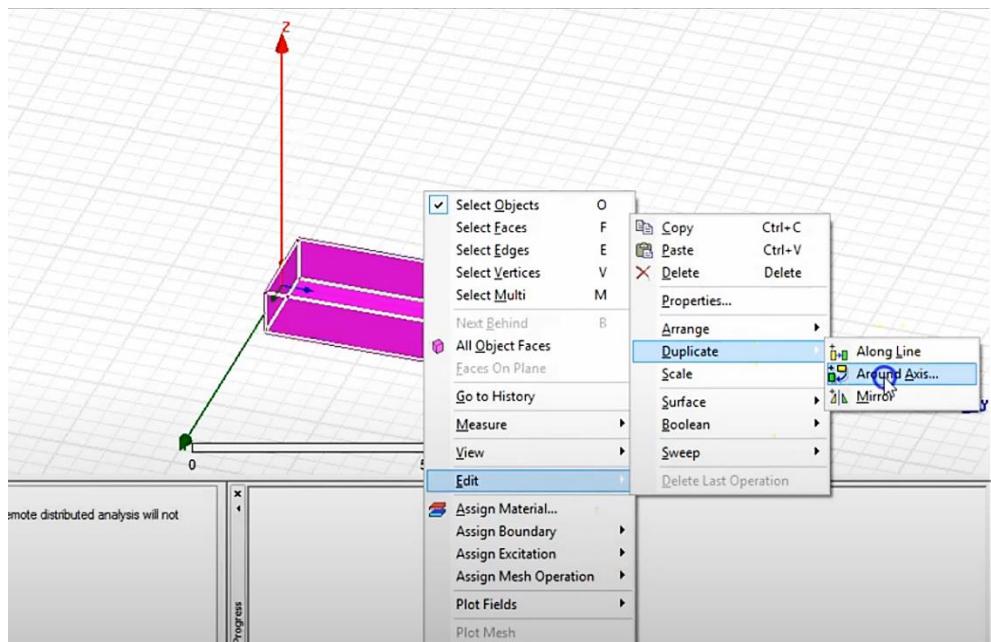

Coplanar-arm (Port 2)

Axis: Z

Angle: 90 deg

Total number: 2

Similarly, Coplanar-arm (Port 1)

Axis: Z

Angle: -90 deg

Total number: 2


For E-plane arm (Port 3) (Ref Fig below)

Select the coplanar port1 arm,

Axis: Y

Angle: -90 deg


Total number: 2

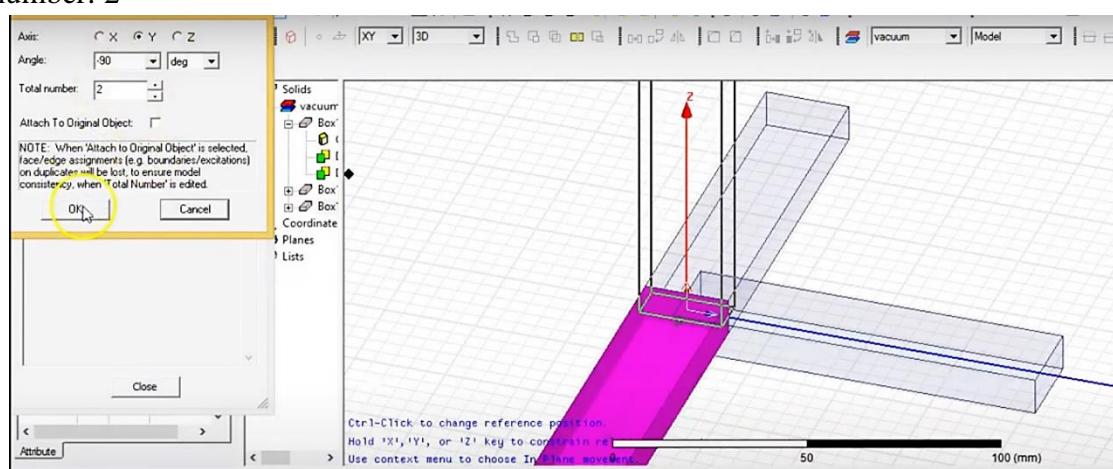

d) Unite all the Box


Edit → Select All Visible or Ctrl + A

Modeler → Boolean → Unite

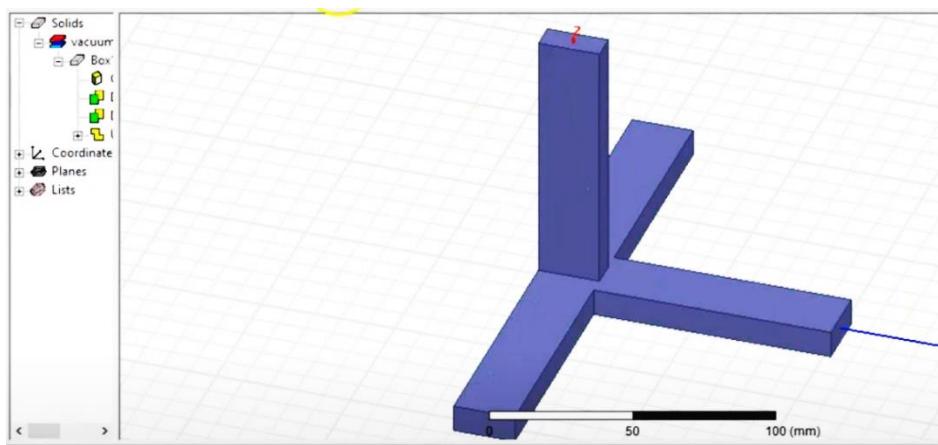

- e) Assign Boundary and excitation to the port arms


Select Ctrl + Select all the arms except faces

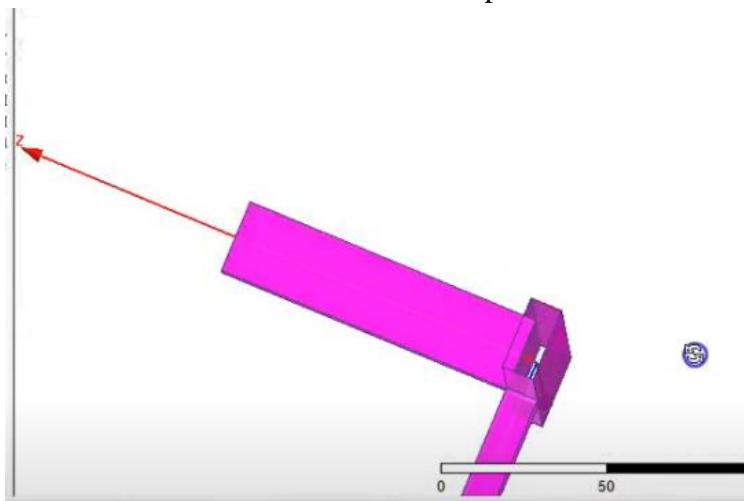


Right click on mouse → Assign Boundary → Perfect E → Name → PerfE1

- f) Assign excitation to wave ports

Use mouse pointer click on face of port and Assign Excitation → Waveport → Name → 3, Integration line → New Line →

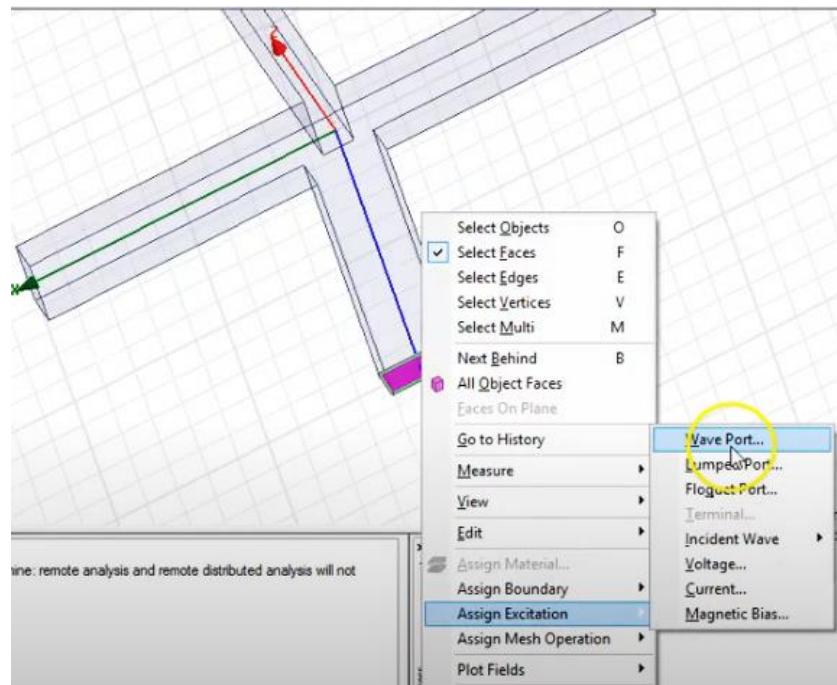

Select the integration line from bottom to top on the face as shown below

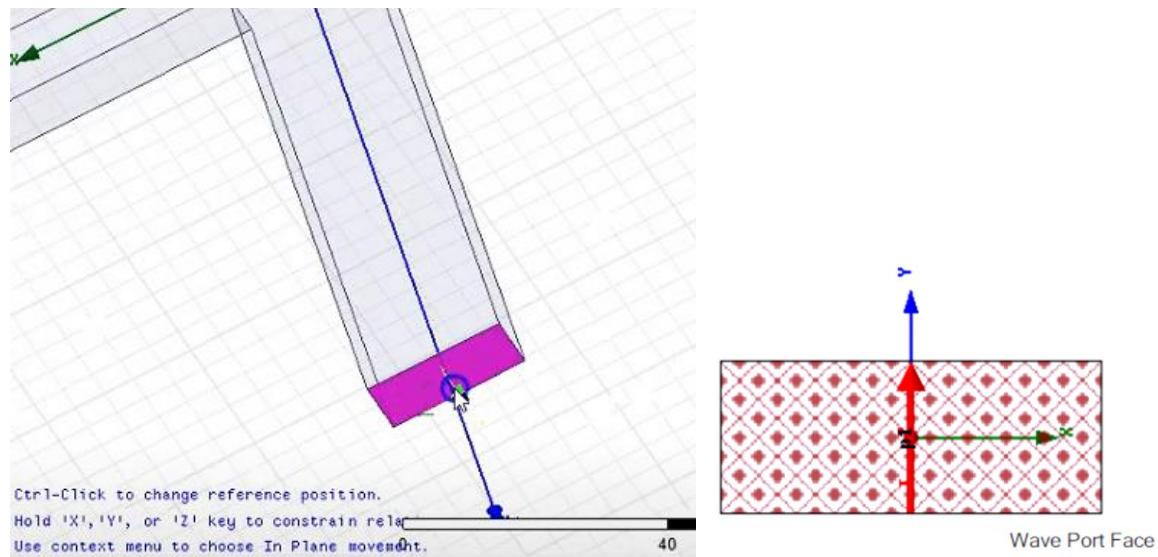

Similarly do for all the arms port1, 2 & 4

g) Analysis Setup

In project manager

Analysis → Add Solution Setu → Solution frequency → 10GHz → Enter OK

Add Frequency Sweep → Sweep type → Interpolation → Type → LinearStep

Start → 6 GHz, Stop → 15 GHz, Step Size → 0.1 GHz → Enter OK

h) To run the program

HFSS--> Validate check (if error is displayed than check the boundary, dimensions and excitations)

After validate--> Execute Analyze all

(Note: if project to be saved than use a relevant name and designated folder to save the project.
Please check with the technical lab staff to know right location. Data loss may occur if the location has been chosen wrongly.)

- i) To see the result,

Choose the “Results” in Project Manager, (Right Click on Mouse)


Create Model Solution Data Report--> Rectangular port--> Choose S Parameter--> Quantity-->

S(1,1), S(2,1), S(1,2), S(2,2)


Click on “New Report”

To view fields and animation

Mouse click on any arms of magic tee → Create Field overlay → Plot field → E → Vector_E

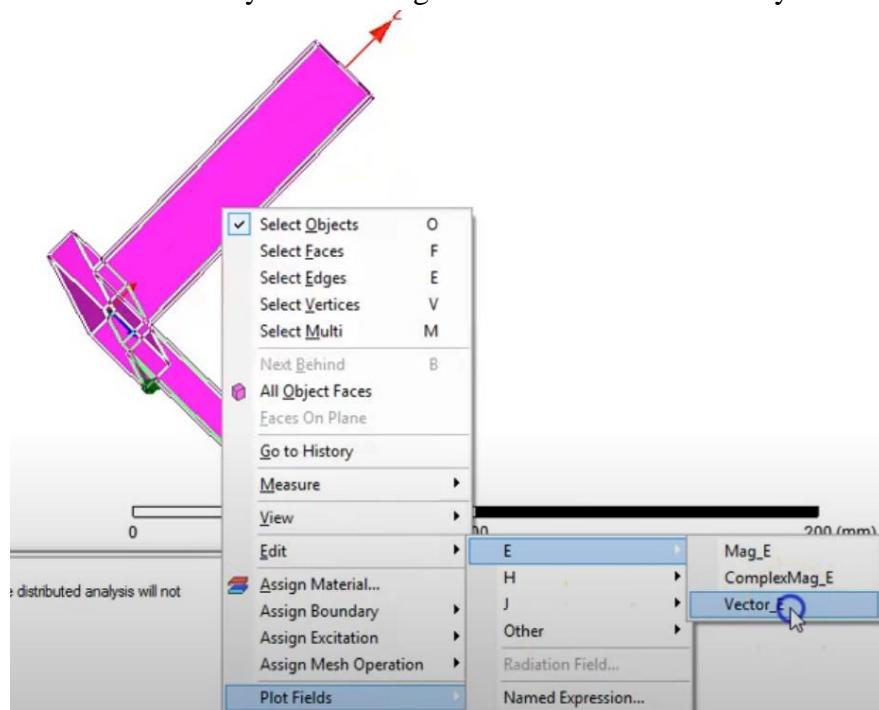


On Create Field Plot Window, Enter Done.

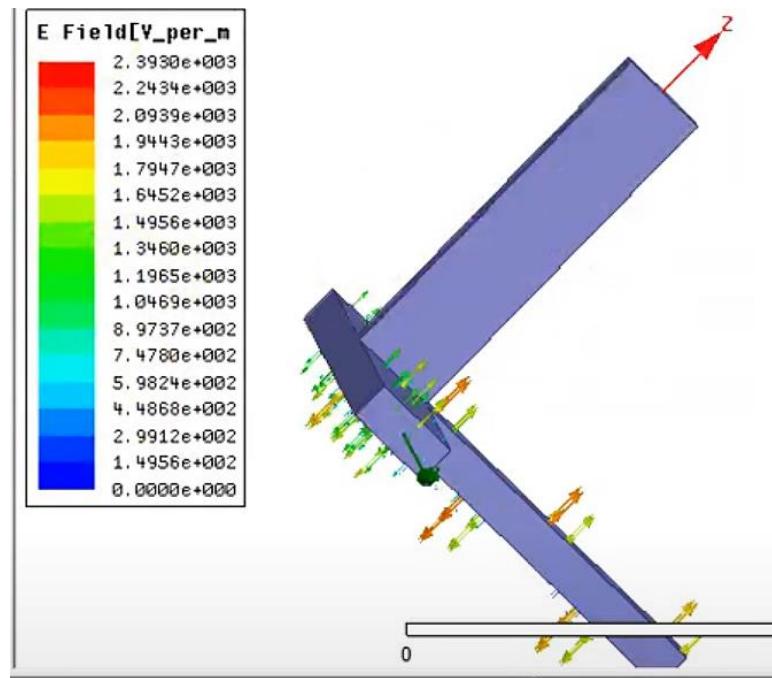

To animate field → In project manager → Field Overlays → E Field → Vector_E → Animate → On Setup
Animate → Enter OK

Similarly E-field magnitude(Mag_E) plot can be seen

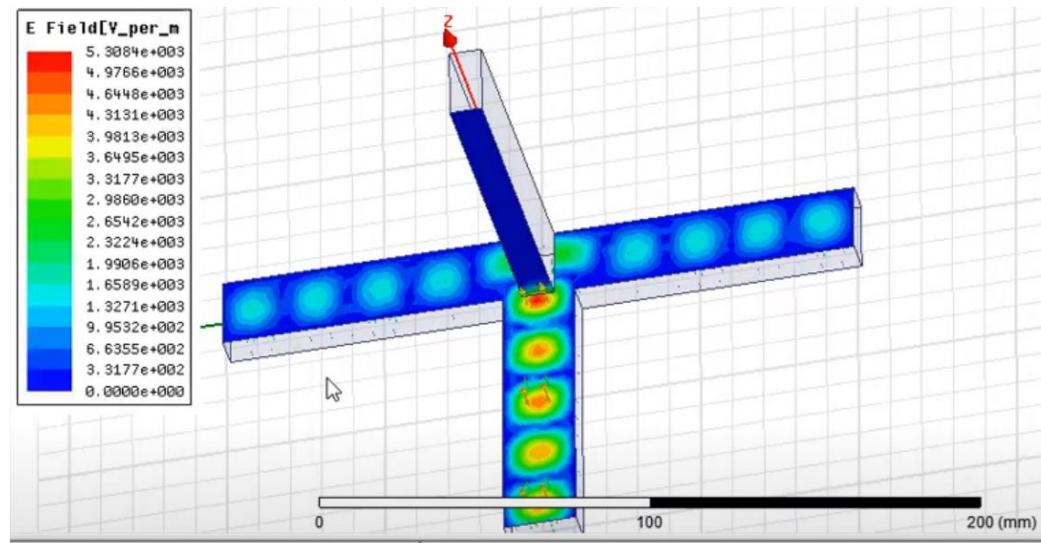

4. RESULTS/OUTCOMES

Rectangular Waveguide

S-parameter plot and Propagation constant plot vs Frequency

Magic Tee

Construct a table of S-parameters

| PARAMETERS | (dB) |
|-------------------|-------------|
| S11 | |
| S22 | |
| S33 | |
| S44 | |
| S12=S21 | |
| S13=S31 | |
| S14=S41 | |
| S23=S32 | |
| S24=S42 | |
| S34=S43 | |

Observations:

| Sl.No | Criteria | Max Marks | Marks obtained |
|-------------------------------|--|-----------|----------------|
| Data sheet | | | |
| 1 | Problem statement | 10 | |
| 2 | Design & specifications | 10 | |
| 3 | Expected output | 10 | |
| Record | | | |
| 4 | Simulation/ Conduction of the experiment | 15 | |
| 5 | Analysis of the result | 15 | |
| 6 | Viva | 40 | |
| 7 | Total | 100 | |
| Scale down to 10 marks | | | |

EXPERIMENT 7

Design and Simulation of Patch Antenna and Optimetrics using HFSS

Topic Learning Objectives:

The student must be able to:

1. Design the rectangular microstrip patch antenna, dipole at given operating frequency.
 2. Simulate the antennas with HFSS software.
 3. Analyze the S parameters and optimetrics of the antennas.
- 1. AIM:** Design and simulation of a coaxial fed rectangular microstrip patch, printed dipole and horn antennas at a specified resonant frequency with HFSS software.
- 2. EQUIPMENT REQUIRED:** 64 bit Personal computer/Laptop and Ansys HFSS design Kit
- 3. THEORY:**

Microstrip patch antenna

The design parameters of Rectangular microstrip patch antenna are: frequency of operation (f), dielectric constant of the substrate (ϵ_r) and height of dielectric substrate (h). The substrate parameters considered are: $\epsilon_r = 2.2$ (RT Duroid), $h = 1.57$ mm. Using the above specifications, the rectangular patch is designed as follows:

For efficient radiation, the width w

$$w = \frac{c}{2f} \sqrt{\frac{2}{\epsilon_r + 1}} \quad (7.1)$$

Where, c is velocity of light, f = resonant frequency in GHz, ϵ_r =Dielectric constant of the substrate.

The effective length L_{eff} is given as

$$L_{eff} = L + 2\delta L \quad (7.2)$$

Where δL is

$$\delta L = 0.412h \left(\frac{\epsilon_r + 0.3}{\epsilon_r - 0.258} \right) \left(\frac{\frac{w}{h} + 0.264}{\frac{w}{h} + 0.8} \right) \quad (7.3)$$

The effective dielectric constant is given by,

$$\epsilon_{ref} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left[1 + 12 \frac{h}{w} \right]^{-1/2} \quad (7.4)$$

The effective length of the patch L_{eff} is

$$L_{\text{eff}} = \frac{c}{2f\sqrt{\epsilon_{\text{reff}}}} \quad (7.5)$$

The normalized radiation pattern in E-plane and H-plane is given by:

$$E_\theta = \frac{\sin\left(\frac{kw\sin\theta\sin\varphi}{2}\right)}{\frac{kw\sin\theta\sin\varphi}{2}} \cos\left(\frac{kl}{2}\sin\theta\cos\varphi\right) \cos\varphi \quad (7.6)$$

$$E_\varphi = -\frac{\sin\left(\frac{kw\sin\theta\sin\varphi}{2}\right)}{\left(\frac{kw\sin\theta\sin\varphi}{2}\right)} \cos\left(\frac{kl}{2}\sin\theta\cos\varphi\right) \cos\theta \sin\varphi \quad (7.7)$$

Dipole antenna:

The design parameters of planar dipole antenna are same as that of a microstrip patch antenna.

Dipole length is $L = \frac{\lambda}{2}$.

The normalized radiation pattern in E-plane and H-plane is respectively given by


$$E_\theta = \eta \frac{\sin\left(\frac{\pi}{2} \cos\theta\right)}{\sin\theta} \quad (7.8)$$

$$H_\theta = \frac{\sin\left(\frac{\pi}{2} \cos\theta\right)}{\sin\theta} \quad (7.9)$$

Where $\eta = 120\pi$.


Probe-Fed Patch Antenna with Optimetrics

- This example shows how to set up a parametric study, optimize, and simulate the Analytic Derivatives of a probe-fed patch antenna using Ansys HFSS in the Ansys Electronic Desktop (AEDT).
- A parametric sweep will be used to determine the effect on the input impedance match as a function of the feed pin position.
 - This parametric sweep will be used to seed an optimization analysis to find the optimal position for the feed pin.
 - Analytic Derivatives will also be used to perform real time tuning of the feed position of the probe (feed_pos).

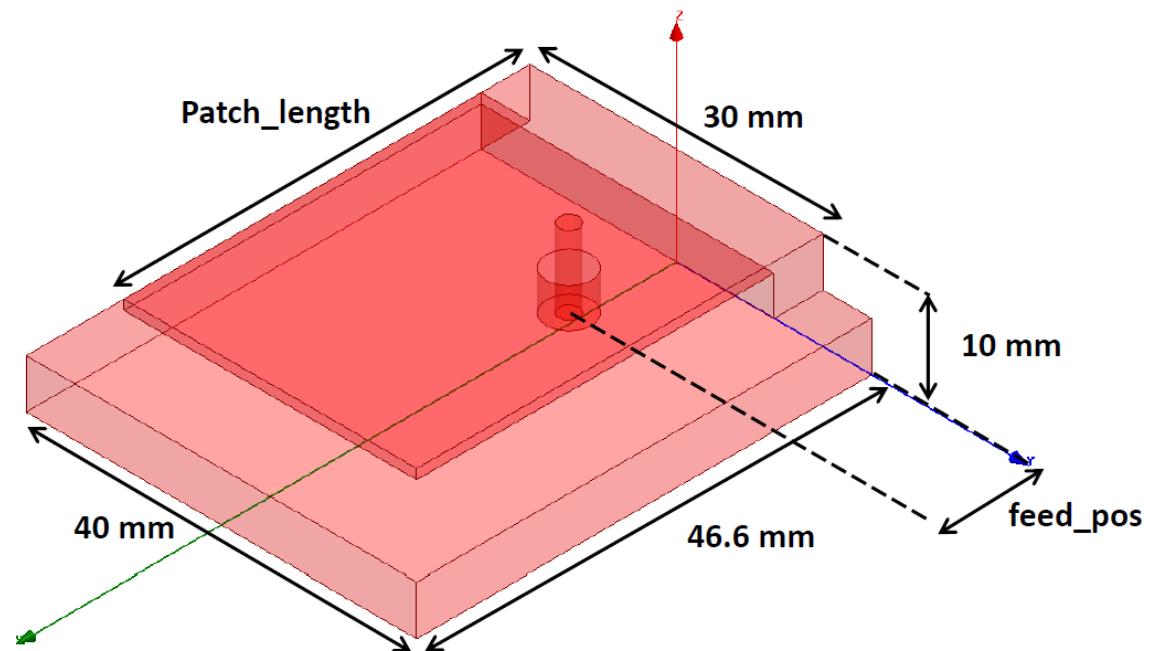

Restore Archive and Save Optimetrics_Patch1.aedt



- In the ribbon, in the **Desktop** tab, selected: **Restore Archive** to bring up the **Archive to Restore** search browser.
- Browse to the training files location and select: **Optimetrics_Patch.aedtz**.
- Click **Open**
- Save the file as **Optimetrics_Patch1.aedt**.

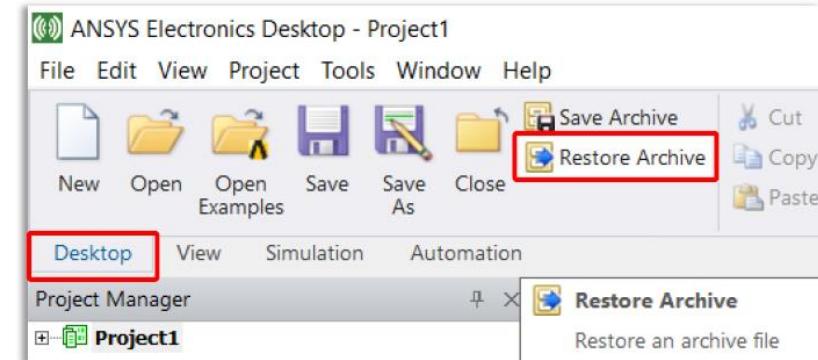

FileName.aedtz indicates an archive, where
FileName.aedt indicates the usual Ansys
Electronics Desktop file extension.


Checking *Local Variables* **feed_pos** and **patch_length**

- There are two design variables that have been created. They control the location of the feed of the patch antenna, **feed_pos** in X, and the length of the patch, **patch_length** in X.
- To view a list of any design variables that have been created for this design:
 - Go to the menu item **HFSS > Design Properties**.
 - Verify that the variable **feed_pos** is assigned the value **10.45 mm**.
 - Verify that the variable **patch_length** is assigned the value **41.6mm**.
 - Press the **OK** button.

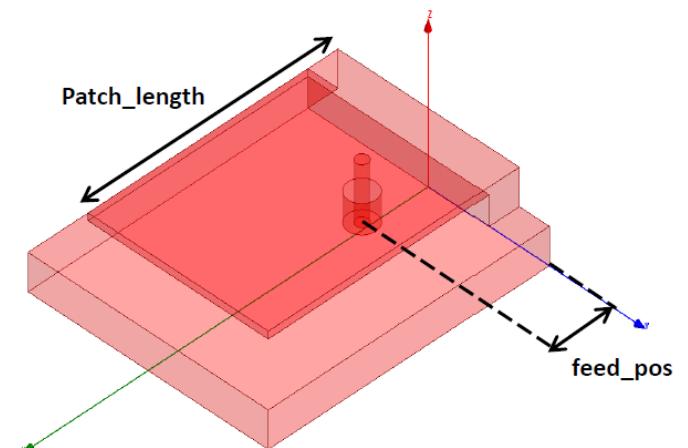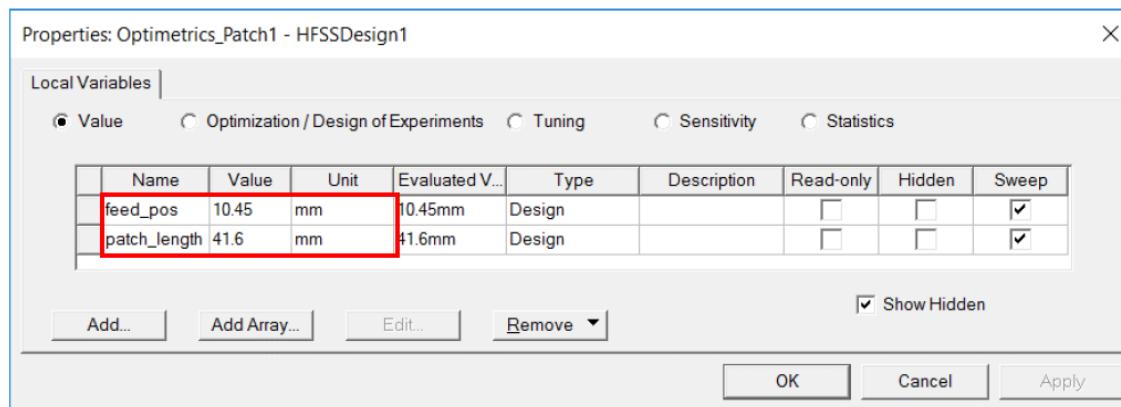

Design Variables are Local Variables

- Alternatively, in the **Project Manager**, click on the design name **HFSSDesign1**. The design variables will be displayed in **Properties**. Think *local* to this *design* to understand this equivalence in terms.

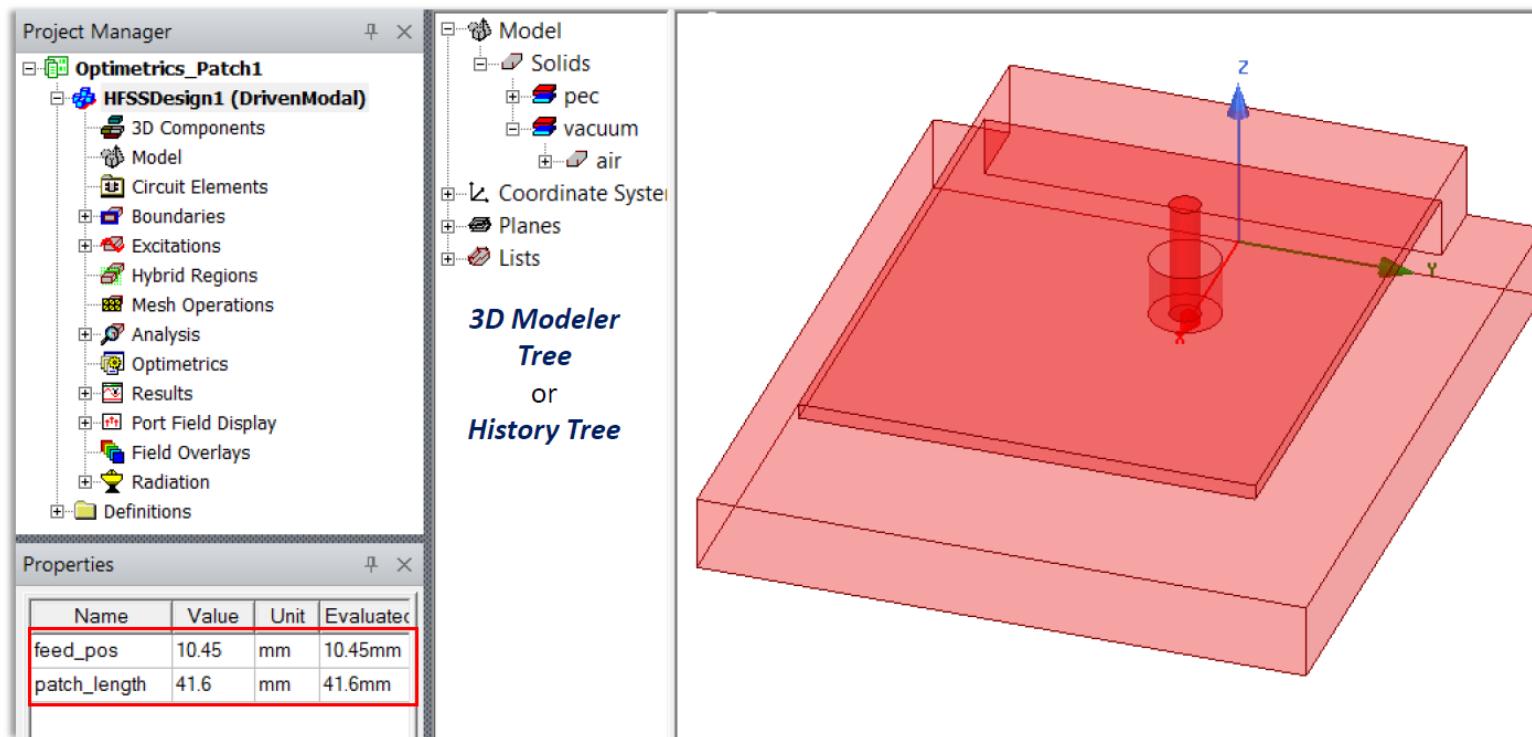

To get this view of the antenna, in the **3D Modeler Tree**, right-click on **air** and select **Hide in Active View**.


Start Parametric Analysis Setup

- **Parametric Sweep of Feed Position `feed_pos`**

- We will now complete the parametric project simulation setup using the defined variable `feed_pos` to vary the coaxial feed position in order to achieve optimal match between the patch antenna and its coaxial feed line. The ratio of the coaxial feed inner and outer diameters was chosen to achieve a 50 Ohm characteristic impedance. We will change the value of the feed offset location until we find a position which presents a 50 Ohm load impedance to the coaxial feed line.

- **Create Parametric Sweep**


- In the **Project Manager**, right-click on **Optimetrics** and select **Add > Parametric...**
 - In the **Setup Sweep Analysis** window, click the **Add...** button to open the **Add/Edit Sweep** window

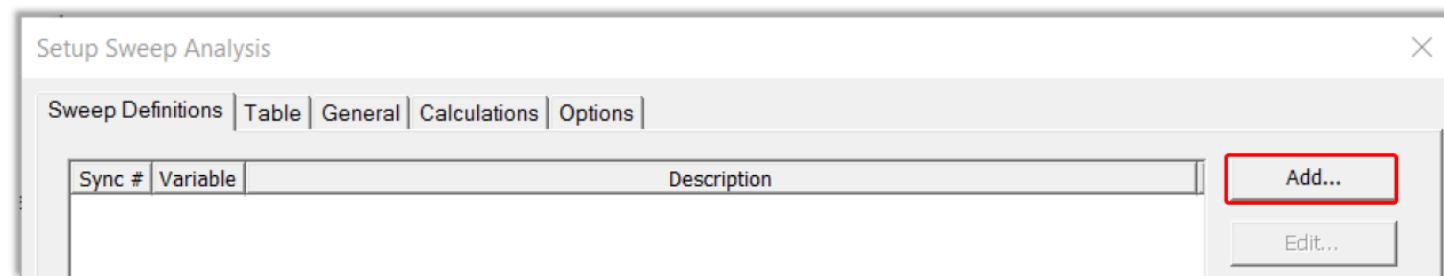

Parametric Analysis Setup - Add/Edit Sweep

Creating the Parametric Sweep for *feed_pos*

- In the **Add/Edit Sweep** window:
 - Select the **Variable feed_pos**
 - Select **Linear Step**
 - Start: 9mm**
 - Stop: 12mm**
 - Step: 1mm**
 - Click the **Add>>** button
 - Click the **OK** button to close the **Add/Edit Sweep** dialog box.
- Click the **OK** button to close the **Setup Sweep Analysis** window.

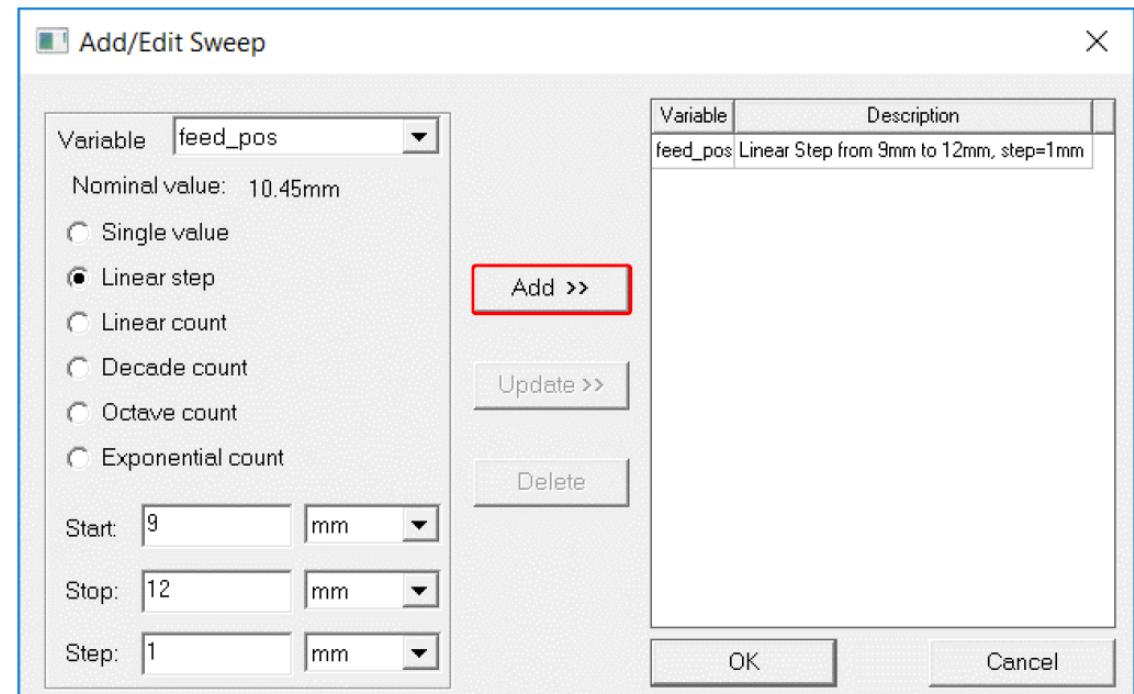


HPC and Analysis Options

- **High Performance Computing Configuration**

- Parametric sweeps can be accelerated by solving multiple variations of a design in parallel. The HPC ***Analysis Configuration*** allows us to specify the number of cores and the number of tasks we would like to run. The number of tasks will correspond to the number of parametric variations or frequency points to run in parallel.

- **Configuring HPC Settings**

- Select the menu item **Tools > Options > HPC and Analysis Options...**
- In the **Configurations** tab, click **Edit** button to bring up the **Analysis Configuration** dialog box.

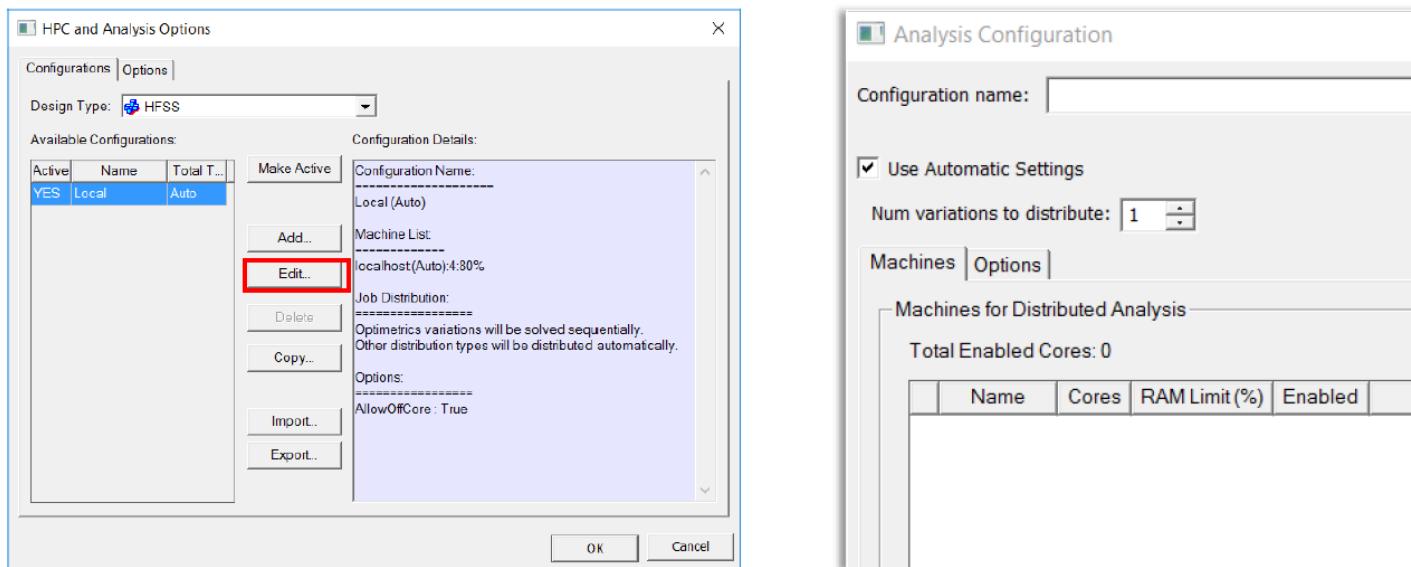


See Also:
High Performance Computing section
in **HFSS Help** documentation.



HPC: Analysis Configuration - Analyze Optimetrics_Patch1

- In the **Analysis Configuration** window
 - Use Automatic Settings:**
 - Num variations to distribute:** 2
 - change or verify the following in the **Machines** tab:
 - Name:** localhost
 - Cores:** 4
 - RAM Limit(%):** 80
 - Enabled:**
 - Click the **OK** button to finish and close **Analysis Configuration** window.
 - Click the **OK** button to close **HPC** and **Analysis Options** dialog box.

Note: **Num variations to distribute** refers to the number of parallel simulations to run for parametric and **Optimetrics** variations. With 4 total cores, this means 2 cores run each of those distributed simulations. The number of cores might vary with different computers.

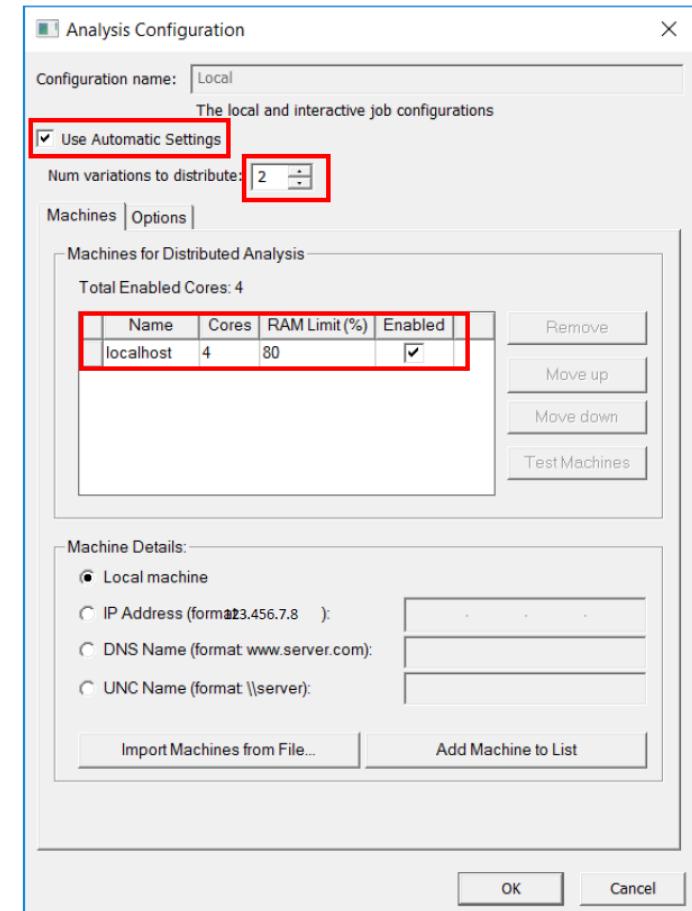


Save, Validate, and Analyze HFSS Design Optometrics_Patch1

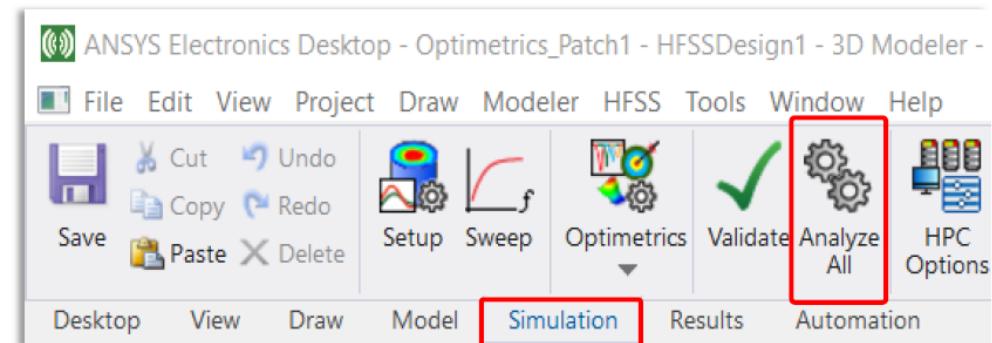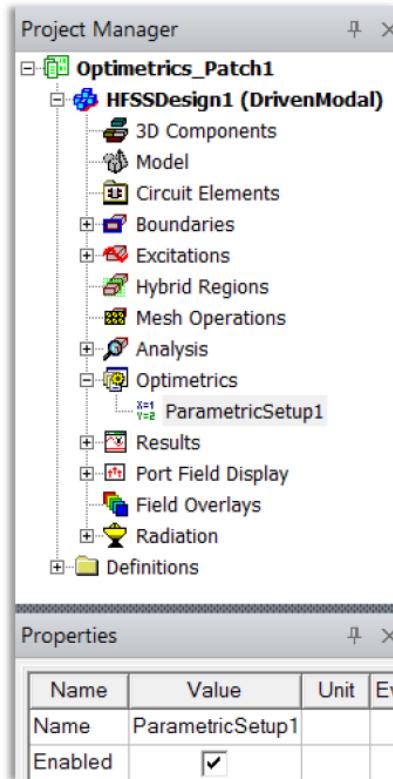

- In the **Ribbon**, with the **Simulation** tab chosen, click the **Validate** gear check mark to validate the project.
- Select **File > Save**
- In the **Project Manager**, under **Optometrics**, right click on **ParametricSetup1** and select **Analyze**.
- Select **File > Save** when the simulation finishes.

**Note the
ParametricSetup1 under
Optometrics.**


Save, Validate, and Analyze HFSS Design Optimetrics_Patch1

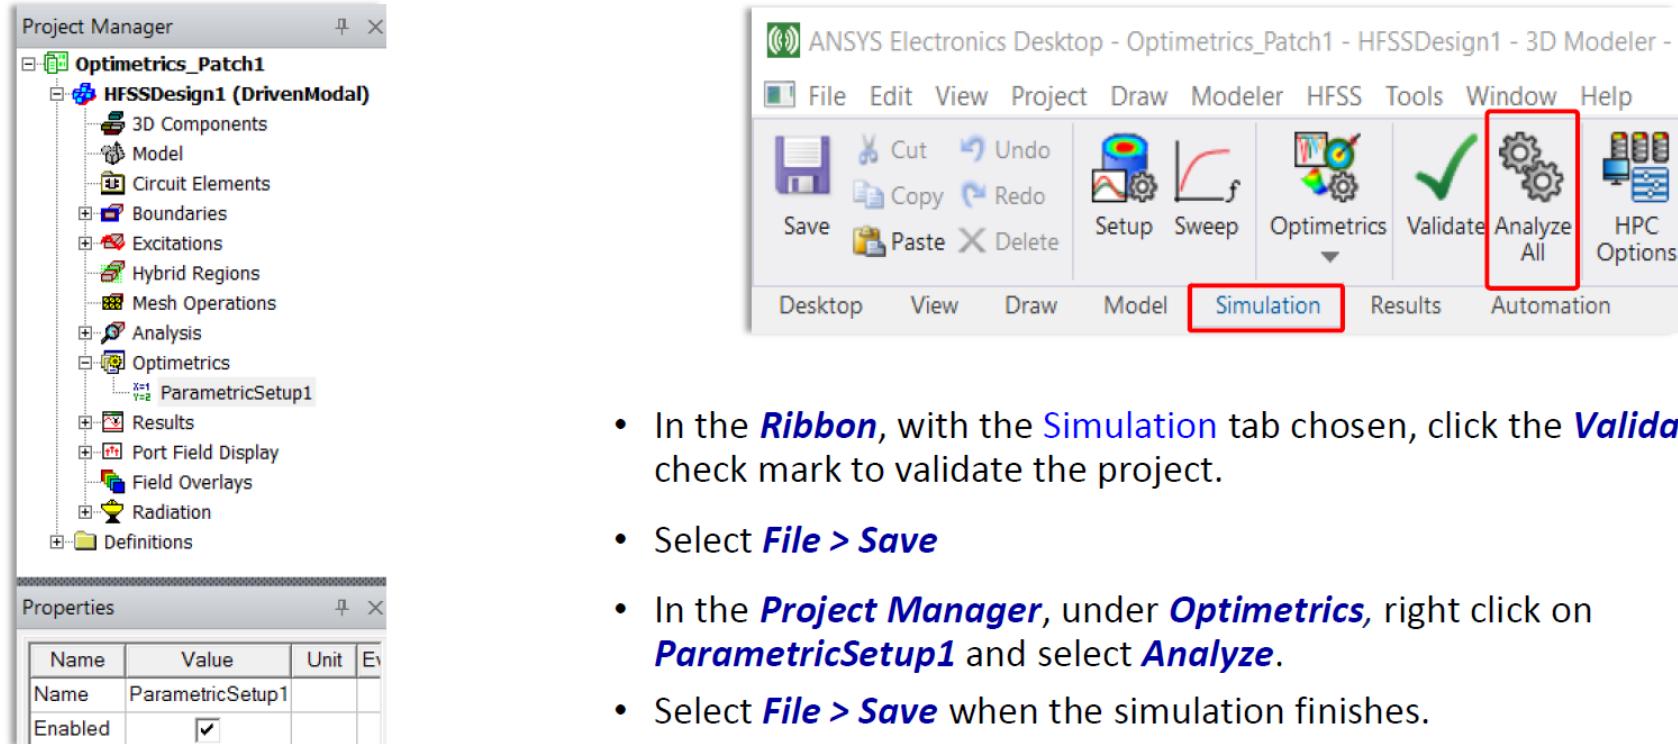

- In the **Ribbon**, with the **Simulation** tab chosen, click the **Validate** gear check mark to validate the project.
- Select **File > Save**
- In the **Project Manager**, under **Optimetrics**, right click on **ParametricSetup1** and select **Analyze**.
- Select **File > Save** when the simulation finishes.


**Note the
ParametricSetup1 under
Optimetrics.**

View S-Parameter Results - Optimetrics_Patch2

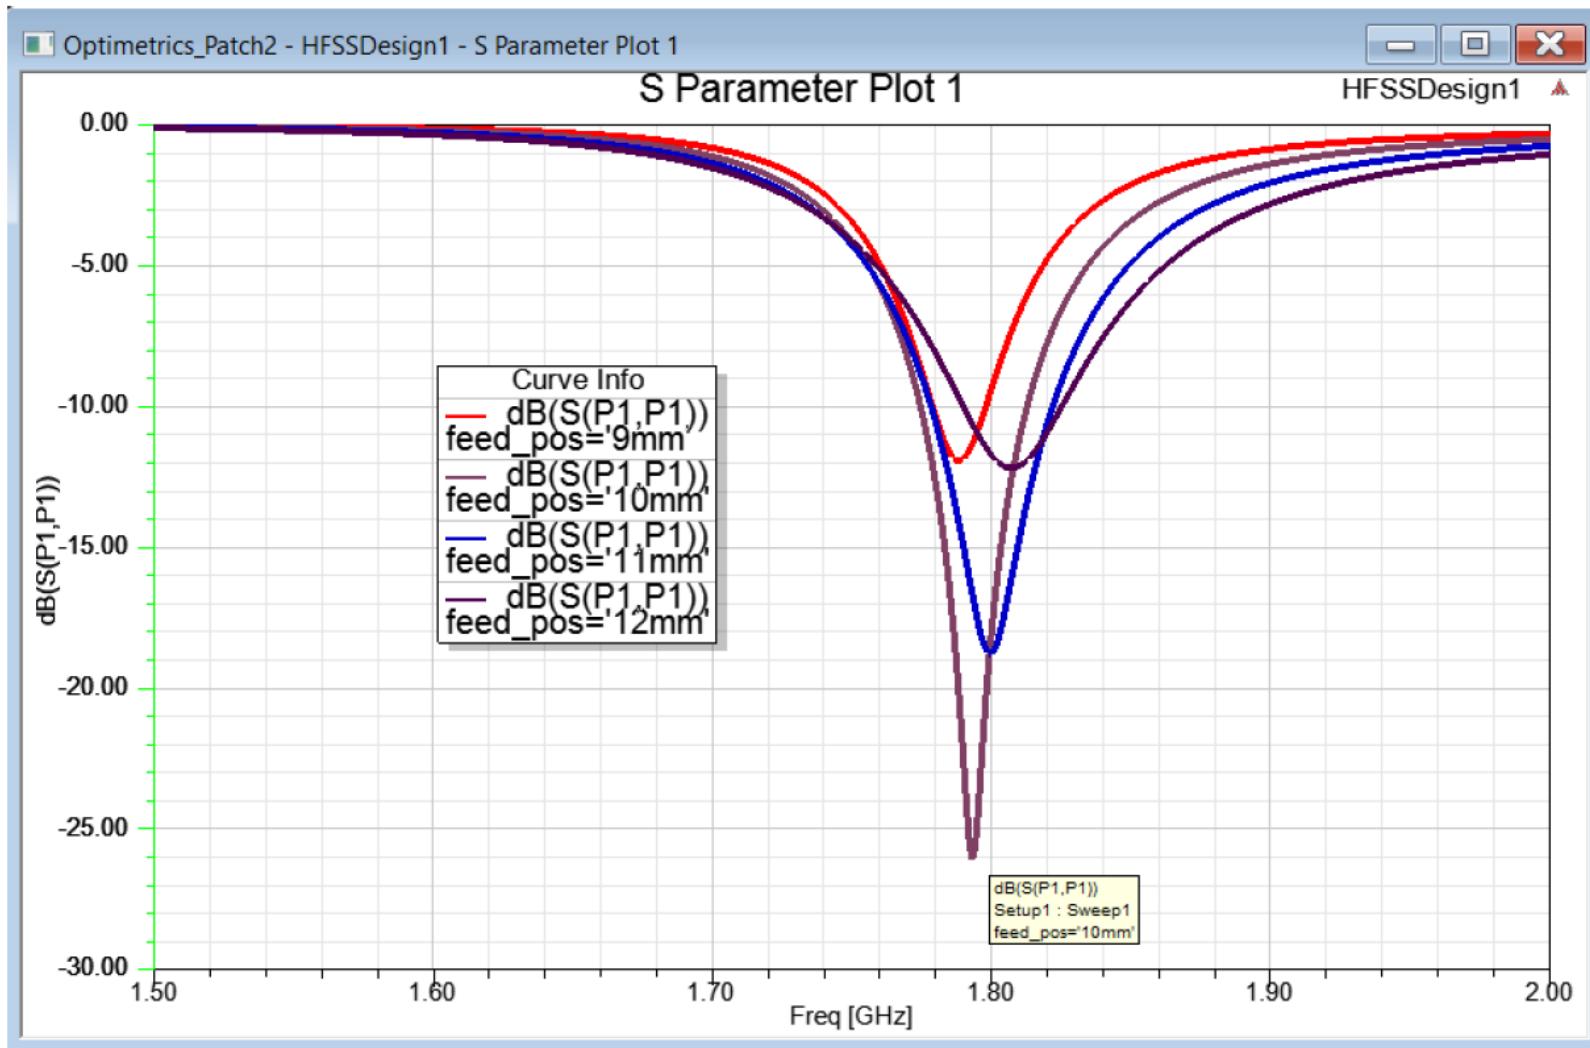

Start Optimization Analysis Setup - Optimization / DOE


- The **Parametric Sweep** was useful for generating design curves. We can use the design curves to make educated guesses at performance targets that are not contained in the **Parametric Sweep**. We will target a minimum of less than -20dB for S_{11} at 1.8GHz for this shorted patch antenna. From the **Parametric Sweep** results, we can see that the minimum return loss at 1.8 GHz will be achieved when the variable **feed_pos** is approximately **11mm**.
- Setting Optimization / Design Of Experiments Properties**
 - Select the menu item **HFSS > Design Properties...**
 - Click the **Optimization / Design of Experiments** radio button:
 - Name:** feed_pos
 - Include:** Checked
 - Min:** 10 mm
 - Max:** 12 mm
 - Click the **OK** button

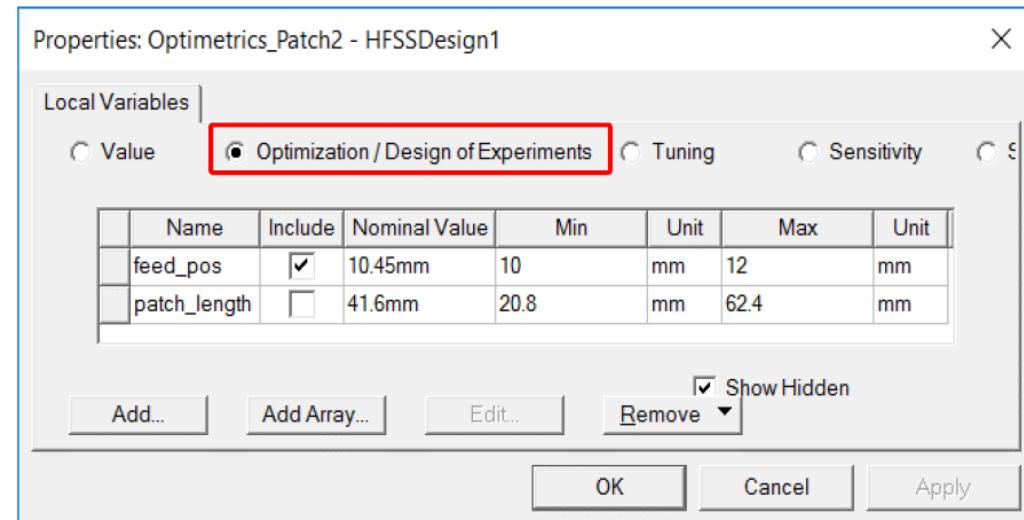

Open Optimization Analysis Setup Dialog Box - Goals Tab



- In the **Project Manager**, right-click on **Optimetrics** and select **Add > Optimization...** to bring up the **Setup Optimization** dialog box.
- In the **Goals** tab:
 - **Optimizer: Pattern Search(Search-based)**
 - Click the **Setup Calculations...** button to bring up the **Add/Edit Calculation** dialog box.

...continued...

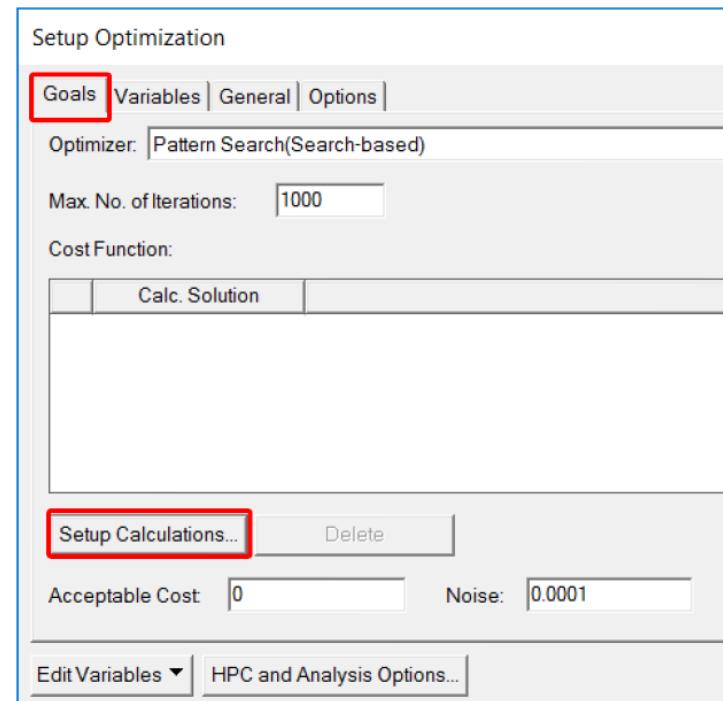

Optimization Setup Add/Edit Dialog Box - Optimetrics_Patch2

- In the **Add/Edit Calculation** dialog:
 - Report Type: Modal Solution Data**
 - Solution: Setup1: Sweep1**
 - Domain: Sweep**
 - Category: S Parameter**
 - Quantity: S(P1,P1)**
 - Function: dB**
 - Click the **Add Calculation** button
 - Click the **Done** button to close the **Add/Edit Calculation** dialog box
(...and go back to the **Setup Optimization** dialog box)

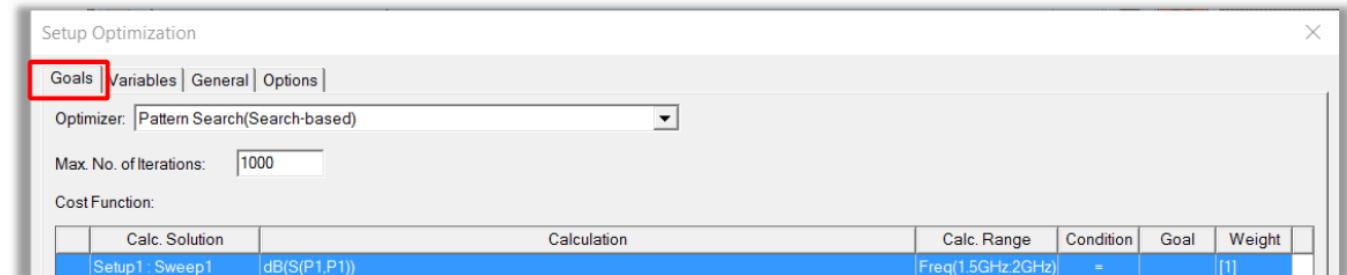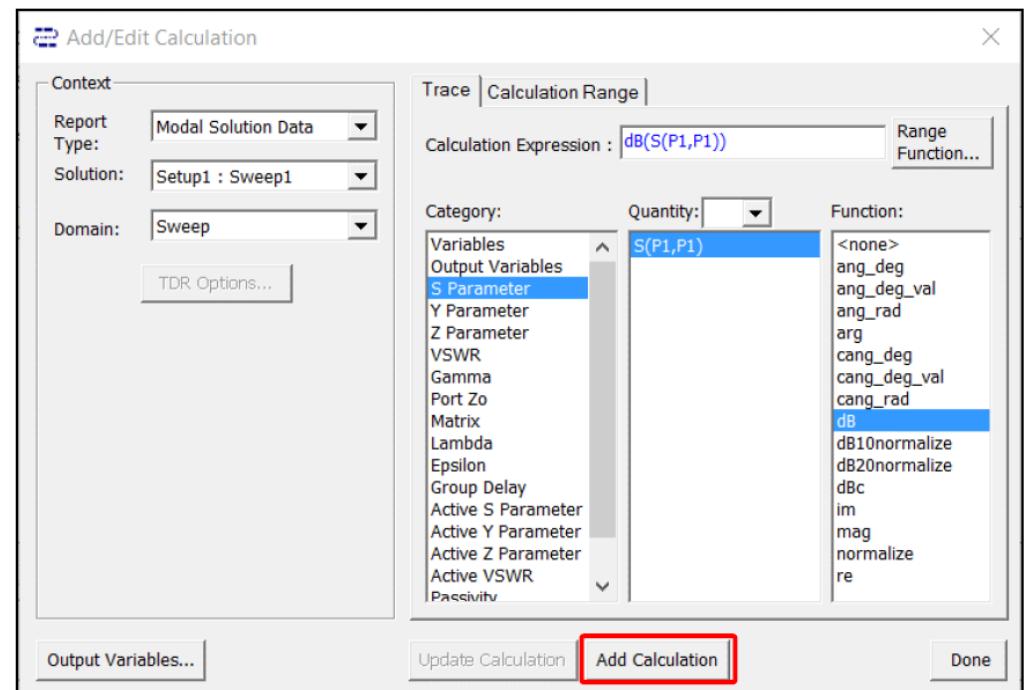


Optimization Setup Edit Calculation Range - Select 1.8 GHz

...back in the ***Setup Optimization*** dialog box,

- Click the value under ***Calc. Range*** and select ***Edit...*** bringing up the ***Edit Calculation Range*** dialog box.
 - In the ***Edit Calculation Range*** window, Click the button **...** below **Edit**.
 - Click the **Select values** radio button and select **1.8GHz**
 - Click **OK** button to choose 1.8 GHz and close the ***Edit Calculation Range*** dialog box.

(which takes back to the ***Setup Optimization*** dialog box)

...continued...



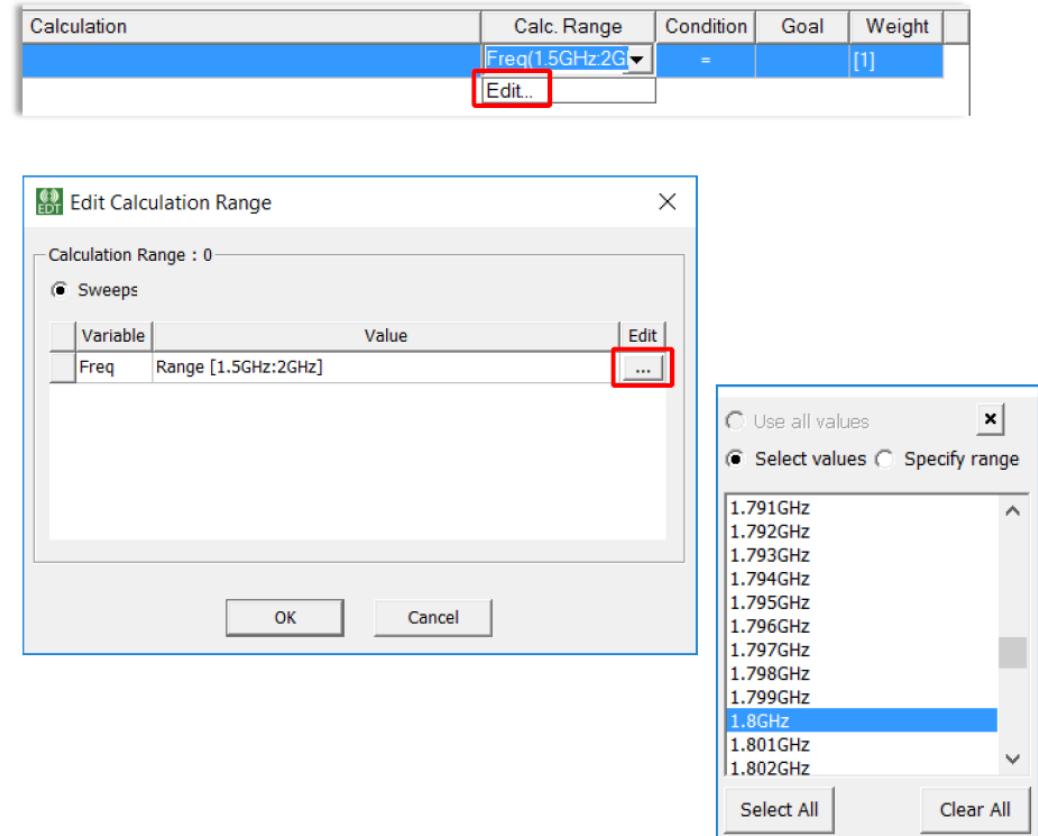


Optimization Setup Dialog Condition Goal Weight

...back in the **Setup Optimization** dialog box,

- Click the value under **Condition** and select \leq .
- Click under **Goal** and select **Edit as Numeric Value...** to bring up the **Edit Goal Value** pop up window.
- In the **Edit Goal Value** pop up, set **Goal Value** to **-20**.
- Click **OK** to close the **Edit Goal Value** dialog box and return to the **Setup Optimization** dialog box.
- In the **Setup Optimization** dialog box, set or verify that the value for **Weight** is **1**.

...continued....next is the Variables tab...

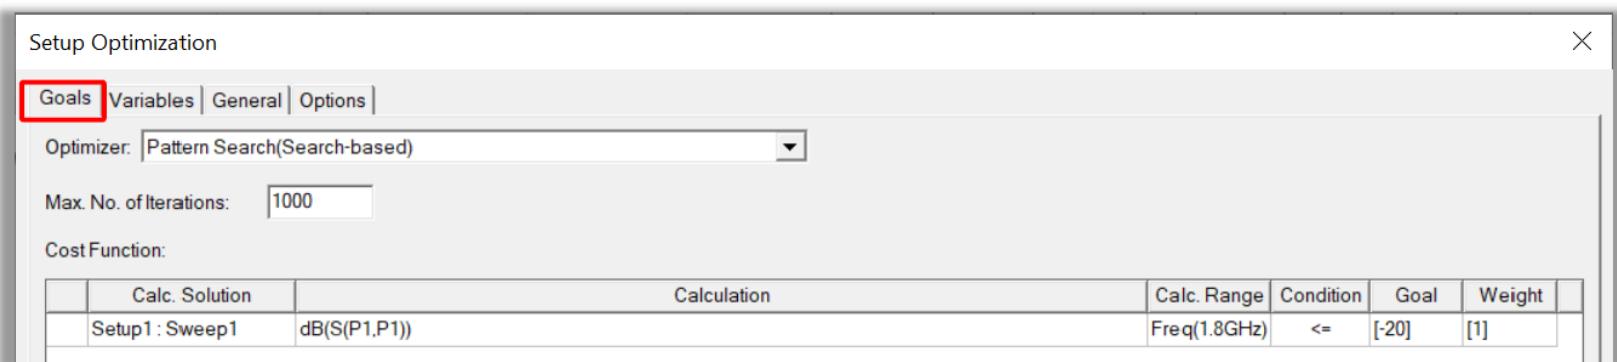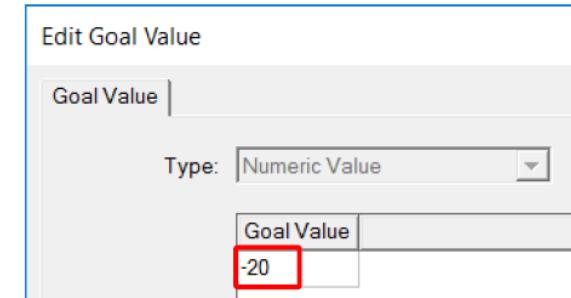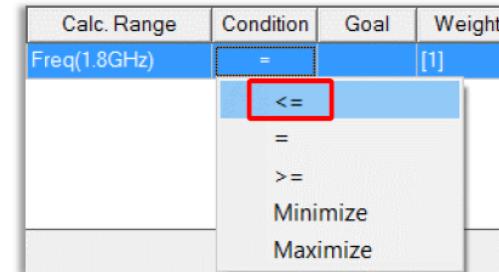


Optimization Setup Dialog - Variables Tab - Optimetrics_Patch2

In the **Setup Optimization** dialog box, click the **Variables** tab:

- Select **View All Columns** in lower right corner: Checked
- Set **Min Step** value: 0.01

...continued...next is General tab...

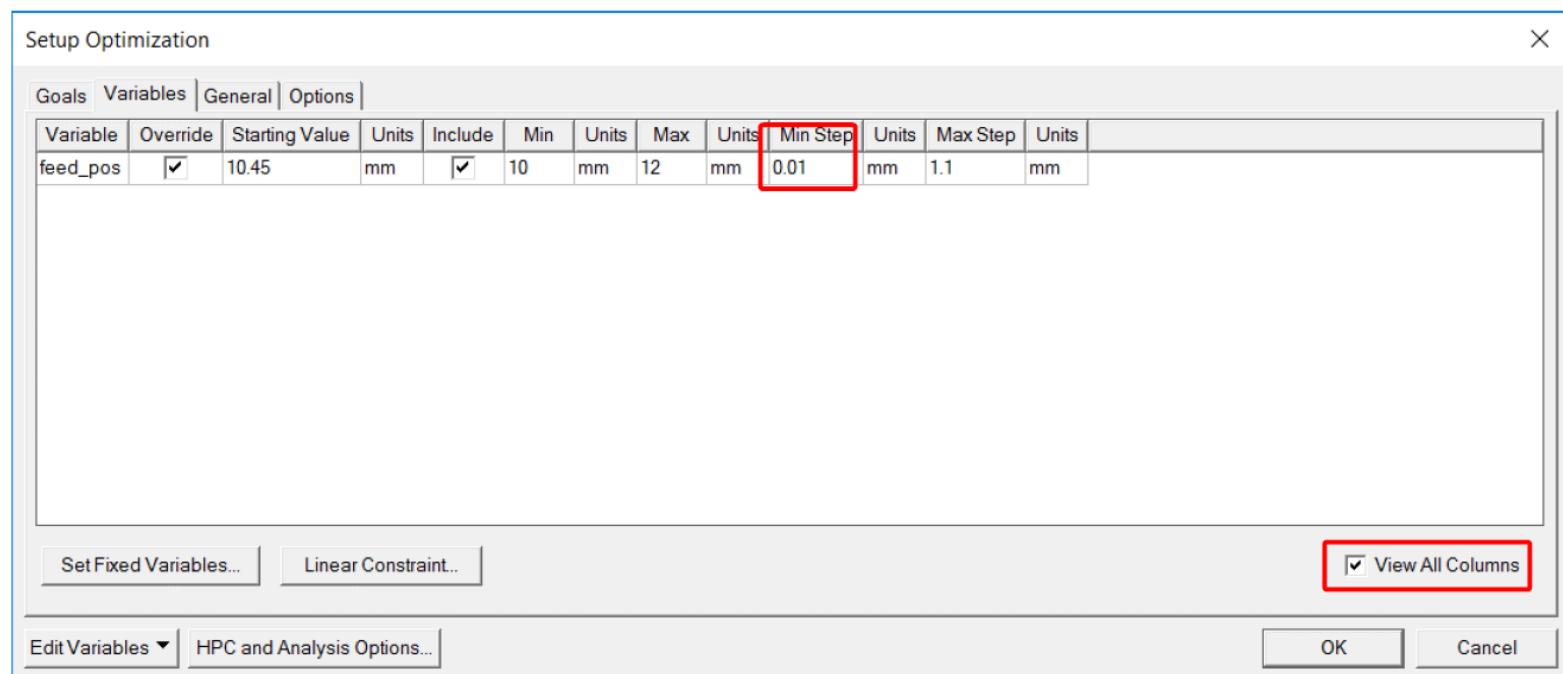



Optimization Setup - General Tab - Analyze Optimetrics_Patch3

In the **Setup Optimization** dialog box, click the **General** tab:

- For **Parametrics Analysis:**, select **ParametricSetup1**.
- Select the radio button **Solve the parametric sweep before optimization**.

The parametric analysis that we solved earlier will be used to seed the optimization.

- Click the **OK** button to complete the optimization setup and close the **Setup Optimization** dialog box.
- In the **Ribbon**, with the Simulation tab selected, click on the green check mark to validate the simulation.
- Save project to **Optimetrics_Patch3**.
- In the **Project Manager** window, select **Optimetrics > OptimizationSetup1**, right click and select **Analyze**.
- Save project **Optimetrics_Patch3** again when the simulation finishes.

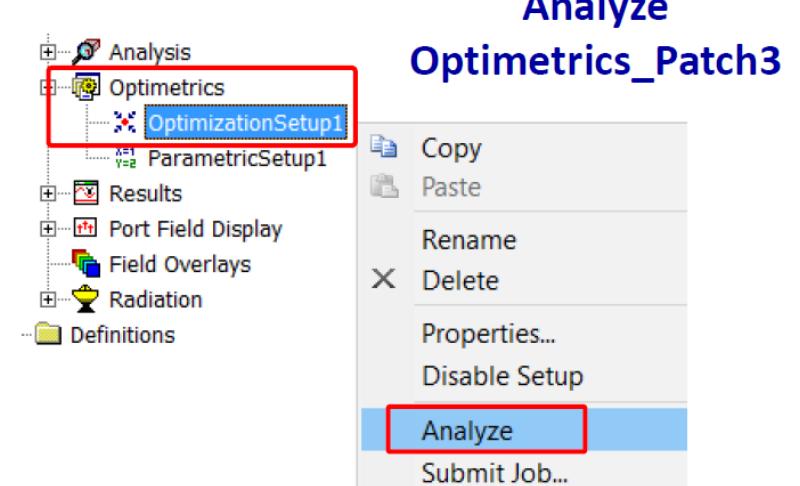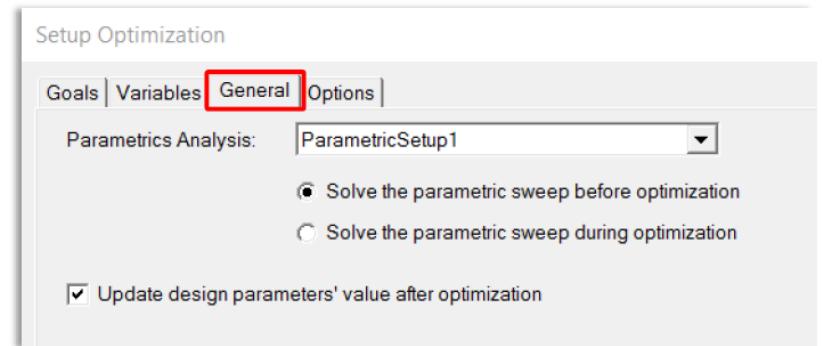

**Analyze
Optimetrics_Patch3**

Optimization Results Table - Optimetrics_patch3

- After the simulation finishes, right-click on **OptimizationSetup1** and select **View Analysis Result** to bring up the **Post Analysis Display**.
- In the **Result** tab, select the radio button for **Table**.
- Click the **Close** button when you are finished viewing the results.


An optimal solution occurs somewhere near 10.45, depending on the points chosen by the optimizer.

Your simulation results may not match the exact numbers you see here.

| Evaluation | feed_pos | Cost |
|------------|----------|--------|
| 1 | 9mm | 113.21 |
| 2 | 10mm | 4.2877 |
| 3 | 11mm | 1.5205 |
| 4 | 12mm | 68.211 |
| 5 | 11.55mm | 36.281 |
| 6 | 10.45mm | 0 |


S-Parameter Results Setup

- Select the menu item **HFSS > Results > Create Modal Solution Data Report > Rectangular Plot**
 - Solution: Setup1:Sweep1**
 - Domain: Sweep**
In the **Trace** tab...
 - Category: S Parameter**
 - Quantity: S(P1,P1)**
 - Function: dB**
- Click the **Families** tab
 - Click the **...** button below **Edit**
 - Click **10.45mm** (or whatever was the optimal value in the simulation) in the pop-up window
 - Close the pop-up window by clicking the **X** button
 - Click **New Report** button
- Click the **Close** button.

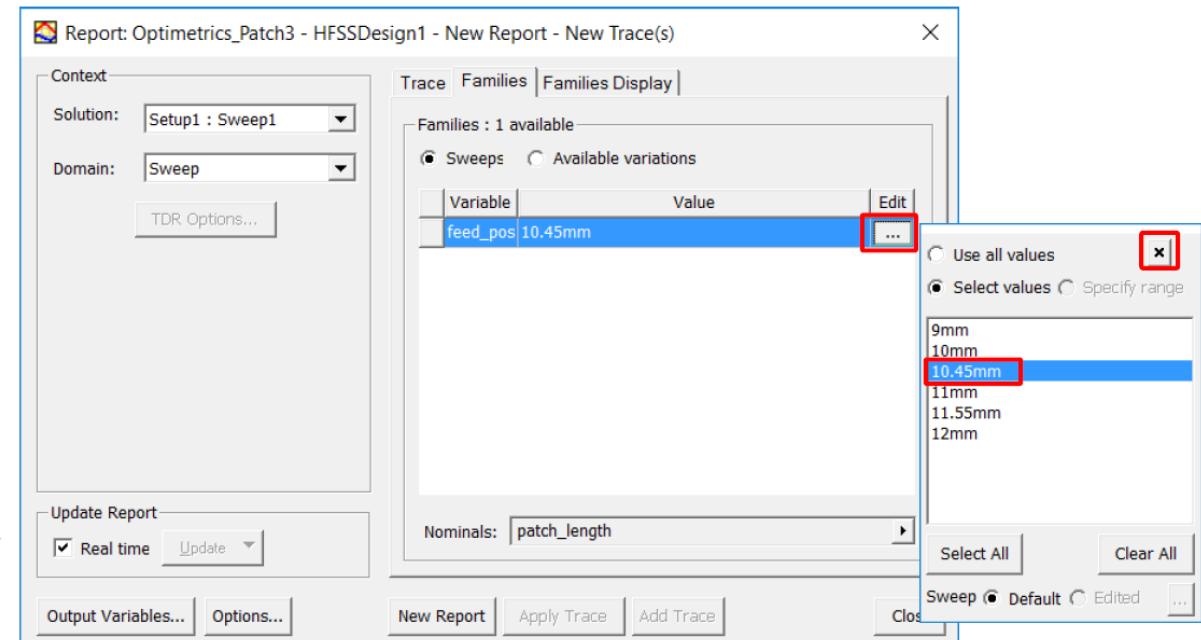


S-Parameter Results Plot - Optimetrics_Patch3

- Save project **Optimetrics_Patch3**.

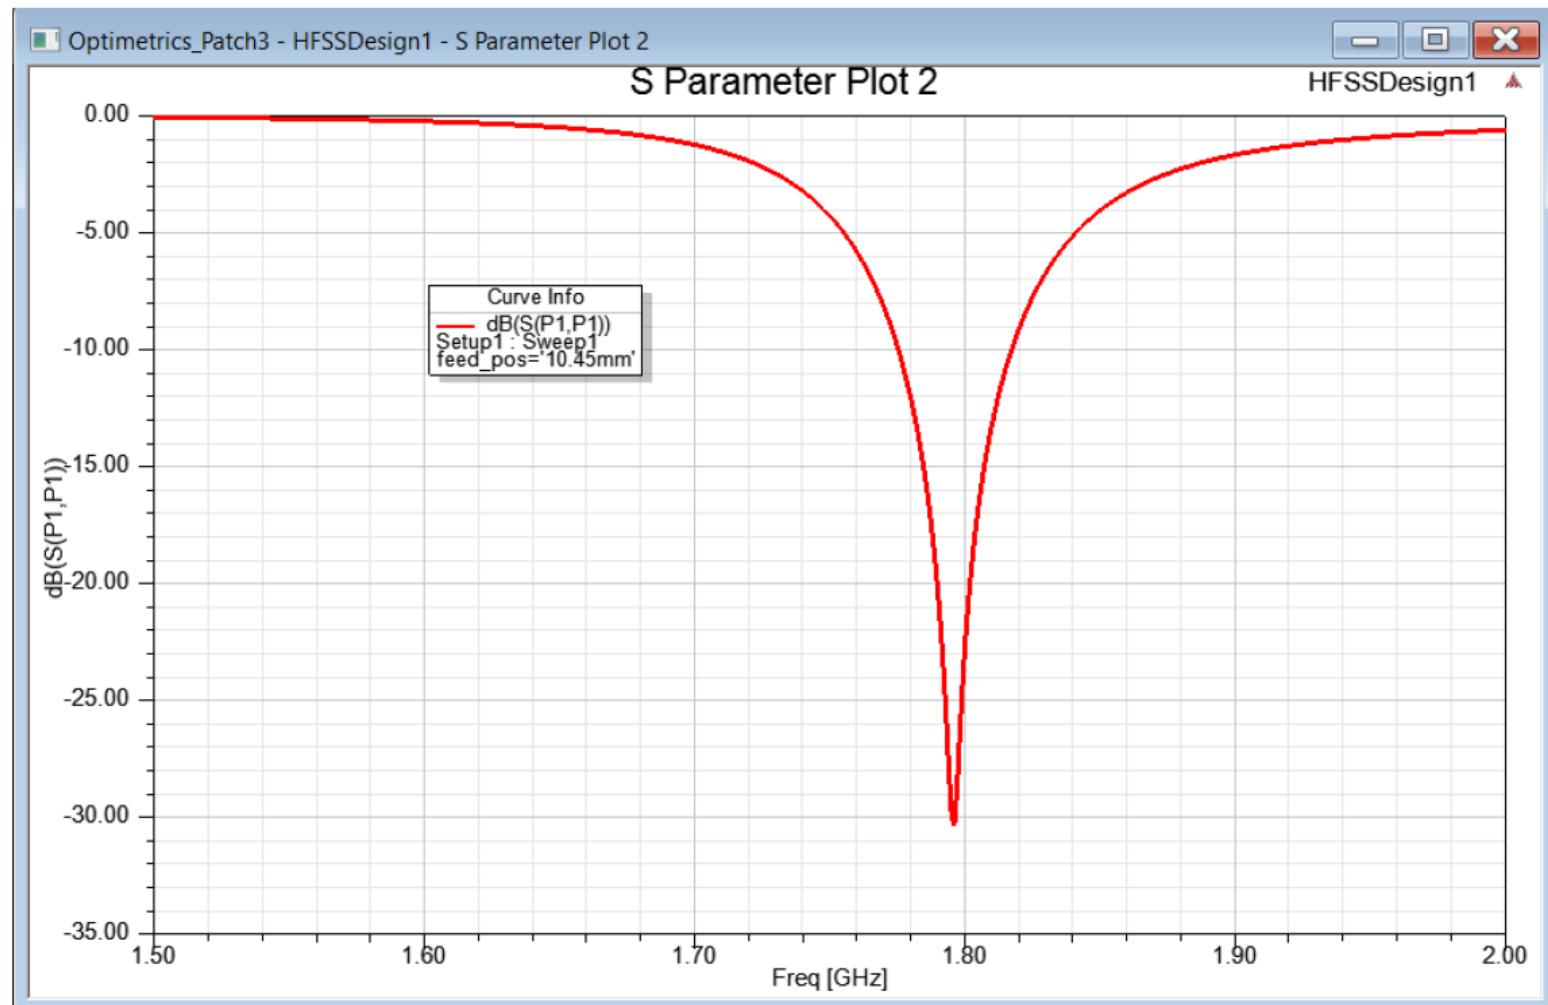


Analytic Derivatives Setup and Analyze Optimetrics_Patch4

- From the parametric sweep and optimization of the **feed position** we can see that the optimal position is at about **10.45mm**. To further investigate or an alternative to the optimization, we could use analytical derivatives to predict the behavior of our model with respect to small changes in design variables.
- Enable Analytic Derivatives
 - In the **Project Manager** window under **Analysis**, Double-click on **Setup1** to bring up the **Driven Solution Setup** dialog box.
 - Select the **Derivatives** tab
 - feed_pos: Use Checked**
 - Click the **OK** button
- Save and Analyze**
 - Save project as **Optimetrics_Patch4**.
 - Right-click on **Setup1** and select **Analyze**
 - Save **Optimetrics_Patch4** again after simulation finishes.

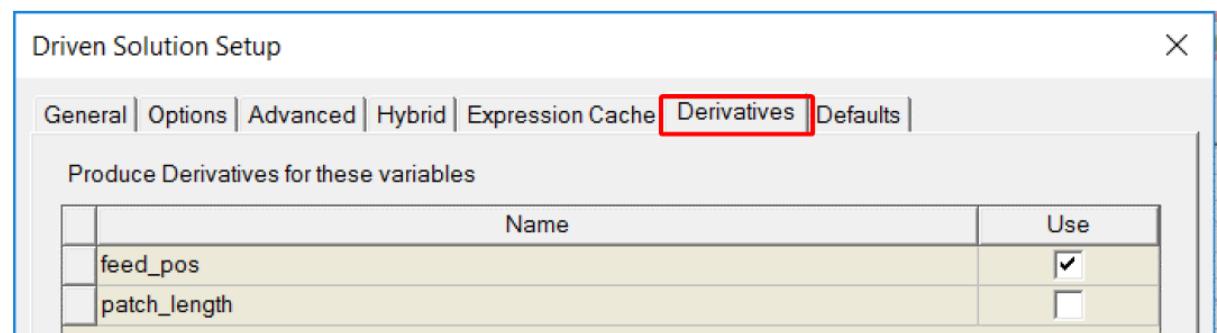

Analytic Derivatives: S-Parameters Nominal Plot (1 of 2)


- In the **Project Manager**, right-click on **Results** and select **Create Modal Solution Data Report > Rectangular Plot**
 - Solution: Setup1: Sweep1**
 - Domain: Sweep**
 - Derivative: <none>**
 - In the **Trace** tab
 - Category: S Parameter**
 - Quantity: S(P1,P1)**
 - Function: dB**
 - Click the **Families** tab
 - Click the **...** button below **Edit**
 - Click **10.45mm** in the pop-up window
 - Close the pop-up window by clicking the **X** button
 - Click the **New Report** button
 - do NOT close **...continued...**

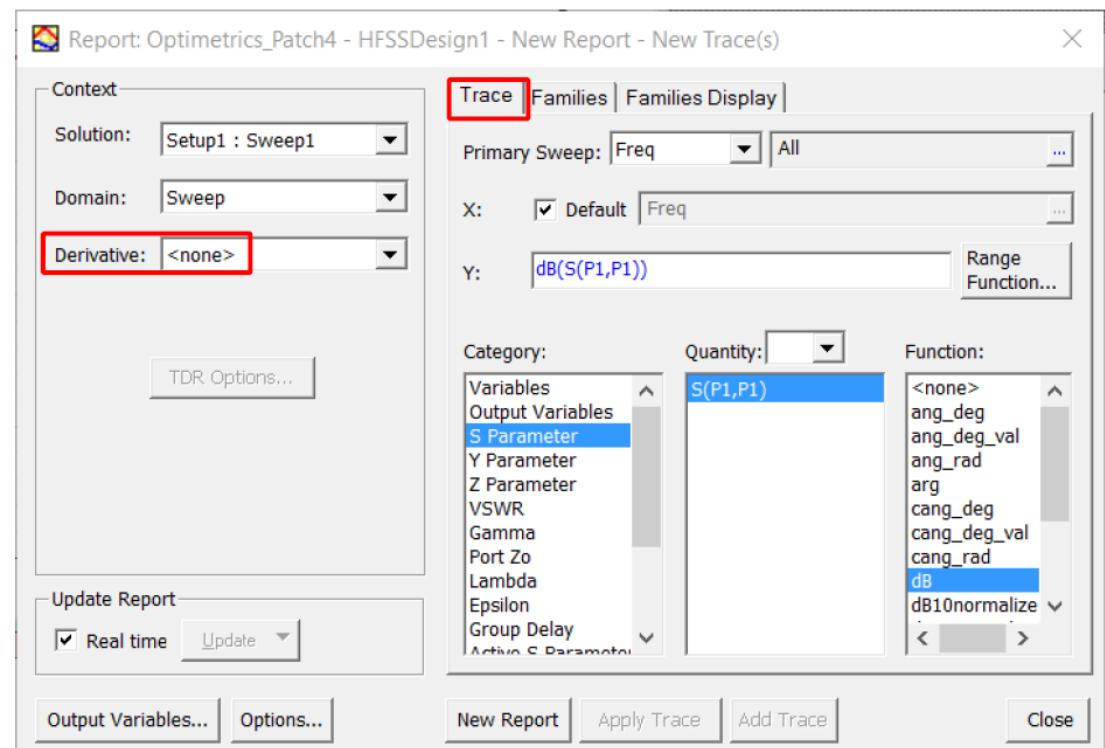

Add Tuning Plot (2 of 2) to S-Parameters Optimetrics_Patch4

Add a Second Tuning Trace to Same Plot


- In the Create Rectangular Plot **Report**, change the **Derivative** option
 - Solution: Setup1: Sweep1**
 - Domain: Sweep**
 - Derivative: feed_pos**
- In the **Trace** tab...
 - Category: Tune S Parameter**
 - Quantity: Tune S(P1,P1,feed_pos)**
 - Function: dB**
- Click the **Add Trace** button
- Click the **Close** button
- Save project **Optimetrics_Patch4**.

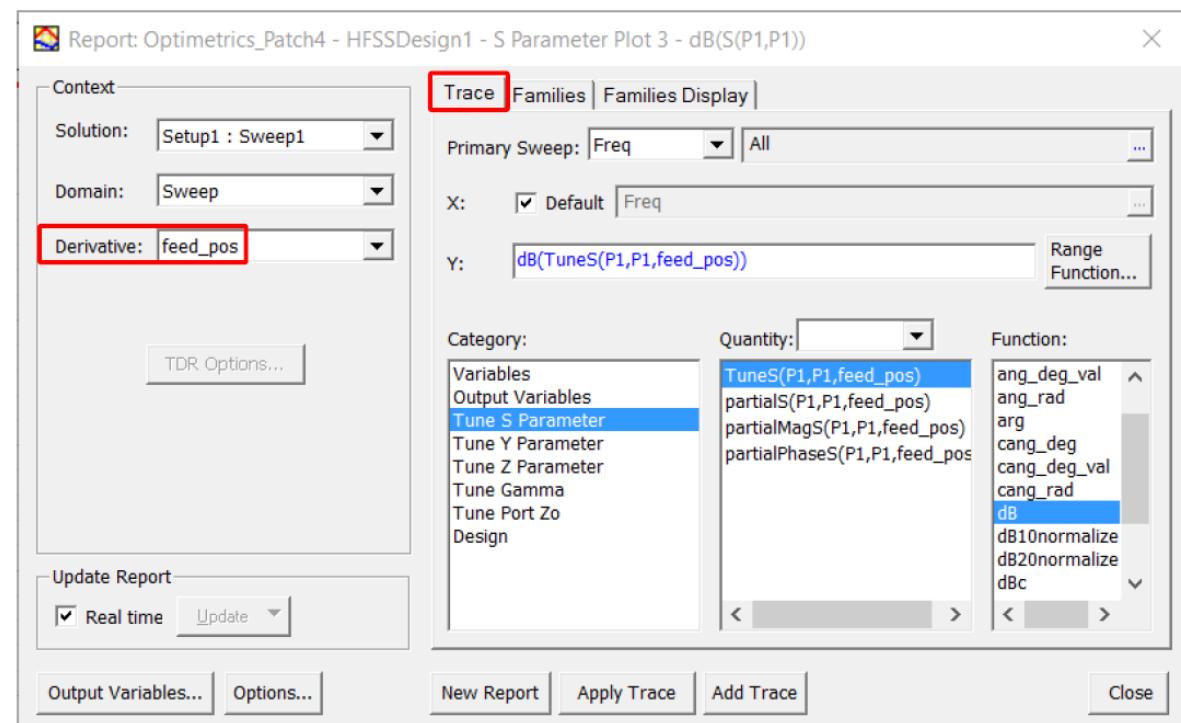

Analytic Derivatives - Tuning Plot

- Select the menu item **HFSS > Results > Tune Reports ...**
- Move the scroll bars in the **Report Tuning** window to predict the performance for various feed position values.
- Click the **Close** button when finished.

 : Nominal
 : Tuning

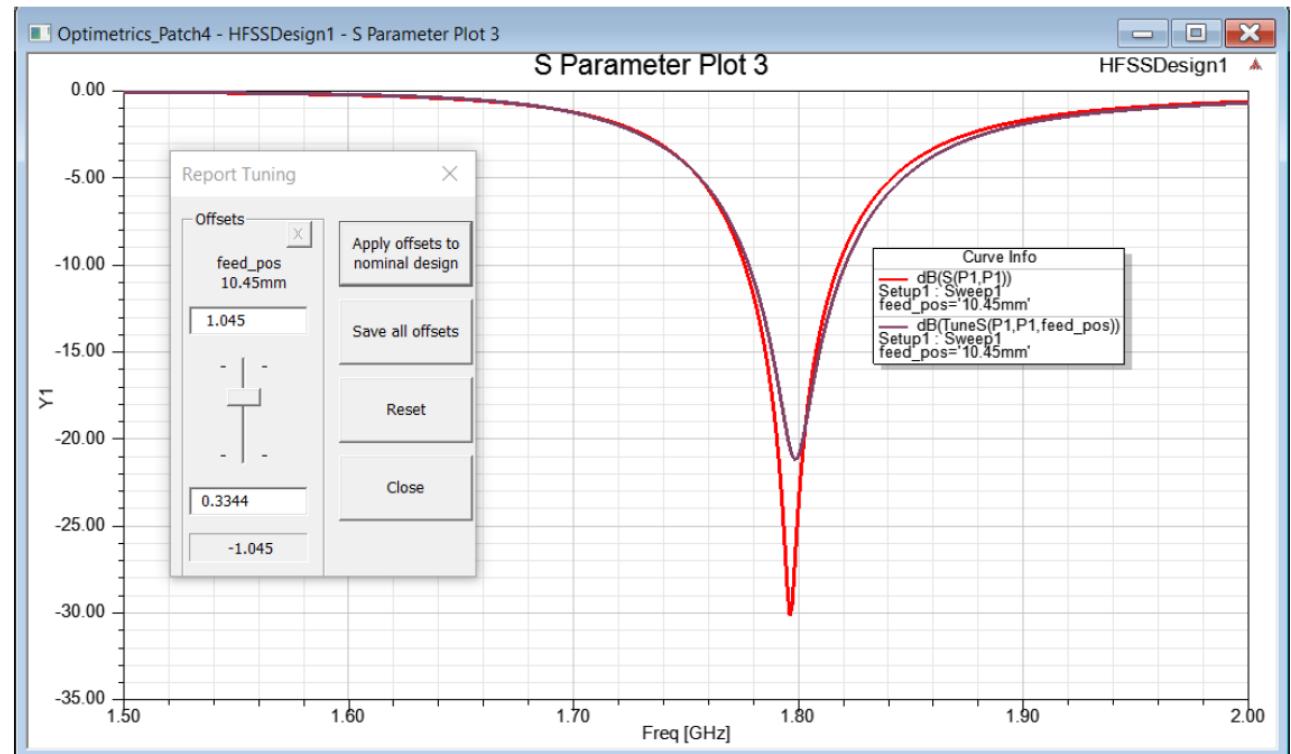

Note: The predicted response is based off the nominal solution and partial derivative that was computed during the solution process. Analytic Derivatives could have been used before any optimization to more quickly narrow the solution space by testing how individual parameters will affect the antenna performance.

Analytic Derivatives: Radiation Pattern Nominal Trace (1 or 2)

- Select the menu item **HFSS > Results > Create Far Fields Report > Radiation Pattern**

- Solution: Setup1: Last Adaptive*

- Geometry: Infinite Sphere 1*

- Derivative: <none>*

- In the **Trace** tab

- Category: Gain*


- Quantity: GainTotal*

- Function: dB*

- Click the **New Report** button

- do **NOT** close...*continued...*


- Continued on Next Page**

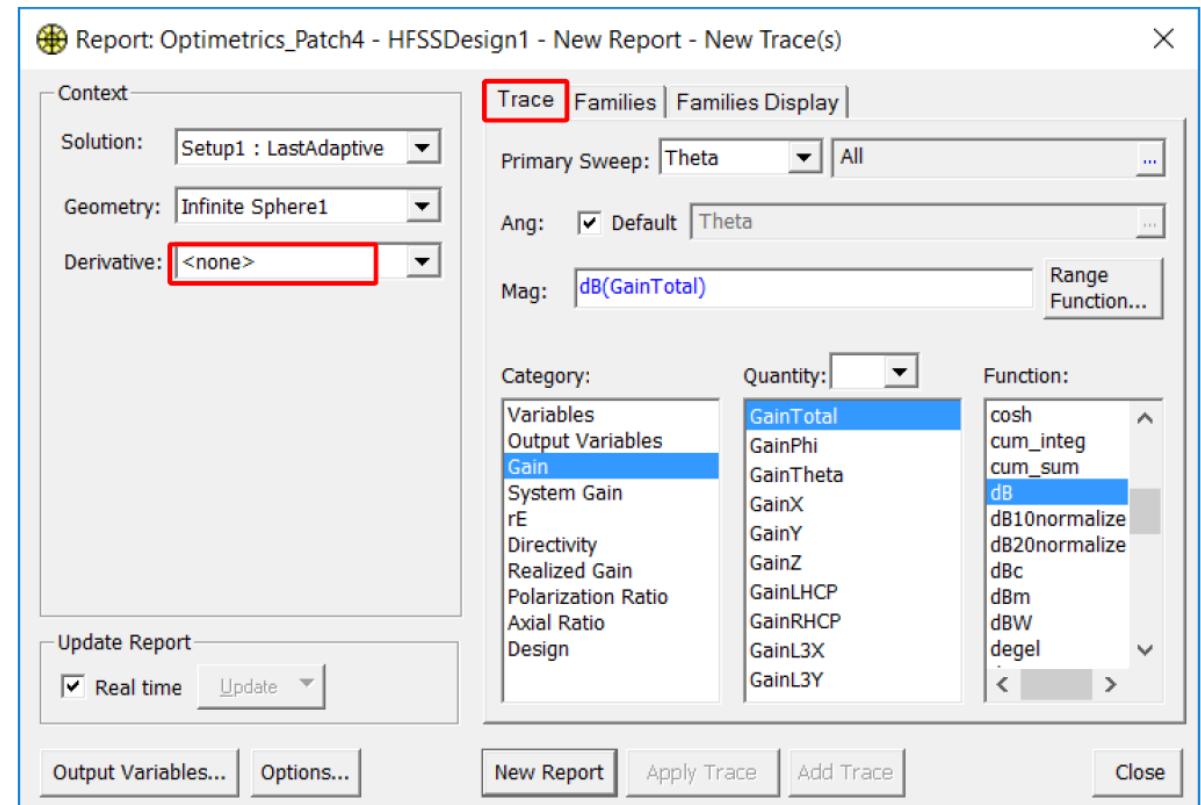

Analytic Derivatives: Radiation Pattern Tuning Trace (2 of 2)

Add a Second Tuning Trace to Same Radiation Plot


- In the Create Radiation Pattern **Report**, change the **Derivative** option
 - Solution: Setup 1: LastAdaptive**
 - Geometry: Infinite Sphere 1**
 - Derivative: feed_pos**
- In the **Trace** tab...
 - Category: Gain**
 - Quantity: Tune_GainTotal(feed_pos)**
 - Function: dB**
- Click the **Add Trace** button
- Click the **Close** button

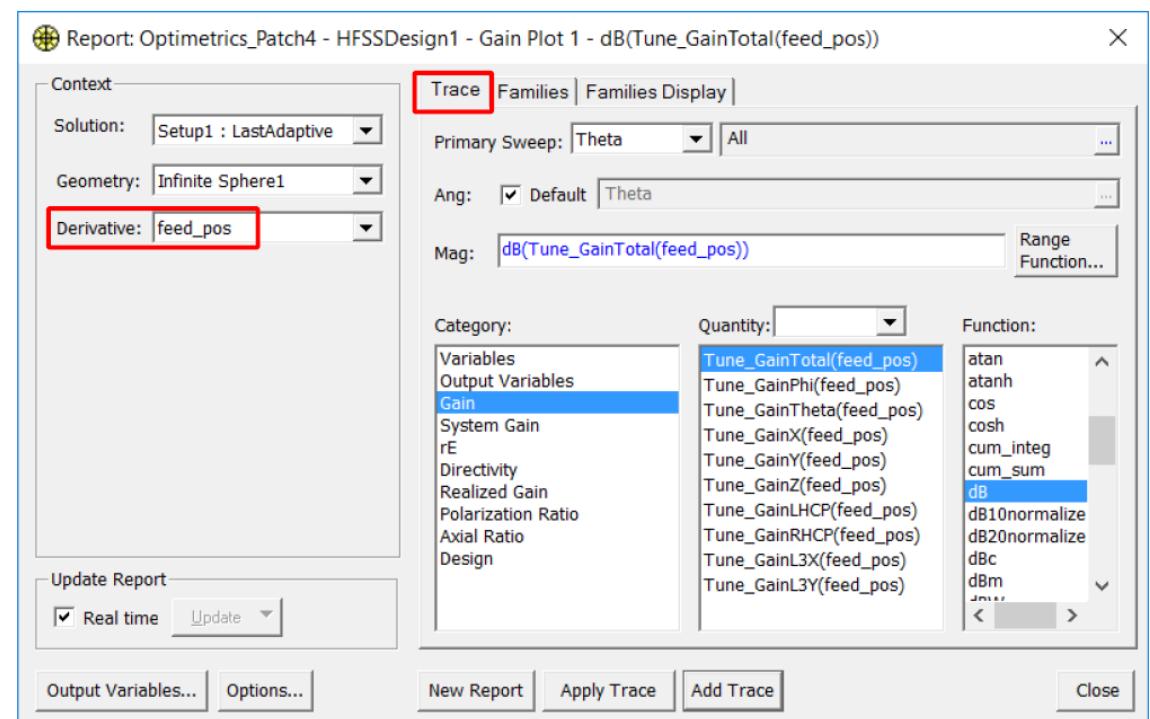

Analytic Derivatives Radiation Pattern Tuning Plot

- In the **Project Manager**, right-click on **Results**, and select **Tune Reports**
...
- Move the scroll bars in the **Report Tuning** window to predict the performance for various patch width and feed position values.
- Click the **Close** button.

— : Nominals
 — : Tuning

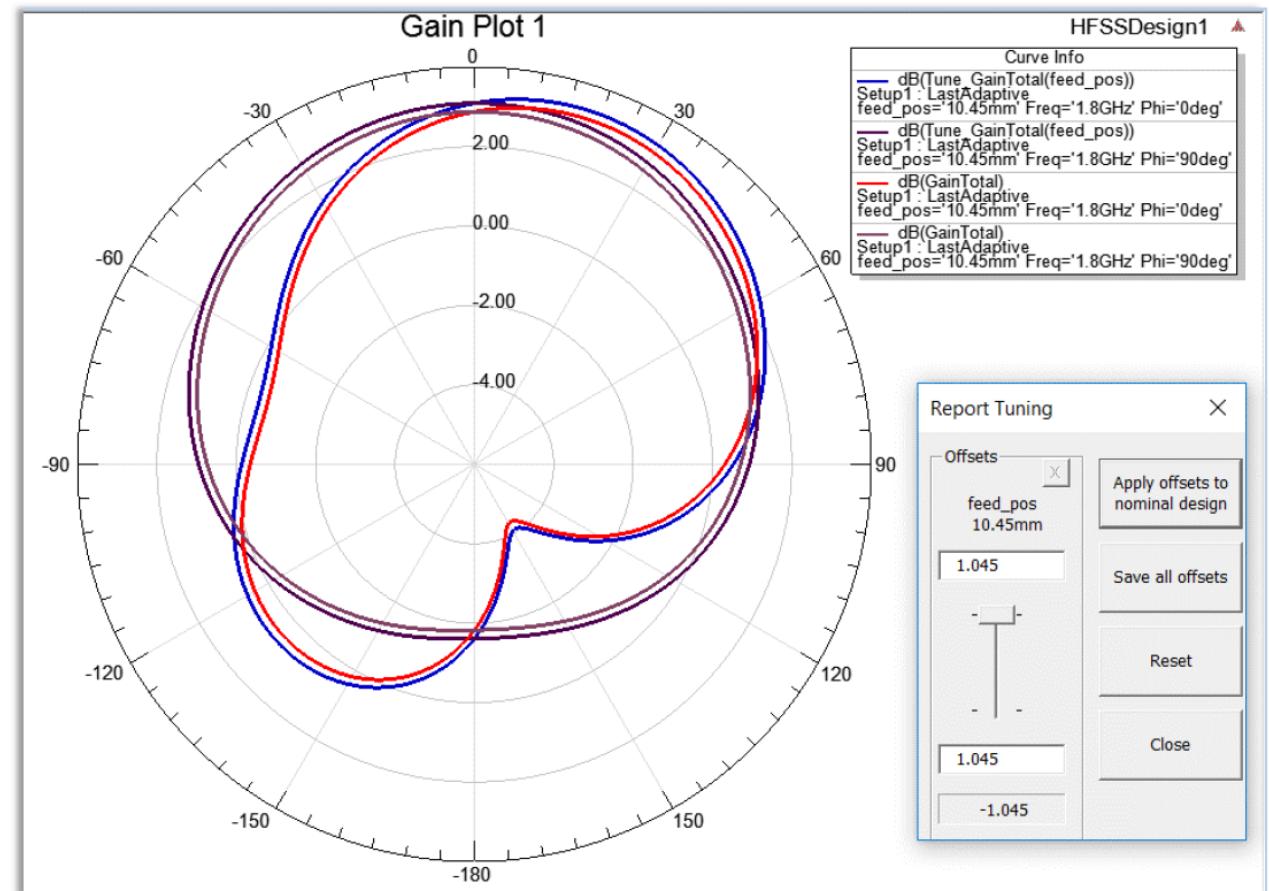

Appendix

Options Settings

Ansys

HFSS: Launching Ansys Electronics Desktop

- **Open HFSS project and Set Options**

- To access HFSS, click the Microsoft Start button, Select:



Programs > Ansys Electromagnetic Suite > Ansys Electronics Desktop

A new Project1 appears under the *Project Manager*.

- Setting **Tool Options**

Select the menu item **Tools > Options > General Options**


Option settings suggested here ensure that the user can consistently follow the steps in the Workshop. A user can prefer his/her own option configuration.

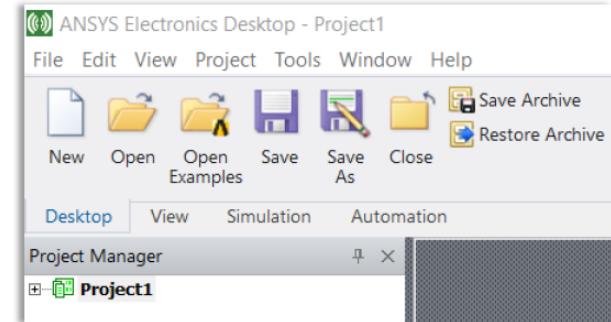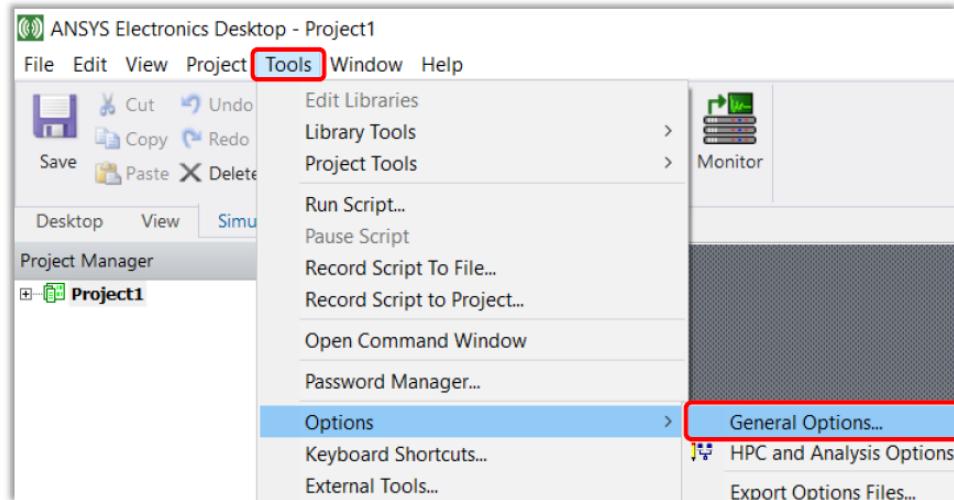

Setting *Tool > Options* for HFSS 1 - Boundary and Drawing

- Selected: ***Tools > Options > General Options***
 - Expand **HFSS** (by clicking on the + sign) and select **Boundary Assignment**
 - **Check all entries**
- Expand 3D Modeler and click Drawing
 - **Automatically cover closed polylines:** **Checked**
 - **Edit properties of new primitives:** **Checked**


Option settings suggested here ensure that the user can consistently follow the steps in the Workshop. A user can prefer his/her own option configuration.

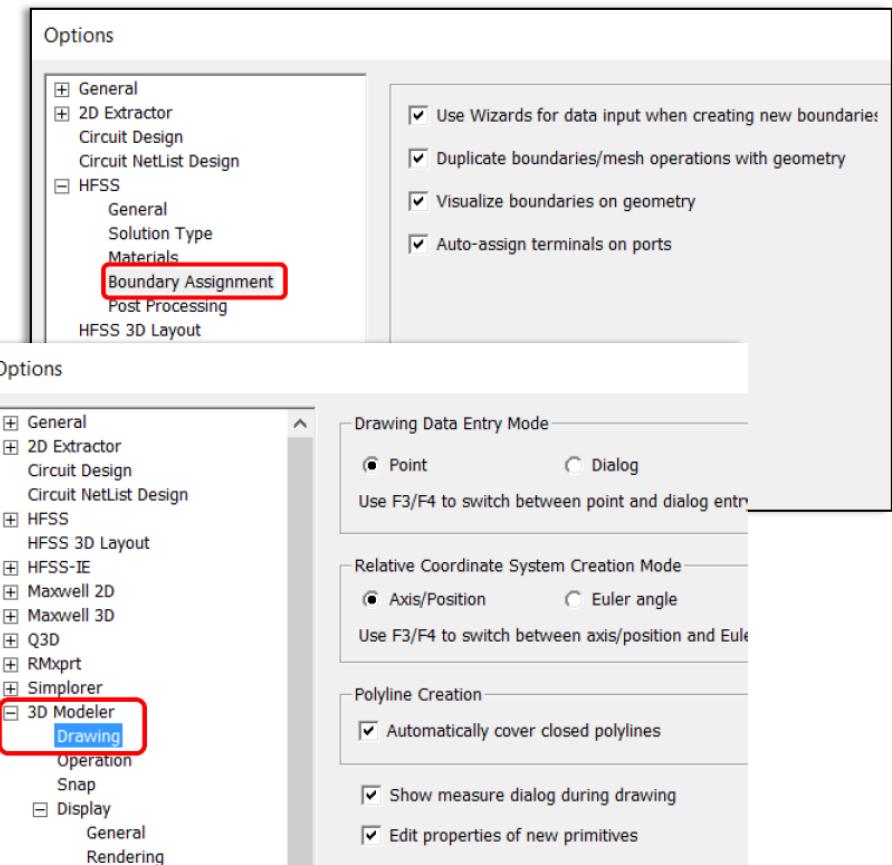

Setting Tool > Options for HFSS 2 - Display History and Transparency


- Expand **Display**
 - Click **Rendering** and set **Default Transparency** to **0.7**
 - Click **History Tree** and **check all entries** (not shown here)
- Click the **OK** button to close the Options dialog box

Option settings suggested here ensure that the user can consistently follow the steps in the Workshop.

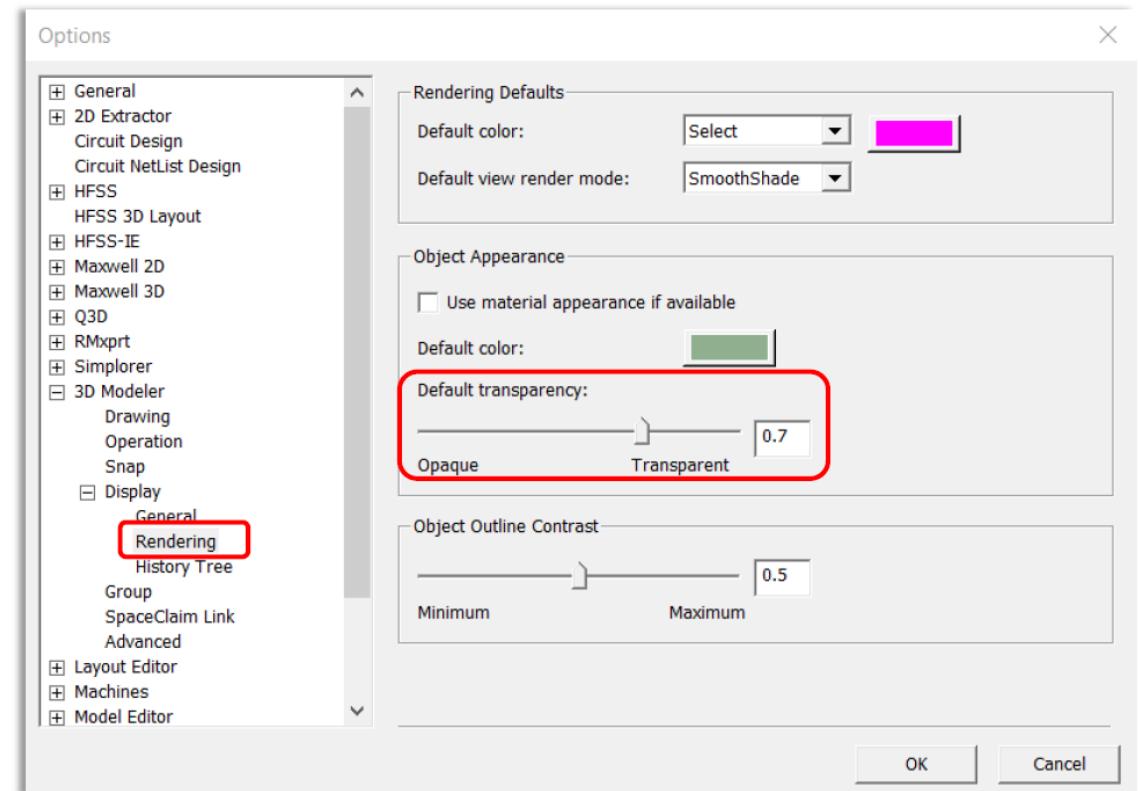


S- Parameter Results Plot


With variable feed position

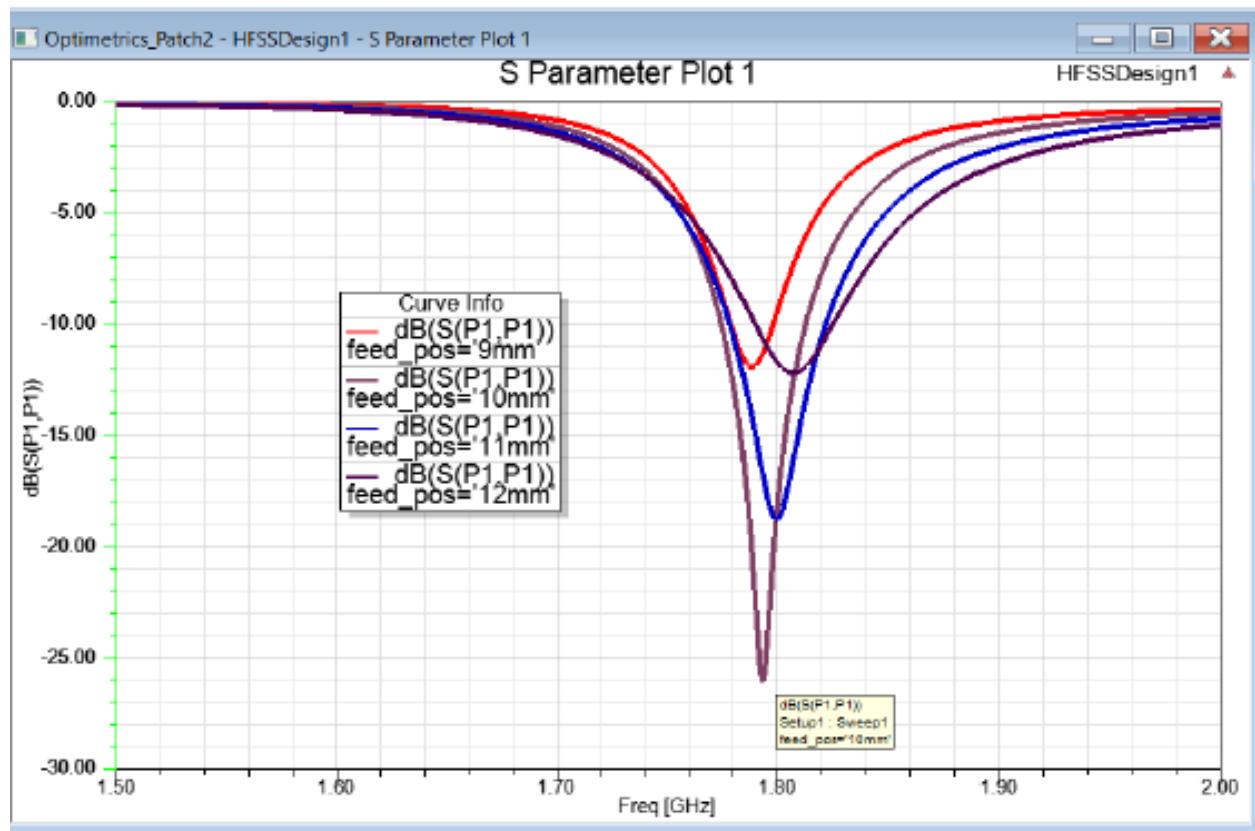

With optimized feed position

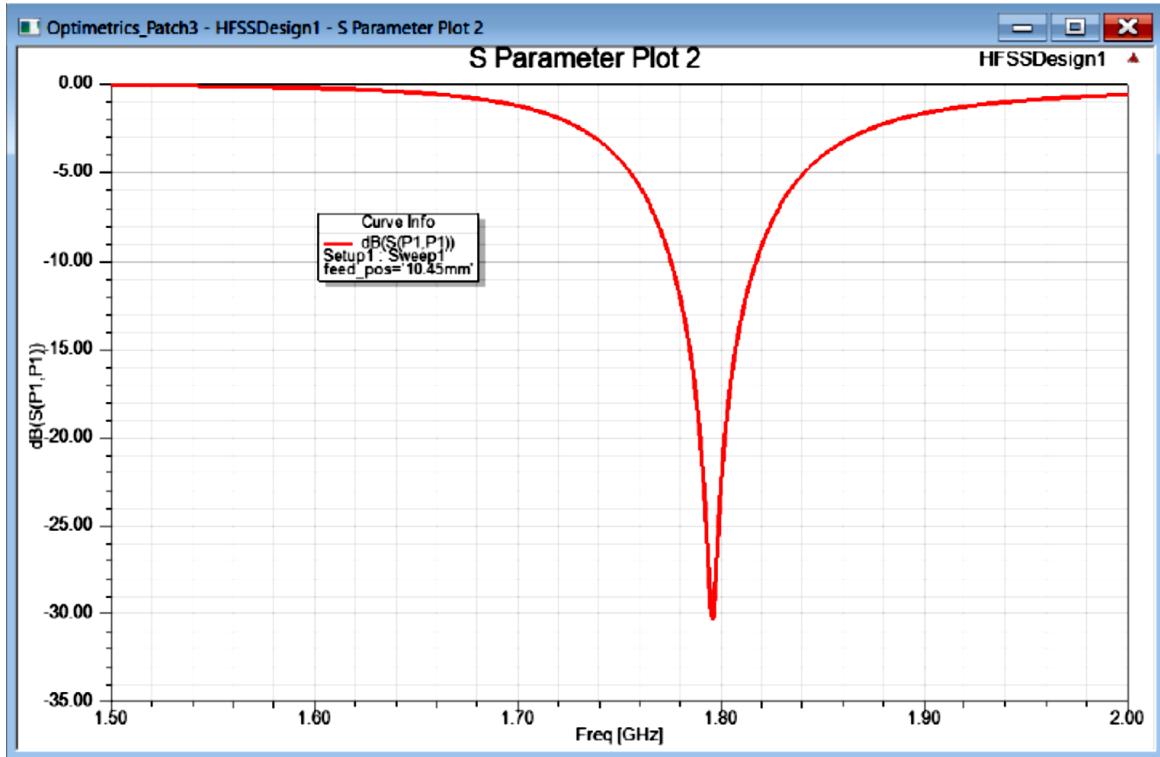

Radiation Pattern plot with performance for various patch width and feed position values.

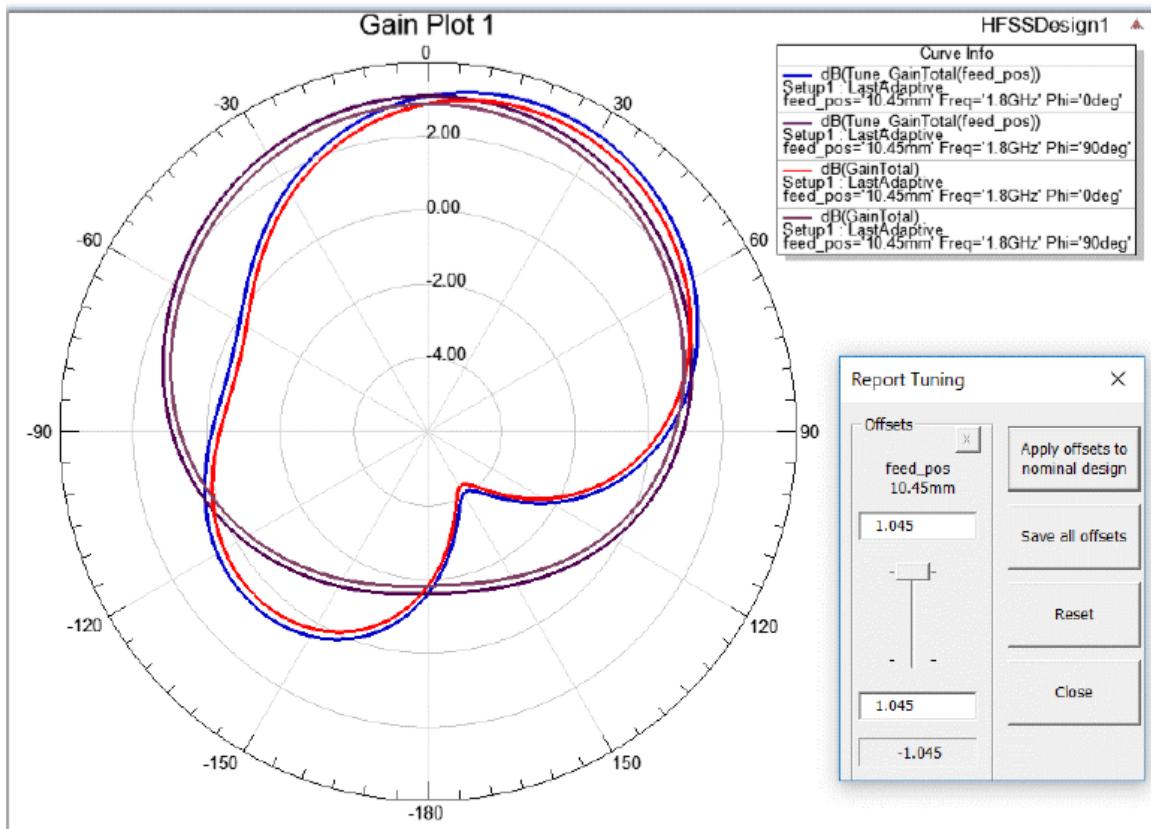

Observations:

| Sl.No | Criteria | Max Marks | Marks obtained |
|-------------------------------|--|-----------|----------------|
| Data sheet | | | |
| 1 | Problem statement | 10 | |
| 2 | Design & specifications | 10 | |
| 3 | Expected output | 10 | |
| Record | | | |
| 4 | Simulation/ Conduction of the experiment | 15 | |
| 5 | Analysis of the result | 15 | |
| 6 | Viva | 40 | |
| 7 | Total | 100 | |
| Scale down to 10 marks | | | |

EXPERIMENT 8

Performance Analysis of Rayleigh Fading Channel Model

Topic Learning Objectives:

The student must be able to:

1. Generate a sequence of Identically distributed Rayleigh random variables and plot the histogram for N symbols and compare with Rayleigh PDF.
2. Perform Monte Carlo simulation to estimate and plot the error probability of a BPSK, BFSK and DPSK signaling communication system in Rayleigh fading and compare with theoretical error probability.
3. Compare the probability of error without fading and with Rayleigh fading channel for BPSK, BFSK and DPSK techniques.

1. AIM: Performance Analysis of Rayleigh Fading Channel Model using Matlab software.

2. EQUIPMENTS REQUIRED: Computer with Matlab software.

3. THEORY: In all communication systems of practical interest, random effects such as channel noise, interference, and fading, degrade the information-bearing signal as it passes through the system from information source to the final user. Accurate simulation of these systems at the waveform level requires that these random effects be modeled accurately. Therefore, algorithms are required to produce these random effects. The fundamental building block is the random number generator.

A random variable having a uniform probability density function is easily transformed to a random variable having a desired PDF other than uniform. Therefore, the first step in the generation of a random variable having a specified PDF is to generate a random variable that is uniformly distributed on the interval (0,1).

Monte Carlo computer simulations are usually performed in practice to estimate the performance of a digital communication system in the presence of noise and interference. The commonly used metric for the performance of a digital communication system is the probability of error.

4. PROCEDURE

The sequential procedure for the performance analysis of Rayleigh fading channel model is as follows.

4a. Generate a sequence of N=20,000 statistically independent and identically distributed Rayleigh random variables. Plot the histogram for the 20000 symbols and compare it with the corresponding Rayleigh probability density function.

Algorithm:

1. Select the number of samples (Ex: N=20,000).
2. Create 1xN matrix of uniform distributed random variables(U)
3. Convert uniform distributed random variable to Rayleigh distributed random variable. Unit variance is assumed. The relation between Rayleigh distributed random variable 'R' and uniform distributed random variable U is given by

$$R = \sqrt{-2\sigma^2 \ln (U)} \quad (8.1)$$

4. Plot the histogram for a given number of samples.

5. Plot the Rayleigh distribution.

The Rayleigh PDF is given by

$$f(\alpha) = \begin{cases} \frac{\alpha}{\sigma^2} e^{\frac{-\alpha^2}{2\sigma^2}} & \alpha \geq 0 \\ 0 & \text{otherwise} \end{cases} \quad (8.2)$$

6. The expected histogram and Rayleigh PDF for 20,000 samples are shown in fig4.1.

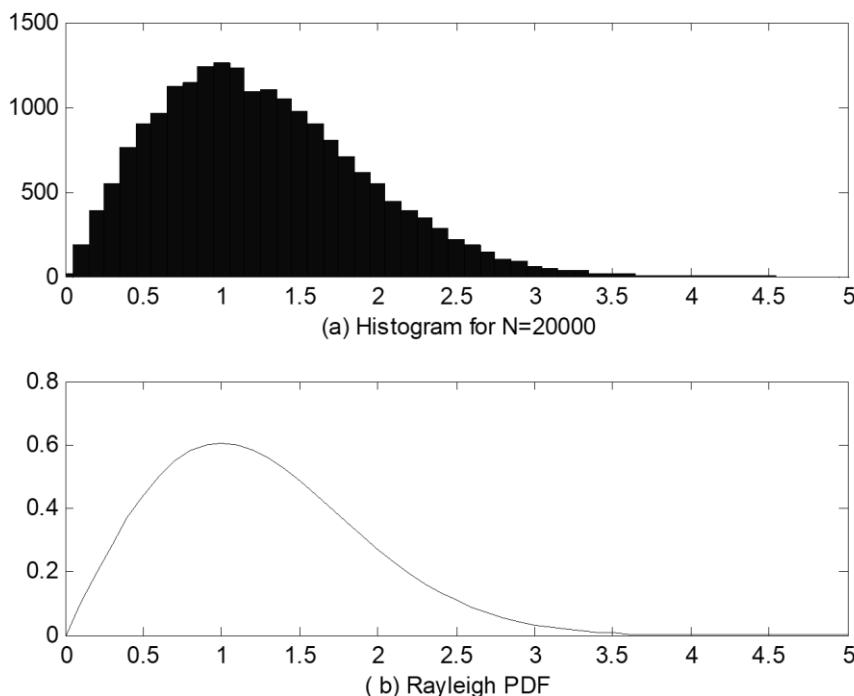


Fig 1: Plots of Histogram and Rayleigh PDF

4b. Perform a Monte Carlo simulation to estimate and plot the error probability of a binary antipodal (BPSK) signaling communication system in Rayleigh fading.
Algorithm:

1. Select the energy per bit to 1.

2. Select the signal to noise power in dB.
3. Initialize BER, Number of bits and Number of errors to zero.
4. Assume: $m = 0$ (All zero code word is transmitted).
5. Create uniform distributed random variable (U)
6. Convert uniform distributed random variable to Rayleigh distributed random variable. Unit variance is assumed.
7. Determine noise voltage using noise power and normally distributed pseudorandom number.
8. Use the expression for input to the detector at the sampling instant to check for the number of errors.

$$y = \alpha\sqrt{E_b} \cos m\pi + n, \quad m = 0, 1 \quad (8.3)$$

If $y \leq 0$, increment the errors. If $y > 0$, errors=0.

9. Determine the BER.

$$BER = \frac{\text{Number of errors}}{\text{No of bits}}$$

10. Calculate error probability using the theoretical formula.

$$P_e = \frac{1}{2} \left[1 - \sqrt{\frac{\bar{\rho}_b}{1 + \bar{\rho}_b}} \right] \quad (8.4)$$

Where,

$$\bar{\rho}_b = \frac{2\sigma^2 E_b}{N_0}$$

The expected results of error probability of a binary antipodal signalling communication system with Rayleigh fading for 10,000 samples are shown in fig 2.

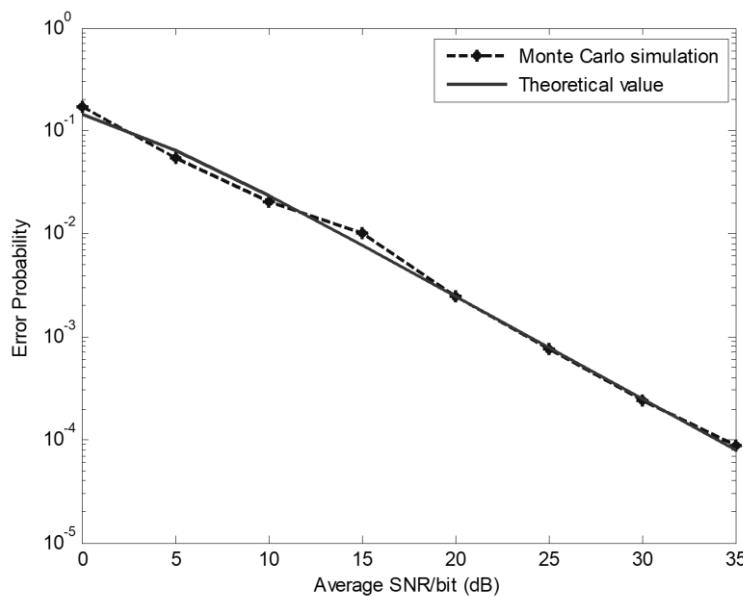


Fig 2: Result of Monte Carlo simulation

4c. perform a Monte Carlo simulation to estimate and plot the error probability of a binary orthogonal signaling (BFSK) communication system in Rayleigh fading.

Algorithm:

1. Select the energy per bit to 1.
2. Select the signal to noise power in dB.
3. Initialize BER, Number of bits and Number of errors to zero.
4. Assume: $m = 0$ (All zero code word is transmitted)
5. Create uniform distributed random variable (U)
6. Convert uniform distributed random variable to Rayleigh distributed random variable. Unit variance is assumed.
7. Determine noise voltage using noise power and 1×2 normally distributed pseudorandom numbers.
8. Use the expression for input to the detector at the sampling instant to check for the number of errors.

$$r_1 = \alpha\sqrt{E_b} + n_1 \quad (8.5)$$

$$r_2 = n_2$$

Where, n_1 and n_2 are the additive noise components at the outputs of the two correlators.

If $r_1 \geq r_2$, number of errors = 0. If $r_1 < r_2$, number of errors = 1.

9. Determine the BER and Calculation of error probability using the theoretical formula

$$P_e = \frac{1}{2} \left[1 - \sqrt{\frac{\bar{\rho}_b}{2 + \bar{\rho}_b}} \right] \quad (8.6)$$

Where,

$$\bar{\rho}_b = \frac{2\sigma^2 E_b}{N_0}$$

The expected results of error probability of a binary orthogonal signalling communication system with Rayleigh fading for 10,000 samples are shown in fig 3.

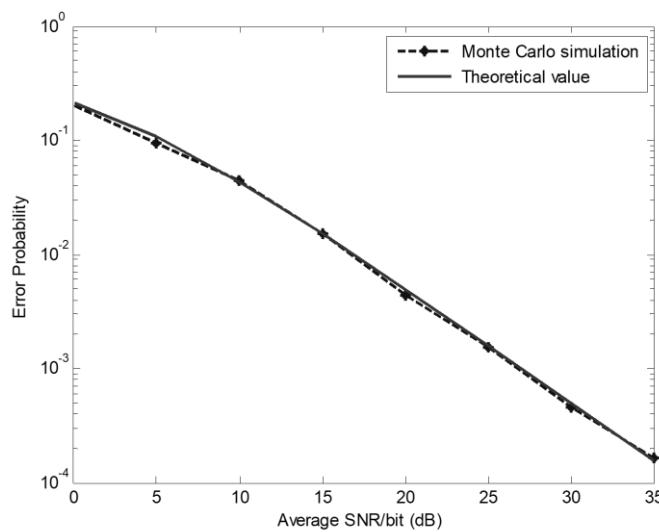


Fig 3: Result of Monte Carlo simulation

4d. Perform a Monte Carlo simulation to estimate and plot the error probability of a DPSK communication systems in Rayleigh fading.

The other type of binary signal modulation is DPSK. The average probability of error for the signal is given by

$$P_e = \frac{1}{2(1 + \bar{\rho}_b)} \quad \text{DPSK} \quad (8.7)$$

The probability of error without fading for BPSK, BFSK and DPSK are respectively given by

$$P_e = Q\left(\sqrt{\frac{2E_b}{N_0}}\right) \quad \text{BPSK} \quad (8.8)$$

$$P_e = \frac{1}{2} e^{-\frac{E_b}{2N_0}} \quad \text{BFSK} \quad (8.9)$$

$$P_e = \frac{1}{2} e^{-\frac{E_b}{N_0}} \quad \text{DPSK} \quad (8.10)$$

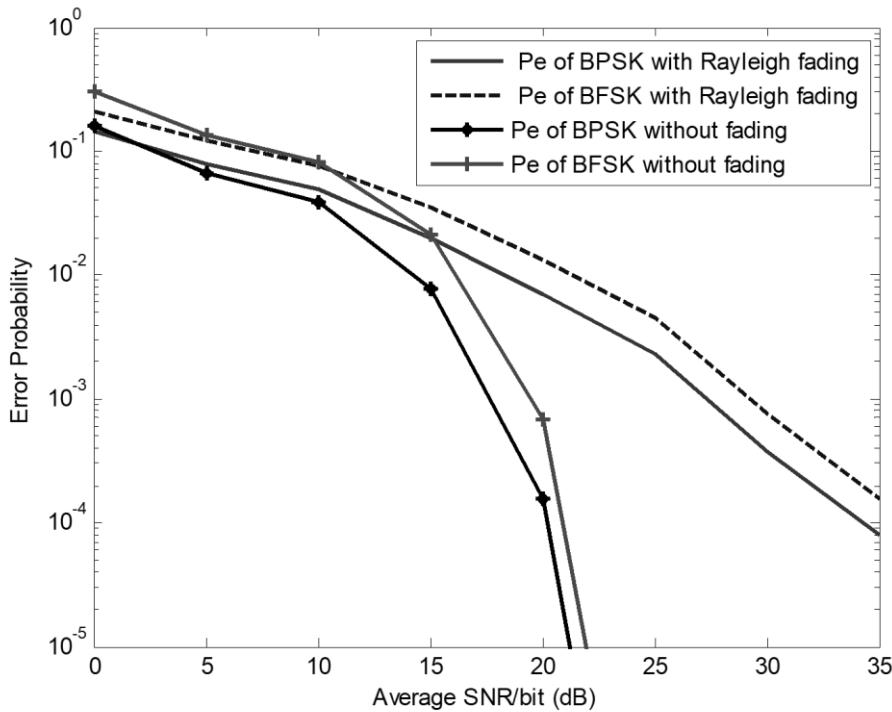


Fig 4: Performance of binary signaling without fading and with Rayleigh fading channel

The comparison plot of probability error with fading and without fading is shown in fig 4. The aspects of these graphs in fading channel are the slow decay of the probability of error as a function of SNR. This is in contrast to the exponential decrease in the case of the AWGN channel.

Codes:

```
AWGN FADING
clc;
close all;
N=20000;
SNR_limit=35;
SNR_db=-5:0.5:SNR_limit;
SNR=10.^{(SNR_db/10)};
u=rand(1,N);
m=floor(2*rand(1,N));
var=1; % sigma^2
nstd=sqrt(var);
y=(zeros(1,N));
Pe_BPSK_sim=(zeros(1,length(SNR)));
Pe_BFSK_sim=(zeros(1,length(SNR)));
Pe_DPSK_sim=(zeros(1,length(SNR)));
% 4(a) generate rayleigh random variable
r=sqrt(-(2*var*log(u)));
figure(1);
hist(r,100);
title('rayleigh random variable histogram plot');
xlabel('random variable R');
```

```

ylabel('frequency')
a=[0:0.01:10];
R=(a/var).*exp(-(a.*a)/(2*var));
figure(2);
plot(a,R);
title('rayleigh PDF');
xlabel('random variable');
ylabel('probability');
legend('variance =1')
%BPSK simulation
Pe_BPSK_id=0.5*(1-sqrt((var*SNR)./(1+var*SNR)));
%BFSK simulation (coherent)
BFSK_id = 0.5*(1-sqrt(var*SNR./(2+(var*SNR)))); 
%DPSK simulation
Pe_DPSK_id=0.5./(1+var*SNR);

%Comparison of Error performance for AWGN and rayleigh fading channels
Pe_BPSK_NF=0.5*(erfc(sqrt(SNR)));
Pe_BFSK_NF=0.5*(erfc(sqrt(SNR/2)));
Pe_DPSK_NF=0.5*exp(-SNR); %non-coherent
figure(3);
semilogy(SNR_db,Pe_BPSK_id,'r.-', SNR_db,BFSK_id,'r*-',SNR_db,Pe_DPSK_id,'r-
', SNR_db,Pe_BPSK_NF,'b.-',SNR_db,Pe_BFSK_NF,'b*-',SNR_db,Pe_DPSK_NF,'b--');
axis([-5 SNR_limit 0.000001 1]);
title('performance of BPSK,BFSK,DPSK')
xlabel('SNR(db)');
ylabel('probability of error');
legend('Pe of BPSK with fading','Pe of BFSK with fading','Pe of DPSK with fading','Pe
of BPSK without fading','Pe of BFSK without fading','Pe of DPSK without fading');

*****
*****
```

BFSK

```

clc;
close all;
N=20000;
SNR_limit=35;
SNR_db=-5:0.5:SNR_limit;
SNR=10.^((SNR_db/10));
u=rand(1,N);
m=floor(2*rand(1,N));
var=1; % sigma^2
nstd=sqrt(var);
y=(zeros(1,N));
Pe_BPSK_sim=(zeros(1,length(SNR)));
Pe_BFSK_sim=(zeros(1,length(SNR)));
Pe_DPSK_sim=(zeros(1,length(SNR)));
```

```
%4(a)generate rayleighrandom variable
r=sqrt(-(2*var*log(u)));
figure(1);
hist(r,100);
title('rayleigh random variable histogram plot');
xlabel('random variable R');
ylabel('frequency')
a=[0:0.01:10];
R=(a/var).*exp(-(a.*a)/(2*var));
figure(2);
plot(a,R);
title('rayleigh PDF');
xlabel('random variable');
ylabel('probability');
legend('variance =1')
```

%BPSK simulation

```
Pe_BPSK_id=0.5*(1-sqrt((var*SNR)./(1+var*SNR)));
%BFSK simulation (coherent)
BFSK_id = 0.5*(1-sqrt(var*SNR./(2+(var*SNR))));
%DPSK simulation
Pe_DPSK_id=0.5./(1+var*SNR);

%Comparison of Error performance for AWGN and rayleigh fading channels
Pe_BPSK_NF=0.5*(erfc(sqrt(SNR)));
Pe_BFSK_NF=0.5*(erfc(sqrt(SNR/2)));
Pe_DPSK_NF=0.5*exp(-SNR); %non-coherent
figure(3);
semilogy(SNR_db,Pe_BPSK_id,'r.-', SNR_db,BFSK_id,'r*-',SNR_db,Pe_DPSK_id,'r-',
SNR_db,Pe_BPSK_NF,'b.-',SNR_db,Pe_BFSK_NF,'b*-',SNR_db,Pe_DPSK_NF,'b--');
axis([-5 SNR_limit 0.000001 1]);
title('performance of BPSK,BFSK,DPSK')
xlabel('SNR(db)');
ylabel('probability of error');
legend('Pe of BPSK with fading','Pe of BFSK with fading','Pe of DPSK with fading','Pe
of BPSK without fading','Pe of BFSK without fading','Pe of DPSK without fading');
```

```
*****
*****
*****
```

BPSK

```
%%Performance of Binary Modulation in Rayleigh Fading Channel
%%transmission through a frequency nonselective channel
clc;
Eb= 1; % Energ per bit
```

```

EbNo_dB= 0:5:35 % vary the average SNR
No_over_2= Eb*10.^(-EbNo_dB/10)% Noise power
sigma= 1 ; % Rayleigh parameter
var=sigma^2;
BER= zeros(1,length(EbNo_dB));

% Calculation of error probabilit using Monte Carlo simulation:
for i = 1:length(EbNo_dB)
no_errors = 0;
no_bits = 0;
% Assumption: m = 0 (All zero codeword is transmitted):
while no_errors <= 10
u = rand;
% rand returns a single uniformly distributed
%random number in the interval (0,1)
alpha = sigma*sqrt(- 2*log(u)) ; % alpha is non-negative
%Rayleigh distrbuted with variance selected to be unity.
noise = sqrt(No_over_2(i))*randn; %randn gives Gaussian, with zero mean and unit
variance
y = alpha*sqrt(Eb) + noise; %simulate the input to the detector
if y <= 0
y_d = 1;
else
y_d = 0;
end
no_bits = no_bits + 1 ;
no_errors = no_errors + y_d;
end
BER(i) = no_errors/no_bits ;%estimated error probability
end
% Calculation of error probabilit using the theoretical formula:
rho_b = Eb./No_over_2*var;
P2 = 1/2*(1-sqrt(rho_b./(1+rho_b))); %the theoretical value
% Plot the results:
semilogy(EbNo_dB,BER, '-* ',EbNo_dB, P2,'-o')
title('Montecarlosimualtion for Performance of BPSK signal');
xlabel('Average SNR/bit (dB)')
ylabel('Error Probability')
legend('Monte Carlo simulation','Theoretical value')

```

Observations:

| Sl.No | Criteria | Max Marks | Marks obtained |
|-------------------------------|--|------------------|-----------------------|
| Data sheet | | | |
| 1 | Problem statement | 10 | |
| 2 | Design & specifications | 10 | |
| 3 | Expected output | 10 | |
| Record | | | |
| 4 | Simulation/ Conduction of the experiment | 15 | |
| 5 | Analysis of the result | 15 | |
| 6 | Viva | 40 | |
| 7 | Total | 100 | |
| Scale down to 10 marks | | | |

EXPERIMENT 9


Simulation of Alamouti Space Time Block Code(STBC) in Rayleigh Fading Channel

Topic Learning Objectives:

The student must be able to:

- i. Perform simulation of Rayleigh Fading Channel and to estimate BER and compare with theoretical BER.
 - ii. Compare the BER by using Alamouti STBC
- 1. AIM:** To compute the BER for BPSK modulation in a Rayleigh fading channel with Alamouti Space Time Block Coding
- 2. EQUIPMENTS REQUIRED:** Computer with Matlab software.
- 3. THOERY:**

Space-time block coding is a technique used in wireless communications to transmit multiple copies of a data stream across a number of antennas. It combines all the copies of the received signal in an optimal way to extract as much information from each of them as possible. A space time block code is usually represented by a matrix. Each row represents a time slot and each column represents one antenna's transmissions over time. Within this matrix, S_{ij} is the modulated symbol to be transmitted in time slot i from antenna j . There are to be T time slots and nT transmit antennas as well as nR receive antennas. This block is usually considered to be of 'length' T .

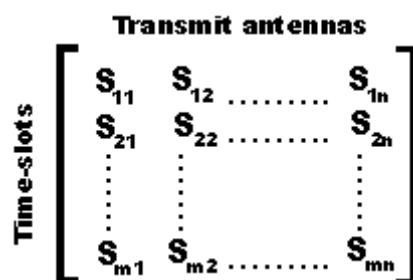

The Alamouti space-time block coding is a simple MIMO technique that can be used to reduce the BER of a system, at a specific SNR, without any loss on the data rate. Consider that we have a transmission sequence, for example $\{x_1, x_2, x_3, \dots, x_n\}$. In normal transmission, we will be sending x_1 in the first time slot, x_2 in the second time slot, and so on. However, Alamouti suggested that we group the symbols into groups of two. In the first time slot, send x_1 and x_2 from the first and second antenna. In second time slot send $-x_2^*$ and x_1^* from the first and second antenna. In the third time slot send x_3 and x_4 from the first and second antenna. In fourth time slot, send $-x_4^*$ and x_3^* from the first and second antenna and so on. Notice that though we are grouping two symbols, we still need two time slots to send two symbols. Hence, there is no change in the data rate.

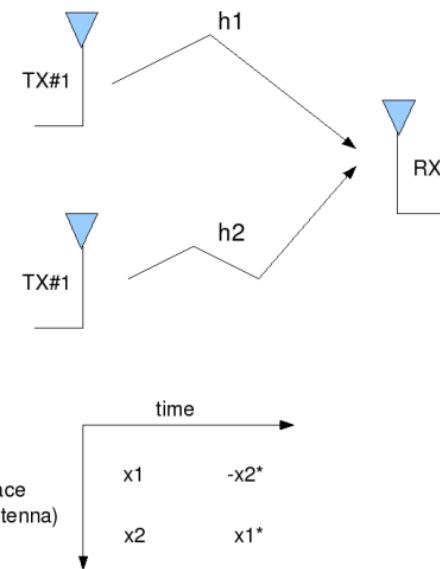


Figure: 2-Transmit, 1-Receive Alamouti STBC coding

Some assumptions are made as follows

1. The channel is flat fading. So, the convolution operation reduces to a simple multiplication.
2. The channel experienced by each transmit antenna is independent from the channel experienced by other transmit antennas.
3. For the i^{th} transmit antenna, each transmitted symbol gets multiplied by a randomly varying complex number h_i . As the channel under consideration is a Rayleigh channel, the real and imaginary parts of h_i are Gaussian distributed having mean $\mu_{h_i} = 0$ and variance $\sigma_{h_i}^2 = \frac{1}{2}$.
4. The channel experienced between each transmit to the receive antenna is randomly varying in time. However, the channel is assumed to remain constant over two time slots.
5. On the receive antenna, the noise has the Gaussian probability density function with $p(n) = \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{(n-\mu)^2}{2\sigma^2}}$ with $\mu = 0$ and $\sigma^2 = \frac{N_0}{2}$.
6. The channel h_i is known at the receiver.

At the receiver by using STBC we get the following

In the first time slot, the received signal is,

$$y_1 = h_1 x_1 + h_2 x_2 + n_1 = [h_1 \ h_2] \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + n_1.$$

In the second time slot, the received signal is,

$$y_2 = -h_1 x_2^* + h_2 x_1^* + n_2 = [h_1 \ h_2] \begin{bmatrix} -x_2^* \\ x_1^* \end{bmatrix} + n_2$$

where

y_1, y_2 is the received symbol on the first and second time slot respectively,
 h_1 is the channel from 1st transmit antenna to receive antenna,
 h_2 is the channel from 2nd transmit antenna to receive antenna,
 x_1, x_2 are the transmitted symbols and
 n_1, n_2 is the noise on 1st, 2nd time slots.

Since the two noise terms are independent and identically distributed.

$$E \left\{ \begin{bmatrix} n_1 \\ n_2^* \end{bmatrix} \begin{bmatrix} n_1^* & n_2 \end{bmatrix} \right\} = \begin{bmatrix} |n_1|^2 & 0 \\ 0 & |n_2|^2 \end{bmatrix}$$

For convenience, the above equation can be represented in matrix notation as follows

$$\begin{bmatrix} y_1 \\ y_2^* \end{bmatrix} = \begin{bmatrix} h_1 & h_2 \\ h_2^* & -h_1^* \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} n_1 \\ n_2^* \end{bmatrix}$$

Let us define $\mathbf{H} = \begin{bmatrix} h_1 & h_2 \\ h_2^* & -h_1^* \end{bmatrix}$. To solve for $\begin{bmatrix} x_1 \\ x_2 \end{bmatrix}$, we know that we need to find the inverse of \mathbf{H} . We know, for a general m x n matrix, the pseudo inverse is defined as,

$$\mathbf{H}^+ = (\mathbf{H}^H \mathbf{H})^{-1} \mathbf{H}^H$$

$$(\mathbf{H}^H \mathbf{H}) = \begin{bmatrix} h_1^* & h_2 \\ h_2^* & -h_1 \end{bmatrix} \begin{bmatrix} h_1 & h_2 \\ h_2^* & -h_1^* \end{bmatrix} = \begin{bmatrix} |h_1|^2 + |h_2|^2 & 0 \\ 0 & |h_1|^2 + |h_2|^2 \end{bmatrix}$$

The term

Since this is a diagonal matrix, the inverse is just the inverse of the diagonal elements, i.e

$$(\mathbf{H}^H \mathbf{H})^{-1} = \begin{bmatrix} \frac{1}{|h_1|^2 + |h_2|^2} & 0 \\ 0 & \frac{1}{|h_1|^2 + |h_2|^2} \end{bmatrix}$$

The estimate of the transmitted symbol is,


$$\begin{aligned}
 \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} &= (\mathbf{H}^H \mathbf{H})^{-1} \mathbf{H}^H \begin{bmatrix} y_1 \\ y_2^* \end{bmatrix} \\
 &= (\mathbf{H}^H \mathbf{H})^{-1} \mathbf{H}^H \left(\mathbf{H} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} n_1 \\ n_2^* \end{bmatrix} \right) \\
 &= \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + (\mathbf{H}^H \mathbf{H})^{-1} \mathbf{H}^H \begin{bmatrix} n_1 \\ n_2^* \end{bmatrix}
 \end{aligned}$$

Since the estimate of the transmitted symbol with the Alamouti STBC scheme is identical to that obtained from Maximal Ratio Combining (MRC), the BER with above described Alamouti scheme should be same as that for MRC. However, there is a small catch. With Alamouti STBC, we are transmitting from two antennas. Hence the total transmit power in the Alamouti scheme is twice that of that used in MRC. To make the comparison fair, we need to make the total transmit power from two antennas in STBC case to be equal to that of power transmitted from a single antenna in the MRC case. With this scaling, we can see that BER performance of 2Tx, 1Rx Alamouti STBC case has a roughly 3dB poorer performance than 1Tx, 2Rx MRC case.

ALGORITHM:

- a. Generate random binary sequence of +1's and -1's.
- b. Group them into pair of two symbols
- c. Code it per the Alamouti Space Time code, multiply the symbols with the channel and then add white Gaussian noise.
- d. Equalize the received symbols
- e. Perform hard decision decoding and count the bit errors
- f. Repeat for multiple values of $\frac{E_b}{N_0}$ and plot the simulation and theoretical results.

Sample Outputs:

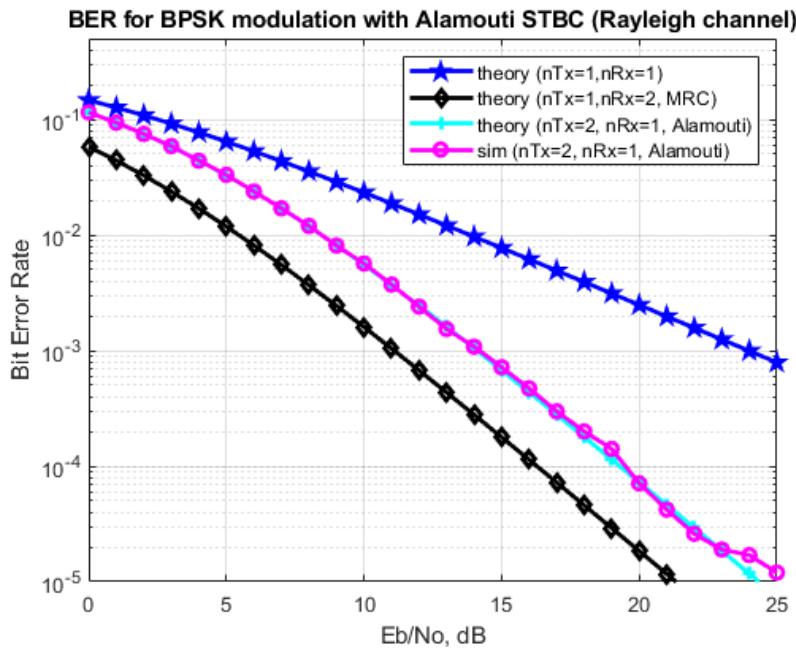**MATLAB CODE:**

```
% Two transmit antenna, 1 Receive antenna

clear
N = 10^6; % number of bits or symbols
Eb_N0_dB = [0:25]; % multiple Eb/N0 values

for ii = 1:length(Eb_N0_dB)
    % Transmitter
    ip = rand(1,N)>0.5; % generating 0,1 with equal probability
    s = 2*ip-1; % BPSK modulation 0 -> -1; 1 -> 0

    % Alamouti STBC
    sCode = zeros(2,N);
    sCode(:,1:2:end) = (1/sqrt(2))*reshape(s,2,N/2); % [x1 x2 ...]
    sCode(:,2:2:end) = (1/sqrt(2))*(kron(ones(1,N/2),[-1;1]).*flipud(reshape(conj(s),2,N/2))); % [-x2* x1* ....]
    h = 1/sqrt(2)*[randn(1,N) + j*randn(1,N)]; % Rayleigh channel
    hMod = kron(reshape(h,2,N/2),ones(1,2)); % repeating the same channel for two
    symbols
    n = 1/sqrt(2)*[randn(1,N) + j*randn(1,N)]; % white gaussian noise, 0dB variance

    % Channel and noise Noise addition
    y = sum(hMod.*sCode,1) + 10^(-Eb_N0_dB(ii)/20)*n;

    % Receiver
    yMod = kron(reshape(y,2,N/2),ones(1,2)); % [y1 y1 ... ; y2 y2 ...]
    yMod(2,:) = conj(yMod(2,:)); % [y1 y1 ... ; y2* y2*...]
```

```

% forming the equalization matrix
hEq = zeros(2,N);
hEq(:,[1:2:end]) = reshape(h,2,N/2); % [h1 0 ... ; h2 0...]
hEq(:,[2:2:end]) = kron(ones(1,N/2),[1;-1]).*flipud(reshape(h,2,N/2)); % [h1 h2
... ; h2 -h1 ...]
hEq(1,:) = conj(hEq(1,:)); % [h1* h2* ... ; h2 -h1 .... ]
hEqPower = sum(hEq.*conj(hEq),1);
yHat = sum(hEq.*yMod,1)./hEqPower; % [h1*y1 + h2y2*, h2*y1 -h1y2*, ... ]
yHat(2:2:end) = conj(yHat(2:2:end));

% receiver - hard decision decoding
ipHat = real(yHat)>0;

% counting the errors
nErr(ii) = size(find([ip- ipHat]),2);
end

simBer = nErr/N; % simulated ber
EbN0Lin = 10.^Eb_N0_dB/10;
theoryBer_nRx1 = 0.5.*((1-1*(1+1./EbN0Lin).^(-0.5)));

p = 1/2 - 1/2*(1+1./EbN0Lin).^(-1/2);
theoryBerMRC_nRx2 = p.^2.*((1+2*(1-p)).^2);

pAlamouti = 1/2 - 1/2*(1+2./EbN0Lin).^(-1/2);
theoryBerAlamouti_nTx2_nRx1 = pAlamouti.^2.*((1+2*(1-pAlamouti)).^2);

close all
figure
semilogy(Eb_N0_dB,theoryBer_nRx1,'bp-','LineWidth',2);
hold on
semilogy(Eb_N0_dB,theoryBerMRC_nRx2,'kd-','LineWidth',2);
semilogy(Eb_N0_dB,theoryBerAlamouti_nTx2_nRx1,'c+-','LineWidth',2);
semilogy(Eb_N0_dB,simBer,'mo-','LineWidth',2);
axis([0 25 10^-5 0.5])
grid on
legend('theory (nTx=1,nRx=1)', 'theory (nTx=1,nRx=2, MRC)', 'theory (nTx=2, nRx=1,
Alamouti)', 'sim (nTx=2, nRx=1, Alamouti)');
xlabel('Eb/No, dB');
ylabel('Bit Error Rate');
title('BER for BPSK modulation with Alamouti STBC (Rayleigh channel)');

```

Observations:

| Sl.No | Criteria | Max Marks | Marks obtained |
|-------------------------------|--|-----------|----------------|
| Data sheet | | | |
| 1 | Problem statement | 10 | |
| 2 | Design & specifications | 10 | |
| 3 | Expected output | 10 | |
| Record | | | |
| 4 | Simulation/ Conduction of the experiment | 15 | |
| 5 | Analysis of the result | 15 | |
| 6 | Viva | 40 | |
| 7 | Total | 100 | |
| Scale down to 10 marks | | | |

EXPERIMENT 10

Simulation of OFDM Transmitter and Receiver

Topic Learning Objectives:

The student must be able to:

- iii. Perform simulation of OFDM transmitter and receiver and to estimate BER and compare with theoretical BER.
- iv. Compare the SNR vs BER for different subcarriers of OFDM.

4. AIM: Performance Analysis of OFDM Transmitter and Receiver using Matlab software.

5. EQUIPMENTS REQUIRED: Computer with Matlab software.

6. THEORY:

Orthogonal frequency-division multiplexing (OFDM) is a method of encoding digital data on multiple carrier frequencies. OFDM has developed into a popular scheme for wideband digital communication, used in applications such as digital television and audio broadcasting, DSL Internet access, wireless networks, power line networks, and 4G mobile communications.

It is the multi carrier system for communication of information over wireless channels. The important advantage is, higher rate information is converted into a group of parallel lower- rate information. The complexity of receiver construction is reduced because frequency-selective fading channel is transformed into a group of similar flat fading sub channels. Orthogonality is introduced between subcarriers in time, however in the frequency domain the spectra of these subcarrier overlap. So, there is effective bandwidth utilization in OFDM systems avoid of ICI as given in figure 1.

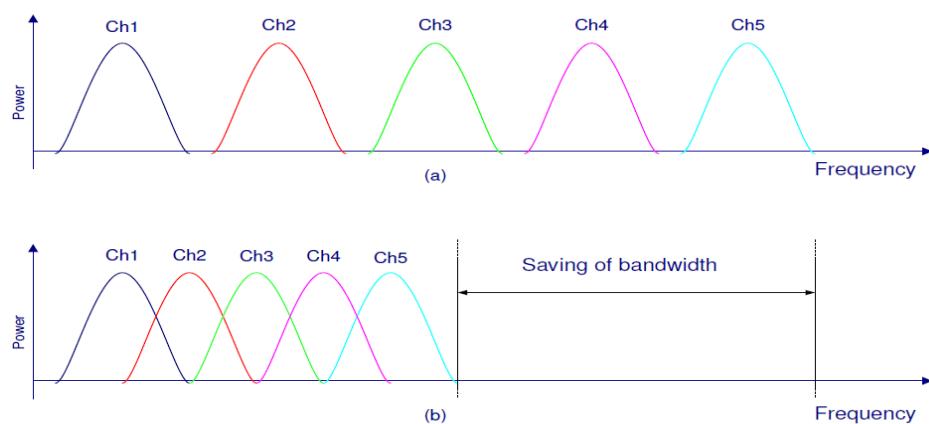


Figure 1

High data rate composite signal is obtained by combining low data rate subcarriers with large symbol time. This mitigates the effect of ISI which frequently happens with signals of short symbol duration in a multipath environment. OFDM is a multicarrier modulation as defined in equation1. OFDM baseband signal with 'n' point IFFT signal processing is equivalent to the summation of n multiple

components of sinusoids.

$$x(n) = \frac{1}{N} \sum_{k=0}^{N-1} X(k) e^{j\frac{2\pi}{N} kn}$$

$$= \frac{1}{N} \sum_{k=0}^{N-1} X(k) \left[\left(\cos \frac{2\pi}{N} kn \right) + j \left(\sin \frac{2\pi}{N} kn \right) \right] \quad (10.1)$$

Where $n = 0$ to $N - 1$ and $x(k)$ = data symbol which is in complex number. The baseband OFDM signal after IFFT is expressed in time domain as follows;

$$x_{OFDM,b}(t) = \sum_{n=0}^{N-1} x[nT] \text{Rect}\left(\frac{t - nT - \frac{T}{2}}{T}\right)$$

$$= \sum_{n=0}^{N-1} [x_{Re}[nT] + jx_{Im}[nT]] \text{rect}\left(\frac{t - nT - T/2}{T}\right) \quad (10.2)$$

$$\text{where } \Pi\left(\frac{t}{T}\right) = \begin{cases} 1, & -T/2 \leq t \leq T/2 \\ 0, & \text{otherwise} \end{cases}$$

And NT is the time duration of OFDM symbol which consists of discrete N time slots each of which has T time duration. The real part and imaginary part of base-band OFDM signal are multiplied $\cos \omega_c t$ by and $\sin \omega_c t$ respectively.

Therefore, the pass band OFDM signal is expressed as follows;


$$x_{OFDM,p}(t) = \sum_{n=0}^{N-1} x_{Re}[nT] \text{rect}\left(\frac{t - nT - \frac{T}{2}}{T}\right) \cos(\omega_c t)$$

$$- \sum_{n=0}^{N-1} x_{Im}[nT] \text{rect}\left(\frac{t - nT - \frac{T}{2}}{T}\right) \sin(\omega_c t) \quad (10.3)$$

$$= \sum_{n=0}^{N-1} \sqrt{x_{Re}^2[nT] + x_{Im}^2[nT]} \text{rect}\left(\frac{t - nT - \frac{T}{2}}{T}\right) \cos(\omega_c t + \theta_n)$$


$$\text{where } \text{rect}\left(\frac{t}{T}\right) = \begin{cases} 1, & -T/2 \leq t \leq T/2 \\ 0, & \text{otherwise} \end{cases}$$

And $\sqrt{x_{\text{Re}}^2[nT] + x_{\text{Im}}^2[nT]}$ means the envelope of the passband OFDM signal in each discrete time slot.

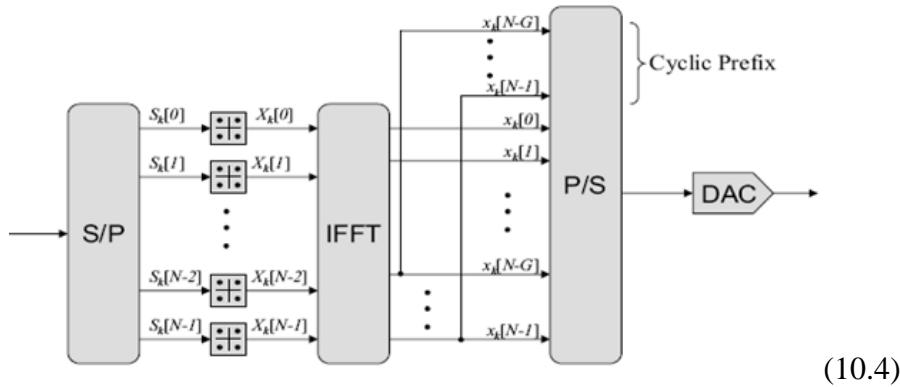

(10.4)

Figure 2 (a). Block diagram of OFDM Transmitter

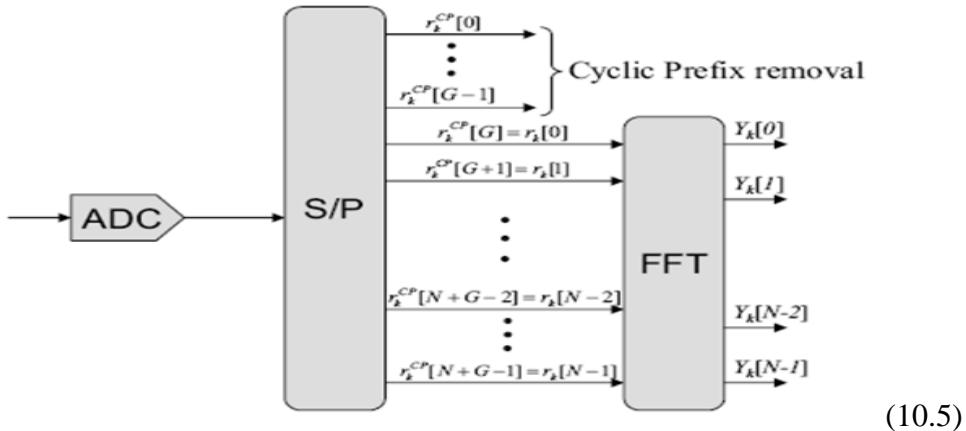

(10.5)

Figure 2 (b). Block diagram of OFDM Receiver

The key challenge in the realization of OFDM was the requirement of many sinusoidal generators at the transmitter and many filters at the receiver. These problems could be resolved using IFFT and FFT at the transmitter and receiver respectively. In OFDM wide-band signal is split into several orthogonal narrow band signals. For this purpose, a high data rate data stream is divided into N parallel low-rate data stream, $X_k = 1$ to N , as shown in Figure 2(a). IFFT is used to modulate the orthogonal narrow band signals.

In order to eliminate ISI a guard interval is added between OFDM symbols and it should be larger than delay spread. A cyclic prefix is included in the guard interval. After passing through parallel to serial converter OFDM symbols are modulated with a high frequency carrier. As shown in the figure 2b, the reverse action is performed to reconstruct the high-rate data stream at the receiver.


ALGORITHM:

- Generation of random binary sequence
- BPSK modulation i.e bit 0 represented as -1 and bit 1 represented as +1
- Assigning to multiple OFDM symbols to data
- Add cyclic prefix and concatenate symbols to form a long transmit sequence.


- e. Generate AWGN using Random signal.
- f. Demodulated data output
- g. Compare Input Data Stream and Demodulated Output Data.
- h. Make the decision on the received data bits
- i. Set the appropriate threshold level and compare it with the demodulated data. Grouping the received vector into multiple symbols, removing cyclic prefix, taking the desired subcarriers.
- j. Compute the number of errors and plot the SNR vs BER
- k. Vary the number of subcarriers and plot the theoretical and practical BER

Sample outputs:

a) Number of subcarriers =64

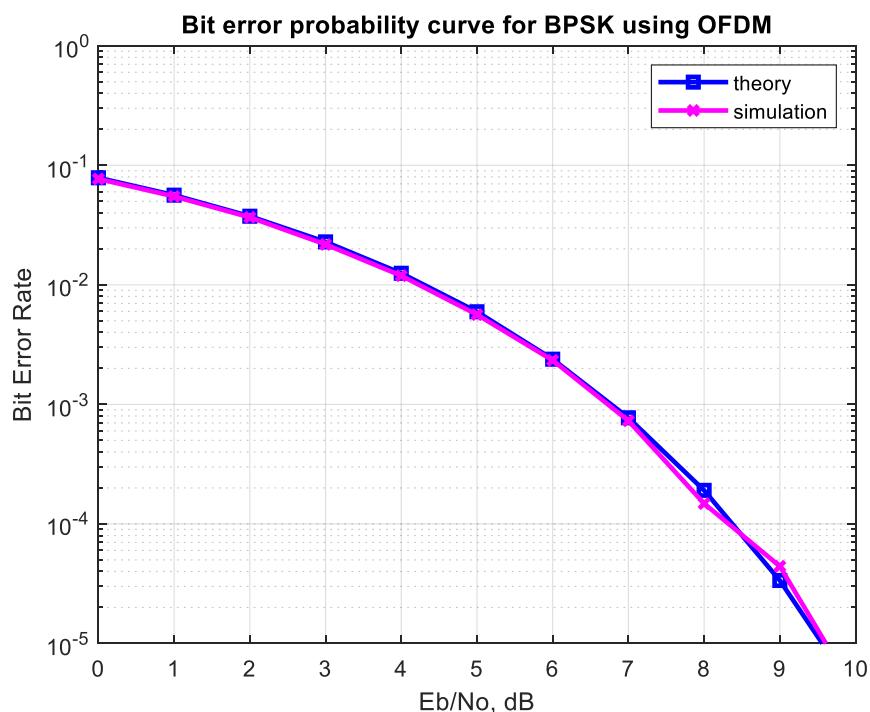

b) Number of subcarriers = 128

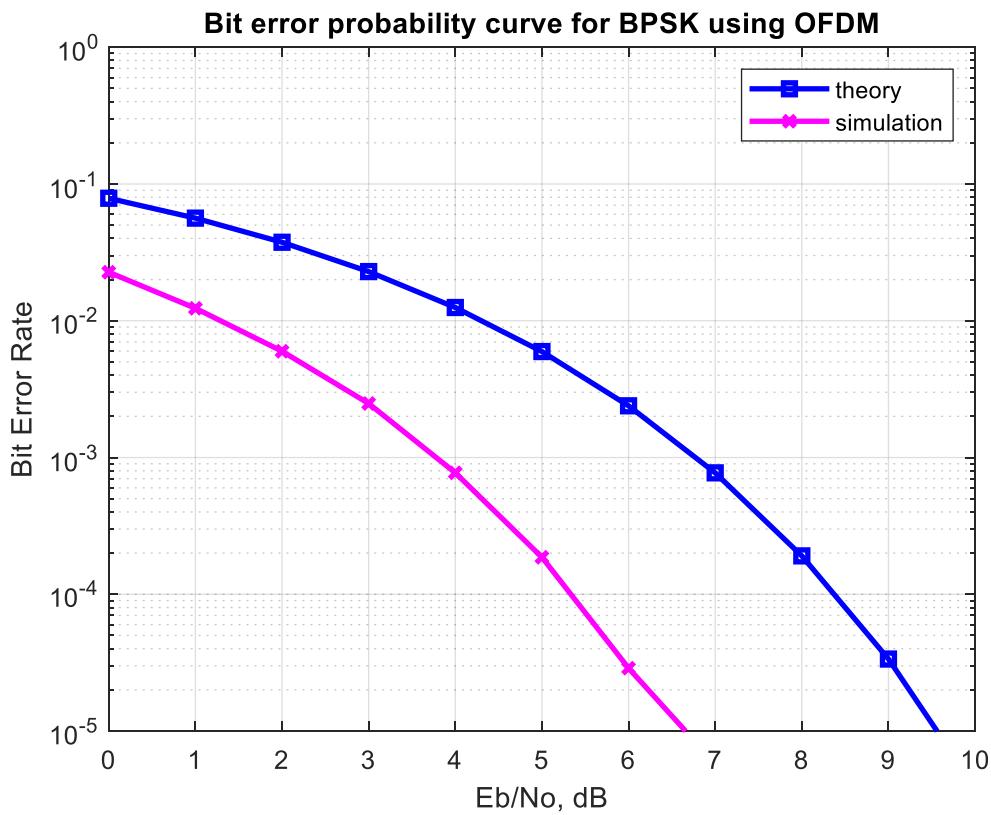

MATLAB CODE

```

clear all
nFFT = 64; % fft size
nDSC = 52; % number of data subcarriers
nBitPerSym = 52; % number of bits per OFDM symbol (same as the number of
subcarriers for BPSK)
nSym = 10^4; % number of symbols

EbN0dB = [0:10]; % bit to noise ratio
EsN0dB = EbN0dB + 10*log10(nDSC/nFFT) + 10*log10(64/80); % converting to symbol
to noise ratio

for ii = 1:length(EbN0dB)

    % Transmitter
    ipBit = rand(1,nBitPerSym*nSym) > 0.5; % random 1's and 0's
    ipMod = 2*ipBit-1; % BPSK modulation 0 --> -1, 1 --> +1
    ipMod = reshape(ipMod,nBitPerSym,nSym).' ; % grouping into multiple symbolsa

    % Assigning modulated symbols to subcarriers from [-26 to -1, +1 to +26]
    xF = [zeros(nSym,6) ipMod(:,[1:nBitPerSym/2]) zeros(nSym,1)
    ipMod(:,[nBitPerSym/2+1:nBitPerSym]) zeros(nSym,5)] ;

    % Taking FFT, the term (nFFT/sqrt(nDSC)) is for normalizing the power of
    transmit symbol to 1
    xt = (nFFT/sqrt(nDSC))*ifft(fftshift(xF.')).';
```

```

% Appending cyclic prefix
xt = [xt(:,[49:64]) xt];

% Concatenating multiple symbols to form a long vector
xt = reshape(xt.',1,nSym*80);

% Gaussian noise of unit variance, 0 mean
nt = 1/sqrt(2)*[randn(1,nSym*80) + j*randn(1,nSym*80)];

% Adding noise, the term sqrt(80/64) is to account for the wasted energy due
to cyclic prefix
yt = sqrt(80/64)*xt + 10^(-EsN0dB(ii)/20)*nt;

% Receiver
yt = reshape(yt.',80,nSym).'; % formatting the received vector into symbols
yt = yt(:,[17:80]); % removing cyclic prefix

% converting to frequency domain
yF = (sqrt(nDSC)/nFFT)*fftshift(fft(yt.'));
yMod = yF(:,[6+[1:nBitPerSym/2] 7+[nBitPerSym/2+1:nBitPerSym] ]);

% BPSK demodulation
% +ve value --> 1, -ve value --> -1
ipModHat = 2*floor(real(yMod/2)) + 1;
ipModHat(find(ipModHat>1)) = +1;
ipModHat(find(ipModHat<-1)) = -1;

% converting modulated values into bits
ipBitHat = (ipModHat+1)/2;
ipBitHat = reshape(ipBitHat.',nBitPerSym*nSym,1).';

% counting the errors
nErr(ii) = size(find(ipBitHat - ipBit),2);

end

simBer = nErr/(nSym*nBitPerSym);
theoryBer = (1/2)*erfc(sqrt(10.^^(EbN0dB/10)));

close all; figure
semilogy(EbN0dB,theoryBer,'bs-','LineWidth',2);
hold on
semilogy(EbN0dB,simBer,'mx-','LineWidth',2);
axis([0 10 10^-5 1])
grid on
legend('theory', 'simulation');
xlabel('Eb/No, dB')
ylabel('Bit Error Rate')
title('Bit error probability curve for BPSK using OFDM')

```

CONCLUSION:

Observations:

| Sl.No | Criteria | Max Marks | Marks obtained |
|-------------------------------|--|-----------|----------------|
| Data sheet | | | |
| 1 | Problem statement | 10 | |
| 2 | Design & specifications | 10 | |
| 3 | Expected output | 10 | |
| Record | | | |
| 4 | Simulation/ Conduction of the experiment | 15 | |
| 5 | Analysis of the result | 15 | |
| 6 | Viva | 40 | |
| 7 | Total | 100 | |
| Scale down to 10 marks | | | |

APPENDIX 1

Sample Calculation to Determine Various Parameter of Reflex Klystron

- 1) Knowing mode top voltage of two adjacent modes, mode number of the modes may be computed from equation below,

$$\frac{N_2}{N_1} = \frac{V_1}{V_2} = \frac{(n + 1) + \frac{3}{4}}{n + \frac{3}{4}}$$

- 2) Knowing mode number, transit time of each mode may be calculated from equation below

$$t_1 = \frac{n + \frac{3}{4}}{f_{01}} = \frac{N_1}{f_{01}} \text{ sec}$$

- 3) Calculate electronic tuning range i.e., the frequency band from one end of the mode to another.
- 4) Electronics Tuning Sensitivity (ETS) may be calculated from equation below,

$$\text{ETS} = \frac{f_2 - f_1}{V_2 - V_1} \frac{\text{MHz}}{\text{V}}$$

f_2 and f_1 being half power frequencies in GHz, and V_2 and V_1 are corresponding voltages for particular mode. A practical example is given below

1) $\frac{N_1}{N_2} = \frac{n + \frac{3}{4}}{(n + 1) + \frac{3}{4}} = \frac{V_2}{V_1}$ (or) $\frac{n + 0.75}{n + 1.75} = \frac{-64}{-105.5}$ (or), $n = \frac{32.9}{40.5} \cong 1$

- 2) Hence, $N_1=1.75$ and $N_2=2.75$ are the respective mode numbers. Corresponding transit times are:

$$t_1 = \frac{N_1}{f_{01}} = \frac{1.75}{9.465} \times 10^{-9} = 1.8 \times 10^{-8} \text{ s}$$

$$t_2 = \frac{N_2}{f_{02}} = \frac{2.75}{9.47} \times 10^{-9} = 2.9 \times 10^{-8} \text{ s}$$

3) ETR for 1.75 mode $= (9.488 - 9.435) \times 10^9 = 53 \text{ Hz}$

ETR for 2.75 mode $= (9.482 - 9.435) \times 10^9 = 53 \text{ Hz}$

4) ETS for 1.75 mode $= \frac{f_2 - f_1}{V_2 - V_1} = \frac{(9.485 - 9.39)}{(111.5 - 98)} \times 10^9 \frac{\text{Hz}}{\text{V}} = \frac{46}{13.5} = 3.4 \text{ MHz/V}$

ETS for 2.75 mode $= \frac{f_2 - f_1}{V_2 - V_1} = \frac{(9.487 - 9.482)}{(69 - 57.5)} \times 10^9 \frac{\text{Hz}}{\text{V}} = \frac{45}{11.5} = 3.9 \text{ MHz/V}$

APPENDIX 2

Definitions of Microwave Parameters

The parameters that define Directional coupler are

Coupling factor, C: it is defined as the ratio of the incident power P_i to the forward power P_f measured in dB. Coupling factor is a measure of how much of the incident power is being sampled while directivity is the measure of how well the directional coupler distinguishes between the forward and reverse travelling powers.

$$C = 10 \log_{10} \frac{P_i}{P_f} \text{ dB} \quad (1)$$

Directivity, D: the directivity is defined as the ratio of forward power P_f to the back power P_b , expressed in dB.

$$D = 10 \log_{10} \frac{P_f}{P_b} \text{ dB} \quad (2)$$

Isolation, I: it is defined to describe the directive properties of a directional coupler. It is defined as the ratio of incident power P_i to the back power P_b .

$$I = 10 \log_{10} \frac{P_i}{P_b} \text{ dB} \quad (3)$$

Isolation in dB is equal to the coupling factor plus directivity.

As with any component or system, there are several specifications associated with RF directional couplers. The major RF directional coupler specifications are summarized in the table below.

| Term | Description |
|-----------------------|--|
| Coupling Loss | Amount of power lost to the coupled port (3) and to the isolated port (4). Assuming a reasonable directivity, the power transferred unintentionally to the isolated port will be negligible compared to that transferred intentionally to couple port. |
| Main line loss | Resistive loss due to heating (separate from coupling loss). This value is added to the theoretical reduction in power that is transferred to the coupled and isolated ports (coupling loss). |
| Directivity | Power level difference between Port 3 and Port 4 (related to isolation). This is a measure of how independent the coupled and isolated ports are. Because it is impossible to build a perfect coupler, there will always be some amount of unintended coupling between all the signal paths. |
| Isolation | Power level difference between Port 1 and Port 4 (related to directivity). |

Vision

Imparting quality technical education through interdisciplinary research, innovation and teamwork for developing inclusive & sustainable technology in the area of Electronics and Communication Engineering.

Mission

- To impart quality technical education to produce industry-ready engineers with a research outlook.
- To train the Electronics & Communication Engineering graduates to meet future global challenges by inculcating a quest for modern technologies in the emerging areas.
- To create centers of excellence in the field of Electronics & Communication Engineering with industrial and university collaborations.
- To develop entrepreneurial skills among the graduates to create new employment opportunities.