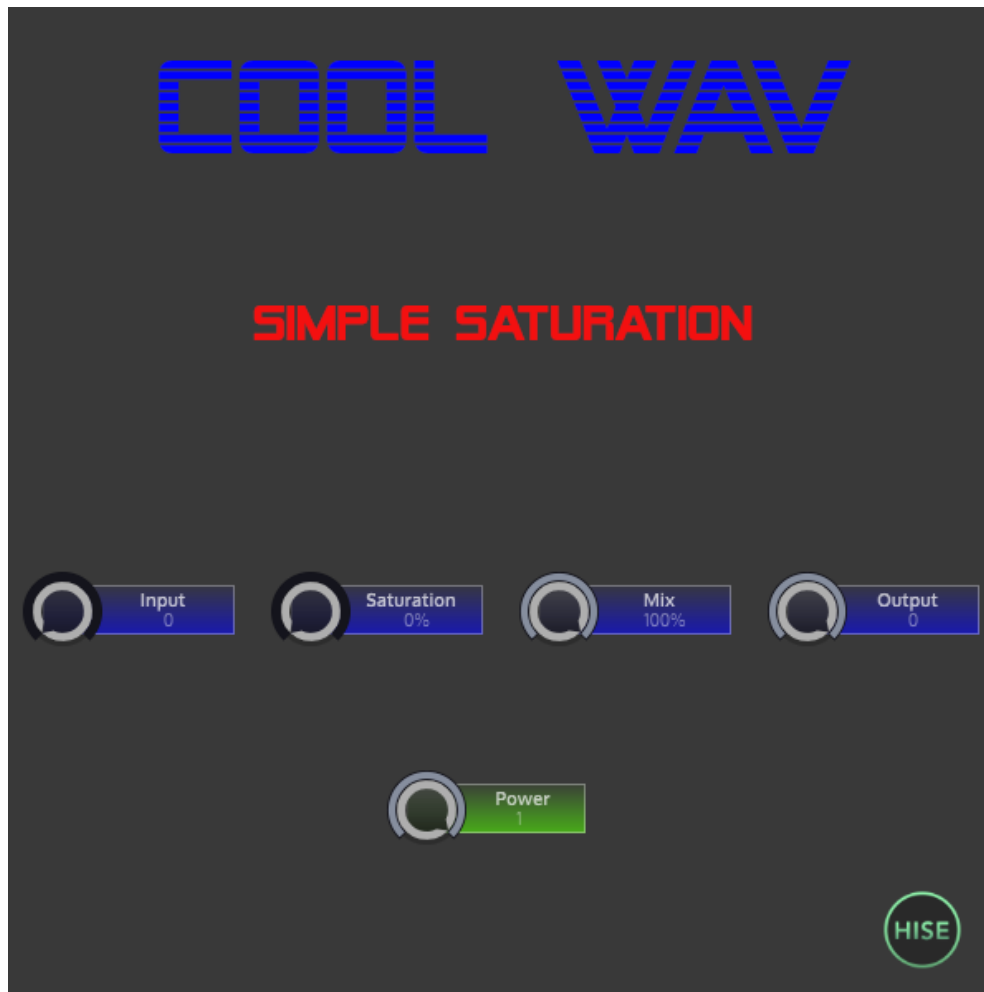# Simple Saturation
# User Manual

Simple Saturation can be used on a variety of sources, giving you anything from subtle saturation to distortion. Be careful going past 85%, it gets really intense. Lower the Mix knob to blend the dry/wet signal.

This is my first plugin! Made with HISE, which is published under the GPLv3 open source license. Please let me know if you have any issues/bugs installing or using it. Email: contactcoolwav@gmail.com Currently it is only available as VST3 for Windows 64-bit. Eventually I will be able to export in VST3 + AU format for MAC.



**Input**: Gain before going through the Saturation circuit. Range is 0 to 10db. The knob is stepped by 1db

**Saturation**: 0 to 100% | Be careful going past 85% it gets really intense. Lower the Output knob to gain match.

**Mix**: 0% = Full dry signal | 100% = Full wet signal | Anything in between is a blend of the two

**Output**: Gain after going through the Saturation circuit. Range is -10 to 0db. The knob is stepped by 1db

**Power**: On/Off