


Cooper Lockridge


CAD & Simulation Portfolio • Cooperlockridge@gmail.com • 770-355-4995 • cooperlockridge.com

CAE Final Project — Optimized Structural Connector


Fully self-modeled in SolidWorks. Brief: bridge two mounting profiles in 6061-T6 aluminum under a 2,000 lbf distributed load, maximizing FOS-to-weight. Five design iterations, each checked with a converged h-adaptive static study. A topology study guided where material came out.

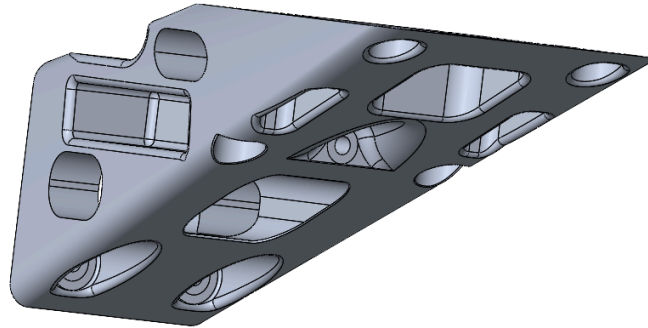

Final design (Iteration 5 configuration). Webbed connector with pockets cut where the topology study showed low stress. Fully parametric, with a configuration saved for each iteration.

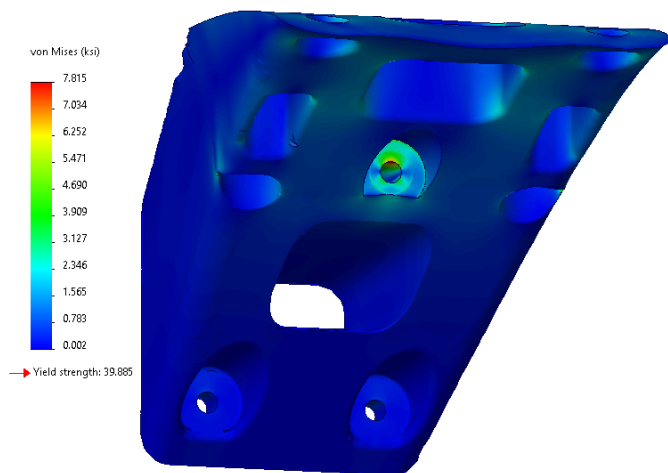


Static study, earlier iteration. von Mises stress, max 7.8 ksi against 39.9 ksi yield (6061-T6), converged h-adaptive mesh.

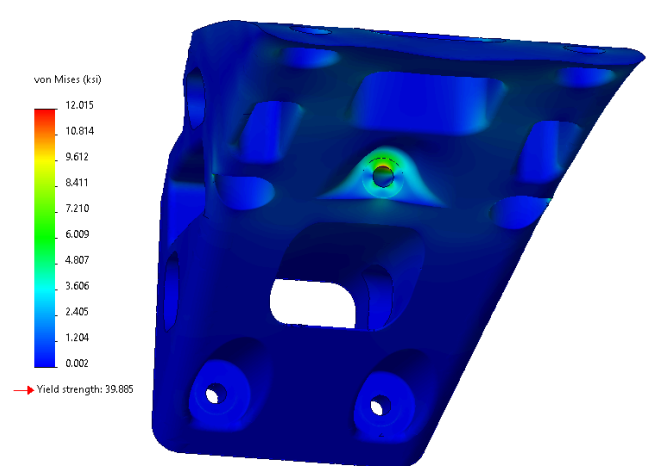


Static study, later iteration. After more material came out, peak stress rose to 12.0 ksi. Still well under yield, with less mass.

Parts modeling


Self-modeled parts from my introductory SolidWorks coursework, captured in SolidWorks with the feature history visible.

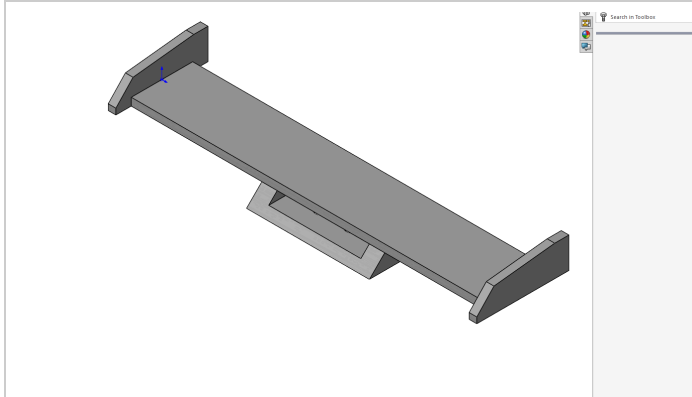


Spoiler. Boss and cut extrudes over a swept profile; later 3D printed for my model car project.

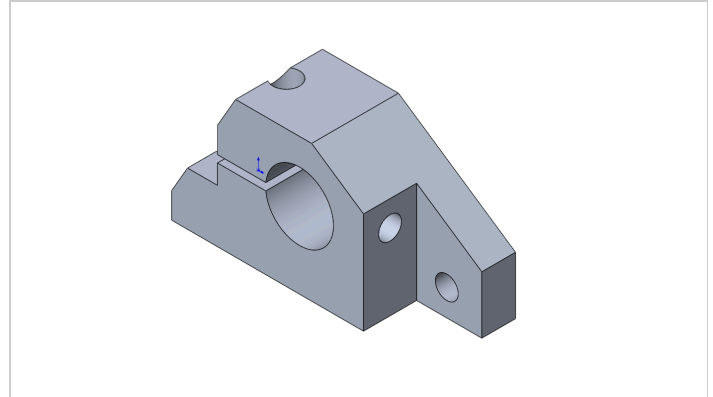

Clutch lever. Extrudes, angled cuts, and hole features in 6061-T6.

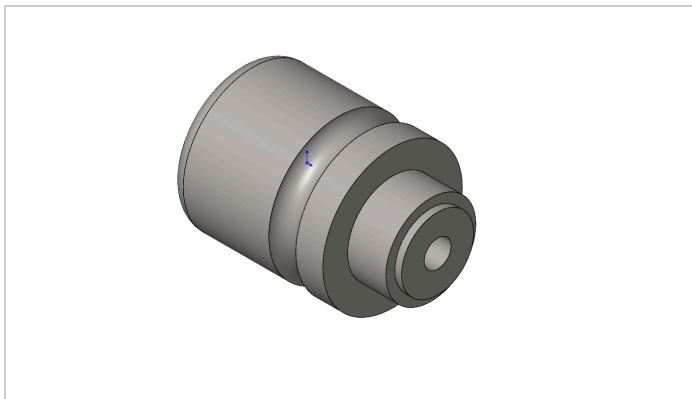


Motor housing. Revolved profile with stepped bores, AISI 304.

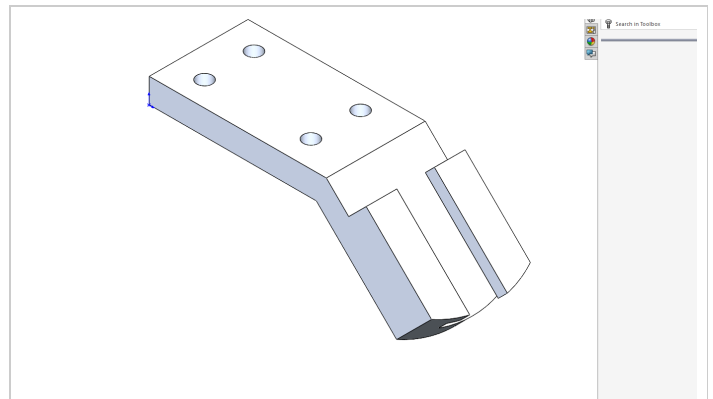


Guide bracket. Plate features and hole patterns.

Simulation coursework


SolidWorks Flow Simulation studies from CAE coursework. Geometry provided by the instructor; flow study setup, meshing, goals, and analysis are my work. Figures below are from my submitted reports.

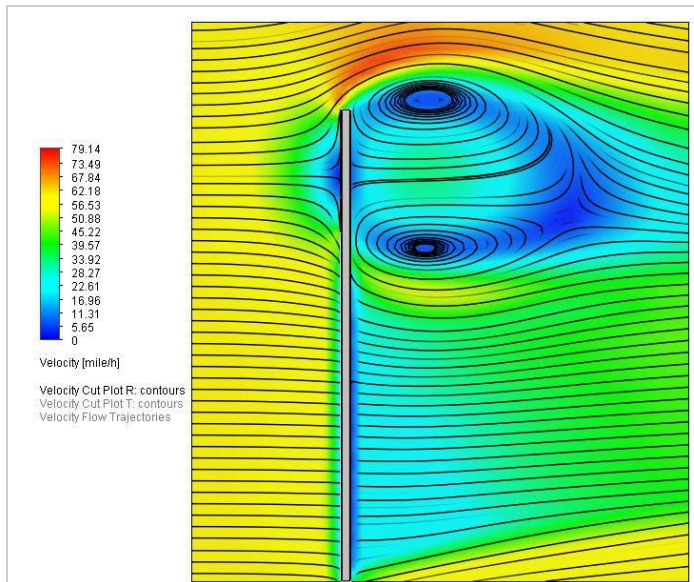


External flow over a stop sign. Velocity cut plot with flow trajectories showing wake recirculation and vortex shedding.

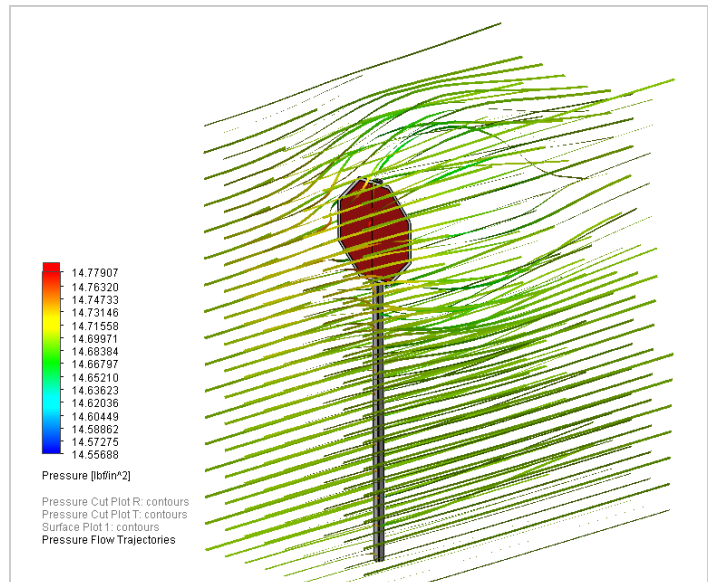

Same study, 3D pressure flow trajectories. Stagnation pressure on the sign face; the wake forms downstream.

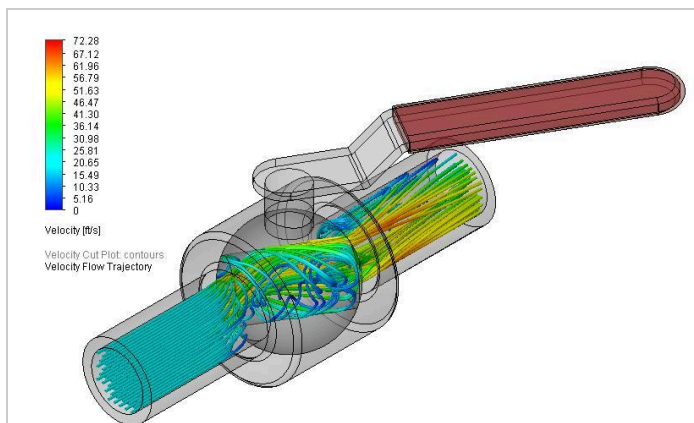

Internal flow through a ball valve, fully open. Velocity flow trajectories, peak 72 ft/s through the bore.

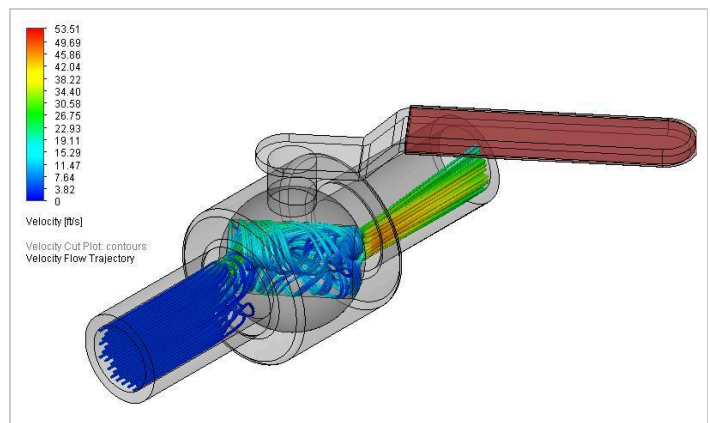

Same valve, throttled. Flow recirculates in the ball cavity and the jet speeds up through the smaller opening.

Additional design work: reverse-engineered a Philips water flosser with full drawings and a technical report; designed and built a model car with passive auto-steering including a 3D-printed SolidWorks spoiler.