


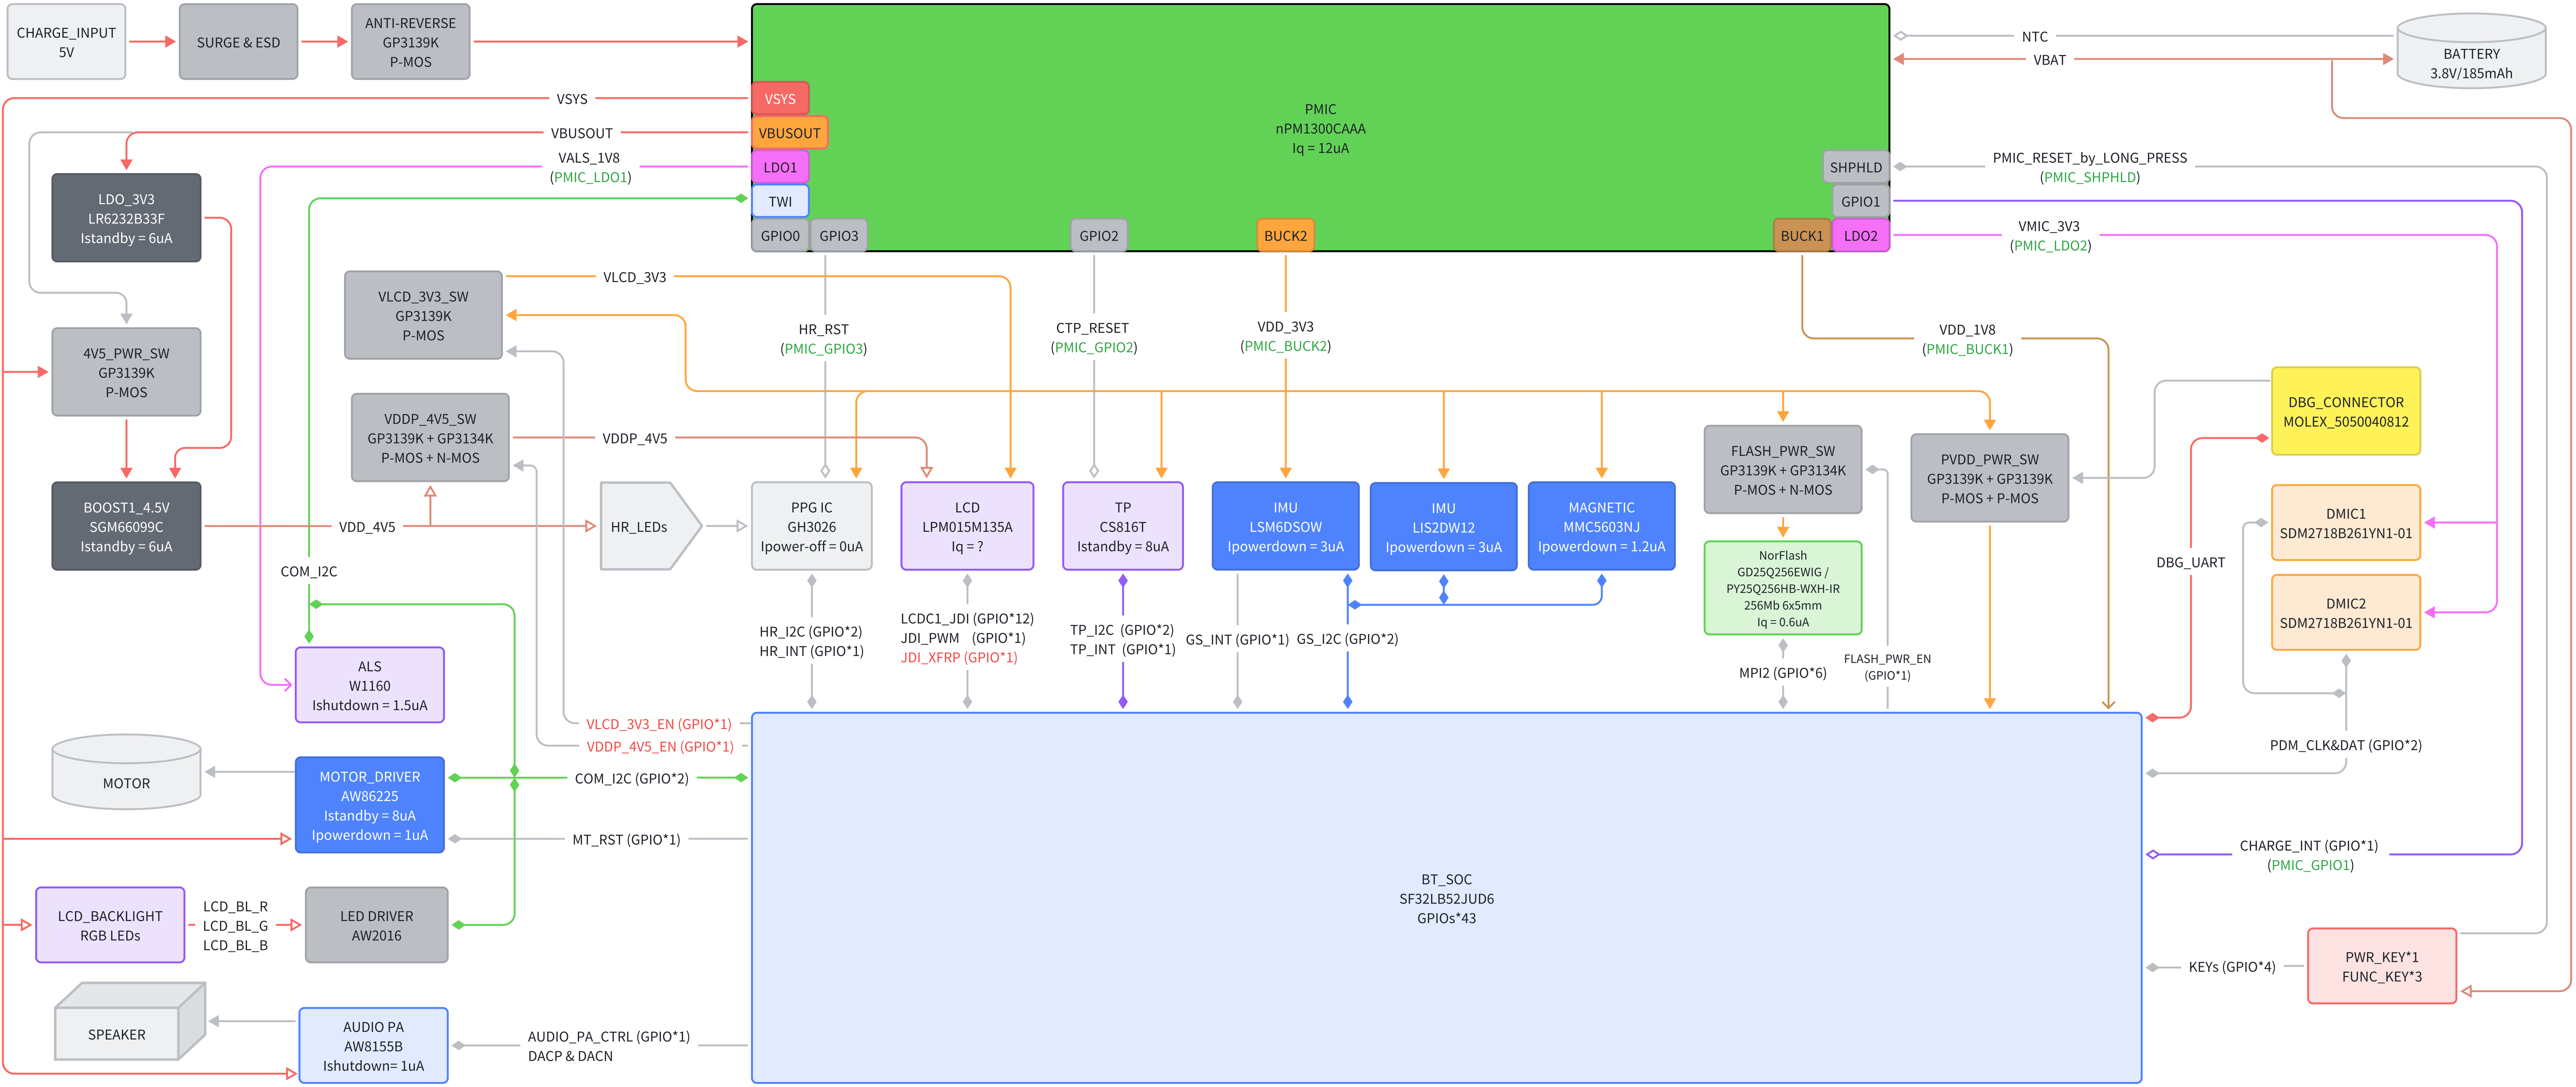

GPIO

1 of 2

[5] AUDIO_PA_CTRL	51	PA0/LCD_RST	SPI1_DIO/I2S_MCLK/GPS_EN/WKUP_0/PA24	9	LCD_JDI_PWM_60HZ	[4]
[4] MT_RSTN	50	PA1/BL_PWM	SPI1_DI/I2S_SDO/WKUP_1/PA25	8	LCD_JDI_XFRP	[4]
[4] LCD_JDI_B2	49	PA2/LCD_TE/8080_TE/JDI_B2/I2S_MCLK	NFC_I2C_SDA/GPS_UART_TXD/WKUP_2/PA26	7	CHARGE_INT	[3]
[4] LCD_JDI_B1	48	PA3/LCD_CS/8080_CS/JDI_B1/I2S_SDO	NFC_I2C_SCL/GPS_UART_RXD/WKUP_3/PA27	6	CTP_WKUP_INT	[4]
[4] LCD_JDI_G1	47	PA4/LCD_CLK/8080_WR/JDI_G1/I2S_SDI	SPI1_CLK/I2S_SDI/GPADC_CH1/PA28	5	VDDP_4V5_EN	[4]
[4] LCD_JDI_R1	46	PA5/LCD_D0/8080_RD/JDI_R1/I2S_BCK	SPI1_CS/I2S_BCK/GPADC_CH2/PA29	4	VLCD_3V3_EN	[4]
[4] LCD_JDI_HST	45	PA6/LCD_D1/8080_DC/JDI_HST/I2S_LRCK	I2S_LRCK/GPADC_CH3/PA30	3	COM_I2C_SDA	[3,4]
[4] LCD_JDI_ENB	44	PA7/LCD_D2/8080_D0/JDI_ENB/PDM_CLK	GPADC_CH4/PA31	2	COM_I2C_SCL	[3,4]
[4] LCD_JDI_VST	43	PA8/LCD_D3/8080_D1/JDI_VST/PDM_DATA	GPADC_CH5/PA32	1	GS_I2C_SCL	[3,5]
[3,4] HR_I2C_SCL	42	PA9/LCD_VDD_EN	GPADC_CH6/PA33	67	GS_I2C_SDA	[3,5]
[3,4] CTP_I2C_SDA	35	PA10/AU_PA_EN	LONGPRESS_RST/GPADC_CH7/WKUP_10/PA34	66	PA_34_KEY_ADC	[3]
[3,4] CTP_I2C_SCL	34	PA11/MPI2_VDD_EN/SD_VDD_EN	USB_DP/WKUP_11/PA35	65	PA_35_KEY_4	[3]
[2] F_CS	33	PA12/MPI2_CS/SD_D2	USB_DM/WKUP_12/PA36	64	PA_36_KEY_3	[3]
[2] F_D1	32	PA13/MPI2_D1/SD_D3/BOOT_STRAP[1]	SPI2_DIO/8080_D2/WKUP_13/PA37	63	PA_37_KEY_2	[3]
[2] F_D2	31	PA14/MPI2_D2/SD_CLK	SPI2_DI/WKUP_14/PA38	62	GS_INT	[5]
[2] F_D0	30	PA15/MPI2_D0/SD_CMD	SPI2_CLK/8080_D3/JDI_VCK/WKUP_15/PA39	61	LCD_JDI_VCK	[4]
[2] F_CLK	29	PA16/MPI2_CLK/SD_D0	SPI2_CS/8080_D4/JDI_XRST/WKUP_16/PA40	60	LCD_JDI_XRST	[4]
[2] F_D3	28	PA17/MPI2_D3/SD_D1/BOOT_STRAP[0]	8080_D5/JDI_HCK/WKUP_17/PA41	59	LCD_JDI_HCK	[4]
DBG_UART_RXD	27	PA18/DBG_UART_RXD/SWDIO	8080_D6/JDI_R2/WKUP_18/PA42	58	LCD_JDI_R2	[4]
[2,5] DBG_UART_TXD	26	PA19/DBG_UART_TXD/SWCLK	8080_D7/JDI_G2/WKUP_19/PA43	57	LCD_JDI_G2	[4]
[3,4] HR_I2C_SDA	25	PA20/VIB_PWM	WKUP_20/PA44	56	HR_WKUP_INT	[4]
[2] FLASH_PWR_EN	24	PA21				
[5] MIC_PDM_CLK	11	PA22/XTAL32K_XI/PDM_CLK				
[5] MIC_PDM_DATA	10	PA23/XTAL32K_XO/PDM_DATA				

All GPIO can assign to UART,I2C,TIM; Recommend PA39~42 to I2C