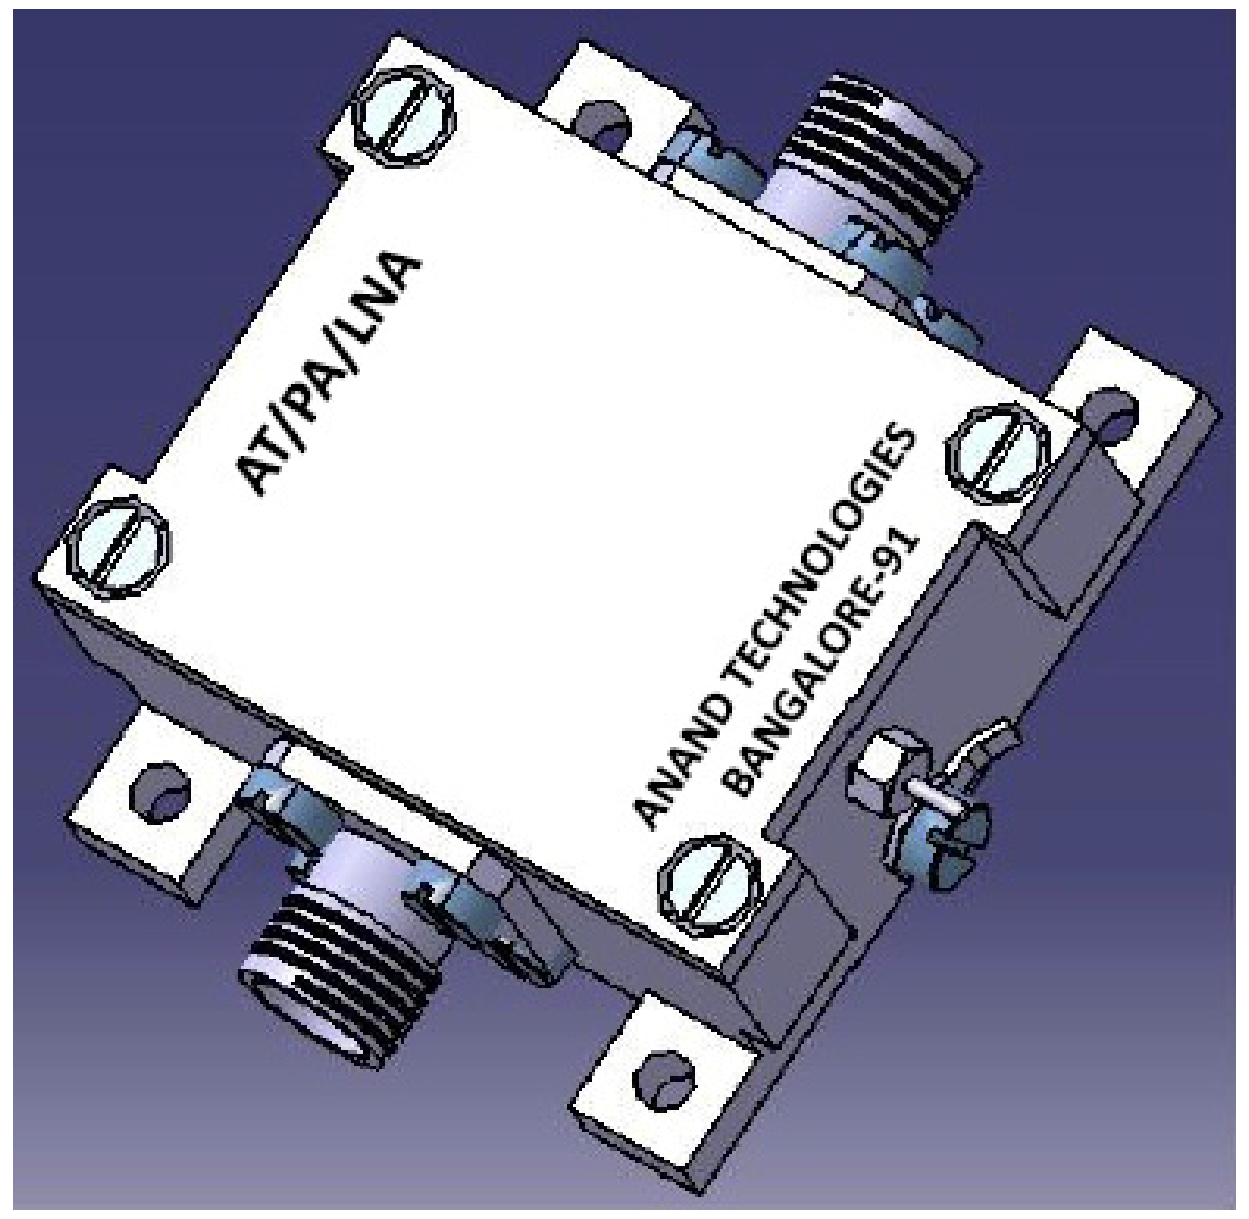

Typical Applications

- Mobile infrastructure
- Wi - Fi Applications
- LTE, CDMA, GSM, GPRS, WCDMA
- General purpose wireless

Features

- 750 - 2600 MHz
- 19 dB Linear Gain at 2.3 GHz
- 0.8 dB Noise Figure at 2.3 GHz
- 50 Ω Cascadable Gain Block
- Unconditionally Stable
- High Input Power Capability
- Miniature Package

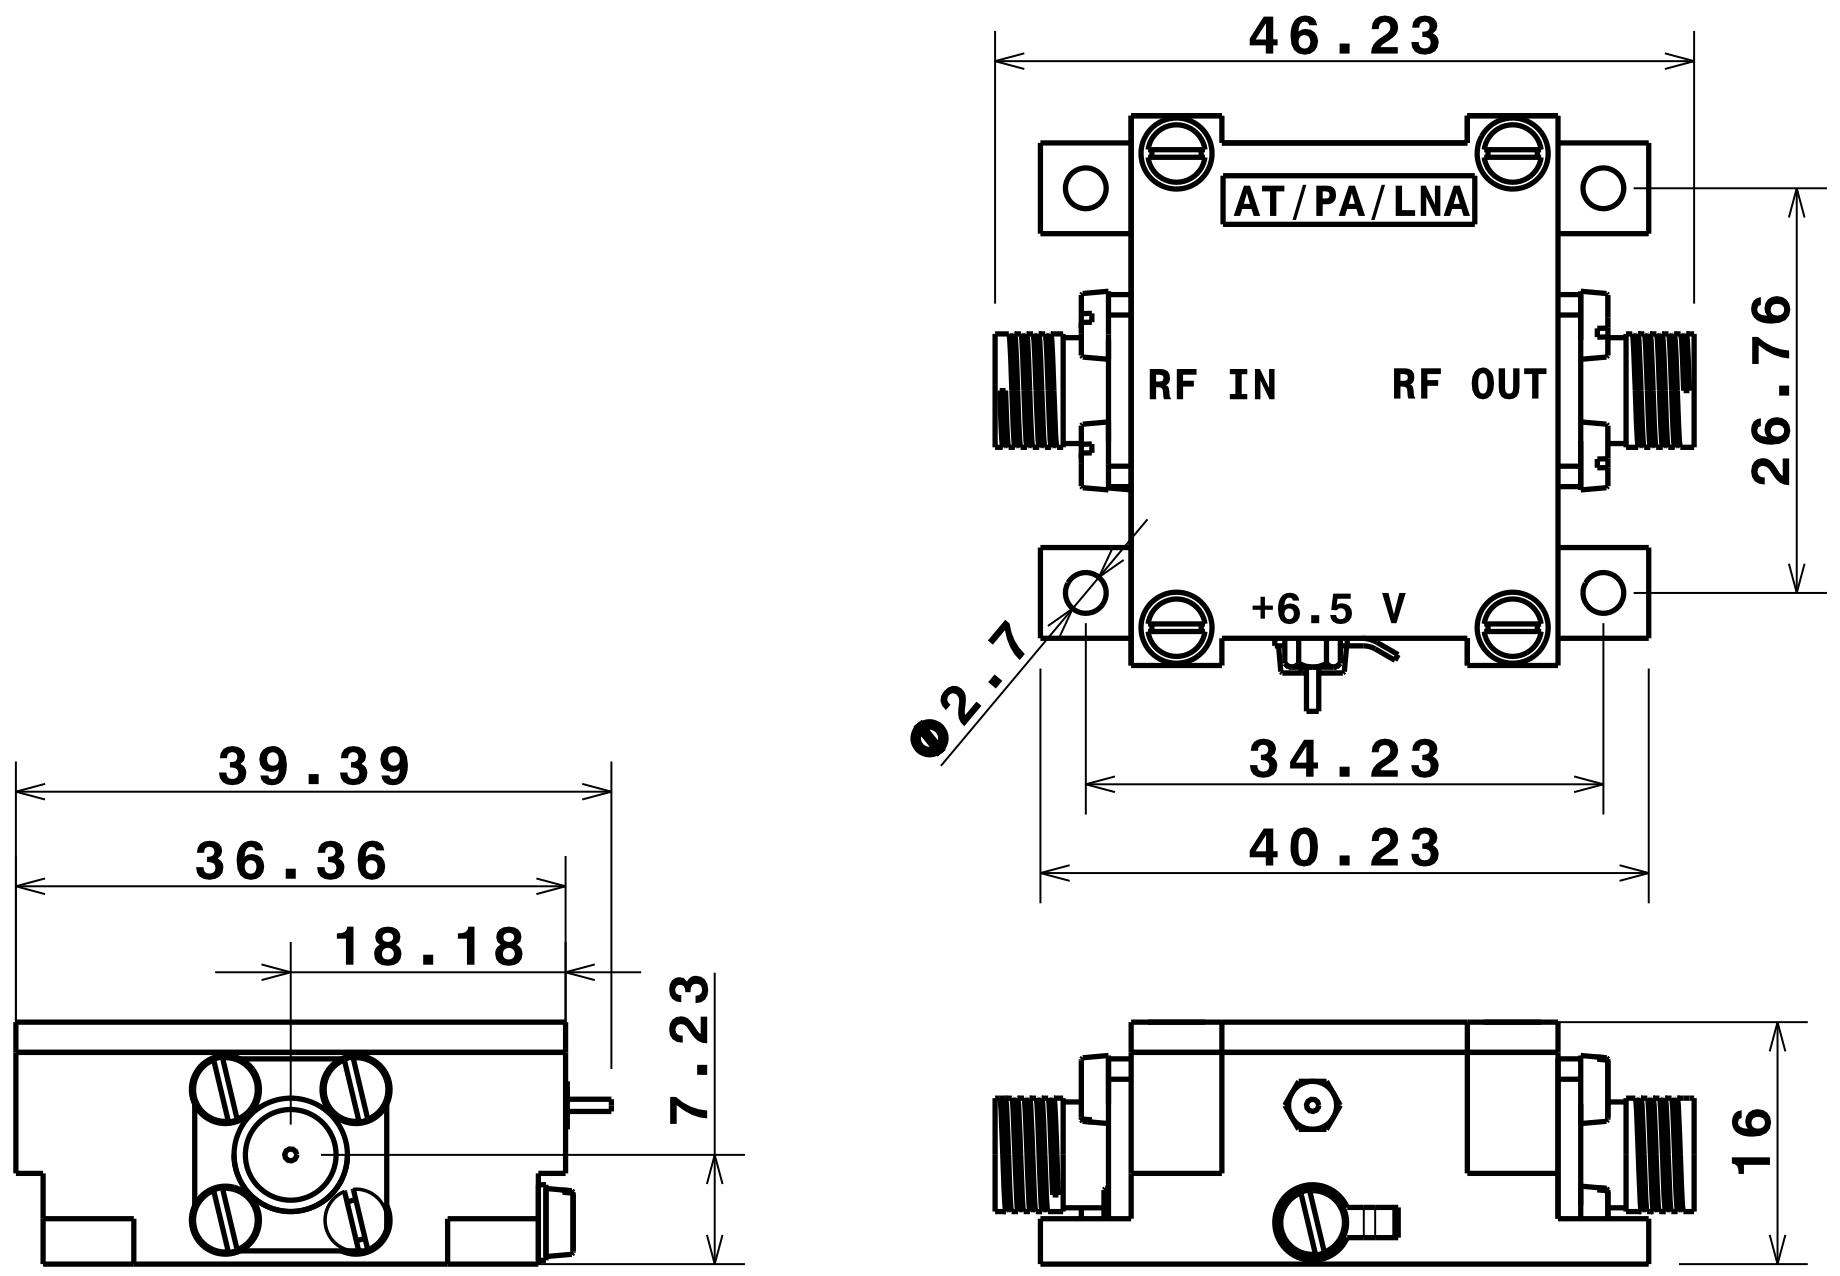

Electrical Specifications (at 25°C)

Operating Frequency Range	750 to 2600 MHz
Linear Gain	19 dB (Min)
Input Return Loss	10 dB
Output Return Loss	15 dB
Output Power (Pout)	+17 dBm (Min)
Output IP3	+33 dBm (Typ), P in= -22 dBm/tone, Δf=11 MHz
Noise Figure	0.9 dB (Max)
In / Out Connector	SMA (F)
Power Supply	+6.5 V , 100 mA (Max)
Operating Temperature	-30 to +55°C
Finish	Al Alloy Housing
Heat Transfer	Through Base Plate mounted on external heat sink

General Description

The AT/PA/LNA is a high dynamic range, single stage amplifier with low noise figure, high gain and excellent linearity, packaged in a miniature housing, operating on single supply with inbuilt regulator.
The AT/PA/LNA covers 0.75 to 2.6 GHz frequency band and is targeted for wireless infrastructure or other applications requiring high linearity and low noise figure.

DESIGNED BY: GURU BIRADAR DATE: 02/08/2017	LOW NOISE AMPLIFIER	
CHECKED BY: Mr. S. METRI DATE: 02/08/2017		
SIZE A3	ANAND TECHNOLOGIES	
SCALE 1:1 / WEIGHT (kg) NA	DRAWING NUMBER AT/PA/LNA	SHEET 1/1

Rev	
I	_
H	_
G	_
F	_
E	_
D	_
C	_
B	_
A	_