PARTS DRAWING

ROHS Compliant

REV	PRODUCT NO.	DATE	NAME	DESCRIPTION
A0	FS-LJX-857	2024.01.12		Initial issuance

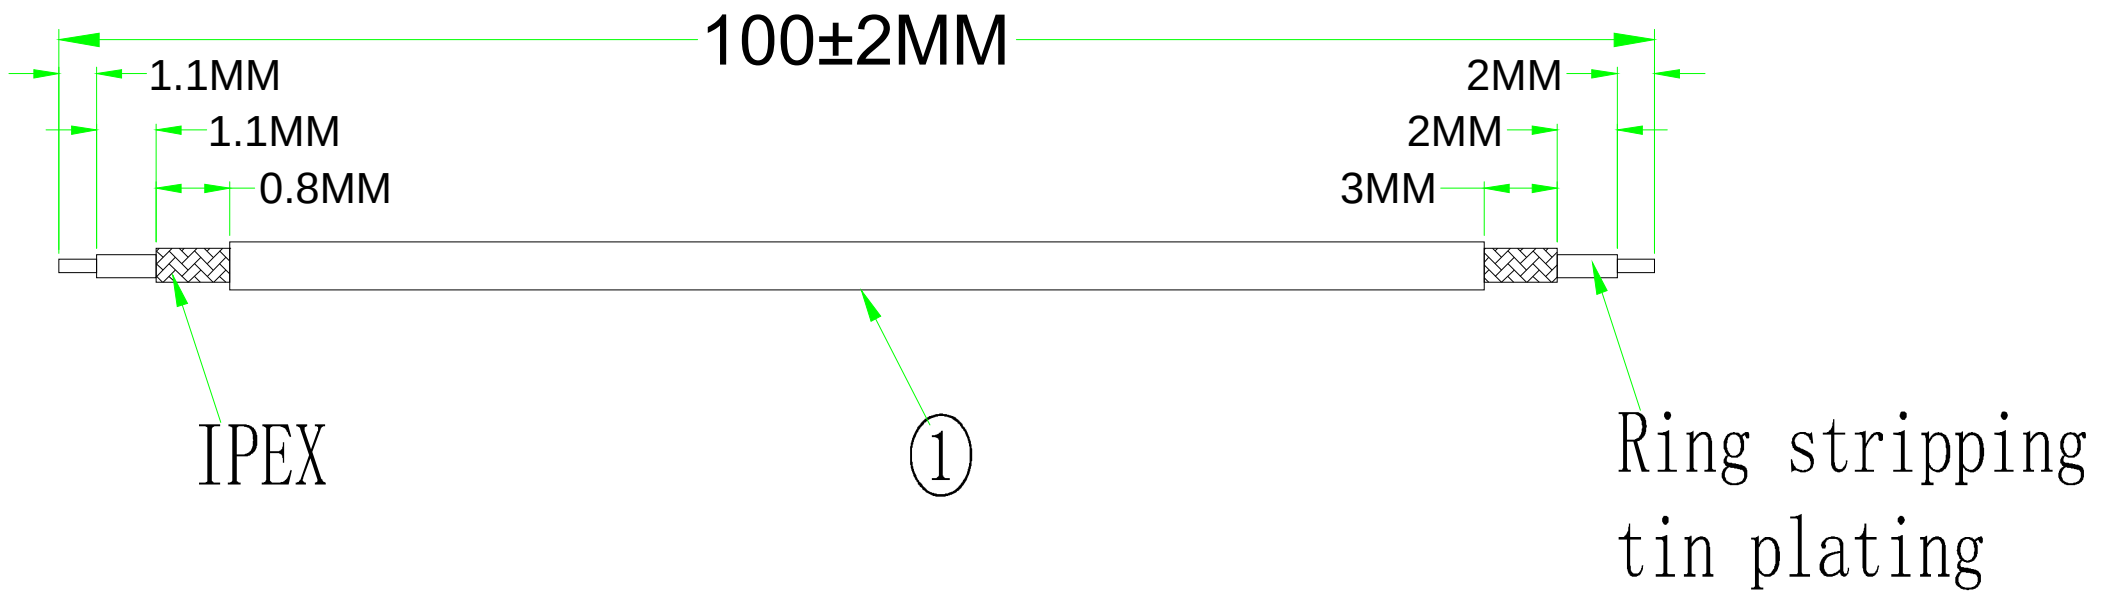

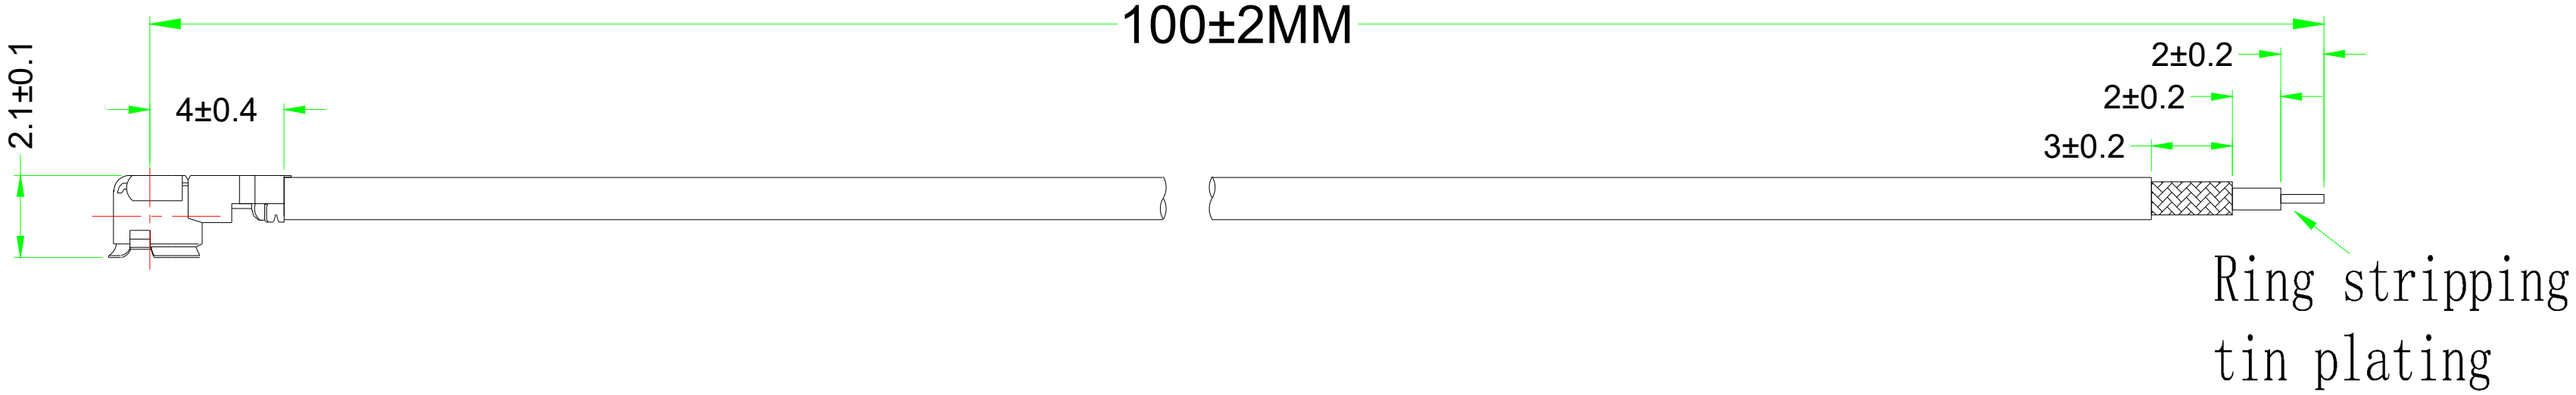



Fre	Return loss value
1GHz	-0.2188 dB
2GHz	-0.2464 dB
3GHz	-0.2155 dB
4GHz	-0.2018 dB
5GHz	-0.3598 dB
6GHz	-0.4877 dB

Fre	V.S.W.R
1GHz	1.0829
2GHz	1.1828
3GHz	1.2396
4GHz	1.3224
5GHz	1.4293
6GHz	1.5011

Ask

1. There is no broken skin or damage to the wire sheath.
2. The finished product must be 100% tested for continuity OK.
3. 100% inspection of finished products is required.
4. Adopt environmental protection process. The finished product meets ROHS requirements.

Test conditions

rated voltage：AC 60V
Contact impedance：20-Ohm
voltage withstand：AC200V
Insulation impedance:500m-Ohm
characteristic impedance：50 Ohm

(Frequency Range)	0-6GHz
(Gain)	
(VSWR)	≤1.6
(Polarization)	vertical
(Impedance)	50Ω

operation temperature：-45℃~85℃
storage temperature：-45℃~85℃

ANGLE PROJECTION

GENERAL TOLERANEC

100～200：	± 3.00
50～100：	± 2.00
25～50：	± 0.20
10～25：	± 0.15
1～10：	± 0.1

PRODUCT NAME

RF COAXIAL CABLE ASSY

P/NO:AT-CA-UFL-OPEN-100-1.13 B

ANAND TECHNOLOGIES

SHEET 1/1

NO	Code	Name	Description	Q'ty
2	1.012.0101	IPEX	1.13 First generation terminals	1
1	1.003.0102	Wire	1.13 wire double tin black L=100MM	1