

Anand Technologies

PRODUCT
CATALOGUE



**PRECISION IN
ANTENNA & RF
TECHNOLOGIES**

www.anandtechnologies.co.in



Anand Technologies

Advanced Antenna & RF Solutions

We specialize in the design and manufacture of high-performance antenna and RF solutions for modern communication systems. With a strong focus on innovation, precision, and quality, we deliver products that meet the evolving needs of industries worldwide. Our expertise spans RF, microwave, and wireless technologies, enabling us to provide reliable and efficient solutions for diverse applications. Every product is engineered to ensure superior performance, durability, and technical excellence. We are committed to driving connectivity through advanced engineering and trusted manufacturing capabilities.



SCAN FOR LOCATION

Why Us?

Anand Technologies delivers advanced RF, microwave, antenna, and wireless communication solutions designed for mission-critical applications. Serving defense, telecommunications, industrial automation, research, and IoT sectors, our products are engineered to provide reliable performance, precision, and connectivity across diverse operating environments.

17+

PRODUCT CATEGORIES

80+

MICROWAVE & RF COMPONENTS

100KHZ TO 80GHZ

FREQUENCY COVERAGE

CUSTOM

RF SOLUTIONS




INDUSTRIES WE SERVE

TELECOM & 5G | DEFENSE & AEROSPACE | AUTOMOTIVE & V2X |
INDUSTRIAL & SCADA | IOT & SMART SYSTEMS | WIRELESS
INFRASTRUCTURE | RESEARCH & DEVELOPMENT

MOUNTING TYPES

Internal - Board Mount Antennas

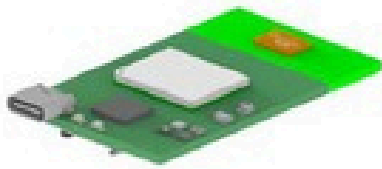

Surface mount

- Consist of: Element + Keep out + Ground
- Small size, low profile
- Ideal for devices with very low height requirement
- Relatively large PCB ground keep out of 10 mm to 20 mm is required



Tab mount

- Consist of: Element + Keep out + Ground
- Higher profile of 10 mm to 20 mm
- Smaller PCB ground keep out of 5 mm to 10 mm is required
- Can save PCB space and offer good antenna performance



Surface mount on ground


- Consist of: Element + Ground
- Higher profile of 5 mm to 25 mm
- No PCB ground keep out is required
- Can save PCB space
- On-ground type ideal for single/dual high band antennas

Internal - Direct and Cable Feed Antennas



Chassis mount, direct feed


- Compact Antenna
- Use existing ground plane
- Ground plane design + components/routing can have strong RF impact
- Automatic and repeatable assembly

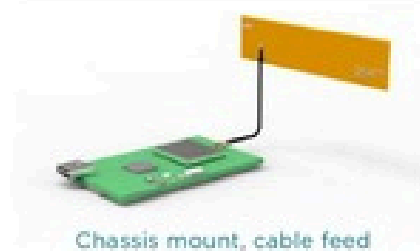

Chassis mount, cable feed

- Larger Antenna
- Ground plane independent antenna
- Ground plane + components having little impact on RF
- Manual assembly

External - Remote, Terminal and Low-Profile Antennas

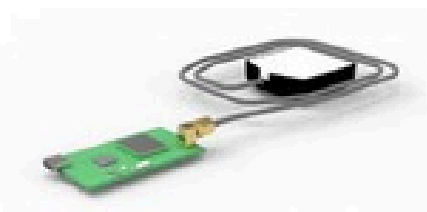

Remote

- Stand-alone antenna
- Little to no dependency on device ground
- Preferred option for metal cases
- Option where antenna position different from device position
- Minimal RF design effort, ready to use



Terminal mount

- Stand-alone antenna
- Dependency on device ground increases with lower frequencies
- Preferred option for metal cases
- Higher gain options available
- Adapter cable = adding cost
- Easy manipulation with minimal RF design effort



Low-profile

- Positioned further from a device/board
- On-ground or ground plane independent versions
- Higher gain options available
- Consistent radiation patterns for uniform performance
- Available in many formats
- Options available for all mounting positions

MOUNTING TYPES

Vehicle - Whip, Low-Profile and Multi-Port Antennas



Whip & Single Band Low-Profile

- Single port solutions covering many frequencies/applications
- Ground plane required and ground plane independent options
- Ruggedized
- Multi-band solutions available
- High performance



Multi-Port Shark Fin

- Shark fin aerodynamic formats
- Up to 9-port antenna options
- Permanent and magnetic mount options available
- Many combinations available covering VHF, UHF, 4G, 5G, Wi-Fi, Bluetooth, GNSS and more



Multi-Port Low Profile

- Low-profile puck formats
- Up to 14 port antenna options
- Next generation technologies incorporated including 5G, Wi-Fi 6E, Wi-Fi 7 and more
- Many combinations available covering VHF, UHF, 4G, 5G, Wi-Fi, Bluetooth, GNSS and more

Infrastructure - Fixed Position Antennas



Outdoor Omni Baton

- Pole or mast mountable
- High gain
- IP-rated for outdoor applications
- Ruggedized
- High performance



Directional Panel

- Wall or ceiling mountable
- Directional radiation patterns
- High gain
- Ideal for IIoT, warehousing and more
- Indoor and outdoor versions
- High performance



Directional Yagi

- Pole or mast mountable
- Directional radiation patterns
- High gain
- Ideal for point-to-point communications
- IP-rated for outdoor applications
- Ruggedized
- High performance



Ceiling Mount DAS

- Hard or ceiling tile mountable
- Low-PIM rated
- High performance means less antennas required to service a given area
- Paintable
- High performance




Fixed Wireless Access

- Omnidirectional and directional options
- Desk, wall, pole and access point mountable
- Next generation technology for current and emerging 4G and 5G applications
- Ideal for primary connectivity or failover support
- High performance

STANDARD ANTENNA EXAMPLES

Stamped Metal Antennas

Formed metal embedded antennas can offer high efficiency and may be appropriate for smaller devices where there is limited internal space. TE's standard off-the-shelf offering of low profile, high performance stamped antennas can deliver a low cost and highly repeatable manufacturing solution. Various mounting options are available.

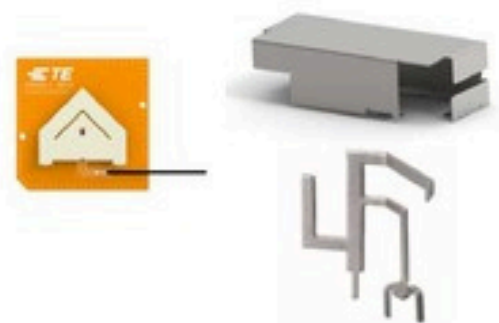

PCB & FPC Antennas

Useful for multi-band antennas, flexible printed circuits (FPCs) and printed circuit boards (PCBs) can allow a wide variety of wireless devices to operate at different frequencies without multiple antennas. TE's innovative MetaSpan antenna technology improves wireless connections by using metamaterials to cover an extensive range of frequency bands. A broad range of standard offerings include low profile and miniaturized antennas. Additional benefits include enhanced bandwidth, reduced size, excellent efficiency, and a smaller keep out zone. Various mounting options are available.



External Antennas

TE has an extensive range of external antennas in multiple formats including terminal and remote mount solutions. As external antennas generally do not require additional tuning, they are easy to implement and therefore may reduce the total cost of ownership. External antennas also have the advantage of improved sensitivity due to farther distance from device noise, which can enable excellent coverage and gain for a wide variety of applications and design possibilities. Most of TE's external antennas are offered as standard off-the-shelf solutions which support very rapid time to market. Additionally, TE can offer supplementary cable assemblies and mating RF receptacles that seamlessly connect to the terminated interfaces of the external antennas, which can provide great flexibility for design.



Infrastructure Antennas

TE offers a broad range of fixed position infrastructure antennas for multiple frequencies and applications. Infrastructure antennas are available in omnidirectional and directional formats, indoor and outdoor rated and varying levels of certifications and standards.

Typical examples include: outdoor omnidirectional baton antennas, directional panel antennas, directional yagi antennas and ceiling mount DAS antenna. TE also offers latest generation Fixed Wireless Access (FWA) antennas for 5G primary connectivity or failover support.



TABLE OF CONTENTS

1	GSM / LTE Antennas	2
2	GPS / GNSS Antennas	6
3	WiFi Antennas	9
4	VHF / UHF Antennas	12
5	High Gain Antennas	15
6	RFID Antennas	18
7	LPA / Wideband Antennas	20
8	Duplexers	22
9	Diplexers	24
10	Power Splitters	26
11	Attenuators	29
12	Couplers	31
13	Band Pass Filters	33
14	Lightning Arrestors	35
15	RF Cable Assemblies	37
16	Power Amplifiers	40
17	Waveguide Components	42

GSM/LTE antenna

1. AT-ANT-QGSM-SMAR90-3.0
2. AT-ANT-QGSM-UFL1.13-0.18-3.0
3. AT-ANT-QGSM-FGNW-NF600-5.0
4. AT-ANT-QGSM-HMM-SMA174-3-5.0
5. AT-ANT-CDMA-SMA210-3.5(SL)
6. AT-ANT-QGSM-SMA110-3.0(SL)
7. AT-ANT-QGSM-SMAR70-3.0
8. AT-ANT-QGSM-SMA305-5.0(SL)
9. AT-ANT-4G-LTE-SMA3-200
10. AT-ANT-QGSM-SMA210-3.5(SL)
11. AT-ANT-4G-LTE-SMA5-250
12. AT-ANT-LTE-ENH-SMA260-3.5(CDOT)



GSM/LTE ANTENNA



AT-ANT-QGSM-SMAR90-3.0

Quad-Band GSM Right Angle Antenna

SMA Male RA, 3.0 dBi

Specifications

FREQUENCY: 850,900,1800,1900,2100 MHz

GAIN: 3.0±0.5 dBi

TYPE: Omni

CONNECTOR: SMA Male RA

Polarization : Vertical/Horizontal

IMPEDANCE: 50 Ω

3.0 dBi Gain

SMA Male

AT-ANT-QGSM-UFL1.13-0.18-3.0

Quad-Band GSM Internal Antenna

UFL (IPEX), 120,160mm cable

Specifications

FREQUENCY: 850,900,1800,1900,2100 (MHz)

GAIN: 3 ± 0.5 dBi

CONNECTOR: UFL (IPEX)

CABLE: 120 , 160mm

MOUNT: Modem type

IMPEDANCE: 50 Ω



3.0 dBi Gain

UFL (IPEX)



AT-ANT-QGSM-FGNW-NF600-5.0

Quad-Band GSM Fiberglass Antenna

N Female, 600mm, Outdoor, 5.0 dBi

Specifications

FREQUENCY: 824-960 / 1710-2170 MHz

GAIN: 5.0 dBi

CONNECTOR: N Female

LENGTH: 600mm

MOUNT: Tower mount

IMPEDANCE: 50 Ω

5.0 dBi Gain

Tower Mount

AT-ANT-QGSM-HMM-SMA174-3-5.0

Quad-Band GSM Magnetic Mount Antenna

SMA Male, RG174, 3M Cable, 5.0 dBi

Specifications

FREQUENCY: 850,900,1800,1900 MHz

GAIN: 5.0 dBi

CONNECTOR: SMA Male

CABLE: RG174, 3M

MOUNT: Magnetic

IMPEDANCE: 50 Ω



5.0 dBi Gain

Magnetic Mount

GSM/LTE ANTENNA



AT-ANT-CDMA-SMA210-3.5(SL)

Quad-Band GSM Sleeve Antenna

SMA Male, 3.5 ± 0.5 dBi

Specifications

FREQUENCY: 850,900,1800,1900 MHz

GAIN: 3.5 ± 0.5 dBi

TYPE: Omni

CONNECTOR: SMA Male

IMPEDANCE: 50 Ω

POLARIZATION: Vertical

3.5 dBi Gain

Quad-Band

AT-ANT-QGSM-SMA110-3.0(SL)

Quad-Band GSM Sleeve Antenna

SMA Male, 3 ± 0.5 dBi

Specifications

FREQUENCY: 850,900,1800,1900 MHz

GAIN: 3.0 ± 0.5 dBi

MOUNT TYPE : Modem

CONNECTOR: SMA Male

IMPEDANCE: 50 Ω



3.0 dBi Gain

Modem Mount



AT-ANT-QGSM-SMAR70-3.0

Quad-Band GSM Modem Antenna

SMA RA, 3 ± 0.5 dBi

Specifications

FREQUENCY: 850,900,1800,1900,2100 MHz

GAIN: 3 ± 0.5 dBi

CONNECTOR: SMA Male

MOUNT TYPE : Direct Modem

IMPEDANCE: 50 Ω

5.0 dBi Gain

Direct Modem

AT-ANT-QGSM-SMA305-5.0(SL)

Quad-Band GSM Internal Antenna

SMA male, 5 ± 0.5 dBi

Specifications

FREQUENCY: 850,900,1800,1900 MHz

GAIN: 5 ± 0.5 dBi

IMPEDANCE: 50 Ω

MOUNT: Modem



3.0 dBi Gain

Modem

GSM/LTE ANTENNA

AT-ANT-4G-LTE-SMA3-200

4G LTE Omni Antenna, SMA, 3 dBi, 200mm

SMA Male , 3 ± 0.5 dBi

Specifications

Frequency: 900,1800,2100,2300,2700 MHz

Gain: 3 ± 0.5 dBi


Connector: SMA Male

Impedance: 50 Ω

Polarization: Vertical

3.0 dBi Gain

PCB Mount



AT-ANT-QGSM-SMA210-3.5(SL)

Quad-Band GSM Sleeve Antenna

SMA Male, 3.5 ± 0.5 dBi

Specifications

FREQUENCY: 850,900,1800,1900 MHz

GAIN: 3.5 ± 0.5 dBi

TYPE: Omni

CONNECTOR: SMA Male

IMPEDANCE: 50 Ω

POLARIZATION: Vertical

3.5 dBi Gain

Vertical Polarization

AT-ANT-4G-LTE-SMA5-250

LTE Antenna Sleeve Type

SMA Male, 5 ± 0.5 dBi

Specifications

FREQUENCY: 900,1800,2300,2700 MHz

GAIN: 5 ± 0.5 dBi

MOUNT TYPE : Adjustable Straight RT Mount

CONNECTOR: SMA Male

IMPEDANCE: 50 Ω

3.0 dBi Gain

Adjustable RT Mount



AT-ANT-LTE-ENH-SMA260-3.5(CDOT)

LTE Sleeve Antenna-28

SMA RA, 3.5 ± 0.5 dBi

Specifications

FREQUENCY: 703,803,1406,1606 MHz

GAIN: 3.5 ± 0.5 dBi

CONNECTOR: SMA Male

MOUNT TYPE : Modem

IMPEDANCE: 50 Ω

3.5 dBi Gain

Modem Mount

GPS / GNSS Antennas

1. AT-ANT-GPSE-SMA-MM174-5.0TCS
2. AT-ANT-GPSE-SMAM-MM174-30-5
3. AT-ANT-GPSGNSS-UFL1.13-INTERNAL-28
4. AT-ANT-CSCM-SMA174-28-3.0
5. AT-ANT-CSCM-SMA316-28-3.0
6. AT-ANT-IRNSS-5
7. AT-GPS-FDAMP-SMAF-28
8. AT-ANT-GPS-HGSCD-NF-40.0 (SCADA)



GPS / GNSS ANTENNAS



AT-ANT-GPSE-SMA-MM174-5.0TCS

GPS External Active Antenna

SMA Male , 5m cable

Specifications

FREQUENCY: 1575.425 MHZ

LNA GAIN: 27.5 dB

NOISE FIGURE: < 1.5 dB

CONNECTOR: SMA MALE

CABLE: RG174, 5m

DC OPERATING VOLTAGE : 1.5 - 3.0 V

IMPEDANCE : 50 Ω

27.5 dB Gain

5m Cable



AT-ANT-GPSE-SMAM-MM174-30-5

GPS External Active Antenna

SMA, 27.5dB LNA, 10m Cable

Specifications

FREQUENCY: 1575.42 MHZ

LNA GAIN: 27.5 DB

CONNECTOR: SMA MALE

CABLE: RG174, 10M

DC OPERATING VOLTAGE : 2.75 - 5.0 V

POLARIZATION : RHCP

27.5 dBi Gain

RHCP

AT-ANT-GPSGNSS-UFL1.13-INTERNAL-28

GPS/GNSS Internal Active Antenna

UFL, 28 $\pm$ 0.5 dB LNA

Specifications

FREQUENCY: 1575.425 + 3 MHZ

LNA GAIN: 28 $\pm$ 0.5 DB

DC OPERATING VOLTAGE : 2.75 - 5.0 V

POLARIZATION : RHCP

MOUNT: Direct PCB Solder



28dB Gain

RHCP

AT-ANT-CSCM-SMA174-28-3.0

GPS/GLONASS/IRNSS Combo Antenna

GSM - SMA, 28dB

Specifications

Frequency: 1575.425 $\pm$ 3 MHz

LNA Gain: 28 dB

Connector: GSM - SMA Male

Cable: RG174, 3m

Supply Voltage: 2.7-5.0V

Impedance: 50 Ω



28 dBi Gain

RG174 3m Cable

GPS / GNSS ANTENNAS



AT-ANT-CSCM-SMA316-28-3.0

GPS/GLONASS/IRNSS Combo Antenna

GSM - SMA, RG316, 3m

Specifications

Frequency: 1575.425 $\pm$ 3 MHz

LNA Gain: 28 dB

Connector: SMA

Male Cable: RG316, 3m

Supply Voltage: 2.7-5V

Mount Type : Screw Mount

28 dBi Gain

RG316 3m Cable

AT-ANT-IRNSS-5

IRNSS/NavIC Dual-Band Antenna

L1+L5

Specifications

Frequency: 1176.45 MHz (L5) & 1227.6 MHz (L1)


Type: Active patch

LNA Gain: 28 dB

Connector: SMA Male

IP Rating: IP67

Temperature: -40°C to +85°C



28dBi Gain

IP67 Waterproof



AT-GPS-FDAMP-SMAF-28

GPS Feeder Amplifier

GSM - SMA, RG316, 3m

Specifications

Frequency: 1575.425 $\pm$ 5 MHz

LNA Gain: 28 dB

Connector: SMA Female / N Female

Male Cable: RG316, 3m

Supply Voltage: 5 $\pm$ V

Weight : 0.15kg

28 dBi Gain

RG316 3m Cable

AT-ANT-GPS-HGSCD-NF-40.0 (SCADA)

GPS High Gain Antenna (SCADA)

L1+L5

Specifications

Frequency: 1176.45 MHz (L5) & 1227.6 MHz (L1)

Type: Active patch

LNA Gain: 40.5 dB

Patch Gain : 4.5 $\pm$ 0.5 dBi

Connector: SMA Male

Polarization : RHCP

Temperature: -40°C to +85°C



40.5 dBi Gain

RHCP

WiFi Antenna Models



1. AT-ANT-WIFI-DB-RPSMA305-5.0
2. AT-ANT-WIFI-DB-RPSMA375-7.0
3. AT-ANT-WIFI-DB-RPSMA430-9.0
4. AT-ANT-WIFI-DB-UFL178-120-3.0(CDOT)
5. AT-ANT-WIFI-FGNW-NFST-12.0
6. AT-ANT-WIFI-FGNW-NFST-5.0
7. AT-ANT-WIFI-YAGI-SMAST58-3-12.0
8. AT-ANT-WIFI-PP-NF-18.0
9. AT-ANT-WIFI-CEILING-SMA58-500-6.0
10. AT-ANT-WIFI-HORN-NFST-24.0

WIFI ANTENNAS



AT-ANT-WIFI-DB-RPSMA305-5.0

WiFi Sleeve Antenna

RP-SMA, 5 dBi, 305mm

Specifications

FREQUENCY: 2400-2500, 4900, 5875 MHz

GAIN: 5 ± 0.5 dBi

CONNECTOR: RPSMA

IMPEDANCE: 50 Ω

POLARIZATION: VERTICAL

5 dBi Gain

Sleeve Antenna

AT-ANT-WIFI-DB-RPSMA375-7.0

Dual-band WiFi Antenna

RP-SMA, 7 ± 0.5 dBi

Specifications

FREQUENCY: 2400 - 2500 , 4900 - 5875 MHz

GAIN: 7 ± 0.5 dBi

CONNECTOR: RP-SMA MALE

MOUNT TYPE : Modem

IMPEDANCE: 50 Ω



7 dBi Gain

Modem Mount



AT-ANT-WIFI-DB-RPSMA430-9.0

Dual-band WiFi Antenna

RP-SMA, 9 ± 0.5 dBi

Specifications

FREQUENCY: 2400-2500 , 4900-5875 MHz

GAIN: 9 ± 0.5 dBi

CONNECTOR: RP-SMA MALE

MOUNT TYPE : Modem

IMPEDANCE: 50 Ω

9 dBi Gain

Modem Mount

AT-ANT-WIFI-DB-UFL178-120-3.0(CDOT)

WiFi CDOT Antenna

UFL, 120mm

Specifications

FREQUENCY: 2400-2500, 4900-5875 MHz

GAIN: 2.1, 2.4, 2.6, 3.4 (± 0.5) dBi

CONNECTOR: UFL

CABLE: 120MM

IMPEDANCE: 50 Ω

MOUNT: Adjustable Straight and Right angle mount



Au Finish

UFL connector

WIFI ANTENNA



AT-ANT-WIFI-FGNW-NFST-12.0

WiFi Fiberglass Networking Antenna

N Female, 12 dBi

Specifications

FREQUENCY: 2400–2500 MHZ
GAIN: 12 dBi
CONNECTOR: N FEMALE (STAINLESS)
IMPEDANCE : 50 Ω
MOUNT: TOWER MOUNT

12 dBi Gain

Tower Mount

AT-ANT-WIFI-FGNW-NFST-5.0

WiFi Fiberglass Networking Antenna

N Female, 5 dBi

Specifications

FREQUENCY: 2400–2500 MHZ
GAIN: 5 dBi
CONNECTOR: N FEMALE
IMPEDANCE : 50 Ω
MOUNT: TOWER MOUNT

5 dBi Gain

FiberGlass



AT-ANT-WIFI-YAGI-SMAST58-3-12.0

WiFi Yagi Directional Antenna

TNC, 12 dBi

Specifications

FREQUENCY: 2400–2500 MHZ
GAIN: 7,9,10,12,14,16 (± 0.5 dBi)
TYPE: YAGI UDA
CONNECTOR:N or TNC
CONNECTOR TYPE : FEMALE
IMPEDANCE: 50 Ω

Vertical / Horizontal Polarization

2.4-2.5 GHz

AT-ANT-WIFI-PP-NF-18.0

WiFi Panel Antenna,

N Female, 18 dBi

Specifications

FREQUENCY: 2400–2500 MHZ
GAIN: 18 dBi
TYPE : PATCH
IMPEDANCE : 50 Ω
CONNECTOR: N FEMALE

i

18 dBi Gain

Directional



WIFI ANTENNA



AT-ANT-WIFI-CEILING-SMA58-500-6.0

WiFi Ceiling Dome Antenna

RPSMA, 6 dBi, 500mm

Specifications

FREQUENCY: 2400–2500 MHZ

GAIN: 6 dBi

MOUNT: CEILING

CONNECTOR: RPSMA

CABLE: RG58, 500MM

IMPEDANCE : 50Ω

6 dBi Gain

Ceiling Mount

AT-ANT-WIFI-HORN-NFST-24.0

WiFi Horn Antenna

N Female, 24 dBi

Specifications

FREQUENCY: 2400–2500 MHZ

GAIN: 24 dBi

TYPE: HORN

CONNECTOR: N FEMALE (STAINLESS)

IMPEDANCE : 50 Ω

MOUNT: CEILING

5 dBi Gain

Outdoor IP65



VHF / UHF Antenna Models

1. AT-ANT-VHF-BNC440-7.0(SL)
2. AT-ANT-VHF-SMART1.5
3. AT-ANT-VHF-SMART2.15
4. AT-ANT-VHF-BNC-5



VHF / UHF ANTENNA MODELS

AT-ANT-VHF-BNC440-7.0(SL)

VHF High Gain Antenna

SMA Male, 400-470 MHz, 7.0 dBi



Specifications

FREQUENCY: 400-470 MHz

GAIN: 7.0 dBi

TYPE: Omni

CONNECTOR: SMA Male

IMPEDANCE: 50 Ω

MOUNT : Modem

7.0 dBi Gain

High Gain Antenna

AT-ANT-VHF-SMART1.5

VHF BNC Antenna

SMA Male, 433 MHz, 1.5 $\pm$ 0.5 dBi

Specifications

FREQUENCY:401-433 MHz

GAIN: 1.5 $\pm$ 0.5 dBi

TYPE: Omni

CONNECTOR: SMA Male Right Angle

IMPEDANCE: 50 Ω



1.5 dBi Gain

SMA Connector

AT-ANT-VHF-SMART2.15

VHF Antenna

SMA Male, 400-470 MHz, 7.0 dBi

Specifications

FREQUENCY: 433 MHz

GAIN: 2.15 $\pm$ 0.5 dBi

TYPE: Omni

CONNECTOR: SMA Male right Angle

IMPEDANCE: 50 Ω

MOUNT : Modem



2.15 dBi Gain

VHF Antenna

AT-ANT-VHF-BNC-5

VHF BNC Antenna

SMA Male, 433 MHz, 5 $\pm$ 0.5 dBi

Specifications

FREQUENCY: 433 MHz

GAIN: 5 $\pm$ 0.5 dBi

TYPE: Omni

CONNECTOR: SMA Male

IMPEDANCE: 50 Ω




5.0 dBi Gain

SMA Connector

HIGH GAIN Antennas

1. AT-ANT-GPS-HGM-SMA58-1-35.0
2. AT-ANT-QGSM-FGNW-NF213-500-10.0
3. AT-ANT-QGSM-FGNW-NF213-500-7.0
4. AT-ANT-WIFI-BFIRE-NF240-500-24.0
5. AT-ANT-WIFI-PRB-NFST-500-24.0
6. AT-ANT-VHF-PM-BNC174-200-6.0

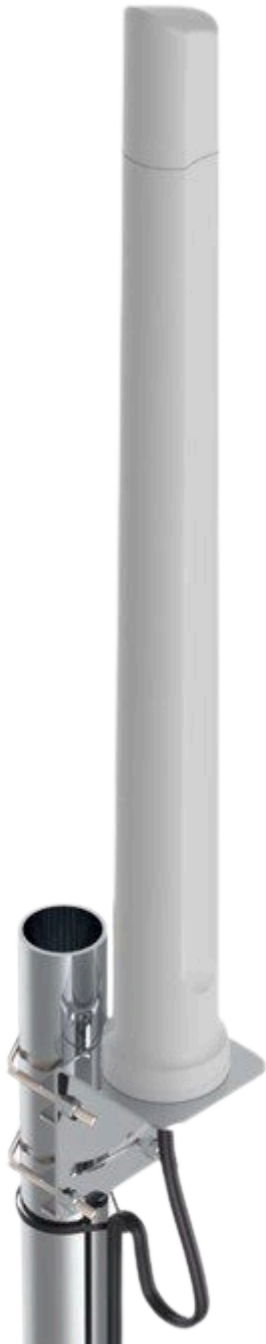

HIGH GAIN ANTENNAS



AT-ANT-GPS-HGM-SMA58-1-35.0

GPS High-Gain Magnetic Antenna

SMA, RG58, 3M Cable

Specifications

FREQUENCY: 1575.425 MHZ

LNA GAIN: 32.5 dB

NOISE FIGURE: < 1.2 dBi

CONNECTOR: SMA MALE

CABLE: RG58, 3M

SUPPLY: 5V

IIMPEDANCE : 50 Ω

32.5 dB LNA

SMA Male

AT-ANT-QGSM-FGNW-NF213-500-10.0

GSM Fiberglass High-Gain Antenna

N Female, 10 $\pm$ 0.5 dBi

Specifications

FREQUENCY: 850,900,1800,1900 MHz

GAIN: 10 $\pm$ 0.5 dBi

CONNECTOR: N Female

MOUNT: Tower

IMPEDANCE: 50 Ω

10 dBi Gain

N Female



AT-ANT-QGSM-FGNW-NF213-500-7.0

GSM Fiberglass Omni Antenna

N Female, 7 $\pm$ 0.5 dBi

Specifications

FREQUENCY: 850,900,1800,1900 MHz

GAIN: 7 $\pm$ 0.5 dBi

CONNECTOR: N Female

MOUNT: Tower

CABLE : RG213

IMPEDANCE: 50 Ω

7 dBi Gain

RG213

AT-ANT-WIFI-BFIRE-NF240-500-24.0

WiFi Backfire High-Gain Antenna

N Female, 500mm, 24 $\pm$ 0.5 dBi

Specifications

FREQUENCY: 2400-2500 MHz

GAIN: 24 $\pm$ 0.5 dBi

CONNECTOR: N Female

TYPE: Omni

MOUNT: Tower , Wall mount

24 dBi Gain

Tower Wall Mount





AT-ANT-WIFI-PRB-NFST-500-24.0

WiFi Parabolic Dish Antenna

SMA, 24± 0.5 dBi

Specifications

FREQUENCY: 2400–2500 MHZ

GAIN: 24 dBi

TYPE:GRID

CONNECTOR: SMA

LENGTH: 0.5,1 m

MOUNT: POLE / TRIPOD

24 dBi Gain

Pole Tripod

AT-ANT-VHF-PM-BNC174-200-6.0

VHF Pole-Mount High-Gain Antenna

BNC, 6 dBi, 200mm

Specifications

FREQUENCY: 400–470 MHZ

GAIN: 6 dBi

CONNECTOR: BNC MALE

CABLE: RG174, 200MM

MOUNT: Wall,Desktop




6 dBi Gain

RG174 ,200mm

RFID Antennas

1. AT-ANT-LF-HF-RFID
2. AT-UHF-RFID-2CH4PO-MR6132 A
3. AT-ANT-UHF-RFID

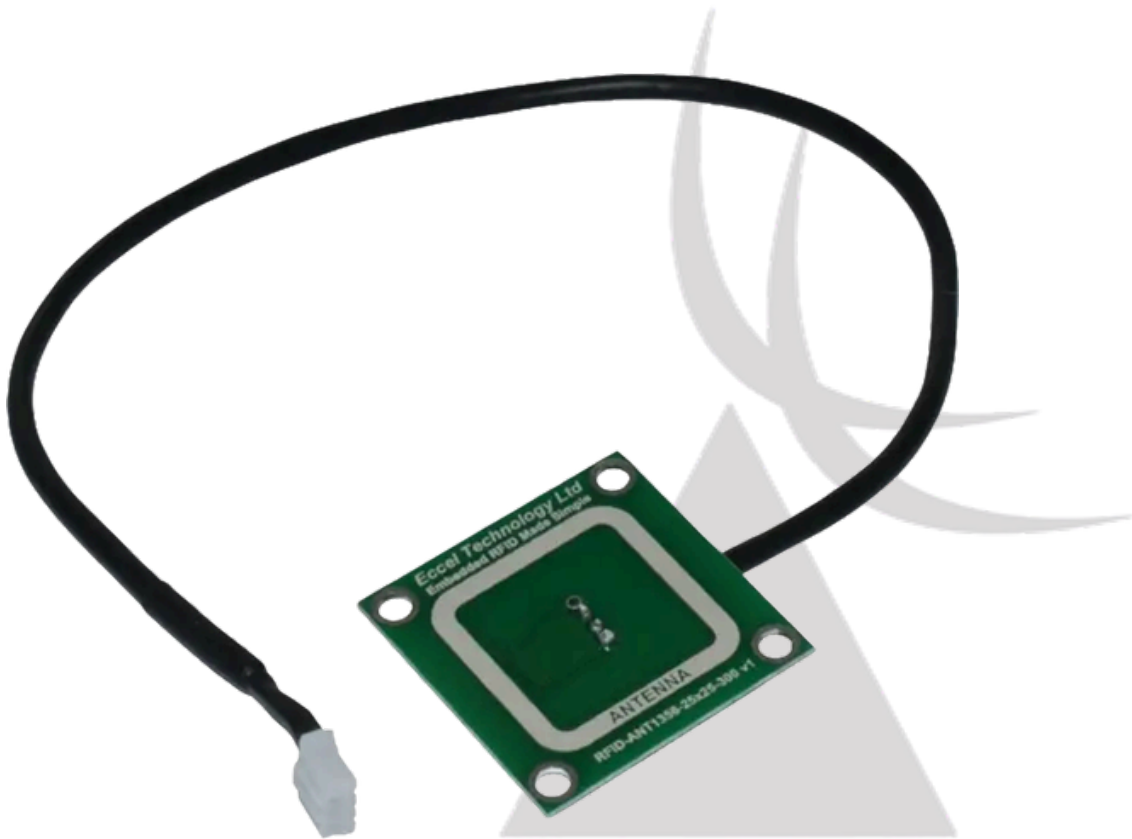

RFID ANTENNAS



AT-ANT-LF-HF-RFID

LF/HF RFID Antenna Module

125 kHz / 13.56 MHz

Specifications

FREQUENCY: 125 kHz (LF) / 13.56 MHz (HF)

SUPPLY: 3-5V DC

IMPEDANCE : 50 Ω

TEMPERATURE : -40 to 85 °C

Dual LF/HF

PCB Module

AT-UHF-RFID-2CH4P0-MR6132 A

UHF RFID Reader Module

4-Port, ISM 865-868 MHz

Specifications

FREQUENCY: ISM 902-928 MHz or ISM 865-868 MHz

ANTENNA PORTS: 4

PROTOCOL: ISO 18000-6B / ISO 18000-6C

IOPERATION MODE : FHSS

POWER: DC 9V



4-Port Reader

12M Range



AT-ANT-UHF-RFID

UHF RFID Patch Antenna

902-928/865-868 MHz

Specifications

FREQUENCY: 928/865-868 MHz

DC VOLTAGE : 3-5 V

IMPEDANCE : 50 Ω


TEMPERATURE : -20 to 60 °C

8 dBic Gain

Circular Pol.

LPA / wideband Antennas

1. LPA-1-30MHz
2. LPA-20-3000MHz
3. LPA-30-500MHz
4. LPA-500-6000MHz

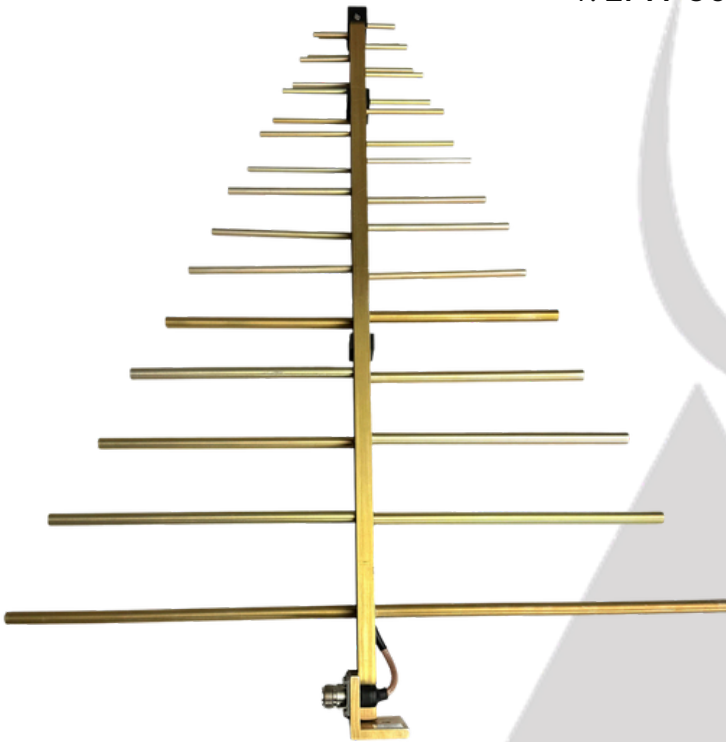


LPA / WIDEBAND ANTENNAS

LPA-20-3000MHz

Log Periodic Antenna 20-3000 MHz

N Female, 3-7± 0.5 dBi



Specifications

FREQUENCY: 20-3000 MHz

GAIN: 3-7± 0.5 dBi

CONNECTOR: N Female

VSWR: ≤ 2

POLARIZATION: Horizontal or Vertical

POWER $\geq 100W$

IMPEDANCE: 50 Ω

20-3000 MHz

3-7 dBi Gain

LPA-1-30MHz

Log Periodic Antenna 1-30 MHz

N Female , Pole Mount

Specifications

FREQUENCY: 1-30 MHz

GAIN: 0-1 ± 0.5 dBi

CONNECTOR: N Female

VSWR: ≤ 2


POLARIZATION: Horizontal or Vertical

POWER $\geq 100W$

IMPEDANCE: 50 Ω

1-30 MHz HF


100W Power



LPA-30-500MHz

Log Periodic Antenna 30-500 MHz

N Female, 3-7± 0.5 dBi



Specifications

FREQUENCY: 30-500 MHz

GAIN: 3-7± 0.5 dBi

CONNECTOR: N Female

VSWR: ≤ 2

POLARIZATION: Horizontal or Vertical

POWER $\geq 100W$

IMPEDANCE: 50 Ω

30-500 MHz

3-7 dBi Gain

LPA-500-6000MHz

Log Periodic Antenna 500-6000 MHz

N Female, 5-7 ± 0.5 dBi

Specifications

FREQUENCY: 500-6000 MHz

GAIN: 5-7 ± 0.5 dBi

CONNECTOR: N Female

VSWR: ≤ 2

POLARIZATION: Horizontal or Vertical

POWER: $\geq 100W$

IMPEDANCE: 50 Ω


500-6000 MHz

5-7 dBi Gain



DUPLEXERS

1. DUPLEXER-136-174MHz
2. DUPLEXER-703-733MHz
3. DUPLEXER-758-803MHz
4. DUPLEXER-1710-1785MHz

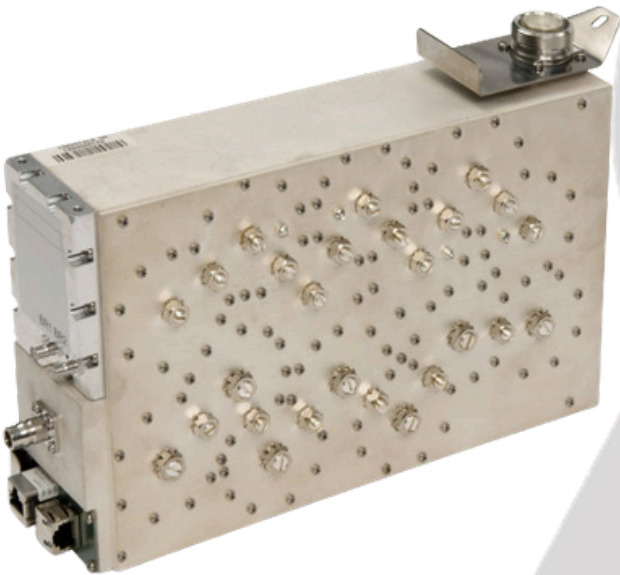

DUPLEXERS

DUPLEXER-136-174MHz

VHF Cavity Duplexer

136–174 MHz



Specifications

TX BAND: 136–148 MHz RX BAND: 148–174 MHz

INSERTION LOSS TX: < 1.5 dB

INSERTION LOSS RX: < 1.5 dB

TX-RX ISOLATION: > 70 DB

VSWR: < 1.3:1

POWER: 50W avg

CONNECTOR: N Female

TEMPERATURE: -30°C to +70°C

20-3000 MHz

6 dBi Gain

DUPLEXER-703-733MHz

LTE Band 28 Cavity Duplexer

703–733 MHz

Specifications

TX BAND: 703–733 MHz RX BAND: 758–788 MHz

INSERTION LOSS TX: < 1.2 dB

INSERTION LOSS RX: < 1.2 dB

TX-RX ISOLATION: > 75 DB

VSWR: < 1.3:1

POWER: 100W avg

CONNECTOR: N Female



1-30 MHz HF

200W Power

DUPLEXER-758-803MHz

LTE Band 20 Cavity Duplexer

758–803 MHz

Specifications

TX BAND: 791–821 MHz

RX BAND: 832–862 MHz

INSERTION LOSS: < 1.0 dB

TX-RX ISOLATION: > 80 DB

PIM: < -153 dBc @ 2×43dBm

CONNECTOR: N Female

POWER: 100W avg



30-500 MHz

7 dBi Gain

DUPLEXER-1710-1785MHz

LTE Band 3 Cavity Duplexer

1710–1785 MHz

Specifications

TX BAND: 1710–1785 MHz

RX BAND: 1805–1880 MHz

INSERTION LOSS: < 0.9 dB

TX-RX ISOLATION: > 80 DB

PIM: < -153 dBc @ 2×43dBm

VSWR: < 1.3:1

POWER: 100W avg

CONNECTOR: N Female



500-6000 MHz

8 dBi Gain

DIPLEXER

1.OV-DIPLEXR-006072023



WWW.ANANDTECHNOLOGIES.CO.IN

DIPLEXERS

OV-DIPLEXR-006072023

RF Diplexer, Dual-Band Frequency Combiner



Specifications

TX BAND: 136–148 MHz
RX BAND: 148–174 MHz
INSERTION LOSS TX: < 1.5 dB
INSERTION LOSS RX: < 1.5 dB
TX-RX ISOLATION: > 70 DB
VSWR: < 1.3:1
POWER: 50W AVG
CONNECTOR: N FEMALE
TEMPERATURE: -30°C TO +70°C

RF diplexer for combining or separating two distinct frequency bands on a single antenna port. Custom-specified passband frequencies available for cellular, WiFi, and private network applications.


30-500 MHz

7 dBi Gain

7 dBi Gain

POWER SPLITTER

1. **AT-LPW-SP-2-500-6000**
2. **AT-LPW-SP-2-1500-8000**
3. **AT-LPW-SP-4-8000**
4. **AT-LPW-SP-16-6000**
5. **AT-GPS-SPLITTER-2**

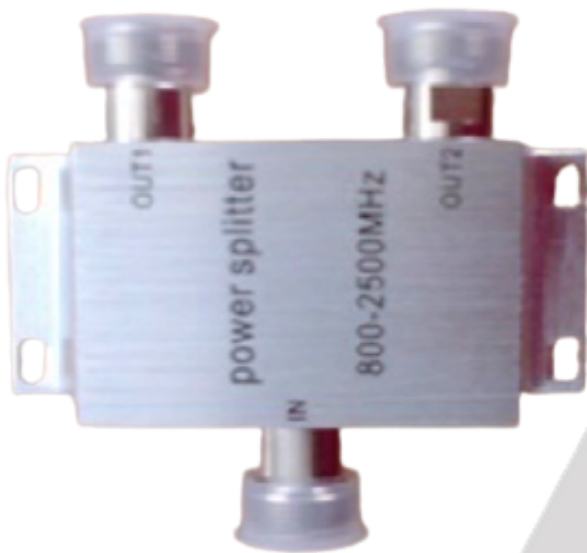

WWW.ANANDTECHNOLOGIES.CO.IN

POWER SPLITTER



AT-LPW-SP-2-500-6000

1x2 Low Power RF Splitter

500–6000 MHz

INSERTION LOSS: < 7.0 dB

Port Isolation: > 20 DB

VSWR: ≤ 1.5

Connector: SMA Female

Power: 10W

500-6000 MHz

> 20dB isolation

AT-LPW-SP-2-1500-8000

1x2 Low Power RF Splitter

1500–8000 MHz

Specifications

FREQUENCY: 1500–8000 MHZ

INSERTION LOSS: < 7 dB

Port Isolation: ≥ 20 DB

VSWR: ≤ 1.5

Connector: SMA Female



1500-1800 MHz HF

SMA Female

AT-LPW-SP-4-8000

1x4 Low Power RF Splitter

up to 8000 MHz

Specifications


FREQUENCY: 500–8000 MHZ

INSERTION LOSS: < 7 dB

Port Isolation: ≥ 20 DB

VSWR: ≤ 1.5

Connector: SMA Female

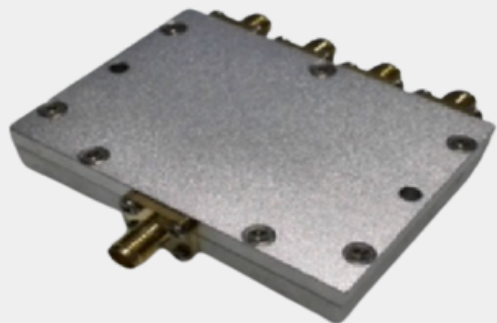

500–8000 MHz

< 7 dBi Inserion Loss

AT-LPW-SP-16-6000

Log Periodic Antenna 500-6000 MHz

Microwave, N Female, 8 dBi

Specifications

FREQUENCY: 380–2500 MHz

GAIN: 20 dBi

Insertion Loss < 7dB

VSWR: < 1.5

Temperature -30 to +70 C

POWER: 10W

IMPEDANCE: 50 Ω



380-2500 MHz

20 dBi Gain

POWER SPLITTER



AT-GPS-SPLITTER-2

GPS Active Splitter

1575.42 MHz

Specifications

FREQUENCY: 1575.42 MHZ

CONNECTOR: SMA FEMALE

VSWR: ≤ 1.30

ISOLATION : ≥ 25 dB

1575.42 MHz

25 dBi Gain

ATTENUATOR

1. AttenuatorVA1
2. AttenuatordkVA-90
3. AttenuatorFX-H2



ATTENUATOR



AttenuatorFX-H2

AT -Attenuator Fixed

3,6,10,20,30,40 dB

Specifications

FREQUENCY: DC-3GHZ

ATTENUATION: 3 / 6 / 10 / 20 / 30 / 40 DB

POWER: 80W

Temperature : -55 to +125

CONNECTOR: N

IMPEDANCE: 50 Ω

DC-3 GHz

80W Power

AttenuatorVA-1

Attenuator VA1

Variable RF Attenuator

Specifications

FREQUENCY: DC-2.7 GHZ

ATTENUATION RANGE: 0-31 DB

INSERTION LOSS : 0.7dB at 2.7 Ghz

STEP VALUE : 1dB

POWER: 2W

Temperature -40 to +85 C



DC-2.7 GHz

2W Power



Attenuator dKVA-90

Digital-Step Variable Attenuator

0-90 dB

Specifications

FREQUENCY: DC-3 GHZ

RANGE: 0-90 DB

STEP SIZE: 0-100/110dB in 1dB step

VSWR: ≤ 1.5

POWER: 10W

CONNECTOR: SMA FEMALE

30-500 MHz

7 dBi Gain

Couplers

1. AT-COUPLER-800-2500
2. AT-COUPLER-117



COUPLERS

AT-COUPLER-800-2500

Directional Coupler



Specifications

FREQUENCY: 800-2500 MHZ

COUPLING: -5dB

DIRECTIVITY: ≥ 20 dB

INSERTION LOSS: ≤ 2.0 dB

VSWR: ≤ 1.20

POWER: 200W (avg) , 1.5 K(peak)

CONNECTOR:N FEMALE

800-2500 MHz

200W Power

AT-COUPLER-117

Hybrid Coupler

N (F) , Band Pass

Specifications

FREQUENCY: 117.75-137 MHZ

ISOLATION: > 20 DB

CONNECTOR: N FEMALE

PORTS: 4

VSWR: <1.5:1



117.75-137 MHZ

4 Ports

BAND PASS FILTERS

1. AT-BPF-GSM900
2. AT-BPF-LTE1800
3. AT-BPF-2400-WIFI



BAND PASS FILTERS

AT-BPF-GSM900

GSM 900 Bandpass Filter



Specifications

PASSBAND: 880–960 MHz
INSERTION LOSS: < 1.5 dB
RETURN LOSS: > 18 DB
REJECTION (± 50 MHz): > 50 DBC
POWER: 20W AVG
CONNECTOR: N FEMALE
TEMPERATURE: -40°C TO +85°C

1-30 MHz HF

200W Power

AT-BPF-LTE1800

LTE Band 3 Bandpass Filter

90°, SMA

Specifications

PASSBAND: 1710–1880 MHz
INSERTION LOSS: < 1.2 dB
RETURN LOSS: > 20 DB
REJECTION (± 100 MHz): > 55 DBC
POWER: 20W AVG
CONNECTOR: N FEMALE



1-30 MHz HF

200W Power

AT-BPF-2400-WIFI

WiFi 2.4 GHz Bandpass Filter

35 dB, N Female

Specifications

PASSBAND: 2400–2485 MHz
INSERTION LOSS: < 1.0 dB
RETURN LOSS: > 18 DB
REJECTION (± 200 MHz): > 40 DBC
POWER: 5W
CONNECTOR: SMA FEMALE



30-500 MHz

7 dBi Gain

LIGHTNING ARRESTORS

1. AT-LA-N-2000
2. AT-LA-N6000



LIGHTNING ARRESTORS

AT-LA-N-2000

RF Lightning Arrestor

800-2000 MHz , DC BLOCKED

Specifications

FREQUENCY: 800-2000 MHZ

INSERTION LOSS: < 0.1 dB

VSWR: < 1.13:1/<-24

SURGE CURRENT: 50 kA (8/20 μ s)

IMPEDANCE : 50 Ω

AVERAGE POWER : 700W

TEMPERATURE: -40°C to +85°C



800-2000 MHz

700W Power

50kA

Gas discharge tube RF lightning arrestor with N Male/Female connectors. Protects antenna feedlines from lightning surges up to 2 GHz. Outdoor IP67 rated.

AT-LA-N6000

RF Lightning Arrestor

DC-6000 MHz

Specifications

FREQUENCY: DC-6000 MHZ

INSERTION LOSS: < 0.6 dB

VSWR: < 1.2:1)

WITHSTAND POWER : 200W PEP

CONNECTOR: N Female

IMPEDANCE : 50 Ω



DC-6000 MHz

200W PEP

N Female

Wideband gas discharge tube RF lightning arrestor covering DC to 6 GHz. Suitable for 5G sub-6 GHz antenna feedlines and outdoor WiFi installations.

RF Cable Assemblies

1. AT-CA-MHF4-SMABH-IP-65-1.13-200
2. AT-CA-MMCX RT-TNCFBH-120-RG178
3. AT-CA-NM-BNC-402-2000
4. AT-CA-SMA-BNC-402-2000 -
5. AT-CA-SMAM-UFLF-200-D1.13
6. AT-CA-SMA-SMA-402-2000
7. AT-CA-SMA-UFL-1.13-150
8. AT-CA-UFL-UFL-40-1.13



RF CABLE ASSEMBLIES



AT-CA-MHF4-SMABH-IP-65-1.13-200

IPEX MHF(HSC COMP) TO SMA B/H CABLE ASSY

110,180,200,220 mm Cable

Specifications

FREQUENCY: DC-6 GHZ
Insulation Resistance : 1000 MOhm-Km MAX
Conductor Resistance : 1400 Ohm-Km @ 20C
Dielectric Strength : AC 1.0 kV
Impedance 50 Ohm
Capacitance : 97 pF

DC-6 GHZ

Varying Cable Lengths

AT-CA-MMCX RT-TNCFBH-120-RG178

RP-SMA to UFL/MHF2 Cable Assembly

PTFE

Specifications

FREQUENCY: DC-6 GHZ
Dielectric Type : PTFE
IMPEDANCE: 50 Ω
Max Operating Voltage : 1200 V
Max Operating Temperature 200C
Voltage Withstand(Vrms) : 2000



2000 Vrms

50 Ohm

AT-CA-NM-BNC-402-2000

RF LOW LOSS CABLE ASSEMBLY

N MALE TO BNC MALE

Specifications

Inner Conductor Material : Copper Clad Steel , Silver
Jacket Material , Color : FEP(Blue)
Frequency : DC-6GHz
Capacitance : 95 pF
Velocity of Propagation 69.90
Impedance : 50Ohm



DC-6Ghz

FEP

AT-CA-SMA-BNC-402-2000 -

BNC Male to SMA Male Cable Assembly

PE

Specifications

Dielectric Type : PE
Impedance :50 ohm
Velocity of Propagation : 69.90
Frequency : DC to 6 GHz
Voltage : 1900 Vrms
Insulators : PTFE



DC TO 6 GHz

1900 Vrms

RF CABLE ASSEMBLIES



AT-CA-SMAM-UFLF-200-D1.13

RF COAXIAL CABLE ASSEMBLY

Coax Cable

Specifications

Cable Diameter :0.81/0.86/1.13 /1.37.1.42mm
cable conductor : Standard
Cable Inner Conductor : Copper , Silver
No of Shields Cable : Single
Frequency :DC-6GHz
Connector : SMA Female , SMAP Male

DC-6GHz

Multiple Diameter Options

AT-CA-SMA-SMA-402-2000

UFL to UFL Cable Assembly

PE

Specifications

Dielectric Type : PE
Impedance : 50 ohm
Velocity : 69.90%
Frequency : DC TO 6 GHz
Voltage : 1900 Vrms



69.90% velocity

DC TO 6 GHz


AT-CA-SMA-UFL-1.13-150

IPEX MHF (HSC COMP) TO SMA B/H Cable Assy

Custom Length

Specifications

FREQUENCY: DC-6 GHz
Insulation Resistance : 1000 MOhm-Km MAX
Conductor Resistance : 1400 Ohm-Km @ 20C
Dielectric Strength : AC 1.0 kV
Impedance 50 Ohm
Capacitance : 97 pF

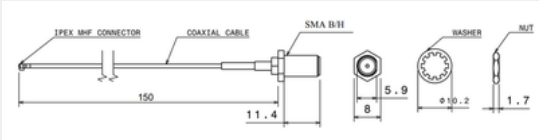

DC-6Ghz


50 Ohm

AT-CA-UFL-UFL-40-1.13

MMCX Right-Angle to SMA Straight Cable

Specifications

FREQUENCY: 0-6 GHz
IMPEDANCE: 50 Ω
VSWR: ≤1.6
Polarization : Vertical
Temperature : -45 to 85 C

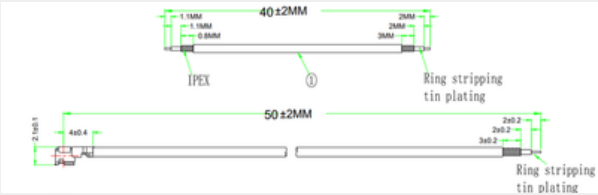

0-6 GHz


Vertical Polarization

POWER AMPLIFIER

- 1. AT-PA-1.0W
- 2. AT-PA-2.0W
- 3. AT-PA-LNA



POWER AMPLIFIER



AT-PA-1.0W

RF Power Amplifier Module

1W

Specifications

FREQUENCY: 2000-2500 MHZ
OUTPUT POWER: 30 dBm (Min)
GAIN: 28 dB (Min)
SUPPLY: +6.5V , 1A (Max)
CONNECTOR: SMA FEMALE
TEMPERATURE : -30 to 55 °C

7.0 dB Max Noise

SMA Female Connector


AT-PA-2.0W

RF Power Amplifier Module

2W


Specifications

FREQUENCY: 2000-2500 MHZ
OUTPUT POWER: 33 DBM (Min)
GAIN: 35 dB (Min)
SUPPLY: +6.5V / 1.7A (Max)
CONNECTOR: SMA FEMALE
TEMPERATURE : -30 to 55 °C



2000-2500 MHz

35 dB Gain



AT-PA-LNA

Low Noise Amplifier Module

750-2600 MHz

Specifications

FREQUENCY: 750-2600 MHZ
GAIN: 19 dB
NOISE FIGURE: 0.9 dB (Max)
SUPPLY: +6.5V / 100mA
CONNECTOR: SMA FEMALE
TEMPERATURE : -30 to 55 °C

750-2600 MHz

0.9dB Max Noise

WAVEGUIDE COMPONENTS

1. AT-ANT-HORN-WR90-N(F)



POWER AMPLIFIER



AT-ANT-HORN-WR90-N(F)

WR90 Standard Gain Horn Antenna

8.2–12.4 GHz

Specifications

FREQUENCY: 8.2–12.4 GHz

GAIN : 20dB

IMPEDANCE : 50 Ohm

VSWR: < 1.3:1

Polarization : Linear

8.2–12.4 GHz

20 dB Gain

X-band waveguide directional coupler for power monitoring and signal sampling in radar and SATCOM systems. WR-90 flange

CONTACT US

We'd love to hear from you

OUR ADDRESS

21, 6th Main Road, Magadi Main Rd,
Sunkadakatte, Bengaluru,
Karnataka 560091, India

CALL US

+91 87629 21780

+91 98860 08882

EMAIL US

smetri@anandtechnologies.co.in

VISIT US ONLINE

www.anandtechnologies.co.in



Check us out on Google



Anand Technologies

Branding & Marketing Managed by



www.coreforgeindia.com



www.anandtechnologies.co.in

Branding & Marketing Managed by



www.coreforgeindia.com



Anand Technologies
RF & MICROWAVE

Precision RF and microwave engineering for mission-critical systems. Trusted by India's leading telecom, defense, and industrial organizations since 2004.

CONTACT

 Anand Technologies,
21, 6th Main Road, Magadi Main Rd,
Sunkadakatte, Bengaluru,
Karnataka 560091, India

 +91 87629 21780

 smetri@anandtechnologies.co.in