

SPECIFICATION


1. IPEX MHF PLUG (SEE CHART FOR P/N)
2. Working Frequency : DC TO 6GHz
3. Insulation Resistance : 1000 MEGA OHM-KM Min
4. Conductor Resistance : 1400 OHM/KM/20°C Max.
5. Dielectric Strength : AC 1.0 KV/minute
6. Spark test : 2.5 KV
7. Nom. Impedance : 50 ± 3 Ohms
8. Nom. Capacitance : 97 ± 3 pF/m
9. Attenuation (dB/1M)
- 2.0 GHz : 3.6

2.4 GHz : 5.1


3.0 GHz : 6.2

4.0 GHz : 7.5

5.0 GHz : 8.5
- 10.STANDARD CABLE LENGTH : 110,180,200,220 mm

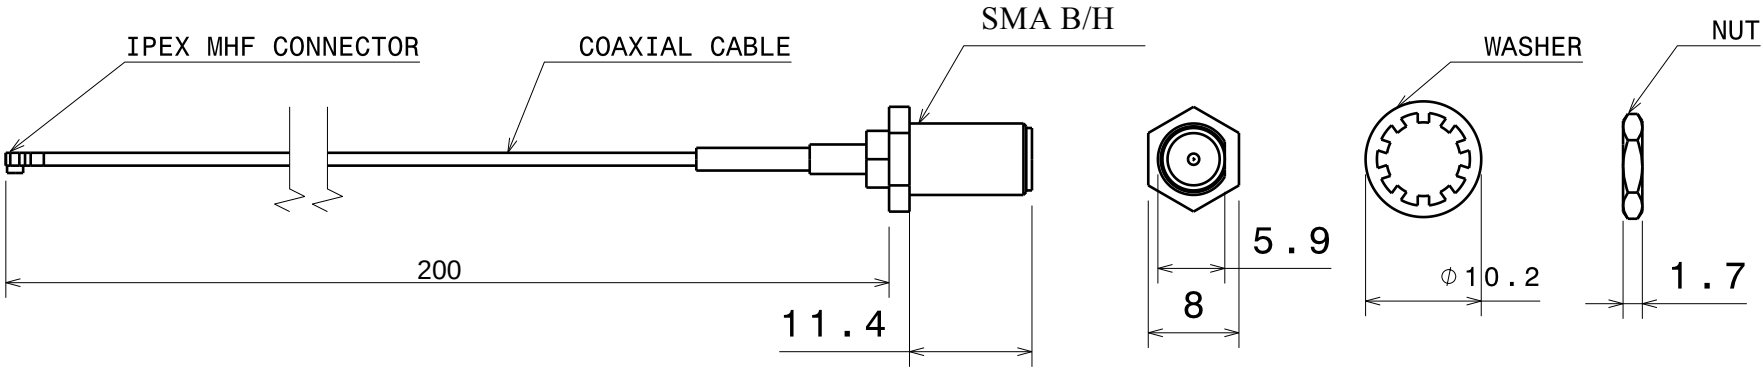


| CABLE & COLOUR   | PLUG P/N      | SMA P/N   | CABLE DIA PART NO. |
|------------------|---------------|-----------|--------------------|
| ø0.81 GRAY&BLACK | 20278-112R-08 | AT-SMA-08 | X1                 |
| ø1.13 GREY&BLACK | 20278-112R-13 | AT-SMA-13 | X2                 |
| ø1.32 GREY&BLACK | 20278-112R-32 | AT-SMA-32 | X3                 |
| ø1.37 GREY&BLACK | 20351-112R-37 | AT-SMA-37 | X4                 |

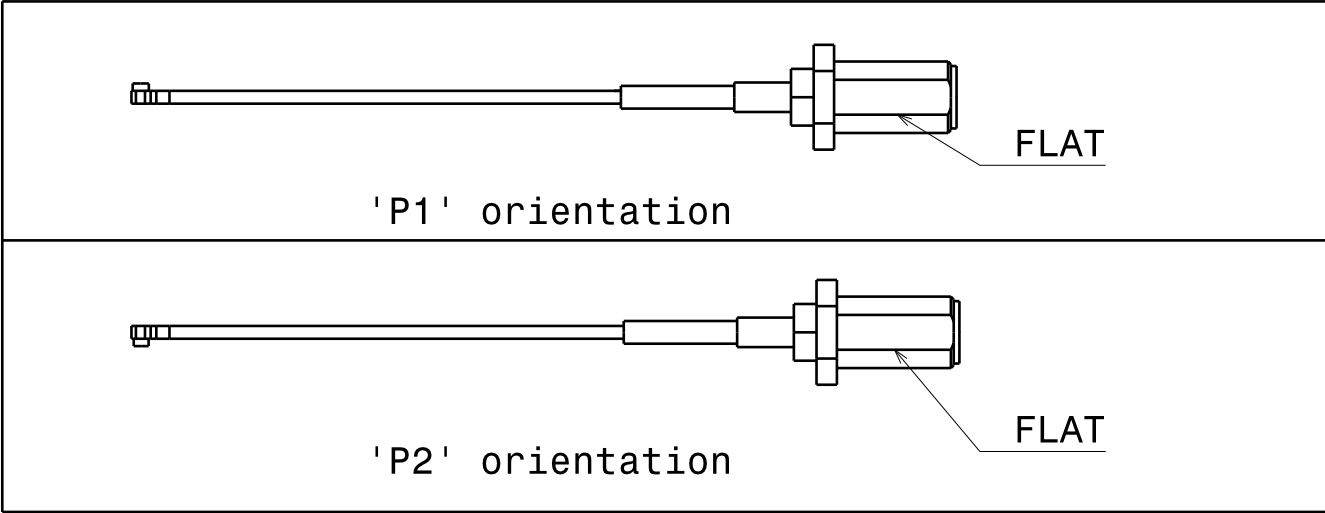

- IMPORTANT PRECAUTIONS:
1. CABLE USING 'MICRO' COAX ARE DELICATE .
2. HANDLE WITH CARE
3. DO NOT TWIST, APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM THE CABLE.

\*DO NOT SCALE THE DRAWINGS.

- NOTE :
1. FIXED ORIENTATION IS POSSIBLE FOR CABLE LENGTH 25MM TO 220MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE ( P1 & P2 ).
2. X1,X2,X3 AND X4 ARE THE DIAMETERS OF THE CABLES TO SELECT THE PART NUMBER.

|                              |                                                                                       |                                                   |  |   |   |
|------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------|--|---|---|
| DESIGNED BY:<br>GURU BIRADAR |                                                                                       | IPEX MHF(HSC COMP) TO SMA B/H CABLE ASSY          |  | I | — |
| DATE:<br>23/11/2016          |                                                                                       |                                                   |  | H | — |
| CHECKED BY:<br>Mr. S. METRI  |                                                                                       | ANAND TECHNOLOGIES                                |  | G | — |
| DATE:<br>23/11/2016          |                                                                                       |                                                   |  | F | — |
| SIZE<br>A3                   |  | DRAWING NUMBER<br>AT-CA-MHF4-SMAB/H-IP65-1.13-200 |  | E | — |
| SCALE<br>1 : 1               | WEIGHT (kg)<br>NA                                                                     |                                                   |  | D | — |
|                              |                                                                                       | SHEET<br>1 / 1                                    |  | C | — |
|                              |                                                                                       |                                                   |  | B | — |
|                              |                                                                                       |                                                   |  | A | — |